

Development Application and Planning Proposal Review



Authority	Authority's Reference	Authority Contact	Authority Notification	Submission Due	Submission Made
Blacktown City Council	LEP-20-0003	Anita Riazifar	17/05/2022	13/06/2022	22/05/2022

Address	Land Title
Clydesdale Estate 1270 Richmond Road, Marsden Park	Former Lot 2 DP 260476

Scope of Development Application or Planning Proposal

Planning Proposal to amend State Environmental Planning Policy (Sydney Region Growth Centres) 2006 for realignment of zoning and heritage boundary and rezoning.

As shown in the below site plan from Endeavour Energy's G/Net master facility model:

In regard to the location of the zoning changes there is:

- An easement benefitting Endeavour Energy (indicated by red hatching) for low voltage and 11,000 volt / 11 kilovolt (kV) high voltage underground cables (with the 11 kV exiting the easement to the opposite side of Richmond Road) being the extension of Clydesdale Farm Road to Richmond Road.
- Low voltage and 11 kV high voltage underground cables in the existing urban residential subdivision road verges / roadways with easements and restrictions for fire rating and swimming pool or spa for various padmount substations.
- 'Developer Area' shown by the indicative subdivision / road layout indicating enquiries and applications for proposed contestable works projects with Endeavour Energy's Customer Network Solutions Branch for electricity supply to the development for urban residential subdivision.

Relevant / applicable clause numbers from Endeavour Energy's standard conditions for Development Application and Planning Proposal Review indicated by ☒ .

Condition	Advice	Clause No.	Issue	Detail
<input type="checkbox"/>	<input type="checkbox"/>	1	Adjoining Sites	Adjoining or nearby development / use should be compatible with the use of Endeavour Energy's sites.
<input type="checkbox"/>	<input type="checkbox"/>	2	Asbestos	Area identified or suspected of having asbestos or asbestos containing materials (ACM) present in the electricity network.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	3	Asset Planning	Applicants should not assume adequate supply is immediately available to facilitate their proposed development.
<input type="checkbox"/>	<input type="checkbox"/>	4	Asset Relocation	Application must be made for an asset relocation / removal to determine possible solutions to the developer's requirements.
<input type="checkbox"/>	<input type="checkbox"/>	5	Bushfire	Risk needs to be managed to maintain the safety of customers and the communities served by the network.
<input type="checkbox"/>	<input type="checkbox"/>	6	Construction Management	Integrity of electricity infrastructure must be maintained and not impacted by vehicle / plant operation, excessive loads, vibration, dust or moisture penetration.
<input type="checkbox"/>	<input type="checkbox"/>	7	Contamination	Remediation may be required of soils or surfaces impacted by various forms of electricity infrastructure.
<input type="checkbox"/>	<input type="checkbox"/>	8	Demolition	All electricity infrastructure shall be regarded as live and care must be taken to not interfere with any part of the electricity network.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	9	Dial Before You Dig	Before commencing any underground activity the applicant must obtain advice from the Dial Before You Dig 1100 service.
<input type="checkbox"/>	<input type="checkbox"/>	10	Dispensation	If a proposal is not compliant with Endeavour Energy's engineering documents or standards, the applicant must request a dispensation.
<input type="checkbox"/>	<input type="checkbox"/>	11	Driveways	For public / road safety and to reduce the risk of vehicle impact, the distance of driveways from electricity infrastructure should be maximised.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	12	Earthing	The construction of any building or structure connected to or in close proximity to the electrical network must be properly earthed.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	13	Easement Management	Preference is for no activities to occur in easements and they must adhere to minimum safety requirements.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	14	Easement Release	No easement is redundant or obsolete until it is released having regard to risks to its network, commercial and community interests.
<input type="checkbox"/>	<input type="checkbox"/>	15	Easement Subdivision	The incorporation of easements into multiple / privately owned lots is generally not supported.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	16	Emergency Contact	Endeavour Energy's emergency contact number 131 003 should be included in any relevant risk and safety management plan.
<input type="checkbox"/>	<input type="checkbox"/>	17	Excavation	The integrity of the nearby electricity infrastructure shall not be placed at risk by the carrying out of excavation work.
<input type="checkbox"/>	<input type="checkbox"/>	18	Flooding	Electricity infrastructure should not be subject to flood inundation or stormwater runoff.

Con- dition	Advice	Clause No.	Issue	Detail
<input type="checkbox"/>	<input type="checkbox"/>	19	Hazardous Environment	Electricity infrastructure can be susceptible to hazard sources or in some situations be regarded as a hazardous source.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	20	Modifications	Amendments can impact on electricity load and the contestable works required to facilitate the proposed development.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	21	Network Access	Access to the electricity infrastructure may be required at any time particularly in the event of an emergency.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	22	Network Asset Design	Design electricity infrastructure for safety and environmental compliance consistent with safe design lifecycle principles.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	23	Network Connection	Applicants will need to submit an appropriate application based on the maximum demand for electricity for connection of load.
<input type="checkbox"/>	<input type="checkbox"/>	24	Protected Works	Electricity infrastructure without an easement is deemed to be lawful for all purposes under Section 53 'Protection of certain electricity works' of the <i>Electricity Supply Act 1995</i> (NSW).
<input type="checkbox"/>	<input checked="" type="checkbox"/>	25	Prudent Avoidance	Development should avert the possible risk to health from exposure to emissions from electricity infrastructure such as electric and magnetic fields (EMF) and noise.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	26	Public Safety	Public safety training resources are available to help general public / workers understand the risk and how to work safely near electricity infrastructure.
<input type="checkbox"/>	<input type="checkbox"/>	27	Removal of Electricity	Permission is required to remove service / metering and must be performed by an Accredited Service Provider.
<input type="checkbox"/>	<input type="checkbox"/>	28	Safety Clearances	Any building or structure must comply with the minimum safe distances / clearances for the applicable voltage/s of the overhead power lines.
<input type="checkbox"/>	<input type="checkbox"/>	29	Security / Climb Points	Minimum buffers need to be provided to avoid the creation of climb point appropriate to the electricity infrastructure being protected.
<input type="checkbox"/>	<input type="checkbox"/>	30	Service Conductors	Low voltage service conductors and customer connection points must comply with the 'Service and Installation Rules of NSW'
<input type="checkbox"/>	<input type="checkbox"/>	31	Solar / Generation	Need to assess the performance of the generation system and its effects on the network and other connected customers.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	32	Streetlighting	Streetlighting should be reviewed and if necessary upgraded to suit any increase in both vehicular and pedestrian traffic.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	33	Sustainability	Reducing greenhouse gas emissions and helping customers save on their energy consumption and costs through new initiatives and projects to adopt sustainable energy technologies.
<input type="checkbox"/>	<input type="checkbox"/>	34	Swimming Pools	Whenever water and electricity are in close proximity, extra care and awareness is required.
<input type="checkbox"/>	<input type="checkbox"/>	35	Telecommunications	Address the risks associated with poor communications services to support the vital electricity supply network Infrastructure.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	36	Vegetation Management	Landscaping that interferes with electricity infrastructure is a potential safety risk and may result in the interruption of supply.

Condition	Advice	Clause No.	Issue	Detail
			Other	

Endeavour Energy	
Completed by:	Decision
Cornelis Duba	Approve (with conditions)
Reason(s) for Conditions / Objection (If applicable)	
<ul style="list-style-type: none"> The Planning Report includes the following advice. <div data-bbox="253 593 1106 1167" data-label="Text"> <p>4.4 Section D – State and Commonwealth interests</p> <p>4.4.1 Is there adequate public infrastructure for the Planning Proposal?</p> <p>The proposed amendments will not impact on the provision or demand for public infrastructure.</p> <p>a) The proposed realignment of zone boundaries will not result in any increase in future number or density of dwellings over the site. Therefore, no additional public infrastructure will be required. The detailed technical studies undertaken during the planning of the precinct remain valid.</p> <p>b) As discussed above, the proposed rezoning will open up approximately 2,000 sqm of land for medium density residential development and likely to cater for 5-10 additional dwellings. This represents only a marginal increase against the existing total of 44.96 ha of residential zoned land across Precincts 1, 2 and 3 (together approved for up to 1,860 dwellings).</p> <p>The proposed rezoning is therefore unlikely to result in the need for increased overall capacity requirements for public infrastructure or primary utilities. The planned infrastructure is considered adequate.</p> <p>c) Removal of the heritage affectation from Precincts 1, 2 and 3 will have no impact on the future number or density of dwellings over the site. Therefore, no additional public infrastructure will be required.</p> </div> The applicant will need to contact Endeavour Energy's Customer Network Solutions Branch who are responsible for managing the conditions of supply with the proponent and their Accredited Service Provider (ASP), if this Planning Proposal: <ul style="list-style-type: none"> Includes any contestable works projects that are outside of any existing approved / certified works. Results in an electricity load that is outside of any existing Supply / Connection Offer requiring the incorporation of the additional load for consideration. All encroachments and /or activities (works) within the easements (other than those approved / certified by Endeavour Energy's Customer Network Solutions Branch as part of an enquiry / application for load or asset relocation project and even if not part of the Development Application) need to be referred to Endeavour Energy's Easement Officer for assessment and possible approval if they meet the minimum safety requirements and controls. However please note that this does not constitute or imply the granting of approval by Endeavour Energy to any or all of the proposed encroachments and / or activities within the easement. <p>Please note Endeavour Energy's Easement Officers do not have access to the NSW Planning Portal. To resolve any easement management matters direct contact with the Easement Officer should be made.</p> Any required padmount or indoor substation will need to be located within the property (in a suitable and accessible location) and be protected (including any associated cabling) by an easement and associated restrictions benefiting and gifted to Endeavour Energy. Please refer to Endeavour Energy's Mains Design Instruction MDI 0044 'Easements and Property Tenure Rights'. 	

- The planting of large / deep rooted trees to near electricity infrastructure is opposed by Endeavour Energy. Existing trees which are of low ecological significance in proximity of electricity infrastructure should be removed and if necessary replaced by an alternative smaller planting. The landscape designer will need to ensure any planting near electricity infrastructure achieves Endeavour Energy's vegetation management requirements.
- Not all the conditions / advice marked may be directly or immediately relevant or significant to the Planning Proposal. However, Endeavour Energy's preference is to alert proponents / applicants of the potential matters that may arise should development within closer proximity of the existing and/or required electricity infrastructure needed to facilitate the proposed development on or in the vicinity of the site occur.

Yours faithfully

Cornelis Duba

Development Application Specialist

Sustainability & Environment

M: 0455 250 981


E: cornelis.duba@endeavourenergy.com.au

51 Huntingwood Drive, Huntingwood NSW 2148


www.endeavourenergy.com.au





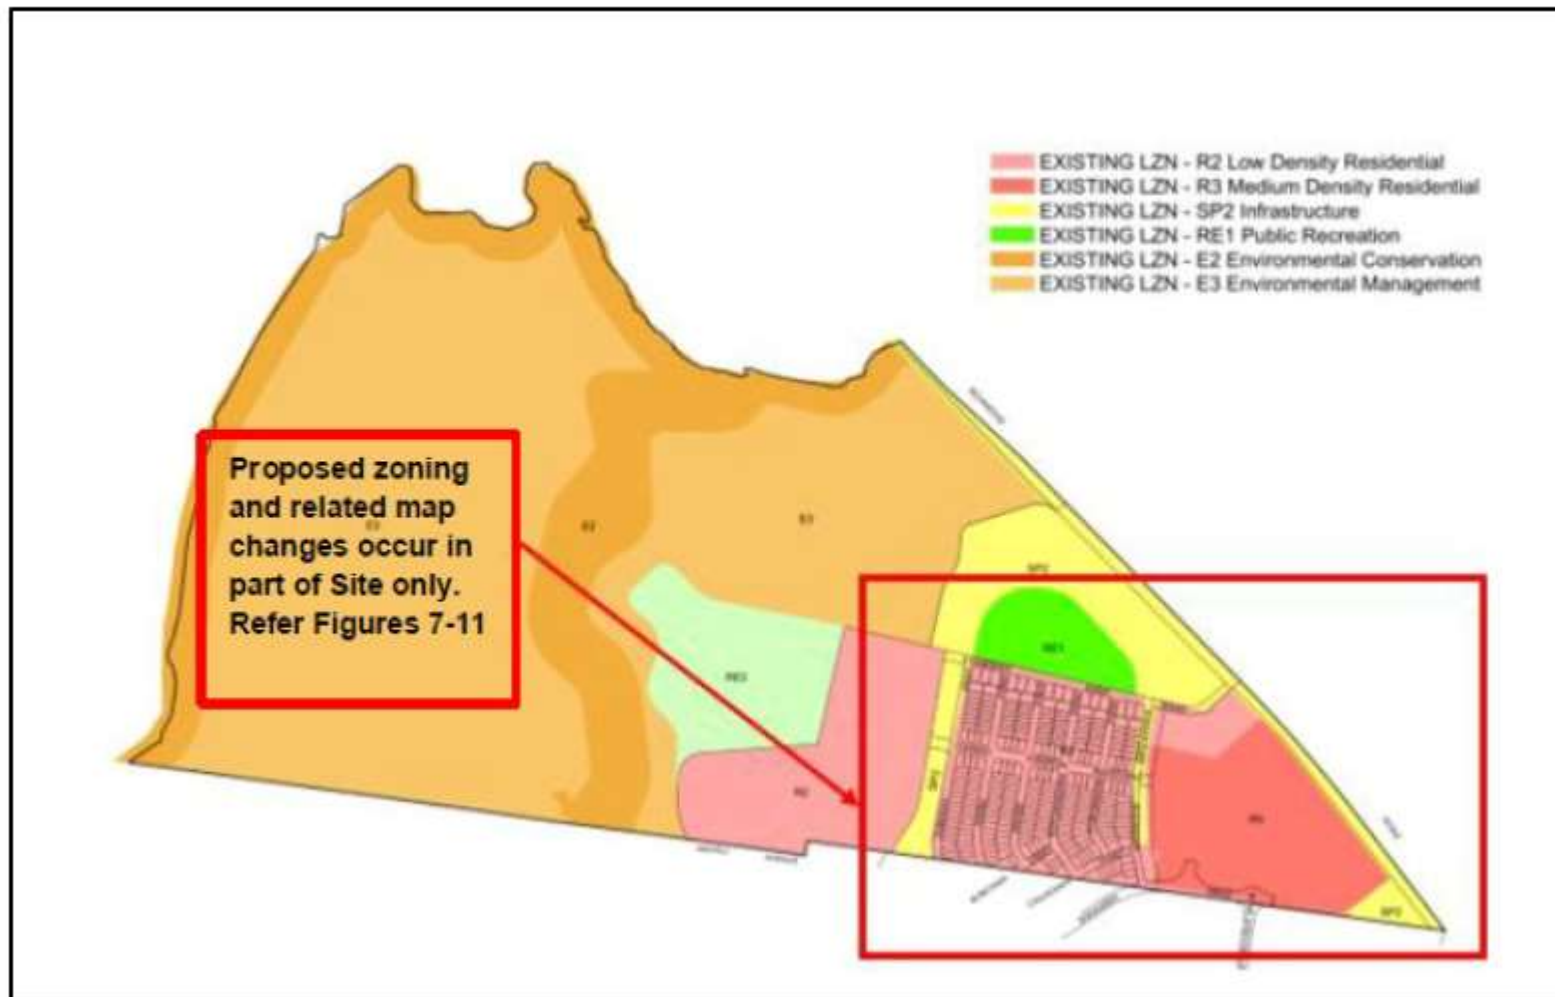



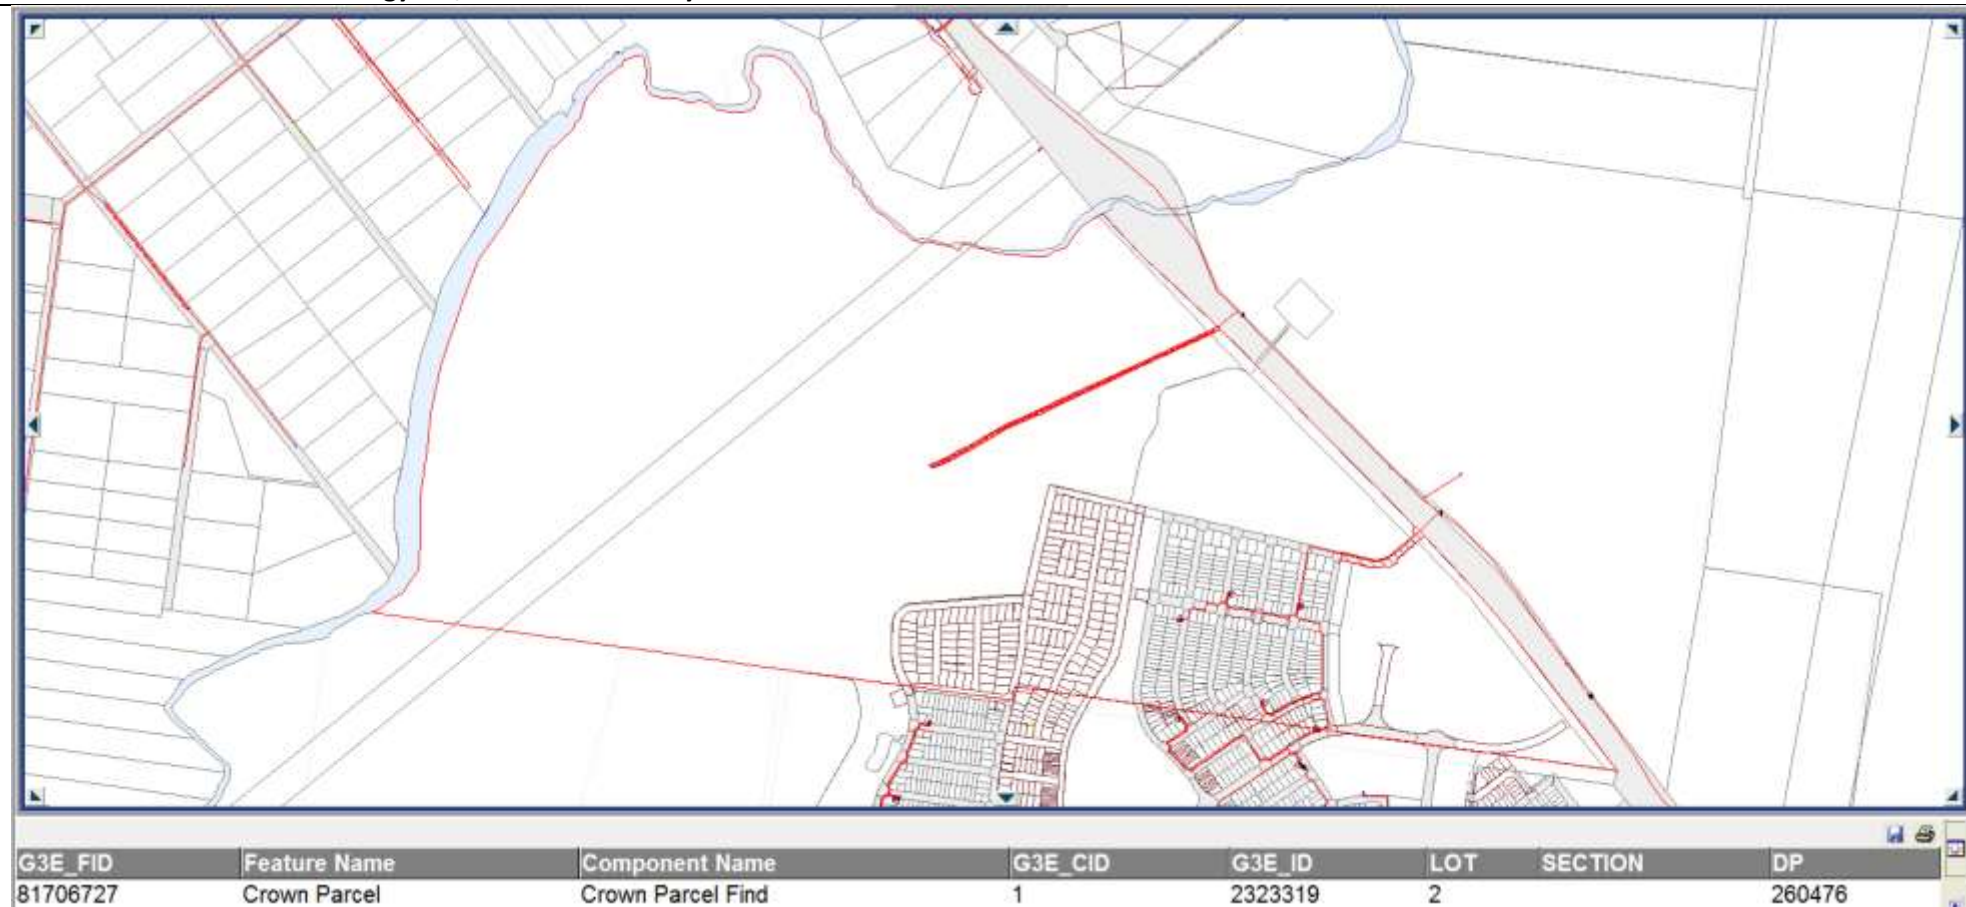













Figure 6 – Existing zoning map of site showing location of zoning changes



Site Plan from Endeavour Energy's G/Net Master Facility Model



Please note the location, extent and type of any electricity infrastructure, boundaries etc. shown on the plan is indicative only. In addition it must be recognised that the electricity network is constantly extended, augmented and modified and there is a delay from the completion and commissioning of these works until their capture in the model. Easements benefitting Endeavour Energy are indicated by red hatching. Generally (depending on the scale and/or features selected), low voltage (normally not exceeding 1,000 volts) is indicated by blue lines and high voltage (normally exceeding 1,000 volts but for Endeavour Energy's network not exceeding 132,000 volts / 132 kV) by red lines (these lines can appear as solid or dashed and where there are multiple lines / cables only the higher voltage may be shown). This plan only shows the Endeavour Energy network and does not show electricity infrastructure belonging to other authorities or customers owned electrical equipment beyond the customer connection point / point of supply to the property. This plan is not a 'Dial Before You Dig' plan under the of Part 5E 'Protection of underground electricity power lines' of the *Electricity Supply Act 1995* (NSW).

LEGEND	
	Padmount substation
	Indoor substation
	Ground substation
	Kiosk substation
	Cottage substation
	Pole mounted substation
	High voltage customer substation
	Metering unit
	Switch station
	Indoor switch station
	Customer connection point
	Low voltage pillar
	Streetlight column
	Life support customer
	Tower
	Pole
	Pole with streetlight
	Customer owned / private pole
	Cable pit
	Subject site

Google Maps Street View

