



BUSH FIRE ASSESSMENT REPORT

WAGGA NORTH BESS PROJECT
116 BAVIN ROAD,
BOMEN

Assessment of bushfire protection for a battery
energy storage system (BESS)

Prepared for ib vogt Development Australia Pty Ltd

10.3.25

Version 2.0



EXECUTIVE SUMMARY

EMBER Bushfire Consulting has been engaged by ib vogt Development Australia Pty Ltd, care of NGH Consulting, to prepare a bush fire assessment report (BFAR) in support of an Activation Precinct Certificate (APC) and Development Application (DA) for the Wagga North Battery Energy Storage System (WNBESS) and associated works at 116 Bavin Road, Bomen NSW (*the Project*). The proposal will include the development, construction, operation and decommissioning of the BESS with a nominal capacity of up to 120 MW / 480 MWh (4 hours).

The Project site is located approximately 7 kilometres northeast of the Wagga Wagga CBD within the Wagga Wagga City Council Local Government Area (LGA) in the Riverina region of NSW, on land currently used for livestock grazing and agricultural activities.

The WNBESS is located in the Wagga Wagga Special Activation Precinct (SAP), with several triggers requiring an assessment from a bushfire protection perspective, not least of which the proposal is on designated bushfire-prone land.

The report establishes the level of bushfire threat to the Project Area. It examines protection measures for the proposal to satisfy the broad aims and objectives of the NSW Rural Fire Service document Planning for Bushfire Protection 2019 (PBP (2019)) as well as specific considerations detailed in Chapter 8 of PBP (2019), such as asset protection zones, landscaping, access, water supplies, construction and emergency management.

The recommendations are designed to inform the Statement of Environmental Effects (SEE) and, in turn, inform the Development Application approval.

Given that the Project Area is a greenfield site with large open spaces and immediately adjacent to the existing TransGrid Wagga North zone substation, there is an excellent opportunity to provide a range of bushfire protection measures that address the bushfire threat and requirements of PBP (2019).

The proposed Asset Protection Zone (APZ) dimensions will ensure that the critical components of the WNBESS are not exposed to excessive radiant heat levels exceeding 29 kW/m².

Access to the Project Area will be well provided for with the entrance point and access road off Bavin Road south of the project area that will meet the access requirements and an internal road network, including a perimeter road surrounding the WNBESS area, all of which will comply with the acceptable solutions set out in PBP (2019).

Specific Firefighting water supplies will be provided and will exceed the specific requirements of PBP (2019).

Preparation of a Bush Fire Emergency Management and Operations Plan during the construction and operational phase of the WNBESS is recommended as part of the project's fire mitigation strategy.

Based on the bushfire assessment and the recommendations in this report, the development proposal will be capable of complying with the specific and broad objectives of PBP (2019).

CERTIFICATION STATEMENT

Document Title:	Bushfire Assessment Report Wagga North BESS Project 116 Bavin Road, Bomen NSW
EMBER Reference:	Bomen PH.49.25
Lot & DP Number	Lot 2 DP 1115229
Street Address	116 Bavin Road, Bomen NSW
Local Government Area	Wagga Wagga City Council
Description of the development	Planning proposal
Type of assessment under Planning for Bushfire Protection (2019)	Section 4 – Bush Fire Strategic Study
Is referral of the proposal to the NSW RFS required?	Yes – Direction 4.7 of the EP&A Act (1979)
Has a pre-DA lodgment or bushfire design brief been provided to the NSW RFS?	No
The highest radiant heat flux determined for indicative development.	<29kW/m ²
Highest level of construction applicable:	Bushfire Attack Level (BAL) -29
Accreditation Scheme / Level of accreditation	Bushfire Planning and Design (BPAD) Accreditation Scheme administered by the Fire Protection Association Australia (FPAA)
Prepared by:	Peter Hague (EMBER Bushfire Consulting)
Verified by:	Jeff Dau – BPAD 33128 - Level 3

The author (Jeffrey Dau) hereby certifies that:

- Peter Hague from EMBER Bushfire Consulting carried out a thorough, in-person survey of the Project area on the 28th of November 2024;
- A subsequent bushfire threat assessment was undertaken of the site and the proposal per the relevant sections of the NSW Rural Fire Service (NSW RFS) document Planning for Bushfire Protection 2019 (PBP 2019);
- A detailed bush fire assessment report is attached per the submission requirements of Section 4 of PBP (2019), together with recommendations needed for future development to satisfy the specifications and requirements of PBP (2019);
- I am a person recognised by NSW RFS as a qualified consultant in bush fire risk assessment and
- Subject to the recommendations in this report, the proposed development conforms to PBP's relevant specifications and requirements.

Furthermore, I am aware that this report will be submitted to support a development application for this site and will be relied upon by the Council to ensure that the bushfire risk management aspects of the proposal have been addressed per PBP (2019).



10/3/2025



DOCUMENT CONTROL

Information	Detail
Document Title:	Bushfire Assessment Report Wagga North BESS Project 116 Bavin Road, Bomen NSW
EMBER Reference:	Bomen PH.49.25
Other Reference:	Project No.: 230683 (NGH Consulting)
Version:	1.0
Version Control:	1.0 – First Issue (DRAFT) – 6.3.25 2.0 – Second Issue (FINAL) – 10.3.25
Status:	Issued
Valid until:	10.3.26 (12 months)

KEY DETAILS OF THE DEVELOPMENT

Information	Detail
Street Address	116 Bavin Road, Bomen NSW
Local Government Area	Wagga Wagga City Council
Zoning of Project land	RAZ – Rural Activity Zone
Zoning of adjoining lands	RAZ – Rural Activity Zone REZ – Regional Enterprise Zone SP2 – Electricity Transmission or Distribution
Project Area size	~4 ha (Subject Site 26.94 ha)
Staging issues	N/A
Planning for Bush Fire Protection 2019	Section 8 – Other Development - 8.3.9 Hazardous Industry
Development Classification	
Type of assessment	Bush Fire Assessment Report (BFAR) in support of a Statement of Environmental Effects (SEE) and DA per the Department of Planning Housing and Infrastructure (DPHI)

	Performance criteria PC54 & PC55 in the Wagga Wagga SAP Delivery Plan.
Fire weather area	Eastern Riverina
Fire Danger Index	80
Predominant vegetation	Cleared land (Grassland) & Grassy Woodlands
Slope	Ranging from upslope to 0° – 5° downslope
Environmental constraints	Subject to APC
Cultural constraints	Subject to APC
Method of meeting performance requirements	Adoption of Acceptable Solutions.

HOW TO READ THIS DOCUMENT

Section 1 Introduction – Introduction and overview of the subject site and proposed development.

Section 2 Bushfire Threat Assessment - Assessment of the critical factors contributing to the potential bushfire attack of the proposed development, planning considerations and assessment of the overall bushfire hazard.

Section 3 Bushfire Protection & Prevention Measures – Discussion and recommendation discussion of the recommended bushfire protection measures in response to the Bushfire Attack Assessment, necessary for life safety and compliance purposes.

Section 4 Bushfire Management Plan – A summary of the recommendations.

Section 5 Conclusion – Concluding statement.

DEFINITIONS -

Asset Protection Zone (APZ) - A fuel-reduced area surrounding a built asset or structure that provides a buffer zone between a bushfire hazard and an asset. The APZ includes a defensible space within which firefighting operations can be carried out. The size of the required APZ varies with slope, vegetation and FFDI.

Bushfire attack - Attack of a built asset or structure by burning embers, radiant heat or flame generated by a bush fire.

Bushfire hazard - Any vegetation that can potentially burn and threaten lives, property or the environment.

Bushfire-prone land (BFPL) - An area of land that can support a bushfire or is likely to be subject to bushfire attack, as designated on a bushfire-prone land map.

Bush fire protection measures (BPMs) - A range of measures used to minimise the risk from a bush fire that needs to be complied with. BPMs include APZs, construction provisions, suitable access, water and utility services, emergency management and landscaping.

Bushfire risk - This is the likelihood and consequence of a bushfire igniting, spreading and causing life loss or damage to buildings of value to the community. Note: This assessment does not intend to determine the likelihood of bushfire impacting the subject site. Instead, it focuses on assessing the

degree of bushfire attack, its expected consequences and the BPMs needed to moderate this attack.

Managed land - Land with vegetation removed or maintained to a level that limits the spread and impact of bush fire. This may include developed land, roads, golf course fairways, playgrounds, sports fields, vineyards, orchards, cultivated ornamental gardens and commercial nurseries. The most common will be gardens and lawns within the curtilage of buildings. These areas are managed to meet the requirements of an APZ.

TABLE OF CONTENTS

<u>1</u>	<u>INTRODUCTION AND OVERVIEW</u>	<u>7</u>	<u>3</u>	<u>BUSHFIRE PROTECTION AND PREVENTION MEASURES.....</u>	<u>33</u>
1.1	PROJECT DESCRIPTION	7	3.1	ASSET PROTECTION ZONES (APZs) & SETBACKS	33
1.2	ASSESSMENT APPROACH	8	3.2	LANDSCAPING	35
1.3	AIM AND OBJECTIVES.....	9	3.3	ACCESS.....	35
1.4	LIMITATIONS AND DISCLAIMER	10	3.4	WATER SUPPLIES	35
1.5	COPYRIGHT NOTICE.....	11	3.5	ELECTRICITY SERVICES.....	36
1.6	PROJECT AREA REGIONAL CONTEXT	12	3.6	CONSTRUCTION	36
1.7	SUBJECT SITE, PROJECT AREA EXTENT AND ACCESS OVERVIEW.....	13	3.7	EMERGENCY MANAGEMENT PLANNING.....	36
1.8	PROJECT AREA INDICATIVE LAYOUT	14	<u>4</u>	<u>BUSHFIRE MANAGEMENT PLAN – SUMMARY OF</u>	
1.9	SUBJECT SITE LAND USE AND ZONING.....	15		<u>RECOMMENDATIONS TO INFORM THE SEE/DA.....</u>	<u>38</u>
1.10	PROJECT AREA DESCRIPTION	16	4.1	ASSET PROTECTION ZONES AND SETBACKS	38
<u>2</u>	<u>BUSHFIRE THREAT ASSESSMENT</u>	<u>18</u>	4.2	LANDSCAPING	39
2.1	METHODOLOGY	18	4.3	ACCESS.....	39
2.2	DESIGN FIRE ATTRIBUTES	18	4.4	WATER SUPPLIES	39
2.3	PROJECT AREA BUSHFIRE PRONE MAPPING	19	4.5	ELECTRICITY SERVICES.....	39
2.4	PROJECT AREA FIRE HISTORY	20	4.6	CONSTRUCTION	39
2.5	PROJECT AREA VEGETATION FORMATIONS AND PHOTO POINTS.....	21	4.7	EMERGENCY MANAGEMENT PLANNING.....	39
2.6	EXAMPLES OF HAZARD TYPES.....	26	<u>5</u>	<u>CONCLUSION.....</u>	<u>40</u>
2.7	SLOPE ASSESSMENT.....	27	<u>6</u>	<u>REFERENCE.....</u>	<u>41</u>
2.8	PHOTOGRAPHIC OVERVIEW OF ACCESS ARRANGEMENTS.....	28	<u>7</u>	<u>APPENDIX A – PHOTOGRAPHIC OVERVIEW OF THE STUDY AREA</u>	<u>42</u>
2.9	EMERGENCY SERVICES	32	<u>8</u>	<u>APPENDIX B – AERIAL OVERVIEW OF THE SUBJECT SITE.....</u>	<u>48</u>

1 INTRODUCTION AND OVERVIEW

1.1 PROJECT DESCRIPTION

EMBER Bushfire Consulting has been engaged by ib vogt Development Australia Pty Ltd (the Proponent and Applicant), care of NGH Consulting Pty Ltd, to conduct a Bushfire Impact Assessment (BIA) of the Wagga North Battery Energy Storage System Project (WNBESS) (*the Project*). Potential Bushfire Impacts from the construction, operation and decommissioning phases of the Project are addressed in this report per relevant regulatory requirements and guidelines.

This report supports an Activation Precinct Certificate (APC) Development Consent approval under Chapter 3, Part 3.3 of the *State Environmental Planning Policy* (Precincts – Regional) 2021 as part of a Statement of Environmental Effects (SEE) for the Project.

The Subject Site is part of a larger commercial precinct, the Wagga Wagga Special Activation Precinct (SAP), which is subject to a master plan that took effect in May 2021. This precinct is one of four (4) special activation precincts across regional NSW that have been identified to become thriving business hubs. The Wagga Wagga SAP covers 4500 hectares, including 300 hectares already developed as part of the Bomen Business Park, providing a sustainable business hub specialising in agribusiness, freight and logistics, advanced manufacturing and food manufacturing and renewable energy and recycling,

capitalising on the existing agricultural industry and its access to the inland rail, major highways and the Riverina Intermodal Freight and Logistics (RiFL) hub.

The Project Area is located on a 26.94 ha privately owned property approximately 7 kilometres northeast of the Wagga Wagga CBD within the Wagga Wagga City Council Local Government Area (LGA) in the Riverina Region of NSW, on land that is currently used for livestock grazing. The Wagga North BESS Project development footprint extends across an area of approximately 4 ha with direct access from Bavin Road, which runs along part of the site's southern boundary.

The Project will involve the development, construction, operation and decommissioning of a lithium-ion phosphate (LFP) battery energy storage system (BESS) with a nominal capacity of up to approximately 120 MW / 480 MWh (4 hours storage) consisting of inverters, battery containers, and step-up transformer. The Project would generally include:

- Approximately 126 battery containers, housing battery cells in modules and associated cooling systems.
- Approximately 42 associated Power Conversion Systems (PCS) comprising of:
 - The inverters, which convert direct current (DC) to alternating current (AC)

- The medium-voltage transformer, which converts the inverter output voltage to the medium-voltage of the system (33 kilovolt) and
- The medium voltage switchgear, which contains the medium voltage circuit breakers and disconnectors for the PCS
- A control room, which will contain battery-monitoring equipment and allow operators to control the plant remotely.
- A transmission line that would connect the BESS to the neighbouring TransGrid Wagga North zone substation (Lot 1 DP1115229) by an underground transmission line from the proposed BESS, entering the zone substation from the southwestern corner, and connecting with a new 132kV bay.
- A switching substation, which collects all the individual medium voltage cables from the PCS units in one location, including:
 - 33kW switchgear.
 - One 33/132kV transformer.
 - A 132kV circuit, including busbars, circuit breakers, disconnectors, isolators, surge arresters, etc.
 - A plant auxiliary transformer and diesel generator.
 - An Operations and Maintenance (O&M) building.
- A water tank for static firefighting water supply.

- Bulk earthworks (cut and fill generally balanced) and stormwater management infrastructure such as diversion banks and a detention basin.
- Security fencing around the BESS perimeter and around the internal substation perimeter.
- Temporary and/or permanent laydown area.

The proposed BESS would be in operation continuously and would largely be monitored remotely. The operational life of the proposed development would be around 40 years, with BESS refurbishment required at 20 years.

The Project layout is shown in Figure 3.

1.2 ASSESSMENT APPROACH

The Wagga North BESS Project is located within the Wagga Wagga SAP, with several triggers initiating an assessment of the proposal from a bush fire protection and prevention perspective, including:

- The Wagga North BESS Scoping Report to assess the potential for increased risk of bushfire generated by the development.
- The Department of Planning Housing and Infrastructure (DPHI) identifies the following in the Wagga Delivery Plan:
 - Performance criteria PC54, 'Development on Vegetation Category 3 (grasslands) includes asset protection from the grass fire hazard' and

- Performance criteria PC55, 'Development on Vegetation Category 3 (excluding grasslands) includes asset protection from the bushfire hazard'. To achieve PC54 and PC55, the development must comply with the requirements of:
 - the latest version of Planning for Bushfire Protection (PBP) and
 - the Rural Fires Act 1997.
- The Project is located on land designated bushfire-prone by the Council and the NSW Rural Fire Service (NSW RFS) and, as a result (if approved), would be subject to Section 4.14 of the EP&A Act and the NSW RFS document Planning for Bushfire Protection 2019 (PBP (2019)).

These documents are, therefore, the basis and key reference for this assessment.

The aim of PBP (2019) in this regard is to protect human life and minimise impacts on property from the threat of bushfires while considering the development potential, site characteristics, and protection of the environment.

It is assumed that this assessment will be one of several through the various development application phases, such as the strategic planning and detailed design phases.

This assessment has been prepared through a desktop study of the Project Area and an in-person area survey completed on the 28th of November 2024 by Peter Hague from EMBER Bushfire Consulting and peer-reviewed by BPAD Level 3 Accredited Bushfire Practitioner Jeff Dau.

The above confirms that a bush fire assessment report shall be prepared which identifies the extent to which the proposed development conforms with or deviates from the relevant provisions of Planning for Bush Fire Protection 2019 and that NSW RFS will have the opportunity to review the proposal at the more detailed phase of planning.

On this basis, PBP (2019) has been the key reference for this assessment.

1.3 AIM AND OBJECTIVES

The aim of this report is to:

- Evaluate the potential bushfire threat to the Project Area,
- Evaluate the potential threat of fire propagating from the site,
- Recommend a range of protection measures that would be required to address these threats and provide the minimum bushfire protection necessary to offer life safety, improve property protection and facilitate fire service intervention during a bushfire event.

The bushfire protection objectives expected from the proposal are to satisfy the broad aims and objectives of PBP (2019) and specific considerations detailed in

Chapter 8, Section 8.3.9 Hazardous Industry (Planning for Bushfire Protection, 2019).

The bush fire protection objectives include:

- afford buildings and their occupants protection from exposure to a bushfire,
- provide for a defensible space to be located around buildings,
- provide appropriate separation between a hazard and buildings, which, in combination with other measures, prevent the likely fire spread to buildings,
- ensure that appropriate operational access and egress for emergency service personnel and occupants is available,
- provide for ongoing management and maintenance of BPMs and
- ensure that utility services are adequate to meet the needs of firefighters.

Accordingly, the following bushfire protection measures are to be assessed:

- Asset Protection Zones (APZs) and setbacks,
- Landscaping,
- Access,
- Water Supplies,
- Utilities, and
- Emergency Management.

1.4 LIMITATIONS AND DISCLAIMER

This report is primarily concerned with assessing the proposal's capacity to withstand the impacts of a bushfire, including ember attack, radiant heat exposure and flame contact.

Protection measures will be recommended where necessary to protect the occupants, firefighters and the structures themselves.

It should be kept in mind that the measures recommended cannot guarantee the development will survive a bushfire event on every occasion. This is primarily due to the dependence on ongoing vegetation management, the unpredictable behaviour of fire, and extreme weather conditions.

EMBER Bushfire Consulting has prepared this report with all reasonable diligence. The information in this report has been gathered from field investigations of the site and plans provided by the Project designer, as well as communications with representatives of the property owner.

Table 1 - Stakeholders

Stakeholder	Role	Contact	Detail
Melissa Hubbard	Property Owner	Melissa Hubbard	0400 501 730
ib vogt Development Aust. Pty Ltd	Independent Power Producer (IPP)	Anthony Yarrow	0405 500 145
NGH Consulting Pty Ltd	Environmental Consultants	Sarah Hillis	0413 343 912
Wagga Wagga City Council	Consent Authority	Not Given	02 6926 9100
Department of Planning, Housing & Infrastructure (DPHI)	Determining Authority	Not Given	Not Given
NSW Rural Fire Service	Referral Authority	Not Given	03 5898 4100

1.5 COPYRIGHT NOTICE

This document is copyrighted. It is a breach of the Copyright Act (1968) for this document to be used to support a development application or any other purpose for any persons/entities other than those for whom this document was prepared.

Unless authorised by Ember Bushfire Consulting and in compliance with the conditions set out in the Copyright Act (1968), this document may not be reproduced, stored in any retrieval system, or transmitted in any form or by any means. Prior written consent from Ember Bushfire Consulting is required.

1.6 PROJECT AREA REGIONAL CONTEXT

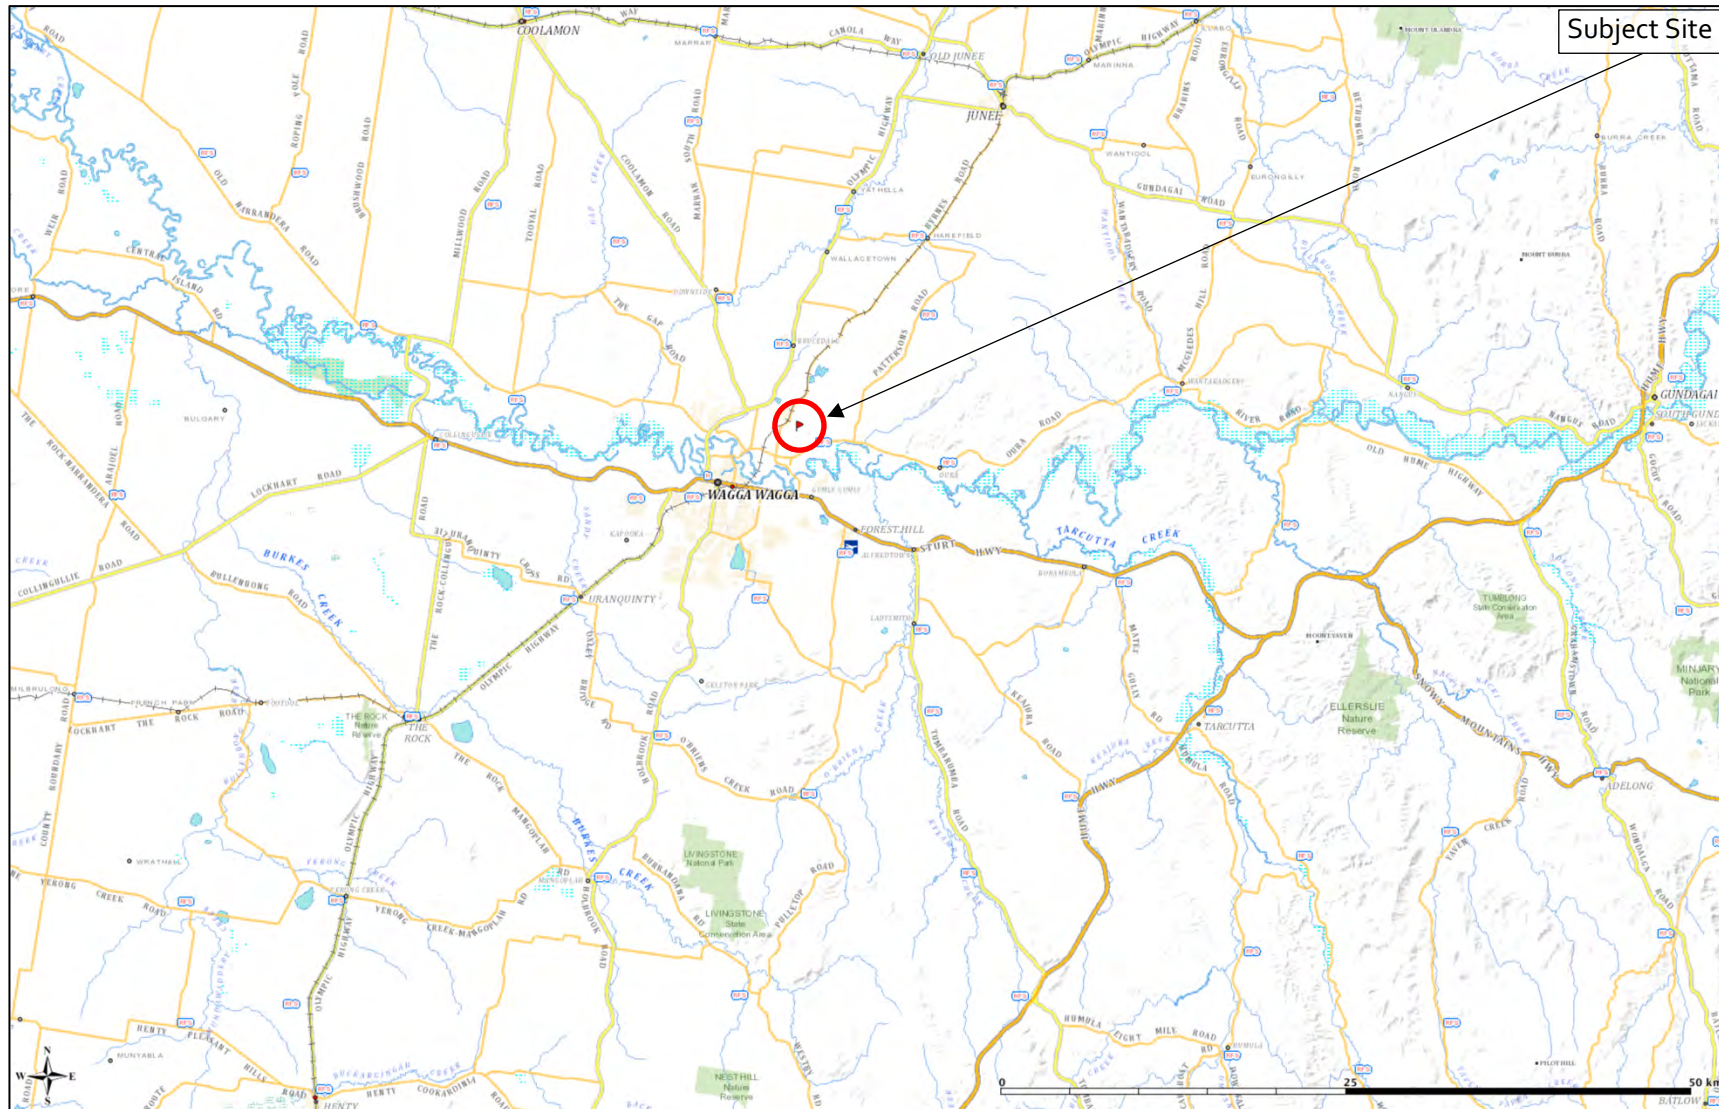


Figure 1 – Regional context of the Project Area (FPA FireMaps, 2025)

1.7 SUBJECT SITE, PROJECT AREA EXTENT AND ACCESS OVERVIEW



Figure 2 – Subject site and indicative extent of the proposed Project Area, point of access and existing TransGrid Wagga North Zone Substation (NGH Consulting Pty Ltd, 2024)

1.8 PROJECT AREA INDICATIVE LAYOUT



Figure 3 – Wagga North BESS indicative Project Area layout and connection to existing TransGrid Wagga North Zone Substation (NGH Consulting Pty Ltd, 2025)

1.9 SUBJECT SITE LAND USE AND ZONING

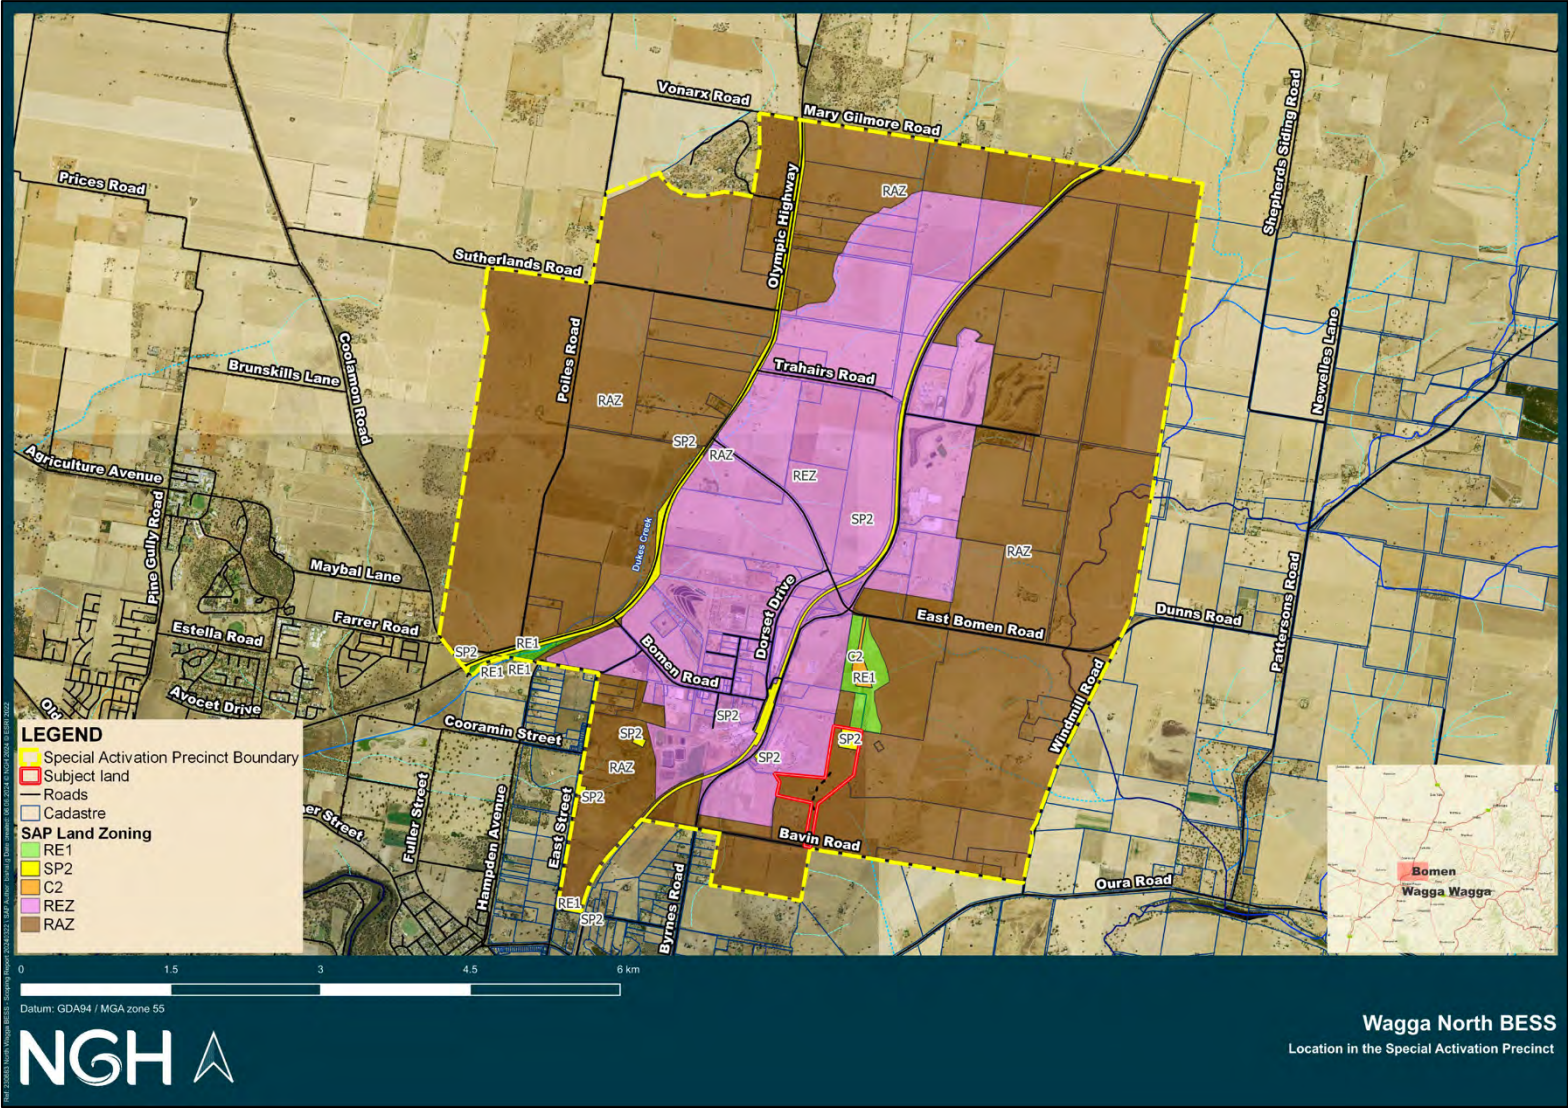


Figure 3 – Showing the zoning of the subject site and adjoining lots within the Wagga Wagga SAP Area (NGH Consulting Pty Ltd, 2024)

1.10 PROJECT AREA DESCRIPTION

Administration:

The 26.94 ha Subject Site (Project Area footprint ~4 ha) falls under the Wagga Wagga City Council (WWCC) administration. Given that the proposal is within the Wagga Wagga SAP, it is subject to the Department of Planning, Housing and Infrastructure (DPHI) being the determining authority, with WWCC being a consent authority.

Land use:

The Subject Site lies at the southern end of the Wagga Wagga Special Activation Precinct (SAP). It is surrounded by further areas of land cleared for agricultural use (north, east and south) and numerous commercial businesses specialising in agribusiness, logistics and food processing in Bomen Business Park to the west/northwest. Accordingly, the Subject Site and Project Area are zoned RAZ – Rural Activity Zone, as are the neighbouring lots to the east and south. Beyond the southern boundary of the Wagga Wagga SAP land is appropriately zoned RU1 – Primary Production.

Land to the west and far north of the Subject Site is zoned REZ – Regional Enterprise Zone with the adjoining TransGrid Wagga North Zone Substation zoned SP2 – Infrastructure (Electricity Transmission or Distribution). The land immediately north of the substation is zoned RE1 – Public Recreation and C2 – Environmental Conservation.

Byrnes Road to the west traverses north/south through the Wagga Wagga SAP and is zoned SP2 – Public Utility Undertaking.

Topography:

The topography within the Subject Site is considered gently undulating, with gradients varying under the classified vegetation. Gradients surrounding the proposed Project Area range from upslope (east) towards boundary plantings/windbreaks within the site and woodland vegetation on the neighbouring property with landform to the west sloping gently in the order of >0° – 5° downslope onto the adjacent property whilst land to the north and south of the Project Area remains relatively flat.

The Subject Site is divided by a minor crest that runs in an east-west orientation, generally separating the northern and southern halves of the property.

The surrounding topography is predominantly featureless and generally consists of open, slightly undulating land consistent with historical land-clearing practices for livestock grazing and agricultural use. The landform slopes gently as it approaches natural drainage lines within the subject site that flow onto the neighbouring properties and continue onto the Murrumbidgee River to the far south of the property.

With the near flat topography, the Project Area and subject site are currently used for livestock grazing.

Vegetation:

The Subject Site and Project Area lie within one of the areas of the Wagga Wagga SAP that have undergone historically widespread native vegetation modification, primarily for dry cropping and livestock grazing, resulting in large areas of cleared land treated as a grassland hazard.

The Subject Site is predominantly open grassland with very few sparsely scattered paddock trees throughout, with an area of remnant wood vegetation present surrounding existing farm structures centrally located on the property. Boundary plantings/windbreaks of varying width (approx. 20 m wide) are present along the majority of the eastern boundary from the TransGrid Wagga North Zone Substation to Bavin Road and west along the minor crest that separates the northern and southern halves of the property.

The vegetation formations surrounding the subject site, as defined by SEED (NSW Government, 2021) NSW State Vegetation Type Map, indicates that the subject site is influenced by Cleared land, which is viewed as unmanaged Grasslands (PCT ID: o), Blakely's Red Gum - Yellow Box grassy tall woodland of the NSW South Western Slopes Bioregion (PCT ID: 277) Grassy Woodlands with an area of White Box - Blakely's Red Gum - White Cypress Pine shrubby woodland on metamorphic hills in the Wagga Wagga - Cootamundra region of the NSW South Western Slopes Bioregion (PCT ID: 346), Dry Sclerophyll Forests (Shrubby sub-formation) southwest of the Subject Site and indicative Project Area.

Vegetation formations have been cross-checked against the NSW State Vegetation Type Map (Figures 6a), verified on-site and detailed in the relevant Biodiversity Report for the Wagga Wagga SAP Master plan and are discussed further in Section 2.

Access:

Access to/from the Project Area to the public road network (Figure 8) is as follows:

- The Project will have close and direct access to Bavin Road via a new property access road ~875 m long from the Wagga North BESS facility entrance point with no alternative access/egress provided.
- Bavin Road (~1.15 km to Byrnes Road) is a council-maintained gravel public no through road that intersects with Byrnes Road.
- Byrnes Road is a major sealed public through road that provides access to the city of Wagga Wagga heading south exiting Bavin Road and Junee heading north.
- A new internal road network has been designed to ensure comprehensive access throughout and around the Project site, including a perimeter road surrounding the WNBESS area.

2 BUSHFIRE THREAT ASSESSMENT

2.1 METHODOLOGY

The methodology adopted by this report is as follows:

Table 2 - Report Methodology

Method	Task	Considerations
Desktop analysis	Review available mapping resources, policy documents & development plans	Online Maps Development Control Plans Local Environmental Plan
Site inspection	Evaluate the context of the site, determine bushfire threat, options for asset protection zones, access roads and infrastructure.	Ground truth online mapping data, validate vegetation class, obtain site measurements, and assess existing structures and infrastructure.
Assessment of proposal against the Moree SAP Master Plan & Delivery Plan, Scoping document and PBP (2019) requirements.	Assess the Project against the objectives of PBP (2019).	APZs, Landscaping, Access, Water supplies, Utilities and Emergency Management.
Report	Preparation and publication of bushfire assessment report	Assess bushfire threat and detail the required and recommended protection measures expected of the proposal.

2.2 DESIGN FIRE ATTRIBUTES

The following bushfire attributes are assessed to determine the potential bushfire threat posed to the Project Area (design fire).

Vegetation Formations

Vegetation formation surrounding the Project Area represents a key bushfire behaviour attribute that determines potential fire intensity and directly relates to the overall bushfire threat.

For example, a fire will burn with significantly greater intensity in forest vegetation than grassland vegetation.

Vegetation formations within 140 m of the Project Area were identified and classified per Appendix A1.2 of PBP (2019).

Slope

In addition to vegetation type and weather conditions, the extent of a fire's rate of spread and intensity will also be determined by the angle of the slope of the land. For example, with each 10 degrees of uphill slope, a fire will double in rate of spread and increase in intensity. Therefore, evaluating the site slope is essential in determining the potential bushfire threat.

Slopes within the Project Area have been calculated per A1.4 & A1.5 of PBP (2019) (Figure 7).

Forest Fire Danger Index (FFDI)

The FFDI measures the degree of danger of fire in Australian vegetation. For PBP (2019), the FFDI required for development assessment purposes is based on local government boundaries.

The 1:50-year fire weather scenario for the Eastern Riverina fire weather area is FFDI 80, as defined by NSW RFS NSW Local Government Areas FDI in May 2017.

Table 3 – Design fire attributes

Factor	Value
Fire Weather Area	Eastern Riverina
FFDI	80
Dominant Vegetation Formations	Cleared land (Grassland) & Grassy Woodlands
Slope	Ranging from upslope to 0° – 5° downslope

2.3 PROJECT AREA BUSHFIRE PRONE MAPPING

Bushfire-prone mapping relative to the Project Area (Figure 4) shows the Subject Site and adjacent land containing Category 1, Category 3 and Buffer Vegetation identified as bushfire-prone land by the Council and NSW RFS.

Vegetation Category 1 is considered to be the highest risk for bushfires. This vegetation category has the highest combustibility and likelihood of forming fully developed fires, including heavy ember production. This category consists of forests, woodlands, heaths (tall and short), forested wetlands and timber

plantations. A 100 m buffer is applied to each area of Bushfire Prone Vegetation (BFPV) Category 1.

Vegetation Category 3 is considered to be medium bush fire risk vegetation. This category generally consists of Grasslands, freshwater wetlands, semi-arid woodlands, alpine complex and arid shrublands. A 30 m external Vegetation Buffer is applied to each area of Bushfire Prone Vegetation (BFPV) Category 3.

During the site survey conducted on the 28th of November 2024, these vegetation categories were verified, and the bushfire-prone map was found to accurately represent the identified hazard across this site.

The location of electricity generating infrastructure, including BESS, should avoid any land subject to identified natural hazards (such as bushfires) and should not contribute to an increased risk of a natural hazard (bushfire).

As the proposed WNBESS is located on grassland and within proximity of woodland hazard vegetation, it must satisfy Performance criteria PC54 and PC55 in the Wagga Wagga SAP Delivery Plan. To achieve PC54 and PC 55, development within 50 metres of Category 3 vegetation (grassland) and 100 metres of Category 3 vegetation (excluding grassland) must comply with the requirements of the latest version of Planning for Bushfire Protection (PBP) and the Rural Fires Act 1997. To satisfy this requirement, Section 6.3.2.2 of the Delivery Plan requires a bushfire hazard assessment and management plan to be prepared in accordance with PBP by a person who is recognised by the NSW

Rural Fire Service as a qualified consultant in bushfire risk assessment stating that the development conforms to the relevant bushfire specifications and requirements.

The bushfire-prone mapping in and of itself is not a bushfire risk assessment. It does not aim to determine the likelihood or level of hazard posed to the Project Area. Instead, the bushfire-prone mapping aims to identify if the Project Area has the potential to be impacted by a bushfire (or not).

In this case, the Subject Site, within which the Project Area is located, is mapped as bushfire-prone; therefore, a range of protection measures are required to address this threat. This report indicates what these bushfire protection measures are and the broad specifications needed for an acceptable level of protection.

A more thorough analysis of the site and the Project during the detailed design and post-approval process would be needed to refine the specifications of these protection measures and ensure an acceptable level of bushfire protection has been met.

2.4 PROJECT AREA FIRE HISTORY

While the bushfire-prone mapping identifies that any development on the Subject Site triggers the requirement for a bushfire assessment and compliance with PBP (2019), fire history provides a clear picture of the actual vulnerability of the site.

Figure 5, the NPWS Fire History mapping, which displays recorded wildfires and prescribed burns since 1902 across NSW (source NPWS), shows the Subject Site fire history and approximate extent of bushfires impacting the area surrounding the Subject Site. This indicates that the Subject Site has not been subject to wildfires in the past 25 years. The most recently recorded major bushfires in the surrounding area were the Dunns Road bushfire during the 2019/20 bushfire season approximately 45 km southeast of Wagga Wagga, which burnt significant areas across the southwest slopes of NSW and northern Victoria and the Jail Break Inn wildfire south of Junee in 2005/06 approximately 24 km northeast of the Subject Site which burnt an area of approximately 25,200 hectares. These fires did not impact the Subject Site.

Although surrounded predominantly by grassland and cropping and with small areas of woodland to the east and south of the proposed Project area, the greatest threat from bushfire comes from the heavily vegetated areas along the Murrumbidgee River ~3 km southeast of the Project Area at its closest point, extending further east and west along the winding river and the large areas of grass fuels and crops to the east that are capable of supporting fast-moving, high-intensity grass fires but with relatively shorter residence time when enough is present and cured representing a medium fire risk.

2.5 PROJECT AREA VEGETATION FORMATIONS AND PHOTO POINTS

Project Area vegetation formations (Figure 6a) as defined by SEED (NSW Government, 2022) NSW State Vegetation Map.

Vegetation mapping indicates that the Project Area is influenced by –

- Grassland (Including Cleared Land)
- Grassy Woodlands and
- Dry Sclerophyll Forests

Examples of these formations are provided below in Photos 1 to 4 (Page 26).

Grassland with individual paddock trees is not viewed as presenting any more significant hazard than grassland and, therefore, is given the same hazard rating.

A comprehensive photographic overview of the project area is provided in the following Appendices:

- [Appendix A](#) – Photographic overview of the vegetation and topography within and surrounding the Project Area.
- [Appendix B](#) – Aerial imagery of the Project Area and surrounding landscape and existing development.

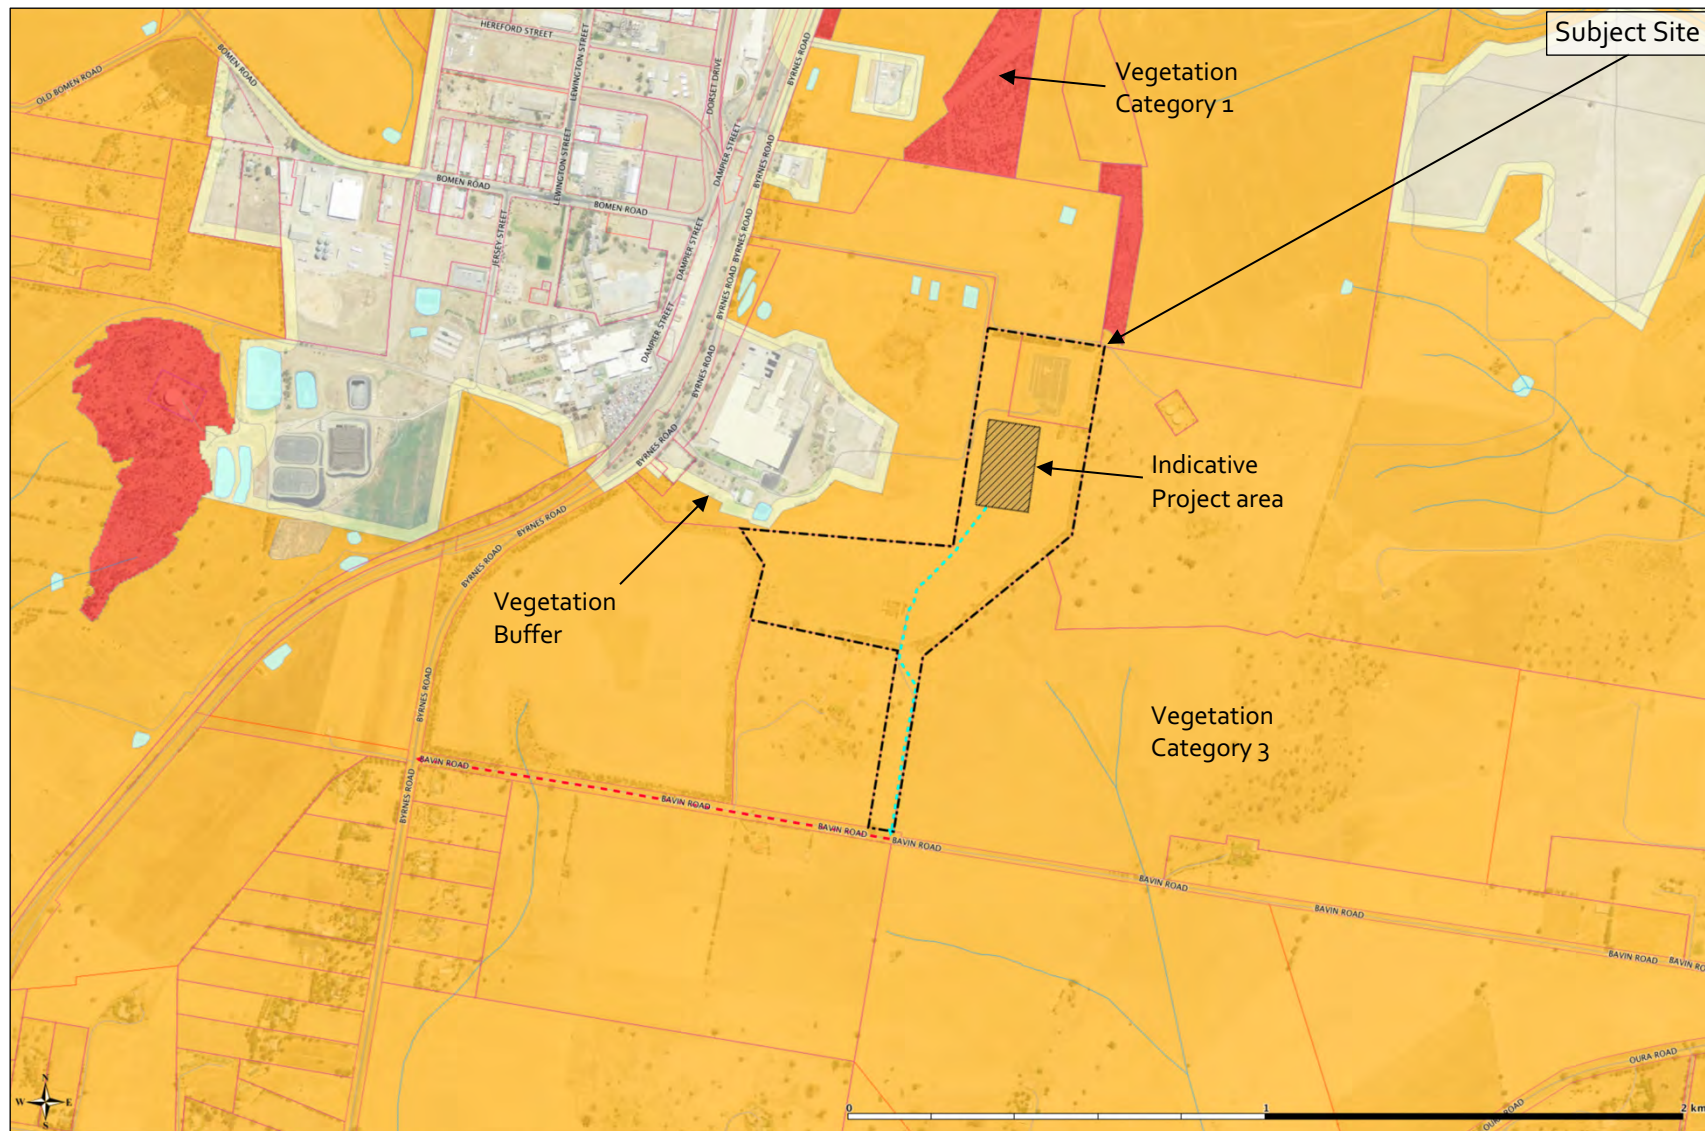


Figure 4 – Subject site bushfire prone land map. (FPA FireMaps, 2025)

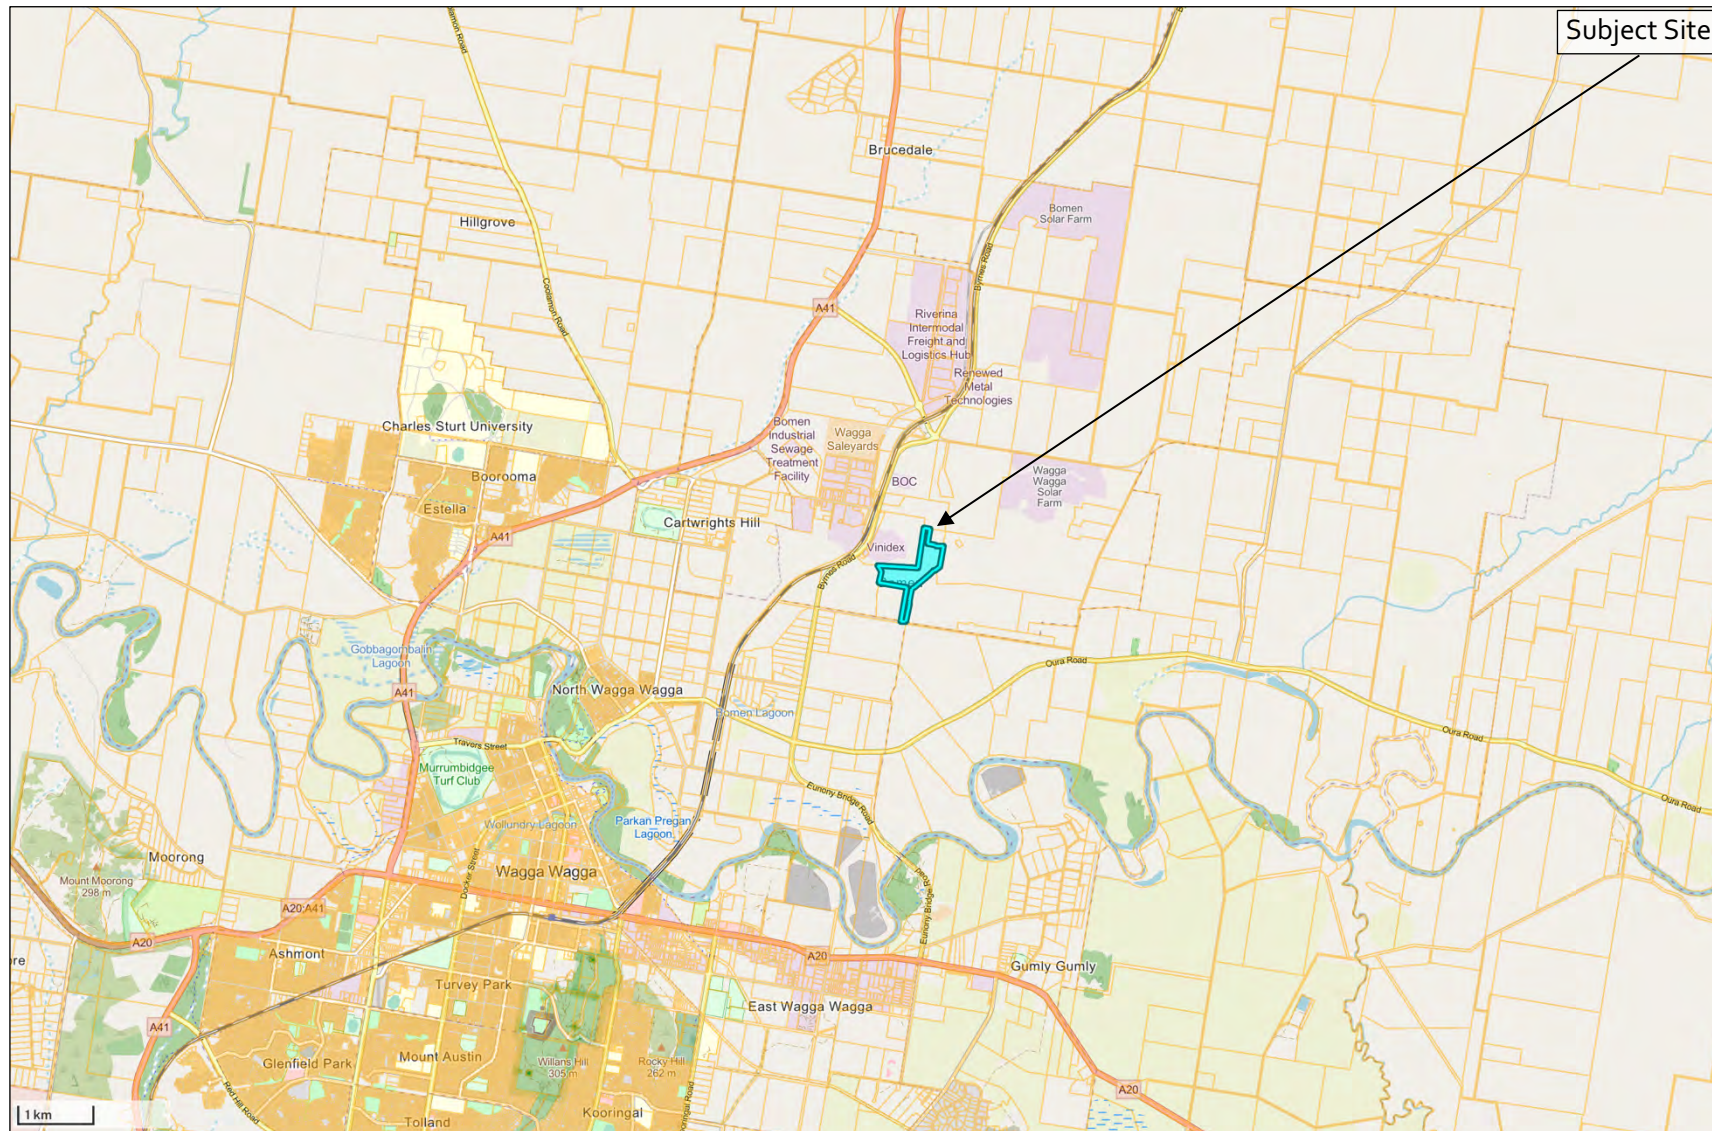


Figure 5 – Map showing fire history and extent in proximity of the Project Area. (SEED, 2025)

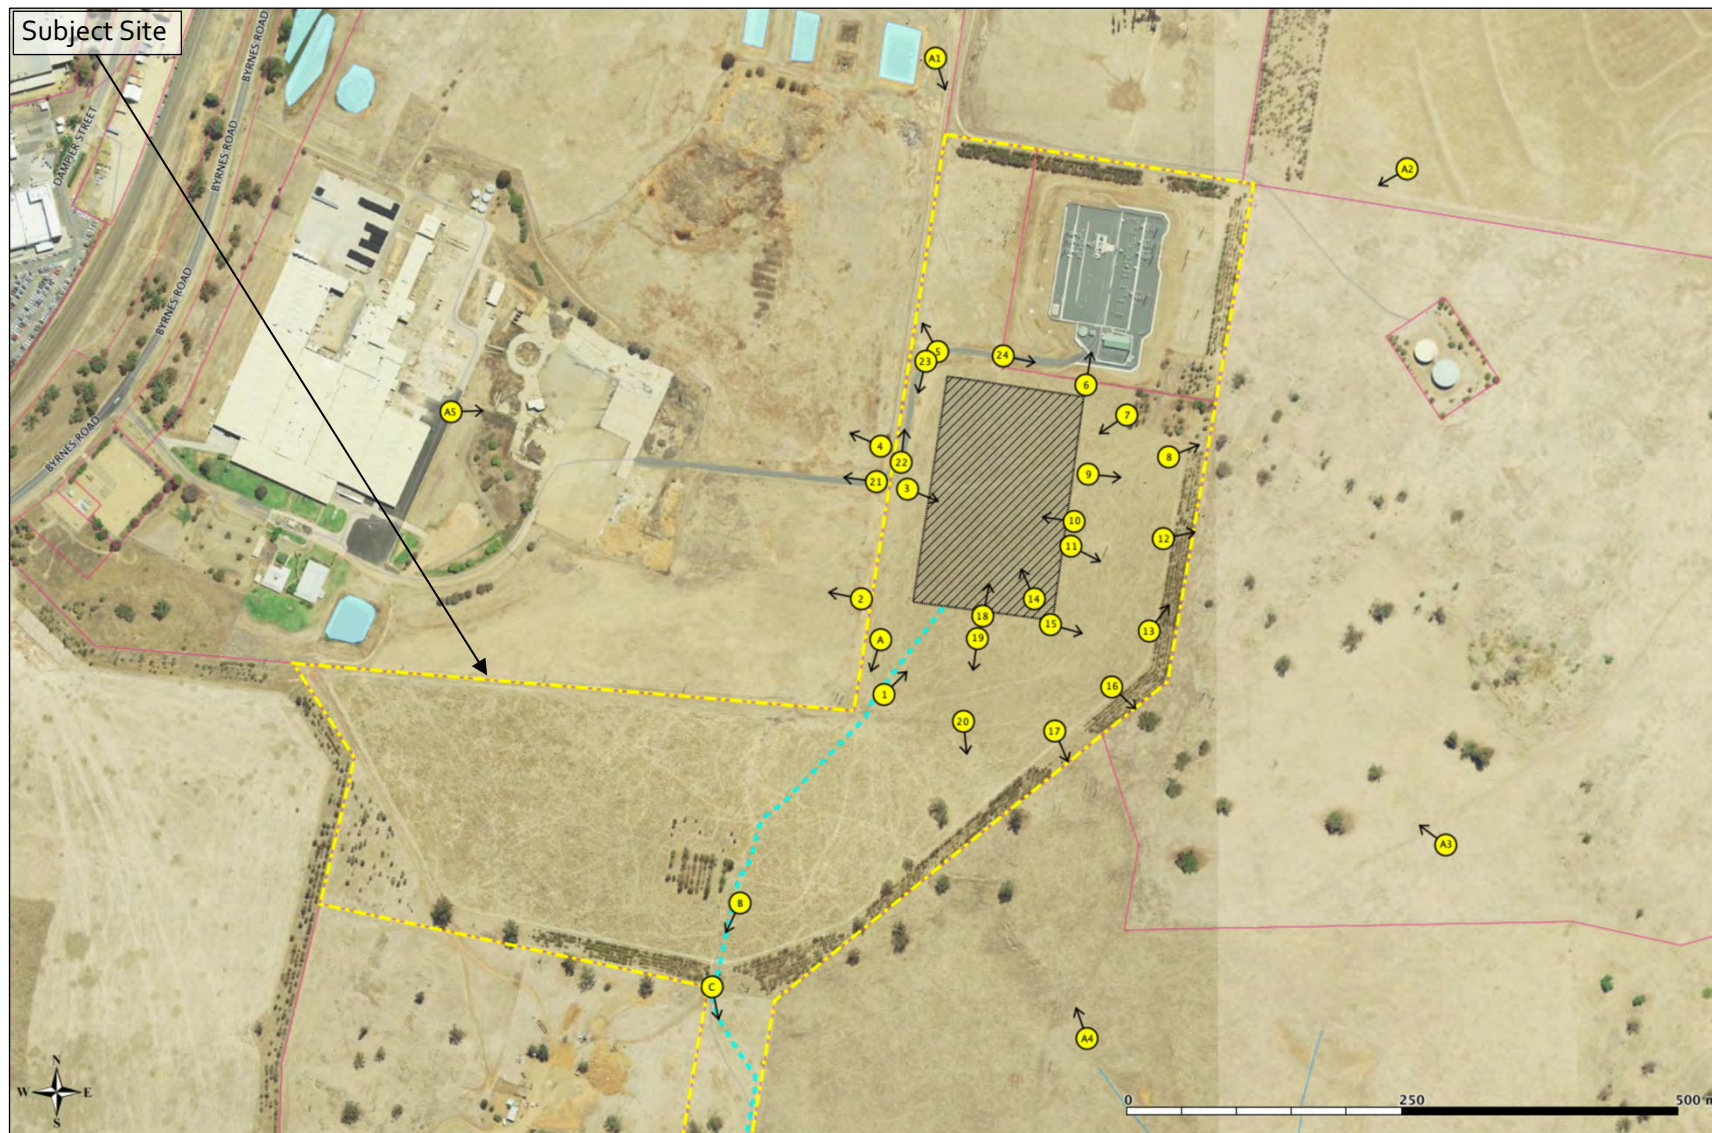


Figure 6 – Study Area photo point locations. (Hague, 2025)

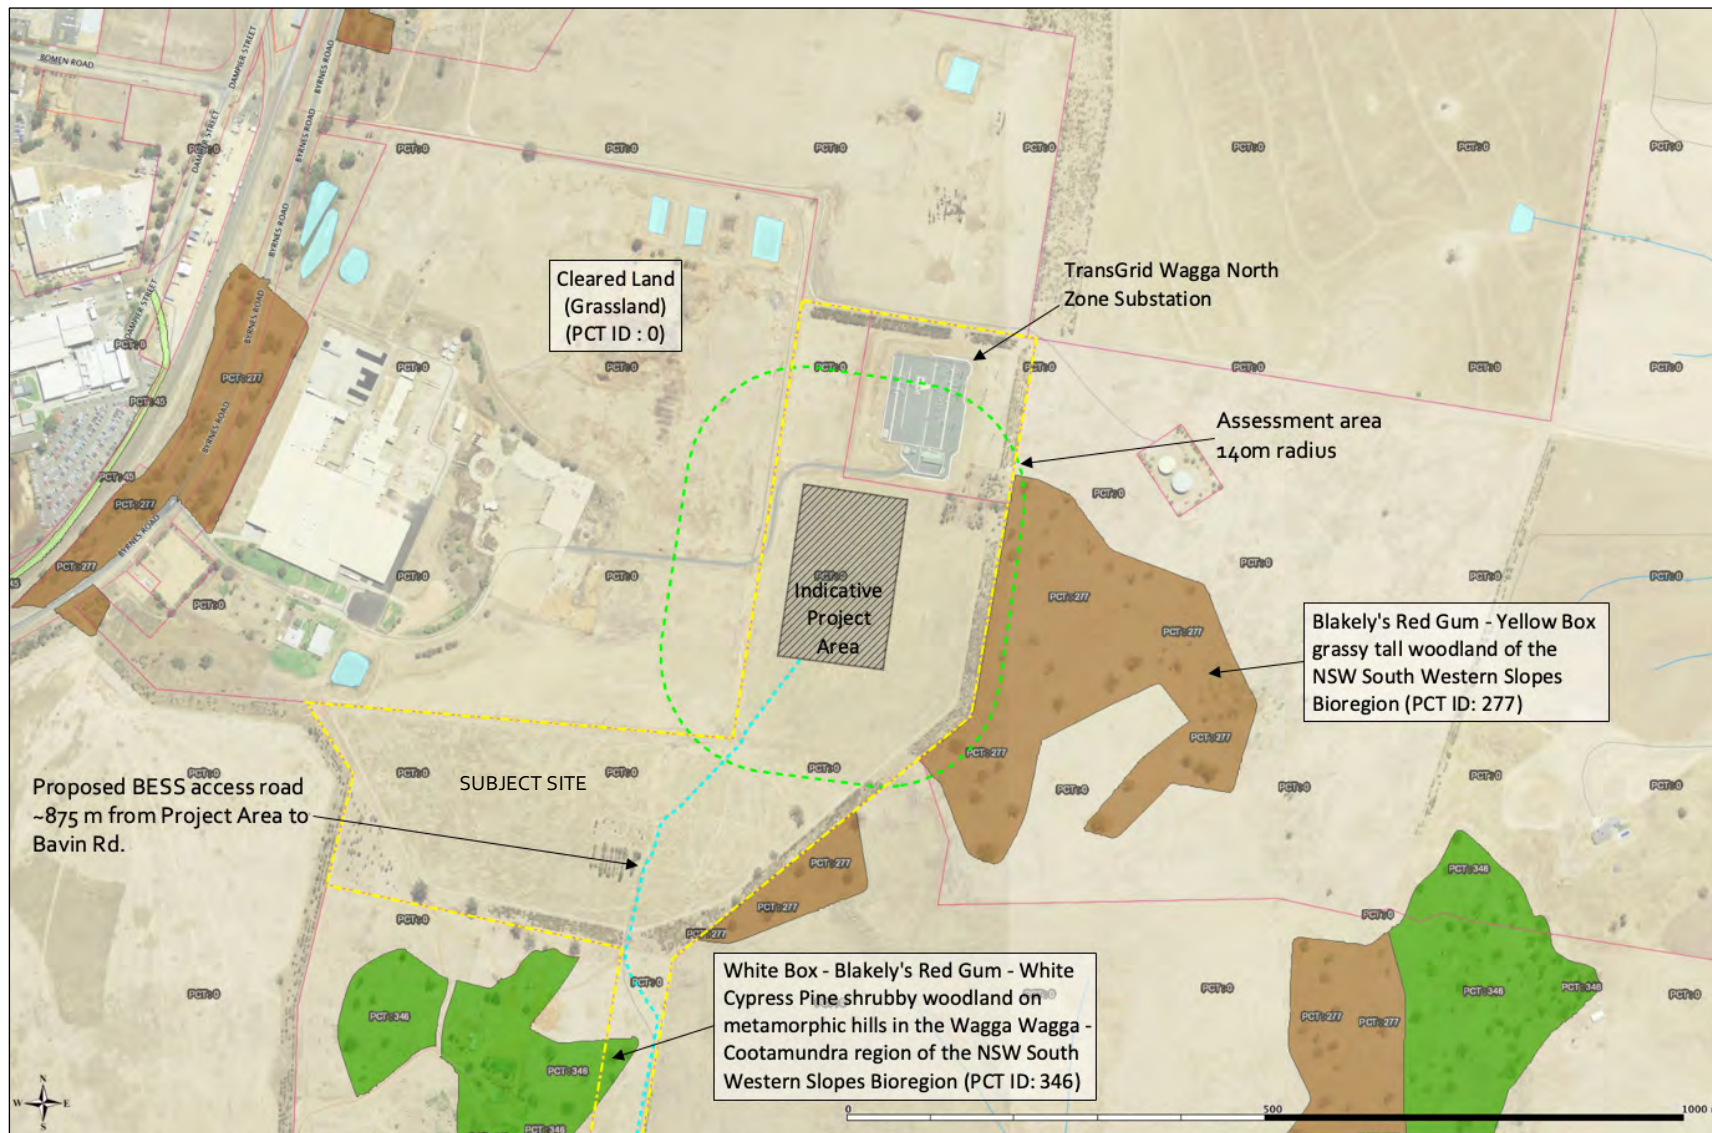


Figure 6a – Vegetation classification within and surrounding the Subject Sites. (SEED, 2025)

2.6 EXAMPLES OF HAZARD TYPES



Photo 1 – Example of grassland hazard. (Hague, 2024)



Photo 3 – Example of Grassy Woodland hazard vegetation (Hague, 2024)



Photo 2 – Example of grassland hazard with scattered paddock trees. (Hague, 2024)



Photo 4 – Example of Grassy Woodland hazard vegetation (Hague, 2024)

2.7 SLOPE ASSESSMENT

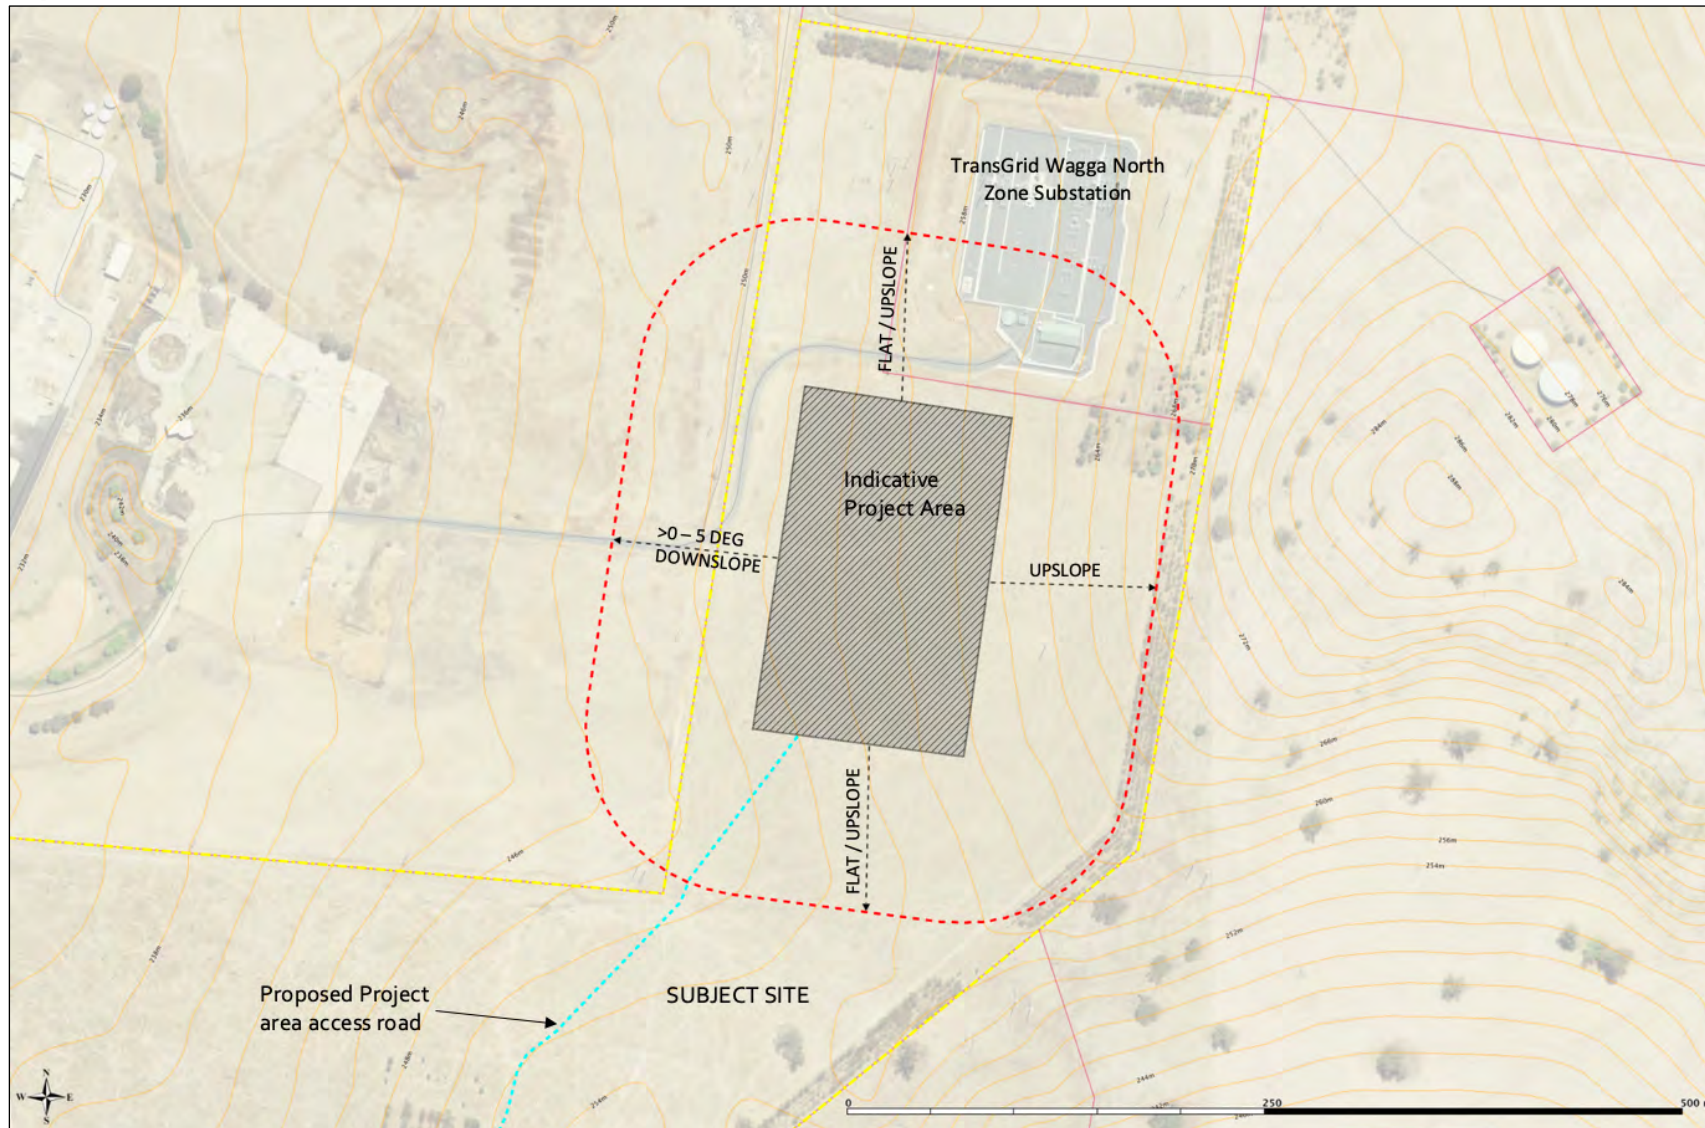


Figure 7 – Broadscale slope assessment highlighting minimal gradients within and surrounding the indicative Project Area. (FPAA FireMaps, 2025)

2.8 PHOTOGRAPHIC OVERVIEW OF ACCESS ARRANGEMENTS



Photo point A. Showing the indicative access road route and access point to the proposed Wagga North BESS (WNBESS) Project Area. (Hague, 2024)



Photo point C. Showing the indicative assess road route from the proposed WNBESS Project Area heading towards the boundary entrance point off Bavin Road. (Hague, 2024)



Photo Point B. Showing the indicative assess road route from the proposed WNBESS Project Area heading towards the boundary entrance point off Bavin Road. (Hague, 2024)

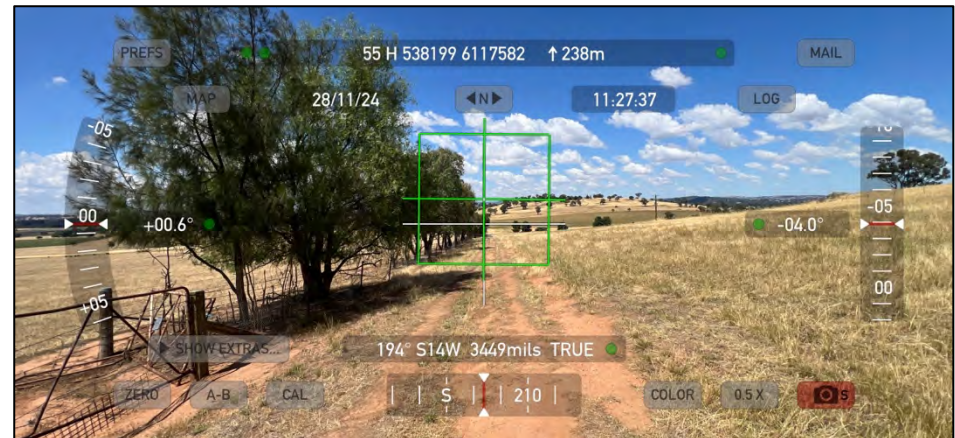


Photo Point D. Showing the indicative assess road route from the proposed WNBESS Project Area heading towards the boundary entrance point off Bavin Road. (Hague, 2024)



Photo point E. Showing the general condition of the boundary entrance point off Bavin Road providing access to the Subject Site and WNBESS Project Area. (Hague, 2024)



Photo point G. Showing the general condition of Bavin Road heading west towards Byrnes Rd from the Subject Site. (Hague, 2024)



Photo Point F. Showing the general condition of Bavin Road (Public no through road) heading west towards Byrnes Rd (Public through road) exiting the Subject Site. (Hague, 2024)



Photo Point H. Showing the general condition of Bavin Road heading west towards Byrnes Rd from the Subject Site. (Hague, 2024)



Photo point I. Showing the general condition of the Byrnes Road/Bavin Road intersection looking east towards the Subject Site. (Hague, 2024)



Photo point K. Showing the general condition of Byrnes Road heading south towards Wagga Wagga exiting Bavin Road. (Hague, 2024)



Photo Point J. Showing the general condition of Byrnes Road heading north exiting Bavin Road. (Hague, 2024)



Figure 8 – Overview of access arrangements to/from the indicative Project Area. (FPAA FireMaps, 2025)

2.9 EMERGENCY SERVICES

NSW Rural Fire Service (NSW RFS) and Fire and Rescue NSW (F&RNSW) service the Project Area.

The Wagga Wagga area is serviced by NSW RFS Wagga Wagga District fire brigades (Riverina Zone (RZ)) comprising twenty-nine (29) fire brigades and one (1) control centre located at 208 Fernleigh Rd, Wagga Wagga as confirmed by N. Duly, Operational Officer Riverina Zone.

The attending fire brigade depends on the type and level of incident requiring response.

The Wagga Wagga District brigades most likely to attend a fire at the Subject Sites and resources are as follows:

- Brucedale – 1 x Cat 1
- Eunony – 1 x Cat 7 tanker, 1 x Cat 9 tanker and 2 x Cat 1 tankers
- Forest Hill – 1 x Cat 1 tanker and 1 x Cat 10 pumper
- Glenfield – 2 x Cat 1 tankers
- Hairfield – 1 x Cat 1 tanker

FIRE & RESCUE NSW

- Coolamon (67 Bruce St N) – Structural Fire and Hazmat Capability (To be confirmed) – (~42 km), response time 31 min.

- Junee (Lisgar Street) – Structural Fire and Hazmat Capability (To be confirmed) – (~29 km), response time 22 min.
- Lockhart (84 Ferrier Street) – Structural Fire and Hazmat Capability (To be confirmed) – (~73 km), response time 52 min.
- Turvey Park (75 Fernleigh Road) – Structural Fire and Hazmat Capability (To be confirmed) – (~12 km), response time 18 min.
- Wagga Wagga (36/38 The Esplanade) – Structural Fire and Hazmat Capability (To be confirmed) – (~9 km), response time 11 min.

3 BUSHFIRE PROTECTION AND PREVENTION MEASURES

In response to the bushfire threat analysis, a suite of Bushfire Protection and Prevention Measures (BPMs) are proposed to satisfy the broad aims and objectives of PBP (2019) and specific considerations detailed in Chapter 8, Section 8.3.9 Hazardous Industry PBP (2019).

These BPMs intend to protect human life and minimise impacts on the facility from the threat of bushfires while considering development potential, site characteristics, and environmental protection.

Bush fire protection measures generally serve a dual purpose: protecting the site from external fire threats, containing fire within the site should it occur, and stopping it from escaping onto adjoining lands. Where specific prevention measures are required, these will be detailed separately.

Given the potentially more hazardous and vulnerable nature of the WNBESS substation and associated infrastructure, the protection and prevention measures may be increased according to the proposal.

3.1 ASSET PROTECTION ZONES (APZs) & SETBACKS

Discussion - APZs:

APZs and setbacks provide a buffer zone between identified hazards and structures. Setbacks will ensure appropriate separation from hazardous

vegetation. At the same time, APZs are bands of managed vegetation that minimise fuel loads and reduce potential radiant heat levels, flame, localised smoke, and ember attacks. The required APZ and setback size varies with slope, vegetation and FFDI.

Appropriate setbacks from adjacent unmanaged hazardous vegetation are to be provided for the Wagga North BESS substation and associated infrastructure. An APZ surrounding the facility, the WNBESS, substation, and related infrastructure is required.

The final APZ dimensions may only be determined at the detailed design phase, in consultation with the NSW RFS and are to be incorporated into the Bushfire Emergency Management and Operations Plan.

PBP (2019) does not provide a maximum radiant heat threshold for Solar Farms or BESS facilities, with the only direction being a minimum 10 m APZ for structures and associated buildings. This dimension, however, does not consider the nature of the surrounding hazard. Therefore, the applicant may consider larger APZs to protect the WNBESS and associated infrastructure better.

Given the heat-sensitive nature of the WNBESS, substation and associated infrastructure, larger APZ and setback dimensions are recommended than those prescribed for photovoltaic (PV) modules.

The current siting, layout and design of the Wagga North BESS provides sufficient space to achieve large APZ and setback dimensions from unmanaged hazardous vegetation, ensuring the development site is not exposed to radiant heat flux levels exceeding 29 kW/m^2 , offering a higher level of protection for the site. Adequate separation and access to the WNBESS from surrounding infrastructure is also provided to minimise the spread of fire within the site should the WNBESS become involved in fire.

Where site constraints make achieving the required APZ or setback dimensions challenging, alternative methods may be employed, such as radiant heat barriers/firewalls or the like, to ensure the critical radiant heat thresholds can be achieved. Such alternative methods are called performance-based design and are subject to endorsement by the consent authority during the detailed design phase of the Project.

Table 4 details the minimum APZ dimensions and setbacks for the WNBESS, substation and associated infrastructure, ensuring they are not exposed to radiant heat levels exceeding 29 kW/m^2 .

The proposed APZ and setback dimensions will meet or exceed the minimum requirements specified by PBP (2019) and can satisfy the acceptable solutions for APZs.

Recommendations:

- Appropriate setbacks from adjacent unmanaged hazardous vegetation are to be provided for the WNBESS, substation and associated infrastructure according to the vegetation type and slope under that classified vegetation. The indicative APZ setback dimensions are provided in Table 4.
- A future APZ will be established surrounding the facility, the WNBESS, substation, and associated infrastructure with the dimensions provided in Table 4.
- APZ and setback locations and widths will be confirmed subject to detailed design in consultation with NSW RFS.
- A minimum 11 m wide facility perimeter APZ is to be provided and incorporate an all-weather, gravel road with a minimum width of 4 m where practicable.
- At the commencement of building works and for the life of the Project, all land identified as APZ within the Project Area is to be managed as an Inner Protection Area (IPA) APZ per the requirements of Asset Protection Zone Standards - Appendix 4 of PBP (2019).
- If required, where site constraints limit the APZ and setback widths, a Performance-based Design approach may provide alternative methods to achieve critical radiant heat thresholds on heat-sensitive equipment.

3.2 LANDSCAPING

Recommendations:

- All vegetation within the areas identified as APZ surrounding the WNBESS, substation and associated infrastructure (entire Project area) is to be managed for the life of the Project per the requirements of Asset Protection Zone Standards - Appendix 4 of PBP (2019).
- Where practicable, the landscape design for areas identified as APZ surrounding the WNBESS, substation and associated infrastructure is to incorporate non-combustible mulch (stone or aggregate) managed for the life of the Project to eliminate the growth of vegetation or storage of combustibles close to this infrastructure.

3.3 ACCESS

Discussion – Access:

Access to/from the Project Area to the public road network (Figure 8) is as follows:

- The Project will have close and direct access to Bavin Road via a new property access road ~875 m long from the Wagga North BESS facility entrance point with no alternative access/egress provided.
- Bavin Road (~1.15 km to Byrnes Road) is a council-maintained gravel public no through road that intersects with Byrnes Road.

- Byrnes Road is a major sealed public through road that provides access to the city of Wagga Wagga heading south exiting Bavin Road and Junee heading north.
- A new internal road network has been designed to ensure comprehensive access throughout and around the Project site, including a perimeter road surrounding the WNBESS area.

In general terms, access is well provided for the site, with direct and close access to Bavin Road and Wagga Wagga. The proposed access provisions will ensure the Project can comply with PBP (2019) access requirements.

Recommendations:

- Property access and the internal road network are to generally comply with the specifications and requirements set out in PBP (2019).
- Provide a perimeter road within the Project Area 11 m perimeter APZ where practicable that is an all-weather, gravel road with a minimum width of 4 m.

3.4 WATER SUPPLIES

Discussion – Water supplies:

The WNBESS will require an adequate water supply and be located so that it is readily accessible by emergency crews for either protection from an external

bushfire threat or to protect surrounding exposures should the WNBESS become involved in fire.

The current WNBESS design and layout includes 1 x ~200,000 L non-combustible water tank, providing a significant volume of water designated for firefighting purposes.

Recommendations:

- Inclusion of 1 x 200,000 L static water supplies (non-combustible tank) within the APZ for the WNBESS, substation, and associated infrastructure.
- All fittings and specifications for water supplies are to be per Table 7.4a PBP (2019).

3.5 ELECTRICITY SERVICES

Recommendations:

- Electrical services are to be provided per Table 7.4a of PBP (2019).

3.6 CONSTRUCTION

Recommendations:

- The WNBESS, substation and associated buildings are recommended to be constructed to the appropriate Bushfire Attack Level (BAL) as per AS3959:2018 - Construction of buildings in bushfire-prone areas.

3.7 EMERGENCY MANAGEMENT PLANNING

Discussion:

Emergency management and operational procedures of the facility during construction and while operational throughout the bushfire season play an important part in fire prevention and site protection. As such, various guidelines, procedures and emergency plans are required.

A Bushfire Emergency Management and Operations Plan (BFEMOP) should identify all relevant risks and mitigation measures associated with the construction and operation of the WNBESS.

This should include:

- detailed measures to prevent or mitigate fires igniting,
- work that should not be carried out during total fire bans,
- availability of fire-suppression equipment, access and water,
- storage and maintenance of fuels and other flammable materials,
- notification of the local NSW RFS Fire Control Centre for any works that have the potential to ignite surrounding vegetation, to be carried out during a bushfire fire danger period to ensure weather conditions are appropriate and
- appropriate bush fire emergency management planning.

It is important to be aware of operations that may be carried out on days of Total Fire Ban and any prohibited activities or exemptions notified by the Commissioner of the NSW RFS under the RF Act s.99.

This is considered an operational phase document (outlining a management plan for the operation of the proposal) and is prepared after approval is granted.

Recommendation:

- Preparation of a Bush Fire Emergency Management and Operations Plan to address the construction and operational phases of the WNBESS should be completed post-approval when facility design and layout have been finalised.

4 BUSHFIRE MANAGEMENT PLAN – SUMMARY OF RECOMMENDATIONS TO INFORM THE SEE/DA.

4.1 ASSET PROTECTION ZONES AND SETBACKS

Appropriate setbacks from adjacent unmanaged hazardous vegetation are to be provided for the WNBESS, substation, and associated infrastructure. An APZ surrounding the facility, the WNBESS, substation, and related infrastructure is required.

The final APZ and setback dimensions may only be determined at the detailed design phase, in consultation with the NSW RFS and are to be incorporated into the Bushfire Emergency Management and Operations Plan.

Table 4 - Indicative APZ dimensions for WNBESS, Substation and associated infrastructure to unmanaged classified vegetation.

Aspect	Vegetation Formation	Slope (Assumed worse case)	Min. APZ required	Max. Radiant Heat (kW/m ²)
N	Grassland	Flat / Upslope	10 m	29
E	Woodland	Upslope	11 m	29
S	Grassland	Flat / Upslope	10 m	29
W	Grassland	>0° – 5° Downslope	11 m	29
E	Remnant (screen planting)	>0° – 5° Downslope	12 m	29
E	Woodland (screen planting)	>0° – 5° Downslope	13 m	29

- Appropriate setbacks from adjacent unmanaged hazardous vegetation are to be provided for the WNBESS, substation, and associated infrastructure. The indicative APZ setback dimensions are provided in Table 4.
- A future APZ will be established surrounding the facility, the WNBESS, substation, and associated infrastructure with the dimensions provided in Table 4.
- APZ and setback locations and widths will be confirmed subject to detailed design in consultation with NSW RFS.
- A minimum 11 m wide facility perimeter APZ is to be provided and incorporate an all-weather, gravel road with a minimum width of 4 m where practicable.
- At the commencement of building works and for the life of the Project, all land identified as APZ within the Project Area is to be managed as an Inner Protection Area (IPA) APZ per the requirements of Asset Protection Zone Standards - Appendix 4 of PBP (2019).
- If required, where site constraints limit the APZ and setback widths, a Performance-based Design approach may provide alternative methods to achieve critical radiant heat thresholds on heat-sensitive equipment.

4.2 LANDSCAPING

Recommendations:

- All vegetation within the areas identified as APZ surrounding the WNBESS, substation and associated infrastructure (entire Project area) is to be managed for the life of the Project per the requirements of Asset Protection Zone Standards - Appendix 4 of PBP (2019).
- Where practicable, the landscape design for areas identified as APZ surrounding the WNBESS, substation and associated infrastructure is to incorporate non-combustible mulch (stone or aggregate) managed for the life of the Project to eliminate the growth of vegetation or storage of combustibles close to this infrastructure.

4.3 ACCESS

- Property access and internal road network to generally comply with the specifications and requirements set out in PBP (2019).
- Provide a perimeter road within the Project Area 11 m perimeter APZ where practicable that is an all-weather, gravel road with a minimum width of 4 m.

4.4 WATER SUPPLIES

- Inclusion of 1 x 200,000 L static water supplies (non-combustible tank) within the APZ for the WNBESS, substation, and associated infrastructure.

- All fittings and specifications for water supplies are to be per Table 7.4a PBP (2019).

4.5 ELECTRICITY SERVICES

- Electrical services are to be provided per Table 7.4a PBP (2019).

4.6 CONSTRUCTION

- The WNBESS, substation and associated buildings are recommended to be constructed to the appropriate Bushfire Attack Level (BAL) as per AS3959:2018 - Construction of buildings in bushfire-prone areas.

4.7 EMERGENCY MANAGEMENT PLANNING

- Preparation of a Bush Fire Emergency Management and Operations Plan during the construction and operational phase of the WNBESS should be completed post-approval when facility design and layout have been finalised.

5 CONCLUSION

This report documents the findings from a bush fire protection assessment to support an Activation Precinct Certificate (APC) and Statement of Environmental Effects (SEE) for the proposed Wagga North Battery Energy Storage System (WNBESS) located at 116 Bavin Road, Bomen.

The report establishes the level of bushfire threat to the Project Area. It examines protection measures for the proposal to satisfy the broad aims and objectives of PBP (2019) and specific considerations detailed in Chapter 8 of PBP (2019), such as asset protection zones, landscaping, access, water supplies, construction and emergency management.

The recommendations are designed to inform the upcoming SEE and, in turn, inform the Development Application approval.

Given that the Project Area is a greenfield site with large open spaces and neighbouring the existing TransGrid Wagga North Zone Substation, there is an excellent opportunity to expand on the existing and provide a range of bushfire protection measures that address the bushfire threat and requirements of PBP (2019).

The proposed APZ dimensions will ensure that the critical components of the WNBESS, substation, and associated infrastructure are not exposed to radiant heat levels exceeding 29 kW/m².

Access to the Project Area will be well provided for with a new entrance point and access road off Bavin Road that will meet access requirements and an

internal road network, including a perimeter road surrounding the WNBESS area, all of which will comply with the acceptable solutions set out in PBP (2019).

A significant volume of firefighting water supplies will be provided, exceeding the requirements of PBP (2019).

Preparation of a Bush Fire Emergency Management and Operations Plan post-approval and before the construction and operational phase of the WNBESS is recommended as part of the site's fire mitigation strategy.

Based on the bushfire assessment and the recommendations contained in this report, the development proposal will be capable of:

- affording structures protection from exposure to a bushfire,
- provide for a defensible space,
- provide appropriate separation between a hazard and structures to prevent the likely spread of fire,
- ensure that appropriate operational access and egress for emergency service personnel is available,
- provide for ongoing management and maintenance of BPMs and
- ensure that utility services are adequate to meet the needs of firefighters.

Therefore, the Project is deemed capable of complying with the specific and broad objectives of PBP (2019).

6 REFERENCE

- ePlanning Spatial Viewer, Department of Planning Industry and Environment, accessed 29 July 2024,
<https://www.planningportal.nsw.gov.au/spatialviewer/#/find-a-property/address>
- FireMaps (FPA Australia, 2021), accessed 10 December 2024,
<https://maps.fpaofiremaps.com.au>
- Keith D. (2004) "Ocean Shores to Desert Dunes", Department of Environment and Conservation, Sydney.
- Wagga Wagga SAP Structure Plan Report (2021) – NSW Department of Planning Industry and Environment, accessed 23 January 2025.
- Wagga Wagga Special Activation Precinct Master Plan (2021), NSW Department of Planning and Environment, accessed 10 December 2024.
- Wagga Wagga Special Activation Precinct Stage 1 Delivery Plan (2022), NSW Department of Planning and Environment, accessed 10 December 2024.
- NSW Rural Fire Service. (2019) "Planning for Bushfire Protection". Sydney (PBP 2019)
- SEED (NSW Government, 2021) NSW State Vegetation Types Map accessed 10 December 2024.
- SEED (NSW Government, 2021) NPWS Fire History – Wildfires and Prescribed Burns, accessed 10 December 2024.
- Six Maps, NSW Department of Finance and Services, accessed 29 July 2024,
<https://maps.six.nsw.gov.au/#>
- Standards Australia, (2018) "AS/NZS 3959-2018 Construction of buildings in bushfire-prone areas."

7 APPENDIX A – PHOTOGRAPHIC OVERVIEW OF THE STUDY AREA



Photo Point 1. Looking northeast along the indicative access road route heading towards the proposed Wagga North BESS (WNBESS) Project Area. (Hague, 2024)



Photo point 3. Looking east in the direction of the proposed WNBESS development site. (Hague, 2024)



Photo point 2. Looking at hazard vegetation west of the proposed WNBESS development site. (Hague, 2024)



Photo point 4. Looking at hazard vegetation west of the proposed WNBESS development site. (Hague, 2024)

PHOTOGRAPHIC OVERVIEW OF THE STUDY AREA



Photo Point 5. Looking at hazard vegetation northwest of the proposed WNBESS development site. (Hague, 2024)



Photo Point 7. Looking in the direction of the proposed WNBESS development site. (Hague, 2024)



Photo point 6. Looking at the TransGrid Wagga North Zone Substation north of the proposed WNBESS Project Area. (Hague, 2024)



Photo point 8. Looking at hazard vegetation northeast of the proposed WNBESS development site. (Hague, 2024)

PHOTOGRAPHIC OVERVIEW OF THE STUDY AREA



Photo Point 9. Looking at hazard vegetation immediately east of the proposed WNBESS development site. (Hague, 2024)



Photo Point 11. Looking at hazard vegetation immediately east of the proposed WNBESS development site. (Hague, 2024)



Photo point 10. Looking west in the direction of the proposed WNBESS development site. (Hague, 2024)



Photo point 12. Looking at hazard vegetation east of the proposed WNBESS development site. (Hague, 2024)

PHOTOGRAPHIC OVERVIEW OF THE STUDY AREA



Photo Point 13. Looking at hazard vegetation east of the proposed WNBESS development site. (Hague, 2024)



Photo Point 15. Looking at hazard vegetation immediately southeast of the proposed WNBESS development site. (Hague, 2024)



Photo point 14. Looking northwest in the direction of the proposed WNBESS development site. (Hague, 2024)



Photo point 16. Looking at hazard vegetation southeast of the proposed WNBESS development site. (Hague, 2024)

PHOTOGRAPHIC OVERVIEW OF THE STUDY AREA



Photo Point 17. Looking at hazard vegetation south of the proposed WNBESS development site. (Hague, 2024)



Photo Point 19. Looking at hazard vegetation immediately south of the proposed WNBESS development site. (Hague, 2024)



Photo point 18. Looking north in the direction of the proposed WNBESS development site. (Hague, 2024)



Photo point 20. Looking at hazard vegetation immediately south of the proposed WNBESS development site. (Hague, 2024)

PHOTOGRAPHIC OVERVIEW OF THE STUDY AREA



Photo Point 21. Looking at the existing well-maintained access road from the TransGrid Wagga North Zone substation heading towards Byrnes Rd. (Hague, 2024)



Photo Point 23. Looking at the existing well-maintained access road from TransGrids Wagga North Zone substation heading towards Byrnes Rd located west adjacent to the proposed WNBESS development site. (Hague, 2024)



Photo point 22. Looking at the existing well-maintained access road to TransGrids Wagga North Zone substation from Byrnes Rd located west adjacent to the proposed WNBESS development site. (Hague, 2024)



Photo point 24. Looking at the existing well-maintained access road and entrance point to TransGrids Wagga North Zone substation located north adjacent to the proposed WNBESS development site. (Hague, 2024)

8 APPENDIX B – AERIAL OVERVIEW OF THE SUBJECT SITE



Photo Point A1. Looking southeast at the Subject Site and indicative Project Area showing the extent of surrounding hazard vegetation and the adjacent TransGrid Wagga North Zone Substation. (Hague, 2024)



Photo Point A2. Looking southwest at the Subject Site and indicative Project Area showing the extent of surrounding hazard vegetation and existing development and the adjacent TransGrid Wagga North Zone Substation. (Hague, 2024)



Photo Point A3. Looking northwest at the Subject Site and indicative Project Area showing the extent of surrounding hazard vegetation and existing development and the adjacent TransGrid Wagga North Zone Substation. (Hague, 2024)



Photo Point A4. Looking north at the Subject Site and indicative Project Area showing the extent of surrounding hazard vegetation and existing development and the adjacent TransGrid Wagga North Zone Substation. (Hague, 2024)



Photo Point A5. Looking west at the Subject Site and indicative Project Area showing the extent of surrounding hazard vegetation and the adjacent TransGrid Wagga North Zone Substation. (Hague, 2024)