




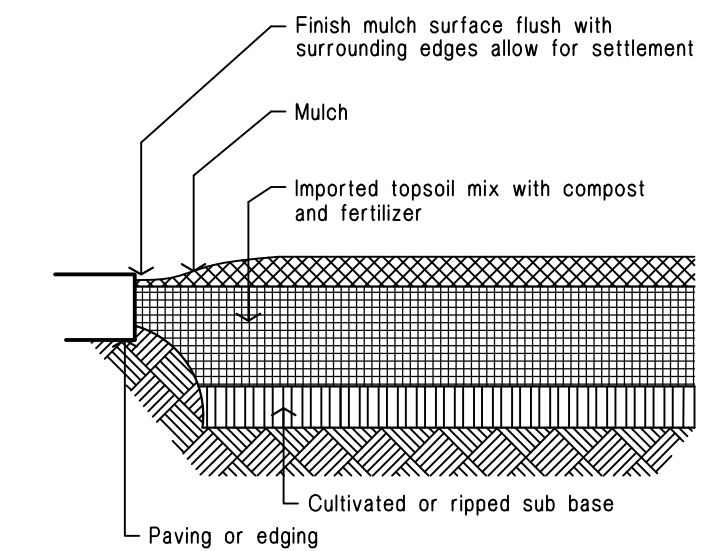



Ground preparation
Planting area using imported topsoil
Detail. Not To Scale.

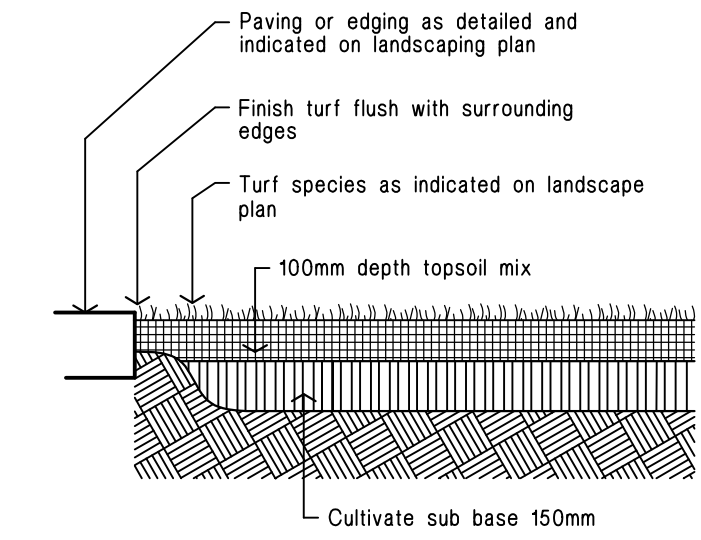

Ground preparation
Grassed area: turf using imported topsoil
Detail. Not To Scale.

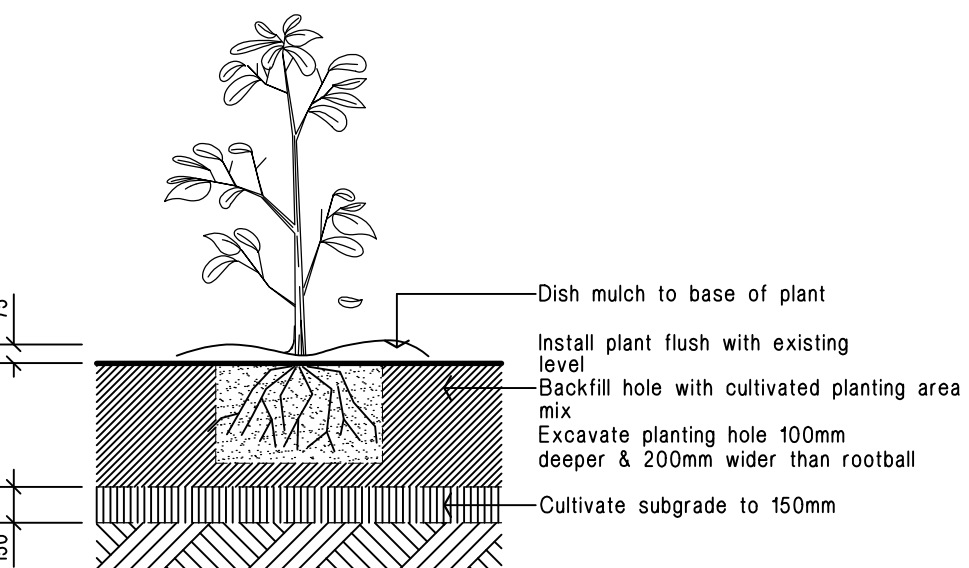

Planting in garden beds
Detail. Not To Scale.

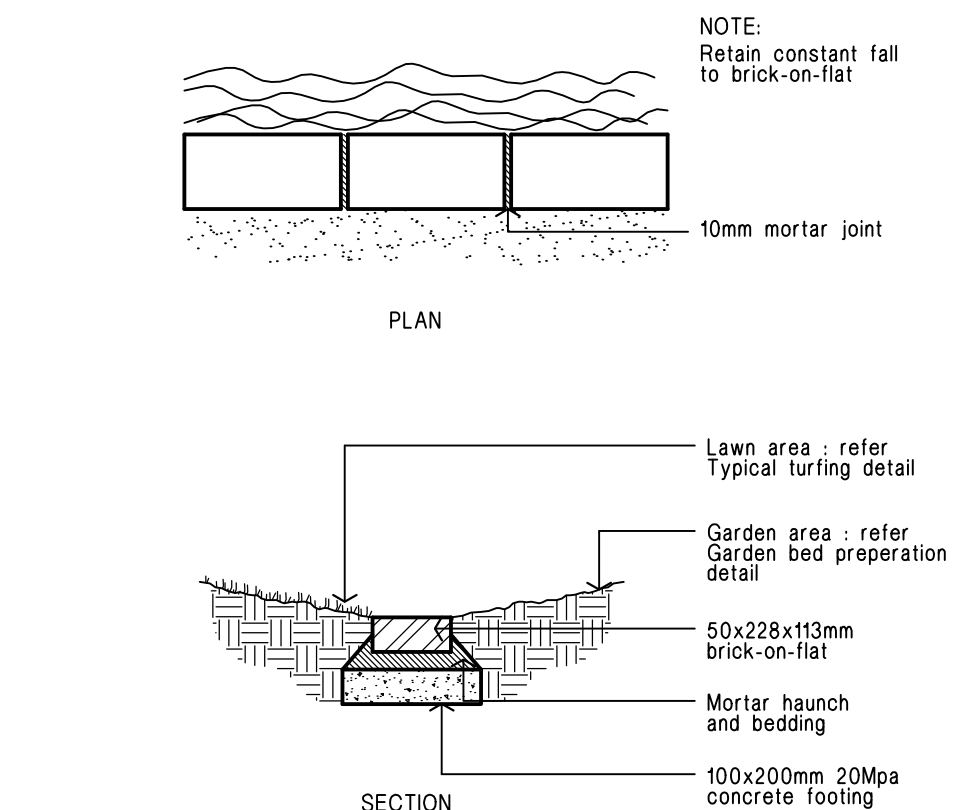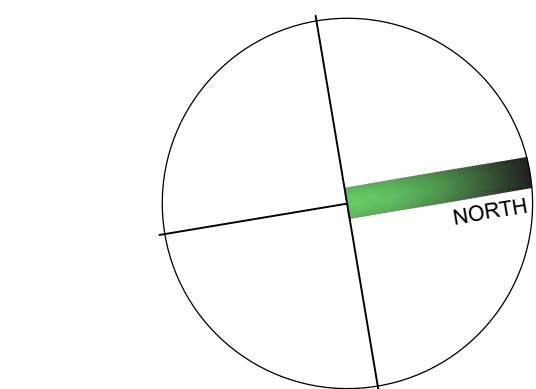

Brick garden edge
Detail. Not To Scale.

LEGEND

- turf
Excavate / grade all areas to be turfed to 120mm below required finished levels. Do not excavate within 1500mm of the trunk of any existing tree to be retained. Ensure that all surface water runoff is directed towards inlet pits, kerbs etc. and away from buildings. Ensure that no ponding will occur. Rip the subgrade to 150mm. Install 100mm depth of imported topsoil. Just prior to spreading the turf, spread "Shirley's No. 17 lawn fertilizer" over the topsoil at the recommended rate. Lay "Kikuyu" turf rolls closely butted. Fill and small gaps with topsoil. Water thoroughly.
- existing trees to be retained
- existing trees to be removed
- brick garden edging
Lay a single course of paving bricks in a mortar haunch (200mm wide and 100mm deep). The edges are to be laid in even curves and straight lines as shown on the plan. Where tight curves are shown use half bricks to show a more even curve. The top of the edges to finish flush with the adjacent turf and mulch levels.
- mulched only areas
75mm depth mulch only areas for access
- planting areas
Ensure that the mass planting areas have been excavated to 300mm below finished levels. Rip to a further depth of 150mm. Supply and install 300mm soil mix. Soil mix to comprise of one part approved compost to three parts topsoil. Topsoil shall be either imported topsoil or stockpiled site topsoil (if suitable ie: No clay). Install 75mm depth of selected mulch.


maintenance:
All landscape works are to be maintained for a period of three months from the date of practical completion. This includes all watering, weeding, spraying and re-mulching necessary to achieve vigorous growth. Any defects which arise during this period are to be rectified immediately. Any plants or areas of turf which fail during this period are to be replaced at no additional cost.

irrigation:
All planting areas on the landscape plan are to be covered by a fully automatic drip irrigation system. All pipework is to be PVC to satisfy AS 1477. All installation is to satisfy the Sydney Water Code and AS 3500. The system is to be installed by a suitable licenced contractor. All equipment and workmanship is to be guaranteed for a minimum period of 12 months.

fencing:
For all fencing types and materials refer to the Architects plans.

PLANT SCHEDULE

Code	Latin Name [Common Name - Mature Height]	Qty	Size	Stake
Trees				
L	Lagerstroemia indica 'Natchez' (Crepe myrtle - 5m)	5	45 litre	yes
P	Pyrus calleryana 'Chanticleer' (Callery Pear - 10m)	1	45 litre	yes
T	Tristania laurina 'Luscious' (Water Gum - 10m)	1	45 litre	yes
Shrubs				
Cs	Camellia sasanqua (Sasanqua - 3m)	19	15 litre	yes
Cbj	Callistemon 'Better John' (Dwarf Bottlebrush - 1m)	20	5 litre	-
Cci	Casuarina 'Cousin It' (Prostrate casuarina - 0.3m)	20	5 litre	-
Hf	Hymenosporum flavum 'Lushious' (Native frangipani - 0.5m)	38	5 litre	-
Mp	Murraya paniculata (Orange Jessamine - 3m)	1	5 litre	-
Ndn	Nandina domestica 'nana' (Dwarf sacred bamboo - 0.4m)	20	5 litre	-
Prr	Photinia 'Red Robin' (Photinia - 2.5m)	25	5 litre	-
Px	Philadelphus xanadu (Dwarf philadelphus - 0.5m)	177	5 litre	-
Rsm	Raphiolepis 'Show maidens' (Indian hawthorne - 0.75m)	46	5 litre	-
Re	Rapala excolita (Parlor palm - 1.5m)	11	5 litre	-
Sre	Syzygium australe 'Resilience' (Lilly Pilly - 3m)	12	5 litre	-
Wmu	Westringia fruticosa 'Mundi' (Westringia - 0.6m)	14	5 litre	-
Groundcovers				
Cm	Clivia miniata (Kaffir lily - 0.5m)	31	150mm pot	-
Lrg	Liriope 'Evergreen Giant' (Giant Liriope - 0.5m)	27	150mm pot	-
Man	Mandevilla sp. 'Pink' (Mandevilla - climber)	58	150mm pot	-
Tjt	Trachelospermum tricolor (Variegated jasmine - 0.3m)	31	150mm pot	-

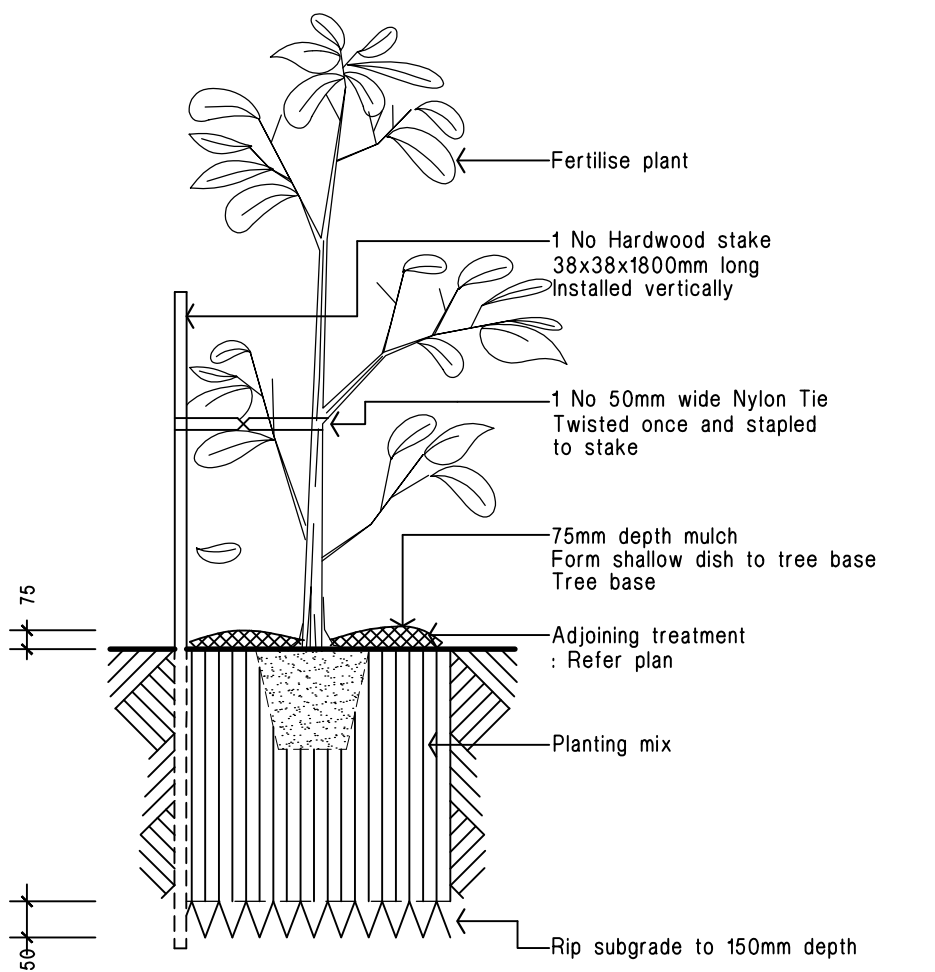

45 litre Tree planting
Detail. Not To Scale.