118 FIRST AVENUE, BELFIELD PROPOSED DUAL OCCUPANCY

STORMWATER CONCEPT PLANS



LOCALITY PLAN

DRAWING INDEX				
Drawing No.	DESCRIPTION			
000	COVER SHEET PLAN			
101	STORMWATER CONCEPT PLAN			
102	SEDIMENT & EROSION PLAN			
103	MISCELLANEOUS DETAILS SHEET			

NOT FOR CONSTRUCTION

					Certific in affilia
					Austral
Α	ISSUE FOR DEVELOPMENT APPLICATION	16/05/2022	MEA	JSF	
sue	Description	Date	Design		
10					1

Certification By Dr. Michel Chaaya in affiliation with Joe Bacha (formerly Australian Consulting Engineers):

SF
ecked

Architect
Ridge Design
G01 / 2A Cooks Avenue
Canterbury, NSW 2193
PHONE: (02) 9787 1595

City of Canterbury Bankstown




118 FIRST AVENUE, BELFIELD PROPOSED DUAL OCCUPANCY STORMWATER CONCEPT PLANS DEVELOPMENT APPLICATION

COVER SHEET PLAN

 Scale
 A3
 Project No.
 Dwg. No.
 Issue

 N.T.S.
 22305
 000
 A

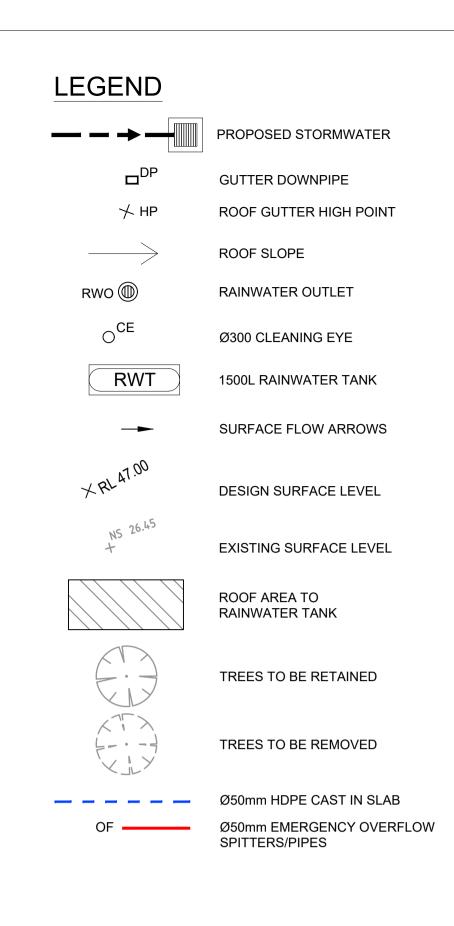


RWT NOTE:

RAINWATER RE-USE AS SPECIFIED BY BASIX CERTIFICATE TO OUTDOOR TAPS AND/OR TOILETS AND/OR WASHING MACHINE

GENERAL NOTES

- ALL LINES ARE TO BE Ø90 uPVC 1.0% GRADE UNLESS NOTED OTHERWISE. CHARGED LINES TO BE SEWERGRADE & SEALED.
- 2. EXISTING SERVICES LOCATIONS SHOWN INDICATIVE ONLY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO LOCATE & LEVEL ALL EXISTING SERVICES PRIOR TO THE COMMENCEMENT OF ANY EARTHWORKS.
- 3. ALL PIPES TO HAVE MIN 150mm COVER IF LOCATED WITHIN PROPERTY.
- 4. ALL PITS IN DRIVEWAYS TO BE 450x450 CONCRETE AND
- ALL PITS IN LANDSCAPED AREAS TO BE 450x450 PLASTIC.

 5. PITS LESS THAN 600mm DEEP MAY BE BRICK, PRECAST
- OR CONCRETE.
- ALL BALCONIES AND ROOFS TO BE DRAINED AND TO HAVE SAFETY OVERFLOWS IN ACCORDANCE WITH RELEVANT AUSTRALIAN STANDARDS.
- 7. ALL EXTERNAL SLABS TO BE WATERPROOFED.
- 8. ALL GRATES TO HAVE CHILD PROOF LOCKS.
- 9. ALL DRAINAGE WORKS TO AVOID TREE ROOTS.
- 10. ALL DPs TO HAVE LEAF GUARDS.
- 11. ALL EXISTING LEVELS TO BE CONFIRMED BY BUILDER PRIOR TO CONSTRUCTION.
- 12. ALL WORK WITHIN COUNCIL RESERVE TO BE INSPECTED BY COUNCIL PRIOR TO CONSTRUCTION.
- 13. COUNCIL'S ISSUED FOOTWAY DESIGN LEVELS TO BE INCORPORATED INTO THE FINISHED LEVELS ONCE ISSUED BY COUNCIL.
- 14. ALL WORK SHALL BE IN ACCORDANCE WITH B.C.A. AND A.S.3500.3.
- 15. REFER TO LANDSCAPE ARCHITECT'S DRAWINGS FOR LANDSCAPING.
- 16. CARE TO BE TAKEN AROUND EXISTING SEWER. STRUCTURAL ADVIICE IS REQUIRED FOR SEWER PROTECTION AGAINST ADDITIONAL LOADING FROM NEW PITS, PIPES, RETAINING WALLS AND OSD BASIN WATER LEVELS.

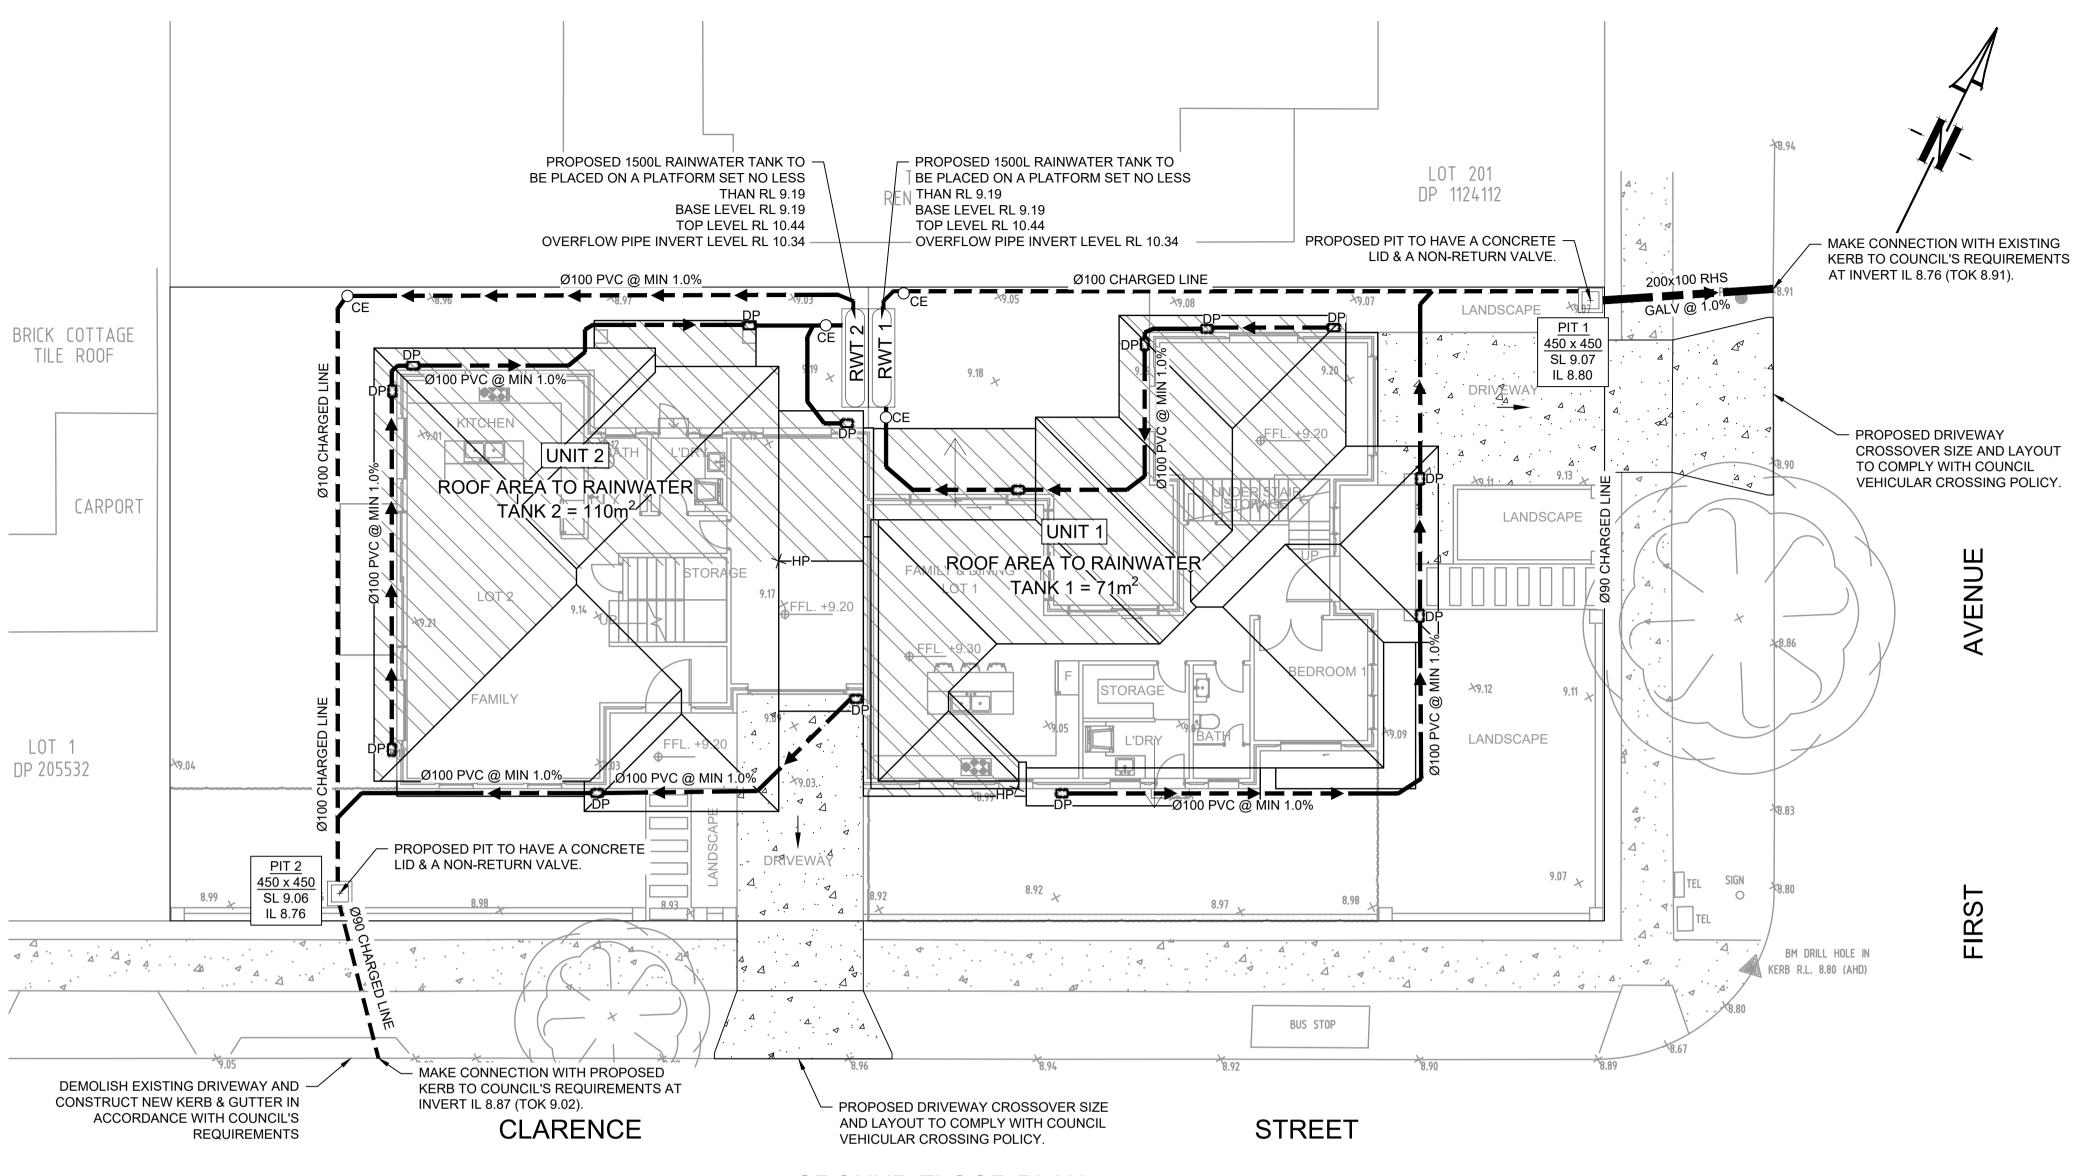


GROUND FLOOR PLAN SCALE 1:200

ROOF NOTE:

IT IS CONTRACTOR'S RESPONSABILITY TO ENSURE MINIMUM 30 TO 40mm OF PONDING IS ACHIEVED OVER THE FLOOR WASTES BY GRADING CATCHMENT'S SURFACES AT MINIMUM 1% FALL.

PIPES NOTE:

Ø65 PVC @ MIN 1.0% Ø90 PVC @ MIN 1.0% Ø100 PVC @ MIN 1.0% Ø150 PVC @ MIN 1.0% Ø225 PVC @ MIN 0.5% Ø300 PVC @ MIN 0.4% UNLESS NOTED OTHERWISE

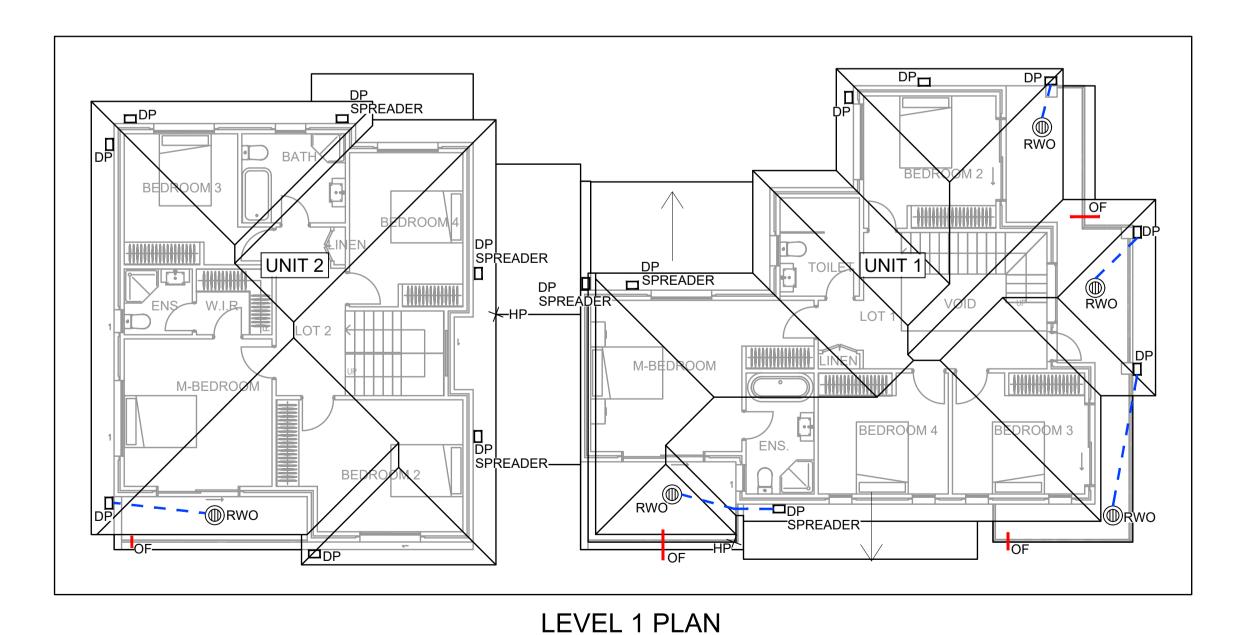

SCALE 1:200

EFEL. +9.20

LANDSCAPE

RL 9.07

1 in 47.6 (2.1%)

A DRIVEWAY

A D

DRIVEWAY GRADES
SCALE 1:200

NOT FOR CONSTRUCTION

A ISSUE FOR DEVELOPMENT APPLICATION 16/05/2022 MEA JSF sue Description Date Design Checked

Certification By Dr. Michel Chaaya in affiliation with Joe Bacha (formerly Australian Consulting Engineers):

Ridge Design

G01 / 2A Cooks Avenue
Canterbury, NSW 2193
PHONE: (02) 9787 1595

City of Canterbury Bankstown 2 4 6 m SCALE 1:200 @ A3

Level 4, 470 Church Street,
Parramatta NSW 2150


PO BOX 3579 Parramatta 2124 Company: Telford Consulting Pty Ltd


118 FIRST AVENUE, BELFIELD PROPOSED DUAL OCCUPANCY STORMWATER CONCEPT PLANS DEVELOPMENT APPLICATION


STORMWATER CONCEPT PLAN

 Scale
 A3
 Project No.
 Dwg. No.
 Issue

 1:200
 22305
 101
 A

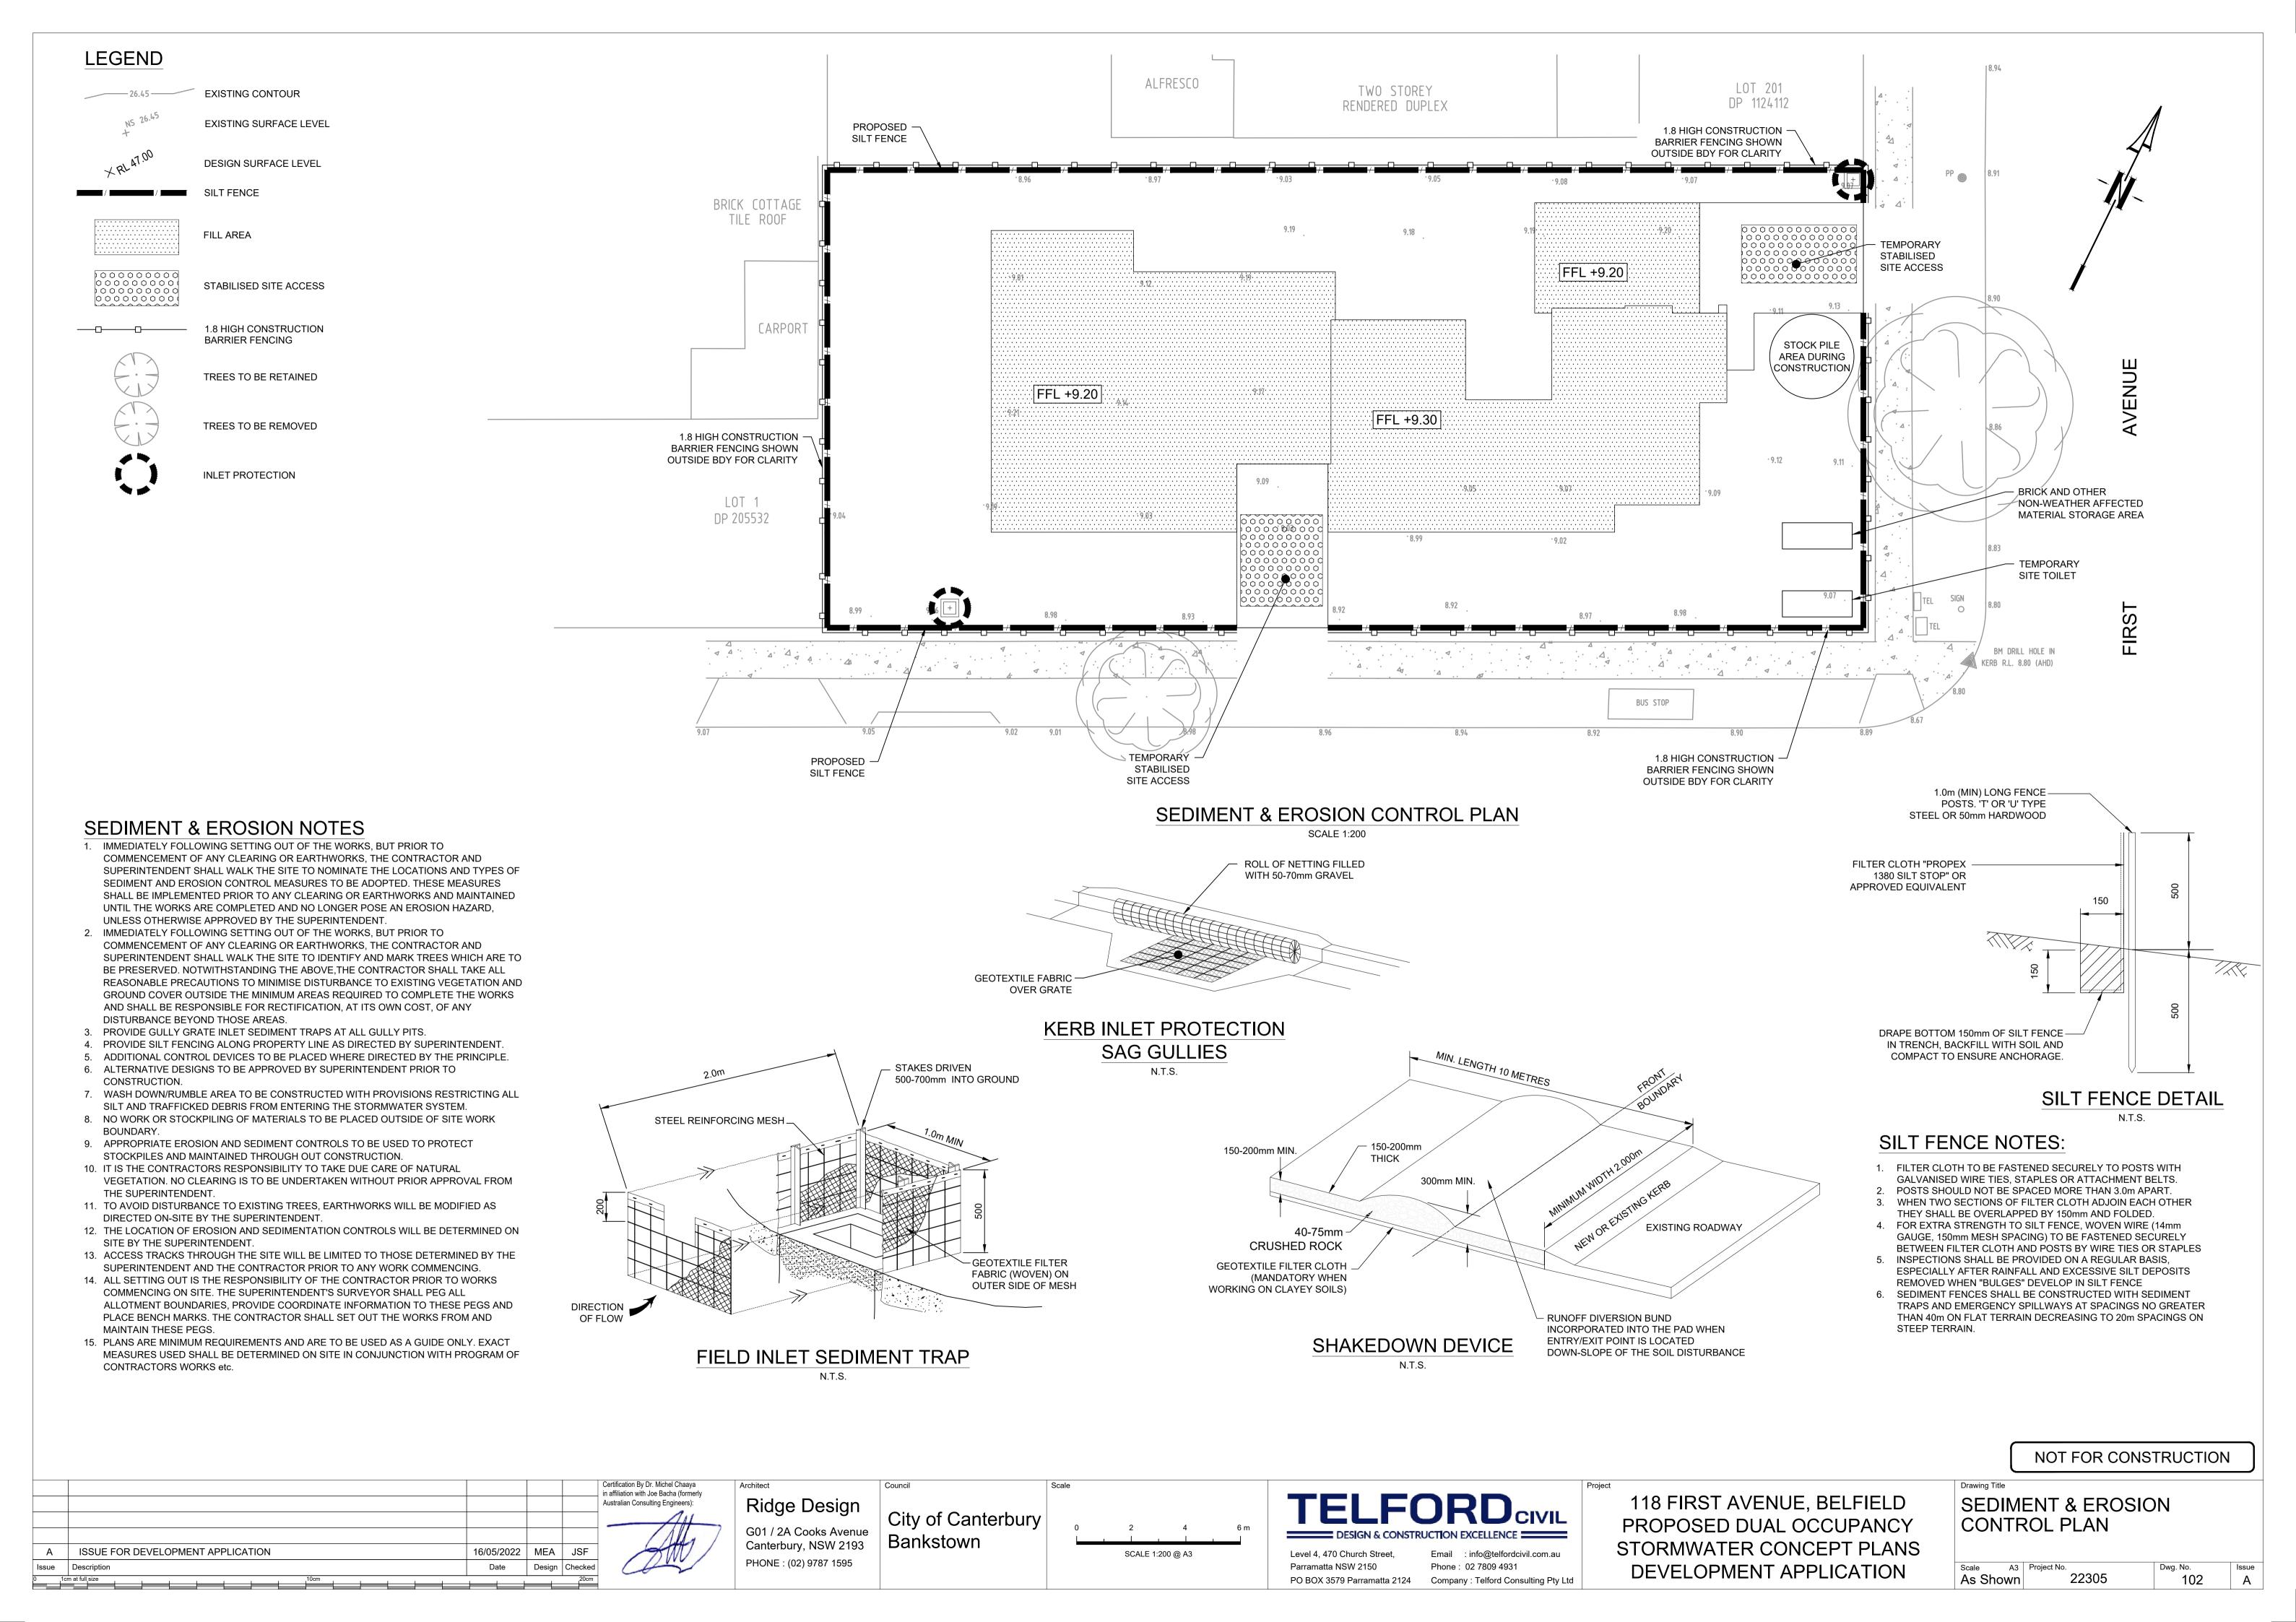


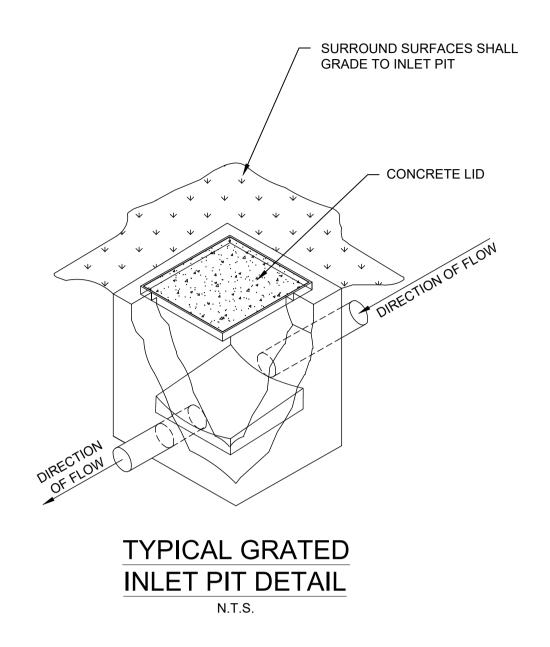

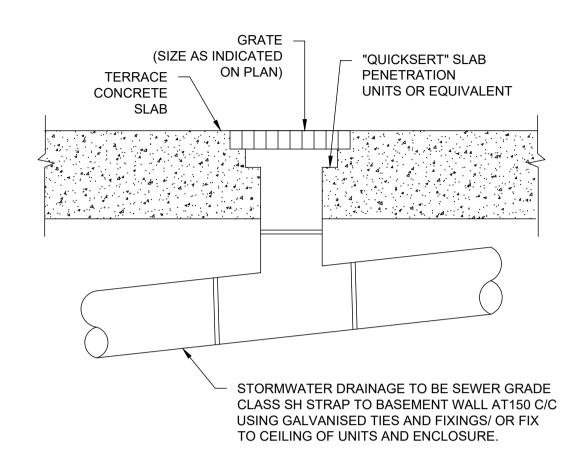


RAINWATER OUTLET DETAIL

N.T.S.

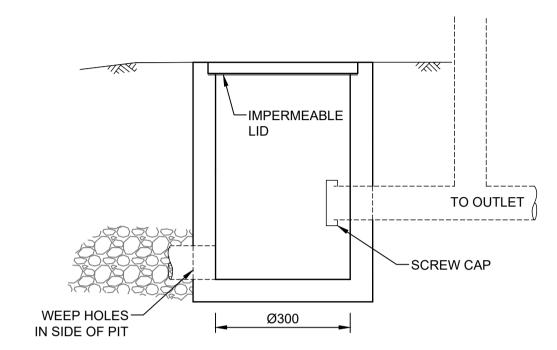

CLEANING EYE DETAIL

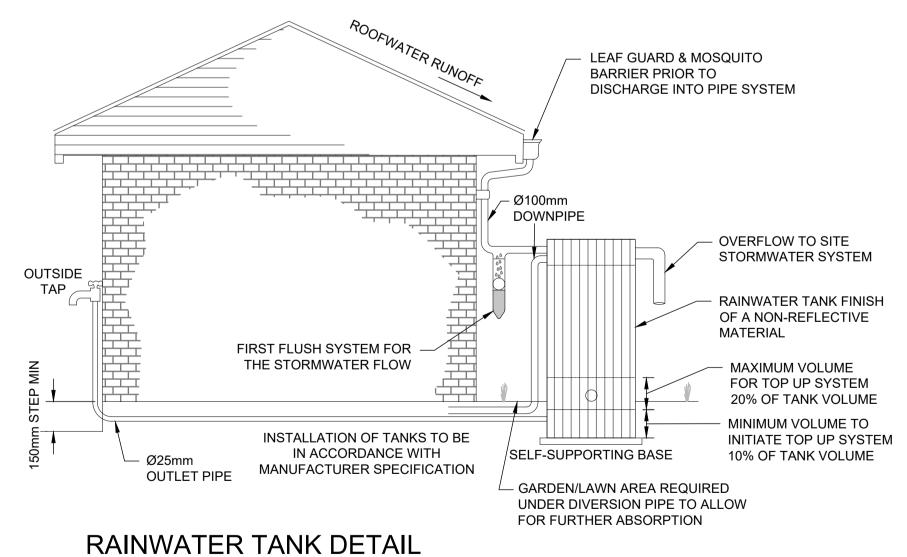

STORAGE TANK NOTES:

- TANK WATER TAPS SHALL BE MARKED "RAINWATER NOT TO HUMAN CONSUMPTION".
- RAINWATER TANKS SHALL BE CONNECTED TO MAINS WATER SUPPLY AS BACKUP.
- 3. THE PUMPS ARE TO BE INSULATED IN ACCORDANCE
- WITH COUNCIL POLICY.
 4. PUMPS SHALL PROVIDE MINIMUM 150 kPa
- PRESSURE.
- 5. EACH TANK TO BE CONNECTED TO AN OUTDOOR TAP FOR IRRIGATION USE.
- RAINWATER TANKS TO BE CLEANED OUT EVERY 6 MONTHS.
- 7. WATER TANK AND ASSOCIATED STRUCTURE TO BE THE SAME COLOR, OR A COLOR COMPLEMENTARY
- TO THE DWELLING.


 8. TOP TANK TO BE BELOW TOP OF NEAREST FENCE,
- OR 1.8 METERS WHICHEVER IS LESS.

 9. THE WATER TANK SHOULD BE LOCATED AT LEAST
- 900mm FROM ANY PROPERTY BOUNDARY

 10. PLUMBING FROM THE WATER TANK IS TO BE KEPT
- SEPARATED FROM THE RETICULATED WATER SUPPLY SYSTEM.
- 11. TANK TO BE BUILT ON SELF-SUPPORTING BASE.12. PROVIDE BACK-FLOW PREVENTION DEVICE AT
- MAINS WATER METER.

 13. ROOF DRAINING TO TANK MUST NOT CONTAIN LEAD,
- TAR BASED PAINTS OR ASBESTOS.

 14. WATER TO BE DRAWN FROM ANAEROBIC ZONE OF
- 14. WATER TO BE DRAWN FROM ANAEROBIC ZONE O TANK.

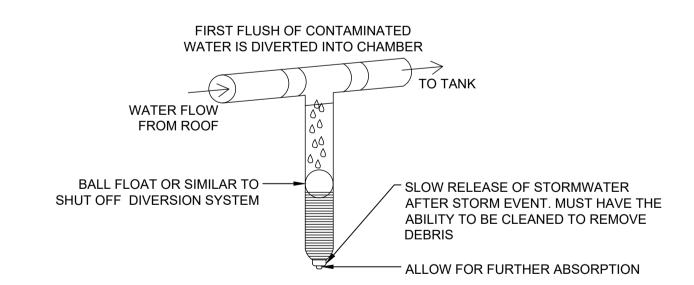

FIRST FLUSH WATER DIVERTER DETAIL

NOT FOR CONSTRUCTION

N.T.S.

TELFORDCIVIL

DESIGN & CONSTRUCTION EXCELLENCE

Level 4, 470 Church Street, Email: info@telfordcivil.com.au

PO BOX 3579 Parramatta 2124 Company : Telford Consulting Pty Ltd

Phone: 02 7809 4931

Parramatta NSW 2150

118 FIRST AVENUE, BELFIELD PROPOSED DUAL OCCUPANCY STORMWATER CONCEPT PLANS DEVELOPMENT APPLICATION

MISCELLANEOUS
DETAILS SHEET

 Scale
 A3
 Project No.
 Dwg. No.
 Issue

 N.T.S.
 22305
 103
 A