


## ATTENTION:

A suitably experienced and qualified engineer is required to inspect the foundation material during construction and verify that an allowable bearing pressure of not less than  $200 \, \mathrm{kN/m}^2$  is achieved.

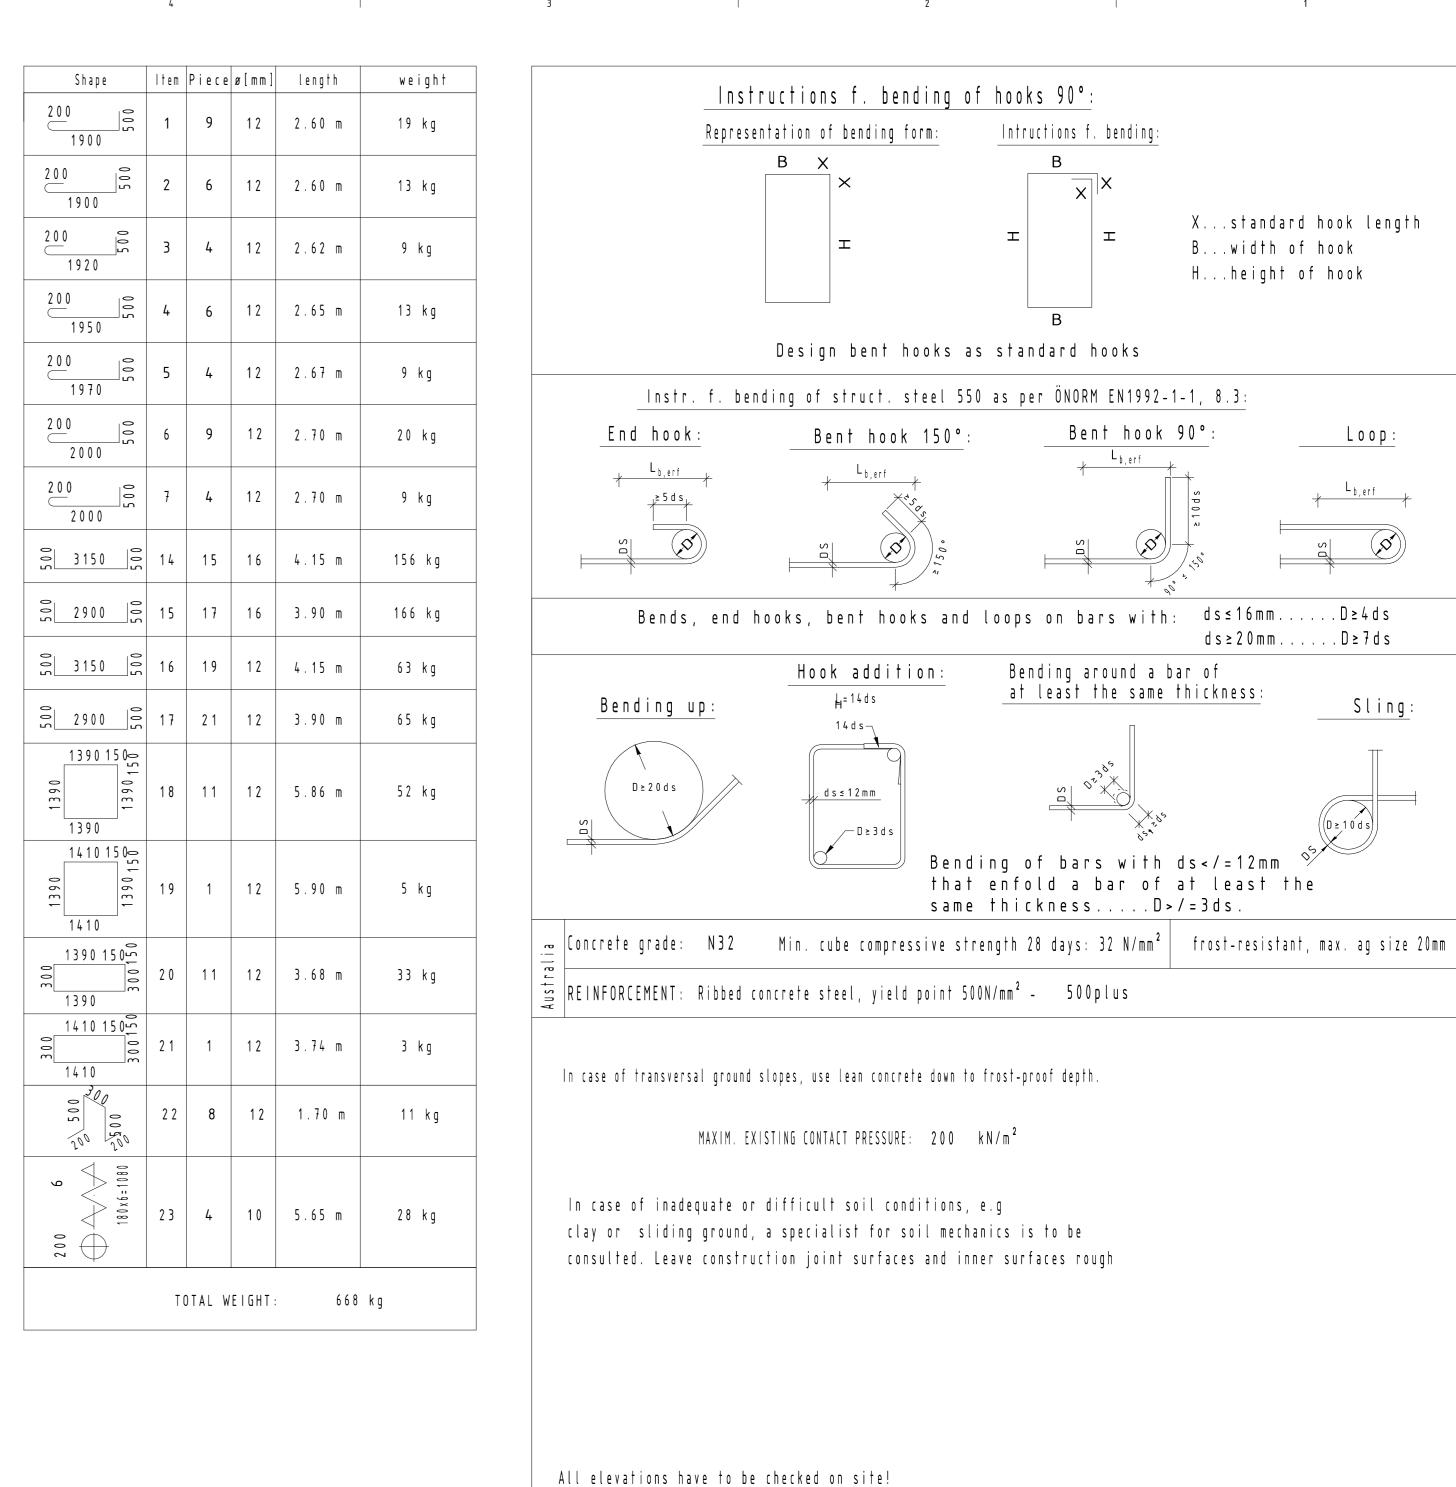


## Remarks:

All dimensions in mm do not scale.

Minimum concrete cover 50mm base and 32mm columns

All exposed corners to have a 20mmx20mm chamfer

The company executing the works is obliged to point out any inconsistencies between this drawing, the architect's drawings or drawings of other expert engineers resp. the local conditions on the constructions site.

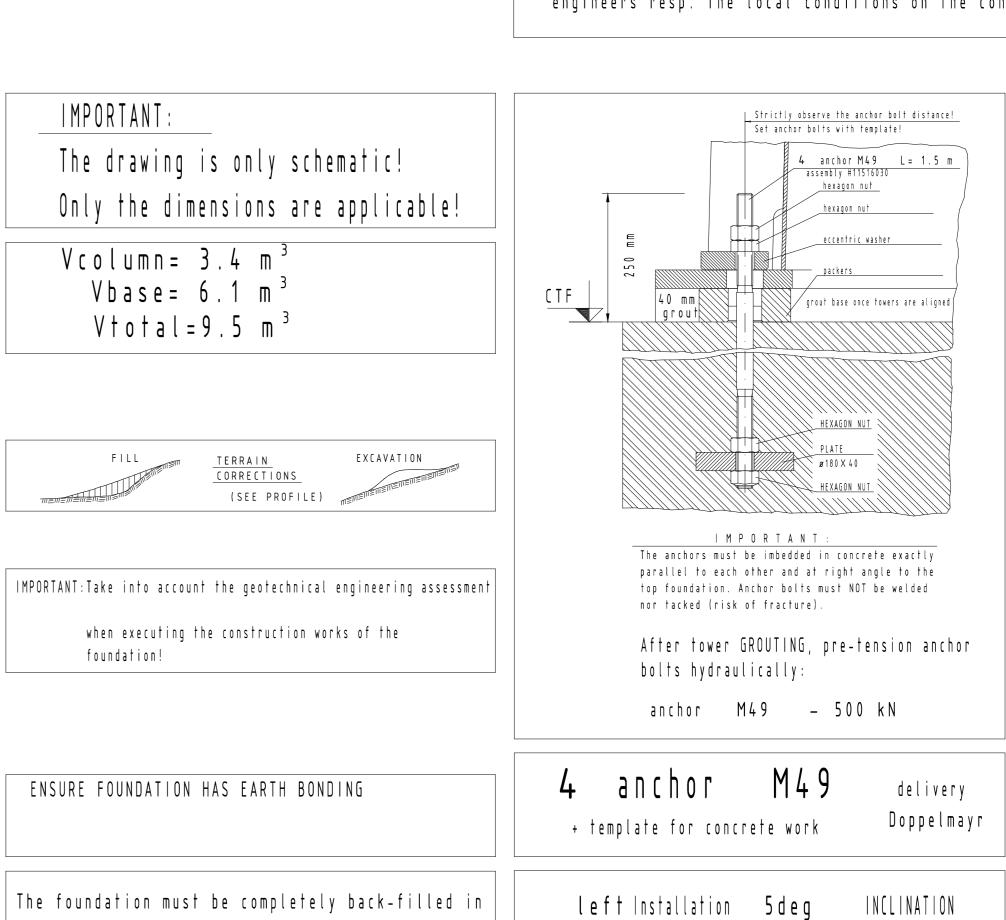

equal layers on the entire surface below the CTF

If the weight of backfill cannot be carried out

in the hereby specified size, the load must be

applied in a different way (e.g. concrete load)

- specific weight 16 kN/m³.

The backfill load was considered

DISTANCE CTF TO GROUND: 470 mm

in the calculation



X...standard hook length

<u>Loop:</u>

\_\_\_Sling

B...width of hook

H...height of hook

 $ds \ge 20 \, mm$ .

