

Building Code of Australia

Design Compliance Report

REF Level Design Review

New High School at Leppington and Denham Court at 128-134 Rickard Rd, Leppington NSW 2179

| Report Number & Revision: | MSA2743_BCA_LEP_4 |
|---------------------------|-----------------------------|
| Prepared For: | NSW Department of Education |
| Date of Issue: | 15 January 2025 |

Revision History & Quality Management

| REPORT NUMBER | REV | STATUS | DATE |
|--|------------------------------------|--|------------------|
| MSA2743_BCA_LEP_1 | Rev1 | 100% Concept BCA Design Review | 15 October 2024 |
| MSA2743_BCA_LEP_2 | Rev2 | 100% Concept BCA Design Review | 06 November 2024 |
| MSA2743_BCA_LEP_3 | Rev3 | REF BCA Design Review | 11 December 2024 |
| MSA2743_BCA_LEP_4 | Rev4 | REF BCA Design Review Incorporating commentary from Town Planning & SI Statutory Planning Teams | 15 January 2025 |
| | | | |
| ROLE | NAME + SIGNATURES | CREDENTIALS | |
| Written By: | 6 hul | Accredited Building Code Consultant & Certifier (Highest Level) Qualified DDA Accessibility Consultant Building and Development Certifier Registration No. BDC2251 | |
| | Gary Pavlou BCA & DDA Consultant | AMAIBS, MAAC, | |
| Ac Bu | | Accredited Building Code Consultant & Certifier (Highest Level) Accredited DDA Accessibility Consultant (Highest Level) Building and Development Certifier Registration No. BDC0809 Association of Consultants in Access Australia – ACAA No.0564 | |
| Matt Shuter MAIBS, MAAC, MACAA DIRECTOR | | | |

[©] Matt Shuter + Associates. All rights reserved.

This document has been prepared solely for the use of our client in accordance with our current professional standards and as per our agreement for providing compliance consulting services. The technical and intellectual content contained within this document is confidential and remains the property of Matt Shuter + Associates. The document is prepared for the express use by the nominated client and Matt Shuter + Associates do not endorse the use of this document by any third party.

This document represents the opinions of Matt Shuter & Associates based on the facts and matters known at the time of preparation of this document. Opinions, judgments and recommendations detailed in this document, which are based on our understanding and interpretation of current statutory and regulatory obligations and standards, should not be construed as legal opinions. No warranty is given, nor liability accepted (except that required by law) in relation to the information contained within this document.

This document has been prepared based on the information provided to our office. Matt Shuter + Associates accepts no liability for information provided by the Client and other third parties used to prepare this document or as the basis of the assessment. Subject to the above conditions, this document may be transmitted, reproduced or disseminated only in its entirety.



Contents

| Executive Summary | 4 |
|---|----------|
| | |
| 1.0 Introduction | 5 |
| 2.0 Assessed Information | 6 |
| 3.0 Purpose & Basis of the Report | 6 |
| | |
| 4.0 Limitations & Exclusions of the Report | 7 |
| 6.0 BCA Mitigation Measures | 14 |
| 7.0 Conclusion | 49 |
| Attachment A – Summary of Fire Resistance Levels (Type A) | 49 |
| Attachment A – Summary of Fire Resistance Levels (Type C) | 52 |
| Attachment R - Assessed Plans | 53 |



Executive Summary

This report assesses the REF Level Design for the proposed New High School at Leppington and Denham Court at 128-134 Rickard Rd, Leppington NSW 2179 against the requirements of the National Construction Code (NCC) / Building Code of Australia (BCA).

The primary purpose of the report is to identify any non-compliances with the deemed-tosatisfy provision of the BCA and provide mitigation measures to best comply with the requirements of the BCA.

Subject to compliance with the mitigation measures of this report, it is considered that the activity can readily comply with the relevant requirements of the BCA. Recommendations have been identified as follows:

- Significant BCA matters, being those with the ability to affect the design have been included in Mitigation Measures Table 1.0 below.
- A BCA Compliance Schedule suitable for the current level of design is also contained in in Mitigation Measures Table 6.0 of this report.

Mitigation Measures Table 1.0 - Significant BCA Compliance Matters

| # | DTS Clause | Recommendation | Status | | |
|------|-----------------------------------|--|-----------------------|--|--|
| Sigi | Significant BCA Compliance Issues | | | | |
| • | D2D5 | Egress Travel Distance Egress travels distances exceed the thresholds stipulated in this clause in the following circumstances: Buildings A & C Building A - Level 1 & 2 - Egress travel distance exceeds more than 20m (Approx 32m) to a point of choice Building C - Level 1 & 2 - Egress travel distance exceeds more than 20m (25m) to a point of choice | Fire Engineering | | |
| • | D2D12 | Travel via External Stairs Buildings A, B, C The discharge of occupants from the external stairs should avoid passing within 6m of the external wall. Otherwise, the wall will require to achieve an FRL of 60/60/60 and any Openings protected in accordance with Clause C4D5. | Can Readily Comply | | |

| # | DTS Clause | Recommendation | Status |
|---|--------------|---|--|
| • | E1D2 | Fire Hydrant Systems There are multiple buildings on the allotment and therefore multiple 'main entrances', hence from a technical standpoint compliance with this provision will not be able to be achieved and a fire engineered performance solution will be required to address this DTS departure. | Fire Engineering |
| • | E1D15 | Fire Control Centre A fire control room may be required as Buildings A, B & C are considered as a 'United Building' and therefore the total floor area may exceed 18,000m². Architect to advise on whether the aggregate floor are exceeds the threshold limit of this clause. | Further Ongoing Detail Required |
| • | NSW E2D16 | Smoke Hazard Management Hall The Hall may be required to be provided with automatic shutdown of any air-handling system in accordance with this clause. • an automatic smoke exhaust system complying with Specification 21 (including Figure S21C2); or Details and design certification must be provided by the Mechanical/fire services engineer. | Further Ongoing Detail Required |
| • | F6D10 | Sanitary Facilities not screened from view The sanitary facilities in Building A Level 1 do not appear to be adequately screened from view. | Further Ongoing Detail Required |
| • | Various | Design Detail Further to the above matters, those items that are indicated as "Can Readily Comply – (Subject to Detail)" in Table 6.0 also require further detailed to allow full assessment by the BCA Consultant. | Further Ongoing Detail Required |

This report assesses the REF Level Design for the proposed New High School at Leppington and Denham Court at 128-134 Rickard Rd, Leppington NSW 2179 against the requirements of the National Construction Code (NCC) / Building Code of Australia (BCA).

This Building Code of Australia (BCA) Report has been prepared to support a Review of Environmental Factors (REF) for the Department of Education (DoE) for New High School at Leppington and Denham Court (the activity). The purpose of the REF is to assess the potential environmental impacts of the activity prescribed by State Environmental Planning Policy (Transport and Infrastructure) 2021 (T&I SEPP) as "development permitted without consent" on land carried out by or on behalf of a public authority under Part 5 of the Environmental Planning and Assessment Act 1979 (EP&A Act). The activity is to be undertaken pursuant to Chapter 3, Part 3.4, Section 3.37A of the T&I SEPP.

The proposed activity is for the construction of a New High School at Leppington and Denham Court located at 128-134 Rickard Road, Leppington, NSW, 2179 (the site).

The purpose of this report is to assesses the REF Level Design for the proposed New High School at Leppington and Denham Court at 128-134 Rickard Rd, Leppington NSW 2179 against the requirements of the National Construction Code (NCC) / Building Code of Australia (BCA).

The site is known as 128-134 Rickard Road, Leppington, NSW, 2179 and is legally described as Lots A and B in Deposited Plan 411211. The site is located on the eastern side of Rickard Road and is approximately 4.1ha in area. The site is located immediately south of the existing Leppington Public School at 144 Rickard Road and is approximately 700m south of Leppington Train Station.





Figure 1 Aerial image of site (source: Near Map)

The northern portion of the site is currently used for residential purposes. The southern portion of the site is used for agricultural purposes, with multiple greenhouses and an existing pond on the property.

2.0 **Assessed Information**

The following information was specifically relied upon for this assessment:

- Desktop assessment of **REF Level design documentation** and supporting design plans and information prepared by DJRD Architects (refer Attachment A - Assessed Plans)
- The Building Code of Australia (National Construction Code) 2022
- The Guide to the Building Code of Australia (National Construction Code) 2022

3.0 **Purpose & Basis of the Report**

3.1 **Report Purpose**

The purpose of this report is to assess the following:

- Assess the design documentation and requirements of the current BCA, and detail any significant issues (or those which have the ability to affect the current design);
- Provide recommendations to best address any significant departures from the requirements of BCA.

3.2 **General Basis**

The general basis of this report is to assess and address compliance with the significant requirements of the Building Code of Australia (BCA) as relevant to the new building works and with regard to the site conditions and design documentation. The scope of services is limited to assessment against Sections C - Fire Resistance, Section D - Access & Egress and Section E - Services & Equipment, Section F - Health and Amenity, and high level parameter advice on Section B - Structure and Section J - Energy Efficiency of the BCA.

3.3 **Regulatory Basis**

The following outlines the regulatory basis for assessment for Crown developments and existing buildings.

3.3.1 **Environmental Planning & Assessment Act, 1979 and Regulation 2021**

This report assumes compliance with the Building Code of Australia is required under Environmental Planning & Assessment Act, 1979 and Regulation 2021.

4.0 **Limitations & Exclusions of the Report**

The Report does not specifically consider anything beyond the considerations contains in Section 2.0 "Assessed Information" and Section 3.0 "Purpose & Basis of Report" and is otherwise also subject to the following specific limitations:

- This report is limited strictly to assessment of the proposed project scope, ie 'the new building works' as detailed in the information referenced in Section 2.0 and does not constitute a full upgrade assessment of any existing building.
- The report is limited to assessment of the development against the deemed-to-satisfy provisions of the applicable Building Code of Australia.
- No assessment has been made of any existing Fire Engineering or BCA Performance based Reports that may apply to the base building or development, unless otherwise specifically noted.
- The information provided to MSA as nominated in Section 2.0 is accepted in good faith as accurate and correct.
- Some requirements of the BCA / Access Regulations are recognised as being interpretive in nature. Where these matters are encountered, interpretations are made in accordance with MSA policy &/or as guided by other standards, guides and industry best practice. Specific relevant interpretations relevant to this assessment are included in Section 5.2 "BCA Assessment Data" of this report.
- MSA does not support the use of combustible cladding or aluminium composite panels as external cladding, lining or ancillary element in any way. Such products are recommended to be avoided and where such products are proposed, MSA automatically excludes their assessment from any reporting and certification and will not accept liability for their use in any way.
- The report does not consider compliance with The Disability Discrimination Act, 1992, the Disability (Access to Premises - Buildings) Standards 2010, or accessibility related parts of the BCA (unless specifically referred to). A separate accessibility (DDA) report is required.

- Detailed assessment of any engineering matters or Australian Standards- e.g: structural, civil, electrical, hydraulic, mechanical, fire, bushfire protection is beyond the scope of this report.
- The Report does not provide for any Alternative /Fire Engineered Solutions.
- For the purposes of this report, Buildings A, B & C have been assessed as a 'United Building'.

5.0 **Building Characteristics**

5.1 **Building Details**

128-134 Rickard Rd, Leppington NSW 2179 5.1.1

The proposed activity is for a new high school in Leppington. The new high school will accommodate up to 1,000 students across 3 new buildings that will comprise 48 permanent teaching spaces (PTS), 3 support teaching spaces (STS), 19 specialist labs/workshops/kitchens and a hall. Buildings 1, 2 and 3 will be clustered along the southern boundary and the hall will be located in south-east corner of the site. The activity also includes the construction of a sports field in the centre of the site and 3 x multipurpose courts along the northern boundary. The proposed scope of works is illustrated in Figure 2 below.



Figure 2 New High School at Leppington and Denham Court (source: djrd) (image to be updated on finalisation of design)

5.2 BCA Assessment Data

The following table details the key BCA characteristics of the building / development:

Table 5.2 – Building details for new buildings

| BCA Clause | | Building A | Building B | Building C |
|------------------------|--|--|--|---|
| A6G1 Classification | | Class 9b (Secondary School & Library) Class 5 (Offices) | Class 9b (Secondary School) Class 5 (Offices) | Class 9b (Secondary School) |
| C2D3 Rise in Stories 3 | | 3 | 3 | 3 |
| C2D2 | Construction Type | Type A Construction (Most Fire Resistant) | Type A Construction (Most Fire Resistant) | Type A Construction (Most Fire Resistant) |
| C3D3 | Floor areas and Fire Compartment Limitations | Type A (Class 5, 9b, 9c)- Max Floor Area 8000m2, Max Volume 48000m3 | Type A (Class 5, 9b, 9c)- Max Floor Area 8000m2, Max Volume 48000m3 | Type A (Class 5, 9b, 9c)- Max Floor Area 8000m2, Max Volume 48000m3 |
| Schedule 1 | Effective Height | Less than 12m | Less than 12m | Less than 12m |

| BCA | A Clause | Building D - Hall |
|------------|--|--|
| A6G1 | Classification | Class 9b (School Hall) |
| C2D3 | Rise in Stories | 1 |
| C2D2 | Construction Type | Type C Construction (Least Fire Resistant) |
| C3D3 | Floor areas and Fire Compartment Limitations | Type C (Class 5, 9b or 9c) - Max Floor Area 3000m2, Max Volume 18000m3 |
| Schedule 1 | Effective Height | Less than 12m |

5.3 BCA / Access Interpretation

Effective height

Effective height means the vertical distance between the floor of the lowest storey included in a determination of rise in storeys and the floor of the topmost storey (excluding the topmost storey if it contains only heating, ventilating, lift or other equipment, water tanks or similar service units).

Exit

Exit means:

(a) any, or any combination of the following if they provide egress to a road or open space:

o An internal or external stairway.

o A ramp.

A fire-isolated passageway.

A doorway opening to a road or open space.

(b) A horizontal exit or a fire-isolated passageway leading to a horizontal exit

Fire compartment

Fire Compartment means—

(a) the total space of a building; or

(b) when referred to in-

(i) the Performance Requirements — any part of a building separated from the remainder by barriers to fire such as walls and/or floors having an appropriate resistance to the

spread of fire with any openings adequately protected; or

(ii) the Deemed-to-Satisfy Provisions — any part of a building separated from the

remainder by walls and/or floors each having an FRL not less than that required for a

fire wall for that type of construction and where all openings in the separating construction are protected in accordance with the Deemed-to Satisfy Provisions of the

relevant Part

Fire-resistance level (FRL)

FRL means the grading periods in minutes determined in accordance with Specification A2.3,

for the following criteria—

(a) structural adequacy; and

(b) integrity; and

(c) insulation,

and expressed in that order.

Note: A dash means that there is no requirement for that criterion. For example, 90/-/- means there is no requirement for an FRL for integrity and insulation, and -/-/- means there is no requirement for an FRL.

Fire-source feature

Fire source feature means—

- (a) the far boundary of a road, river, lake or the like adjoining the allotment; or
- (b) a side or rear boundary of the allotment; or
- (c) an external wall of another building on the allotment which is not a Class 10 building

Fire wall

Fire wall means a wall with an appropriate resistance to the spread of fire that divides a storey or building into fire compartments

Non-combustible

Non-combustible means -

- (a) applied to a material not deemed combustible as determined by AS 1530.1 Combustibility Tests for Materials; and
- (b) applied to construction or part of a building constructed wholly of materials that are not deemed combustible.

Occupiable Outdoor Area

Open /unroofed sections may be considered 'occupiable outdoor area' a new definition under Part G6 of BCA 2019 that requires unroofed parts of buildings meet certain BCA criteria in relation to fire resistance, egress and services and equipment as these areas can have an effect on the safety of occupants.

Performance requirement

Performance requirement means a requirement which states the level of performance which a Performance Solution or Deemed-to-Satisfy Solution must meet.

Performance Solution

Performance Solution means a method of complying with the Performance Requirements other than by a Deemed-to-Satisfy Solution.

| United Buildings |
|---|
| Buildings are deemed united when two or more buildings adjoining each other are connected and used as one building. |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| Matt Shuter & Associates - Ruilding Code + DDA Accessibility + Certifiers |

6.0 BCA Mitigation Measures

The following Table 6.0 provides a summary of assessment of the architectural plans against the significant requirements of the BCA. The following notations are made in the "Status" column of Table 6.0 for ease of reference.

Key of Compliance Status

| Status | Description |
|---|---|
| Complies | The design documentation for the development demonstrates compliance with the BCA deemed-to-satisfy (DTS) provisions as relevant to the new building works &/or the existing level of compliance is maintained. |
| Can Readily Comply or Further Detail Required | Though strict & full compliance can't necessarily be ascertained on the current level of documentation detail, compliance can be readily achieved within the constraints of the design. This may be in the form of a plan or specification note, or further detailed information. |
| NA / Informational | The matter is not applicable to the item of the project scope or the clause is informational only. No specific action required. |
| Does Not Comply | There is an apparent or foreseeable non-compliance with the BCA deemed-to-satisfy provisions indicated on the design documentation that will require re-design or further consideration. |
| Critical Detail Required | There is a critical detail required to assess or confirm full BCA compliance that should be identified as soon as possible to reduce project risk. |
| Fire Engineering | A Fire Engineering Report (fire safety issue) is required to address the DTS non-compliance (or re-design). The recommendations of any fire engineering report must be incorporated into the design. |
| BCA Performance Solution | A BCA Performance Solution Report (for <u>non</u> -fire safety issue) is required to address the DTS non-compliance (or re-design). <i>The recommendations of any performance solution report must be incorporated into the design.</i> |
| Certification by Designer or Specialist | Detailed assessment and confirmation is required from the relevant design engineer, designer or specialist to confirm compliance with the specified requirements of the BCA &/or referenced Australian Standards. This may be technical advice at early design stages or design compliance certification at detailed design stages. |

Table 6.0 provides a summary of key BCA considerations only and should be read in conjunction with the full terms, wording and requirements of the Building Code of Australia to ensure compliance. Some BCA Clauses that are not relevant have specifically not been included in the Table.

Mitigation Measures Table 6.0 -BCA Compliance Schedule

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status | | |
|---------------------|-----------------------|---|--|---|--|--|
| | | | | | | |
| Section B - | Section B – Structure | | | | | |
| Section B | Section B | Structural Compliance All new works must meet current Structural Requirements of Section B of the BCA. Existing structures should be confirmed as capable of supporting any new loads. Glazing – BCA Clause B1.4 | CERTIFICATION BY DESIGNER OR SPECIALIST - Design compliance certification from the designer or specialist is required for the following: Structural Engineer to design and certify any new structural works are in accordance with BCA Section B & Australian Standards. CERTIFICATION BY DESIGNER OR SPECIALIST - Design compliance certification from the designer or specialist is required for all glazing | Certification by Designer or Specialist Certification by | | |
| | | All glazing must be selected and installed in accordance with AS2047 & AS1288. | to be selected and installed in accordance with AS2047 & AS1288. | Designer or Specialist | | |
| Section C - | Fire Resista | nce | | | | |
| Part C2 - Fi | ire Resistanc | e & Stability | | | | |
| C1.0 | C2D1 | Deemed to Satisfy Provisions Informational clause indicating link between Part C2 performance requirements and other parts of the BCA. | The clause is informational only in nature | Informational | | |
| C1.1 | C2D2 | Type of Construction All new works must meet current Fire Resistance Level (FRL) requirements of Section C and Specification 5 of the BCA for the required Type of Construction. Refer to "Fire Resistance of Building Elements below in this table and Attachment B for more Fire Resistance Level information. | Buildings are required to be benchmarked as Type A & C Construction, requiring fire resistance levels in accordance with BCA Specification 5 and as summarised in Attachment A. The following should be noted: • The Hall building is required to be designed to Type C Construction • Buildings A, B & C are required to be designed to Type A Construction – Refer to Table 5.2 Fire Rating Plans to be provided to confirm all elements requiring an FRL. This includes all Structural Load Bearing Elements in external walls that require an FRL. Where FRLs will not be met, the Fire Engineer will be required to rationalise the FRL's under the BCA Performance Requirements. | Certification by Designer or Specialist | | |
| 2.1 of Spec C1.1 | S5C2 | Exposure to Fire Source Features A building element is exposed to a fire-source feature if any of the horizontal straight lines between that part and the fire-source feature, or vertical projection of the feature, is not obstructed by another part of the building that- • has an FRL of not less than 30/-/-; and • is neither transparent nor translucent. | The clause is informational only in nature | Informational | | |
| 2.2 of Spec C1.1 | S5C3 | Fire Protection for Support of Another Part Where a building element vertically or laterally supports a building element required to have an FRL, that part must generally maintain the same FRL as the part it supports. | The clause is informational only in nature | Informational | | |
| 2.3 of Spec C1.1 | S5C4 | Lintels A lintel must have the FRL required for the part of the building in which it is situated, unless it does not contribute to the support of a fire door, fire window or fire shutter, and— (a)it spans an opening in— • a wall of a building containing only one storey; or • a non-loadbearing wall of a Class 2 or 3 building; or (b)it spans an opening in masonry which is not more than 150 mm thick and— • not more than 3 m wide if the masonry is non-loadbearing; or not more than 1.8 m wide if the masonry is loadbearing and part of a solid wall or one of the leaves of a cavity | Any lintel required to have an FRL to comply. Subject to detail, plan or spec note. | Can Readily Comply - Detail | | |
| | | wall. | | | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|----------------------|-----------------|--|---|--|
| 2.4 of Spec C1.1. | S5C5 | Method of attachment not to reduce the fire resistance of building elements The method of attaching or installing a finish, lining, ancillary element or service installation to a building element must not reduce the fire-resistance of that element below that required. | Details demonstrating compliance are required to be provided in a 'BCA Compliance Specification' | Can Readily Comply - Detail |
| 2.5 of Spec C1.1 | S5C6 | Concessions to Fire Resistance Levels Certain elements are given concession to compliance with the FRL requirements of Spec 5: Steel columns (1 or 2 storey buildings) Timber columns (1 storey buildings) Structures on roofs Curtain walls and panel walls Balconies and verandahs Certain non-combustible structures on roofs containing only service equipment | This clause is informational only in nature. | Informational |
| 2.7 of Spec C1.1 | S5C8 | Enclosure of Shafts Fire-isolated shafts are required to be enclosed at the top and bottom of the shaft with fire rated construction having an FRL required for the walls of a non-load-bearing shaft in the same building, as per specification 5 This fire rating is required in two directions. The above does not apply to shafts extending beyond the roof covering, other than fire isolated stair and lift shafts and the bottom of non-combustible shafts laid directly on the ground. | The clause is informational only in nature | Informational |
| Spec C1.1 | S5C21 | Fire-Resistance of Building Elements The FRL's of all elements are to be in accordance with: The FRL's detailed in the Table contained within Attachment B of this report. The FRLs for specific separation of equipment (addressed elsewhere in this report) | Details demonstrating compliance are required to be provided in a 'BCA Compliance Specification' & via an appropriate designer such as Structural Engineer & Architect. | Can Readily Comply - Detail Certification by Designer or Specialist |
| C1.2 | C2D3 | Rise in Storeys The building rise in stories is generally the sum of the greatest number of storeys at any part of the external walls of the building and any storeys within the roof space above the finished ground next to that part. | INFORMATIONAL - the clause is informational only in nature Refer to 5.2 of this report BCA Assessment Data | Informational |
| C1.3 | C2D4 | Buildings of Multiple Classification In a building of multiple classification, the type of construction applying to the top storey, applies throughout. | Informational clause. | Informational |
| C1.4 | C2D5 | Mixed Types of Construction Informational clause relating to the requirements for buildings more than one type of construction. | Informational clause. | Not Applicable |
| C1.5 | C2D6 | Two Storey Class 2, 3 or 9 buildings Provides a concession for construction type in certain Class 2, 3 and 9b buildings. | NA - The matter is not applicable &/or not affected by scope. | Not Applicable |
| C1.6 | C2D7 | Class 4 Parts Provides construction type requirements for Class 4 parts | NA - The matter is not applicable &/or not affected by scope. | Not Applicable |
| C1.7 | C2D8 | Open Spectator Stands Provides construction type requirements for buildings containing open spectator stands. | NA - The matter is not applicable &/or not affected by scope. | Not Applicable |
| C1.8 | C2D9 | Lightweight Construction Lightweight construction must comply with Specification 6 where it is used for fire rated elements and/or lifts shafts. | Where lightweight construction is proposed to be used, the architect/structural engineer should certify that any lightweight construction used complies with BCA Specification 6. | Can Readily Comply - Detail |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | | Compliance Comment | Status |
|-----------------|-----------------|--|---|---|---|
| C1.9 | C2D10 | Non-combustible building elements a) In a building required to be of Type components must be non-combustible: | A or B construction, the following building elements and their | Hall The Hall is not Type A or B, therefore complying with C2D10 is not required. | Not Applicable |
| | | covering, framing and insulation. The flooring and floor framing of I Non-loadbearing internal walls wh A shaft, being a lift, ventilating, pipe, go of combustion, that is non-loadbearing, a building required to be of Type I a Class 2, 3 or 9 building; and | arbage, or similar shaft that is not for the discharge of hot products, must be of non-combustible construction in— A construction; and B construction, subject to C2.10, in— | Buildings A, B & C Buildings are required to be Type A Construction, as such, certain building elements, including external walls, are required to comprise of non-combustible building elements in accordance with C2D10. Plans and certification demonstrating compliance are required to be provided in a via an appropriate designer such as Structural Engineer & Architect. | Can Readily Comply - Detail |
| | | - a Class 5, 6, 7 or 8 building if the shaft connects more than 2 storeys. c) A loadbearing internal wall and a loadbearing fire wall, including those that are part of a loadbearing shaft, must comply with Specification C1.1. d) Certain concession apply for elements containing certain combustible elements such as plasterboard, FC and come bonded laminates Building elements required to be non-combustible, concrete, masonry or fire-protected timber in a building of Type A construction Building element External wall Common wall Non-combustible Common wall Floor and floor framing of lift pit Non-combustible All loadbearing internal walls (including those of shafts) Concrete, masonry or fire-protected timber | | | |
| | | All load bearing internal walls (including those of shafts) Loadbearing fire walls | Type B construction Non-combustible Non-combustible Non-combustible Concrete, masonry or fire-protected timber Concrete, masonry or fire-protected timber Non-combustible | | |
| C1.10 | C2D11 | Specification 7 (or otherwise considered nor Floor Linings – must have an appropriate <i>C</i> 9239.1-2003 and meeting the indices in Spe | ritical Radiant Flux and smoke development rate % tested per ISO | All new floor, wall and ceiling linings and assemblies must comply with BCA Specification 7. | Can Readily Comply - Detail |
| C1.11 | C2D12 | Performance of external walls in fire Concrete external walls that could collapse a having a rise in storeys of not more than 2, | as complete panels (e.g. tilt-up and pre-cast concrete), in a building must comply with Specification 8. | Where tilt-up and pre-cast concrete is utilised for the hall certification via an appropriate designer such as Structural Engineer is to be provided. Notwithstanding the above, external walls of the hall seems to be designed with a combination of brick and fibre cement cladding which | Certification by Designer or Specialist |
| C1.13 | C2D13 | Fire protected timber: Concession Fire protected timber can be used in certain Class 2, 3 or 5 buildings subject to meeting specified conditions i this clause. | | The matter is not applicable &/or not affected by scope. | Not Applicable |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|---|--|---|
| C1.14 | C2D14 | An ancillary Elements An ancillary element must not be fixed, installed or attached to the internal parts or external face of an external wall that is required to be non-combustible unless it is non-combustible or otherwise specified (given concession) in this clause. | Hall The Hall is not Type A or B, therefore complying with C2D14 is not required. Buildings A, B & C Buildings are required to be Type A Construction. As such, any proposed ancillary elements are required to comprise of non-combustible building elements in accordance with C2D14. In this regard specific details have not been provided based on the current level of design however the design can readily comply subject to additional details. | Not Applicable Can Readily Comply - Detail |
| New Clause | C2D15 | Fixing of bonded laminated cladding panels In a building required to be of Type A or B construction, externally located bonded laminated cladding panels must have all layers of cladding mechanically supported or restrained to the supporting frame. An externally located bonded laminated cladding panel need not comply with the above if it is one of the following: | Hall The Hall is not Type A or B, therefore complying with C1.14 is not required. Buildings A, B & C | Not Applicable Not Applicable |
| | | A laminated glass system. (a) Layered plasterboard product. (b) Perforated gypsum lath with a normal paper finish. (c) Fibrous-plaster sheet. (d) Fibre-reinforced cement sheeting. (e) A component of a garage door. | Buildings are required to be Type A Construction. As such, any externally located bonded laminated cladding panels must have all layers of cladding mechanically supported or restrained to the supporting frame in accordance with C2D15. The subject works do not appear to include cladding panels that fall under the requirements of this clause; however, this will be monitored and assessed as the design develops. | |
| Part C3 - C | ompartment | ation & Separation | | |
| C2.0 | C3D1 | Deemed to Satisfy Provisions Informational clause indicating link between Part C3 performance requirements and other parts of the BCA. | The clause is informational only in nature | Informational |
| C2.1 | C3D2 | Application of Part C3D3, C3D4 and C3D5 do not apply to a carpark provided with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17, an open-deck carpark or an open spectator stand. (2)C3D13(1)(e) does not apply to a Class 8 electricity network substation. | The clause is informational only in nature | Informational |
| C2.2 | C3D3 | Fire Compartment Floor Area & Volume Limitations The BCA requires that the floor area of fire compartments is limited to certain areas and volumes dependant on the Type of Construction. | Hall The floor area of the Hall is less than 3000m², however confirmation from the Architect to be provided to confirm the volume of the Hall does not exceed 18000m³. | Informational |
| | | Table C3D3: Maximum size of fire compartments or atria Classification Type A construction Type B construction Type C construction 5, 9b or 9c Max floor area—8 000 m² Max floor area—5 500 m² Max floor area—3 000 m² Max volume—48 000 m³ Max volume—33 000 m³ max volume—18 000 m³ 6, 7, 8 or 9a (except for patient care areas) Max floor area—5 000 m² Max volume—21 000 m³ Max volume—12 000 m³ Max volume—30 000 m³ Max volume—21 000 m³ Max volume—12 000 m³ | Buildings A, B & C Buildings are connected by aerial walkways, and for the purposes of this report, they have been considered as a 'united building'. Notwithstanding, each building and storey will be treated as a separate fire compartment therefore the combined floor area and volumes of these compartments do not exceed the maximum fire compartment size allowed for Type A construction given the inherent design. | Informational |
| C2.3 | C3D4 | Large Isolated Buildings | The buildings have not been assessed as a large-isolated building. | Not Applicable |
| C2.4 | C3D5 | Requirements for Open Space & Vehicular Access | As above | Not Applicable |
| C2.5 | C3D6 | Class 9 Buildings Class 9a and 9c buildings are subject to further requirements in terms of smoke and fire compartmentation. Note BCA NSW C2.5 contains variations to this clause (Applicable in NSW) | The buildings are not class 9a or 9c buildings. | Not Applicable |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|---|--|----------------------|
| | | | | |
| C2.6 | C3D7 | Vertical Separation of Openings in External Walls | Hall | Not Applicable |
| | | In buildings required to be of Type A construction, openings in external walls are required to be protected with vertical spandrels or horizontal slabs to prevent fire from spreading from a storey below. | The Hall is not Type A, therefore complying with C3D7 is not required. | |
| | | Vertical separation must be in the form of: Vertical spandrels must be non-combustible, have a FRL of at least 60/60/60, and a height of at least | Buildings A, B & C | Can Readily Comply - |
| | | 900mm. At least 600mm must be above the surface of the intervening floor | Buildings are required to comply with the requirements of this clause. | Detail |
| | | | In this regard specific details have not been provided based on the current level of design however the design can readily comply subject to additional details. | |
| | | FRL of 60/60/60 | | |
| | | Horizontal Slab separation – FRL of not less than 60/60/60 and extend outwards of the opening not less than 1100mm and horizontally not less than 450mm from the side of the opening. | | |
| | | In-fill panels – part of opening (construction need not have an FRL) | | |
| | | (a) Section | | |
| | | (b) Elevation | | |
| C2.7 | C3D8 | Separation by Fire Walls | Any fire walls included within the design are required to comply with this clause. | Can Readily Comply - |
| | | Fire walls being continuous vertical walls meeting the highest FRL for a fire wall and the classifications concerned as follows: | | Detail |
| | | To Separate Buildings – must be vertical and extend from the lowest storey to the highest roof covering (or extend 6m above the lower roof or certain sprinklers) | | |
| | | To Separate Fire Compartments - must be vertical and extend through all stories and to the highest roof covering or floor slab with FRL | | |
| C2.8 | C3D9 | Separation of Classifications Within the Same Storey | Hall | Not Applicable |
| | | Separate classifications within the same storey must either be | There are no separate classifications within the same storey for the Hall. | |
| | | separated by a fire wall or | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|--|---|---------------------------|
| | | huilt to the highest FDL movined by the two desiffertions throughout | | |
| | | built to the highest FRL required by the two classifications throughout | Buildings A, B & C | |
| | | | Buildings may, in some instances, contain both Class 5 and 9b classifications within the same storey. Since these classifications have the same FRL requirements, separating them within the same storey is not considered necessary. | |
| C2.9 | C3D10 | Separation of Classification between Storeys | Hall | Not Applicable |
| | | Floor separating differing classifications must meet the FRL required for the upper level floor. | The Hall only contain the 9b classification only. | |
| | | | Buildings A, B & C | Not Applicable |
| | | | Buildings may, in some instances, contain both Class 5 and 9b classifications between storeys. Since these classifications have the same FRL requirements, separating them with a higher FRL is not considered necessary. | |
| C2.10 | C3D11 | Separation of Lift Shafts | Hall | Not Applicable |
| | | Where a lift connects or passes by more than 2 stories, or more than 3 stories in a sprinkler protected building, the lift must be contained in a fire rated lift shaft achieving an FRL of no less than: | The Hall does not contain a lift. | |
| | | Type A Construction – the shaft meets the FRLs specified Spec 5 | Buildings A, B & C | Certification by |
| | | • Type B Construction - if loadbearing, the shaft meets the FRLs specified in Spec 5, if non-loadbearing, the shaft must be non-combustible. | A lift is provided to Building B and connects more than 2 stories. Therefore under the provisions of this clause are required to achieve FRL's in accordance with Spec 5 of the BCA | Designer or Specialist |
| | | Openings for lift landing doors and services must meet BCA Part C3. | | |
| C2.11 | C3D12 | Stairways & Lifts in One Shaft | There are no fire isolated stairways and lift shafts within the same shaft. | Complies |
| | | A stairway and lift must not be in the same shaft if either the stairway or the lift is required to be in a fire-resisting shaft. | | |
| C2.12 | C3D13 | Separation of Equipment | Rooms containing equipment as detailed in C2.12 must be by construction having an FRL as required by Specification 5, but not less | Certification by |
| | | Any of the following equipment located in the building must be separated from the remainder of the building: | than FRL 120/120/120 with openings protected by self-closing fire doors having an FRL of not less than -/120/30. | Designer or Specialist |
| | | lift motors and lift control panels; or | Electrical Design Consultant to verify where specified. | |
| | | emergency generators used to sustain emergency equipment operating in the emergency mode; or | | |
| | | central smoke control plant; or | | |
| | | boilers; or bottom outtom installed in the building that has a total voltage of 13 voltage are more and a storage. | | |
| | | a battery system installed in the building that has a total voltage of 12 volts or more and a storage capacity of 200 kWh or more. | | |
| | | Equipment need <u>not</u> be separated in if the equipment comprises: | | |
| | | smoke control exhaust fans located in the air stream which are constructed for high temperature operation in accordance with Specification E2.2b; or | | |
| | | • stair pressurizing equipment installed in compliance with the relevant provisions of AS 1668.1:2015; or | | |
| | | a lift installation without a machine room; or | | |
| | | equipment otherwise adequately separated from the remainder of the building. | | |
| | | Separation must be by construction having an FRL as required by Specification C1.1, but not less than FRL 120/120/120 with openings protected by self-closing fire doors having an FRL of not less than -/120/30. | | |
| | | Separation of on-site fire pumps must comply with the requirements of AS 2419.1:2005. | | |
| C2.13 | C3D14 | Electricity Supply System | Electrical supply system and emergency equipment to be fire separated in accordance with C2.13. | Certification by |
| | | Any electrical substation located within the building must be separated from the remainder of the building by construction having an FRL of not less than 120/120/120, and doorways protected with self-closing fire doors having an FRL of not less than -/120/30. | Electrical Design Consultant to verify where specified. | Designer or Specialist |
| | | A main switchboard which sustains emergency equipment operating in the emergency mode must be fire separated from any other part of the building by construction having an FRL of not less than 120/120/120 and have the doorway fitted with self-closing fire door having an FRL of not less than -/120/30. | | |
| | | Any electrical conductors located within the building that supply a substation or main switchboard for emergency equipment must comply with BCA clause C2.13. | | |
| | | Emergency equipment switchgear must be separated from non-emergency equipment switchgear by metal partitions designed to minimize the spread of a fault from the non-emergency equipment switchgear. | | |


| Second S | BCA 2010 | BC4 2022 | BCA Bassissanas | | | Compliance Company | Chatura |
|--|-----------------|---------------|--------------------------------------|---|--|--|----------------|
| Part | BCA 2019 Cl. | | BCA Requirement | | | Compliance Comment | Status |
| Part | | | | | | | |
| Procedure Proc | | | Emergency equip | oment includes but is not limited to the f | following: | | |
| Part | | | fire hydrant boos | ster pumps; | | | |
| Part | | | sprinkler pumps; | | | | |
| Control of Control o | | | hose reel pumps; | ; | | | |
| Company Comp | | | air-handling system | ems designed to exhaust and control the | e spread of smoke; | | |
| Part County Public contributes (in Class 2 in 3 junition processes) Public contributes (in Class 2 in 3 junition particle county in Class 2 in 3 junition particle county in Class 2 in 3 junition particle county in Class 2 in 3 junition particle (in Class 2 in 3 junition particle county in Class 2 in 1 junition part | | | emergency lifts; | | | | |
| Part Cut Public corridors in Class 2 & 3 Buildings Not Applicable | | | control and indicate | ating equipment; and | | | |
| Post Car Post-action of Openings | | | sound systems are | nd intercom systems for emergency pur | poses. | | |
| Part Cal - Protection Designation of Part | C2.14 | C3D15 | Public corridors in Class | 2 & 3 Buildings | | Not Applicable – there are no class 2 or 3 parts proposed. | Not Applicable |
| CFI2 CFI2 Application of Part This distance relatives openings in construction which are not subject to this part: Cross Country Joint, seek unless and the like in external whills of inaccurry construction which are not subject to this part: Cross Country Joint, seek unless and the like in external whills of inaccurry in the construction of joints between parters in any other vertication in the construction of joints between parters in any other vertication in the construction of joints between parters in any other vertication in the construction of joints between parters in a series of a location of the construction of joints between parters in a series of a location of parters and in spaced and instants at Joint many where vertication is provided upon the construction of th | | | | 3 | of 40m, they must be subdivided into smoke | | |
| Second content of the content of t | Part C4 - P | Protection of | Openings | | | | |
| COLOR joins, ever belter and valle of measure construction in all cases they are not larger than recessing for the purpose. Row-construction of pre-case contracts of in a class they are not larger than recessing for the purpose. Deputing in the varieties the state of the state of the same and a class shade of the state of the same and a subset for statistics or contribution, it can does not exceed 4s 000 mm/s in those area and is suspected to these than 2 in from any other varietistics in the same action. Deputing in the varietistics for statistics or contribution and active state of the same active of the same | C3.1 | C4D2 | Application of Part | | | The clause is informational only in nature | Informational |
| Section Sect | | | This clause clarifies opening | gs in construction which are not subject | to this part: | | |
| Not Applicable | | | external walls of pre-cast c | | | | |
| Section Sect | | | Non-combustible ventilators | | | | |
| caparit, and subject to, the following openings in a caparit floor. Service penetration & openings formed by evidence and evidence in the protected against the spread of penings in a caternal wall that is required to have an FILL must be protected against the spread of penings, or a maternal wall that is required to the protected, must not occupy more than 1/3 of the area of the external wall of the store of the external wall of the store in from the protection of the protected, must not occupy more than 1/3 of the area of the external wall of the store in from the protection of the protected, must not occupy more than 1/3 of the area of the external wall of the store in from the paper to require protection Buildings. A. B. A. C. All Tracades are >3m to the allotment boundaries and >6m from buildings on the same allotment, and therefore any openings do not paper to require protection Buildings. A. B. A. C. All Tracades are >3m to the allotment boundaries and >6m from buildings on the same allotment, and therefore any openings do not paper to require protection Buildings. A. B. B. C. All Tracades are >3m to the allotment boundaries and >6m from buildings on the same allotment, and therefore any openings do not paper to require protection Buildings. A. B. B. C. All Tracades are >3m to the allotment boundaries and >6m from buildings on the same allotment, and therefore any openings do not paper to require protection Buildings. A. B. B. C. Buildi | | | | | at the construction edge or perimeter of a | | |
| Openings in an external wall that is required to have an FRL must be protected against the spread of fire (directives, fire rated glazing, fire shutters) if they are not less than: a fire from the far boundary of a road, river lake or the like adjoining the allotment (except for ground level openings), or 6 firm from another building on the same allotment. a fire required to be protected, must not occupy more than 1/3 of the area of the external wall of the storey in which it is located C3.3 C4D4 Separation of External Walls and Associated Openings in Different Fire Compartments placed and analysis between external walls and associated openings in different fire compartments must be: Angle Review Walls | | | carpark, and subject to, the | | | | |
| Concessions apply if those parts of sexual walls and associated openings in the first output of the same allotment (except for ground level openings), or from the far boundary of a road, river lake or the like adjoining the allotment (except for ground level openings), or most from another building on the same allotment | C3.2 | C4D3 | Protection of Openings in | in External Walls | | <u>Hall</u> | Not Applicable |
| • 6m from the far boundary of a road, river lake or the like adjoining the allotment (except for ground level openings), or • 6m from another building on the same allotment • If required to be protected, must not occupy more than 1/3 of the area of the external wall of the stored in which it is located C3.3 C4D4 Separation of External Walls and Associated Openings in Different Fire Compartments Distance (and angle) between external walls and associated Openings in different fire compartments must be: Magle Retiven Walls Openings Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection Openings required to be protected under Clause C3.2 (or C3.3) allow must be protected as follows: C3.5 Acceptable Meth | | | | | | | |
| Separation of External Walls and Associated Openings in Different Fire Compartments must be: Angle Retween Walls Distance (and angle) between external wall sand associated openings in different fire compartments must be: Angle Retween Walls Distance (and angle) between external walls and associated openings in different fire compartments must be: Angle Retween Walls Distance (and angle) between external walls and associated openings in different fire compartments must be: Angle Retween Walls Distance (and angle) between external walls and associated openings in different fire compartments must be: Angle Retween Walls Distance (and angle) between external walls and associated openings in different fire compartments must be: Angle Retween Walls Distance (and angle) between external walls and associated openings in different fire compartments in the refore the combination of these buildings are connected by aerial walkways, and for the purposes of this report, they have been considered as a single 'united' building, Not withistanding, each building and storey will be treated as a separate fire compartment therefore the combined floor area and volumes of these buildings do not exceed the maximum fire compartments size allowed for Type A construction given the inherent design. Having regard to the above the distance (and angle) between external walls and associated openings in different fire compartments in the above buildings do not contravene the provisions of this clause. CAUS | | | 3m from a side or rea | ar boundary of the allotment, or | | | |
| Case | | | | ndary of a road, river lake or the like adj | oining the allotment (except for ground level | | |
| C3.3 C4.5 | | | 6m from another built | lding on the same allotment | | Buildings A, B & C | Not Applicable |
| Distance (and angle) between external walls and associated openings in different fire compartments must be: Angle Between Walls Minimum Distance | | | l ' | | of the area of the external wall of the storey | | |
| Distance (and angle) between external walls and associated openings in different fire compartments must be: Angle Between Walls (Degrees) | C3.3 | C4D4 | Separation of External W | Valls and Associated Openings in Dif | ferent Fire Compartments | Hall | Not Applicable |
| Concessions apply if those parts of each wall have an FRL of minimum 60/60/60, and any openings protected in accordance with C3.4 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: Buildings A, B & C Buildings are connected by aerial walkways, and for the purposes of this report, they have been considered as a single 'united' building. Notwithstanding, each building and storey will be treated as a separate fire compartment therefore the combined floor area and volumes of these buildings do not exceed the maximum fire compartment size allowed for Type A construction given the inherent design. Having regard to the above the distance (and angle) between external walls and associated openings in different fire compartments in the above buildings do not contravene the provisions of this clause. C3.4 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: C3.4 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: C4D5 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: C4D5 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: C4D5 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: C4D5 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: | | | Distance (and angle) between | een external walls and associated openin | ngs in different fire compartments must be: | | |
| Buildings are connected by aerial walkways, and for the purposes of this report, they have been considered as a single 'united' building. Notwithstanding, each building and storey will be treated as a separate fire compartment therefore the combined floor area and volumes of these buildings do not exceed the maximum fire compartment size allowed for Type A construction given the inherent design. Buildings are connected by aerial walkways, and for the purposes of this report, they have been considered as a single 'united' building. Notwithstanding, each building and storey will be treated as a separate fire compartment therefore the combined floor area and volumes of these buildings do not exceed the maximum fire compartment size allowed for Type A construction given the inherent design. Having regard to the above the distance (and angle) between external walls and associated openings in different fire compartments in the above buildings do not contravene the provisions of this clause. Concessions apply if those parts of each wall have an FRL of minimum 60/60/60, and any openings protected in accordance with C3.4 CADS Acceptable Methods of Protection | | | | Minimum Distance | | Buildings A. P. 9. C. | Tufoundional |
| O-45 5m Notwithstanding, each building and storey will be treated as a separate fire compartment therefore the combined floor area and volumes of these buildings do not exceed the maximum fire compartment size allowed for Type A construction given the inherent design. O-45 4m Store 4m Notwithstanding, each building and storey will be treated as a separate fire compartment therefore the combined floor area and volumes of these buildings do not exceed the maximum fire compartment size allowed for Type A construction given the inherent design. Having regard to the above the distance (and angle) between external walls and associated openings in different fire compartments in the above buildings do not contravene the provisions of this clause. Concessions apply if those parts of each wall have an FRL of minimum 60/60/60, and any openings protected in accordance with C3.4 C4D5 Acceptable Methods of Protection The clause is informational only in nature Informational | | | (Degrees) | 6m | | | Informational |
| 90-135 3m 2m 135-180 2m NIL Concessions apply if those parts of each wall have an FRL of minimum 60/60/60, and any openings protected in accordance with C3.4 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: Having regard to the above the distance (and angle) between external walls and associated openings in different fire compartments in the above buildings do not contravene the provisions of this clause. The clause is informational only in nature The clause is informational only in nature | | | | 5m | | Notwithstanding, each building and storey will be treated as a separate fire compartment therefore the combined floor area and volumes | |
| 135-180 2m 180 or more NIL 2m Having regard to the above the distance (and angle) between external walls and associated openings in different fire compartments in the above buildings do not contravene the provisions of this clause. Concessions apply if those parts of each wall have an FRL of minimum 60/60/60, and any openings protected in accordance with C3.4 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: The clause is informational only in nature Informational Infor | | | | | | | |
| Concessions apply if those parts of each wall have an FRL of minimum 60/60/60, and any openings protected in accordance with C3.4 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: The clause is informational only in nature Informational | | | 135-180 | 2m | | | |
| C3.4 C4D5 Acceptable Methods of Protection (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: The clause is informational only in nature The clause is informational only in nature | | | - | | | 5 | |
| (a) Openings required to be protected under Clause C3.2 (or C3.3) above must be protected as follows: | | | | parts of each wall have an FRL of minim | num 60/60/60, and any openings protected | | |
| | C3.4 | C4D5 | Acceptable Methods of P | Protection | | The clause is informational only in nature | Informational |
| (i) Doorways— | | | (a) Openings required to b | be protected under Clause C3.2 (or C3.3 | s) above must be protected as follows: | | |
| | | | (i) Doorways— | | | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|---|---|---------------------------|
| CI. | CI. | | | |
| | | (A) internal or external wall-wetting sprinklers as appropriate used with doors that are self-closing or automatic closing; or | | |
| | | (B) -/60/30 fire doors that are self-closing or automatic closing. | | |
| | | (ii) Windows— | | |
| | | internal or external wall-wetting sprinklers as appropriate used with windows that are automatic closing or permanently fixed in the closed position; or | | |
| | | - /60/ fire windows that are automatic closing or permanently fixed in the closed position; or | | |
| | | - /60/ automatic closing fire shutters. | | |
| | | (iii) Other openings— | | |
| | | excluding voids — internal or external wall-wetting sprinklers, as appropriate; or | | |
| | | construction having an FRL not less than /60/. | | |
| | | (b) Fire doors, fire windows and fire shutters must comply with Specification C3.4. | | |
| C3.5 | C4D6 | Doorways in Fire Walls | There are no fire walls in the current design. | Not Applicable |
| | | • The aggregate width of doorways in fire walls must not exceed ½ of the length of the fire wall. | | |
| | | The doorways can be protected with 1 or 2 doors to achieve the required FRL | | |
| | | Doors must be self or automatic closing | | |
| C3.6 | C4D7 | Sliding Fire Doors | There are no sliding fire doors in the current design. | Not Applicable |
| | | Sliding fire doors must automatically close in accordance with this clause and be provided with warning | | |
| | | signage. | | |
| C3.7 | C4D8 | Protection of Doorways in horizontal exits | There are no horizontal exits in the current design. | Not Applicable |
| | | Doors in horizontal exits must achieve the same FRL as that of the fire wall | | |
| | | Doors must be self or automatic closing | | |
| C3.8 | C4D9 | Openings in fire isolated exits | Fire isolated exists have not been incorporated into the current design. | Not Applicable |
| | | Doorways serving the fire isolated exit must be protected with a self-closing fire door achieving a FRL of not less than -/60/30. | | |
| | | Window in the external wall of a fire isolated exit within 6m and exposed to a window or other opening in a wall of the same building must be protected externally in accordance with Clause C3.4. | | |
| C3.9 | C4D10 | Service Penetrations in fire-isolated exits | There are no fire-isolated exits in the in the current design. | Not Applicable |
| | | Service penetrations in fire exits must comply with this clause. Generally, only electrical wiring and water | | |
| | | supply pipes for fire services are permitted within the exits. | | |
| C3.10 | C4D11 | Openings in Fire isolated lift shafts | Lift Design Consultant to verify where specified. | Certification by |
| | | The entrance doorways must be protected with fire doors (achieving a FRL of not less than -/60/- which comply with AS1735.11 and are set to remain in the closed position (except when discharging or receiving passengers) | | Designer or Specialist |
| | | The lift indicator panels and the like must be backed with construction achieving a FRL of not less than - | | |
| | | /60/60 – if it exceeds an area of 35,000mm ² | | |
| C3.11 | C4D12 | Bounding Construction | The proposal does not contain any Class 2 and 3 buildings, Class 4 parts and Class 9b 'Entertainment Building' parts. | Not Applicable |
| | | Applies to Class 2 and 3 buildings and Class 4 parts | | |
| | | The entrance doorways of the sole occupancy units, which open onto a public corridor must be protected with a self-closing fire door achieving a FRL of not less than -/60/30. | | |
| | | In a Class 2 or 3 building, where the path of travel to an exit does not provide a person seeking egress | | |
| | | with a choice of travel in different directions to alternative exits and is along an open balcony, landing or the like and passes the external wall of another unit or other room, then that wall must be fire rated and openings protected internally. | | |
| | | Note NSW C3.11 Bounding Construction: Class 2, 3, 4 and 9b buildings | | |
| | | | | |

| BCA 2019 | 1 | BCA Requirement | Compliance Comment | Status |
|--------------------|---------------|---|---|---------------------------------|
| CI. | CI. | | | |
| C3.12 | C4D13 | Openings in floors and ceilings for services | Passive Fire Services Consultant to review and provide Certification confirming all passive fire stopping elements comply with the | Certification by |
| | | Where services pass through a floor which is required to achieve an FRL or a ceiling required to have a resistance to the incipient spread of fire, or fire protective covering, the service must be enclosed within a fire resisting shaft or fire protected in accordance with Clause C3.15. | provisions of this clause. | Designer or Specialist |
| C3.13 | C4D14 | Openings in shafts must be protected by: | Passive Fire Services Consultant to review and provide Certification confirming all passive fire stopping elements comply with the provisions of this clause. | Certification by Designer or |
| | | • if it is in a sanitary compartment – a door or panel which together with its frame, is non-combustible or has an FRL of not less than –/30/30; or | provisions of this clouse. | Specialist |
| | | • a self-closing -/60/30 fire door or hopper; or an access panel having an FRL of not less than -/60/30; or | | |
| | | if the shaft is a garbage shaft – a door or hopper of non-combustible construction. | | |
| C3.15 | C4D15 | Openings for Service Installations & Construction Joints | Passive Fire Services Consultant to review and provide Certification confirming all passive fire stopping elements comply with the provisions of this clause. | |
| | | Where services penetrate a building element required to have an FRL, the services must generally be protected against the spread of fire (mechanical with dampers, hydraulic with collars and electrical with fire rated mastic). | provisions of this clause. | Designer or Specialist |
| | | All cable penetrations through floors or fire walls must be fire stopped in accordance with BCA C3.15 and AS1530.4 with fire rated mastic to seal gaps. | | |
| C3.16 | C4D16 | Construction Joints | The design can readily comply subject to ongoing design detail | Can Readily Comply - |
| | | Construction joints, spaces and the like in and between building elements required to be fire-resisting with respect to integrity and insulation must be protected in a manner identical with a prototype tested in accordance with AS 1530.4:2014 to achieve the required FRL. | | Detail |
| C3.17 | C4D17 | Columns protected in lightweight construction to achieve FRL | The design can readily comply subject to ongoing design detail | Can Readily Comply - |
| 1 | | Columns protected in lightweight construction which penetrate a building element required to achieve a FRL or | | Detail |
| | | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. | | |
| | · Access & Eg | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. | | |
| | | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. | The clause is informational only in nature | Informational |
| Part D2 - F | rovision for | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Iress Escape | The clause is informational only in nature | Informational |
| Part D2 - F | rovision for | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Tress Escape Application of Part | The clause is informational only in nature | Informational |
| Part D2 - F | rovision for | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Escape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part | The clause is informational only in nature Hall | Informational |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Escape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. | | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Fescape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Escape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required • At least one exit must be provided from each storey of every building | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Escape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required At least one exit must be provided from each storey of every building At least 2 alternative exits must be provided from: | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Escape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required At least one exit must be provided from each storey of every building At least 2 alternative exits must be provided from: Every storey of a building which has an effective height of more than 25m Basement storeys where egress from the building involves a vertical rise of 1.5m or more (some | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Escape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required • At least one exit must be provided from each storey of every building • At least 2 alternative exits must be provided from: • Every storey of a building which has an effective height of more than 25m • Basement storeys where egress from the building involves a vertical rise of 1.5m or more (some small basements provided with an exemption) | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. **Tess** **Escape** Application of Part** This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. **Number of Exits Required** At least one exit must be provided from each storey of every building** At least 2 alternative exits must be provided from: Every storey of a building which has an effective height of more than 25m* Basement storeys where egress from the building involves a vertical rise of 1.5m or more (some small basements provided with an exemption) Class 8 buildings with a rise in storeys of more than 6 | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Tress Escape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required At least one exit must be provided from each storey of every building At least 2 alternative exits must be provided from: Every storey of a building which has an effective height of more than 25m Basement storeys where egress from the building involves a vertical rise of 1.5m or more (some small basements provided with an exemption) Class 8 buildings with a rise in storeys of more than 6 A storey which contains a 'patient care area' | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. Fescape Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required • At least one exit must be provided from each storey of every building • At least 2 alternative exits must be provided from: © Every storey of a building which has an effective height of more than 25m © Basement storeys where egress from the building involves a vertical rise of 1.5m or more (some small basements provided with an exemption) © Class 8 buildings with a rise in storeys of more than 6 © A storey which contains a 'patient care area' © A storey which contains sleeping areas in a Class 9c building | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. **Tescape** **Application of Part** This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. **Number of Exits Required** **At least one exit must be provided from each storey of every building** **At least 2 alternative exits must be provided from: **o** Every storey of a building which has an effective height of more than 25m** **o** Basement storeys where egress from the building involves a vertical rise of 1.5m or more (some small basements provided with an exemption) **o** Class 8 buildings with a rise in storeys of more than 6 **o** A storey which contains a 'patient care area'** **o** A storey which contains sleeping areas in a Class 9c building **o** Every storey in a childcare centre* | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. FESCAPE Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required At least one exit must be provided from each storey of every building At least 2 alternative exits must be provided from: Every storey of a building which has an effective height of more than 25m Basement storeys where egress from the building involves a vertical rise of 1.5m or more (some small basements provided with an exemption) Class 8 buildings with a rise in storeys of more than 6 A storey which contains a 'patient care area' A storey which contains sleeping areas in a Class 9c building Every storey in a childcare centre Each storey of a primary/secondary school with a rise in storeys of 2 or more | Hall | |
| Part D2 – F | D2D2 | a RISF must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the required FRL or RISF. RESCAPE Application of Part This clause clarifies openings in construction which are not subject to this part: This part does not apply to the internal parts of a sole-occupancy unit in a Class 2 or 3 building or a Class 4 part of a building. Number of Exits Required • At least one exit must be provided from each storey of every building • At least 2 alternative exits must be provided from: • Every storey of a building which has an effective height of more than 25m • Basement storeys where egress from the building involves a vertical rise of 1.5m or more (some small basements provided with an exemption) • Class 8 buildings with a rise in storeys of more than 6 • A storey which contains a 'patient care area' • A storey which contains sleeping areas in a Class 9c building • Every storey in a childcare centre • Each storey of a primary/secondary school with a rise in storeys of 2 or more • Any storey or mezzanine which accommodates more than 50 ppl • Any storey used as a Class 9b early childhood centre, or any Class 9b early childhood centre which | Hall The Hall has access to a minimum of 2 exits. Buildings A, B & C | Complies |

| BCA 2019 Cl. | BCA 2022 CI. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|---|--|----------------|
| | | A part of a storey which is provided with direct egress to a road or open space is permitted to have only 1 exit for buildings with an effective height of more than 25m. | | |
| D1.3 | D2D4 | When Fire Isolated Exits Are Required Exits are required to be fire isolated depending on the Classification of the building and number of storeys connected. The following general requirements apply (exits are required to be fire isolated in the following circumstances): | Hall The Hall is not required to have fire isolated exits. | Not Applicable |
| | | Class 2 buildings - > 3 consecutive storeys Class 3 buildings - > 2 consecutive storeys Class 5-9 buildings (> 2 consecutive storeys) Class 9a (patient care parts) & 9c buildings - all exits to be fire isolated. Note D1.7 in relation to design of fire isolated exits. | Buildings A, B, C Buildings A, B & C have been designed with 'External stairways lieu of fire-isolated exits.' Refer to Clause D2D13 for assessment. | Not Applicable |
| D1.4 | D2D5 | Exit Travel Distances Class 2 & 3 buildings The distance between the entrance door of a Sole Occupancy Unit (SOU) and an exit or Point of Choice (POC) to 2 alternative exits must not exceed 6m (20m on ground floor) From all parts not in a SOU – 20m to exit or POC Class 4 buildings – entrance door of SOU to exit or POC must not exceed 6m Class 5, 6, 7, 8 or 9 buildings – 20m to exit or POC Additional requirements apply to Class 9 buildings, and open Spectator stands | Hall Egress travel distances from the Hall generally comply. | Complies |

| BCA 2019 | | BCA Requirement | Compliance Comment | Status |
|---------------------------------|-------|--|---|--------------------------------|
| CI. | CI. | | | |
| D1.5 | D2D6 | Distance Between Alternative Exits BCA requires that where exits are provided as 'alternative' should be distributed as uniformly as possible around the storey. Alternative exits must: | Distance between alternative exits are considered compliant in the Hall Building . | Complies |
| | | Be not less than 9m apart Be not more than 45m apart in a Class 2 or 3 building (or patient care area in a Class 9a building) Be not more than 60m apart in any other case Be located so that alternative paths of travel do not converge to be less than 6m apart. | Buildings A, B & C Distance between alternative exits are considered compliant in Buildings A, B & C. | Informational |
| D1.6(a) | D2D7 | Height of exits, paths of travel to exits and doorways Required exits or path of travel to exits must have an unobstructed height throughout of not less than 2 m, except the unobstructed height of any doorway may be reduced to not less than 1980mm. | The height of exits, paths of travel to exits and doorways appear compliant at this stage of the design, subject to ongoing design detail. | Can Readily Comply - Detail |
| D1.6(b), (c), (d) and (e) | D2D8 | Width of Exits & Paths of Travel to Exits Generally a minimum 1m egress path of travel must be provided. Wider exits required for Class 9a or 9c buildings for patients on beds Appropriate aggregate exit width must be provided or maintained in the building to allow for safe egress of the building populations. | Hall The Hall accommodates approximately 7.44m of aggregate exit widths throughout its main parts, centrally connected to the main hall. Based on this figure, a maximum of 1016 occupants can be accommodated. Note: Roller or tilt up doors have not been included as part of the aggregate egress width on account that these types of doors are not permitted to be considered as egress doors. Refer to BCA Clause D3D24. | Can Readily Comply - Detail |
| | | | Buildings A, B, C Based on the current design aggregate exit width for Buildings A, B & C appear to comply with the provisions of this clause. | Can Readily Comply - Detail |
| D1.6(f) | D2D9 | Width of doorways in exits or paths of travel to exits General min width of doorway in an exit or path of travel: Unobstructed egress width (as per D2D8) minus 250mm Generally 750mm (unless to sanitary compartments) Additional widths required in Class 9a or 9c buildings. | A door schedule should be provided in subsequent design reviews | Can Readily Comply - Detail |
| D1.6(g) | D2D10 | Exit width not to diminish in direction of travel The unobstructed width of a required exit must not diminish in the direction of travel to a road or open space, except where the width is increased in accordance with D2D8(1)(b) or D2D9(a)(i). | Exits in both the Hall & Buildings A, B & C do not appear to diminish in the direction of travel. | Complies |
| D1.6(h) and (i) | D2D11 | Determination and measurement of exits and paths of travel to exits The required width of a stairway or ramp in a required exit or path of travel to an exit must— (a) be measured clear of all obstructions such as handrails, projecting parts of barriers and the like; and (b) extend without interruption, except for ceiling cornices, to a height not less than 2 m vertically above a line along the nosings of the treads or the floor surface of the ramp or landing. | The clause is informational only in nature | Informational |
| D1.7 | D2D12 | Travel via Fire Isolated Stairs Doors from rooms must not open directly into a fire isolated exit unless the room is a public corridor, lobby, SOU occupying the whole of storey, or sanitary compartment. Fire isolated exists must provide independent egress from each storey served and discharge directly to: A road or open space | Buildings A, B, C The discharge of occupants from the external stairs should avoid passing within 6m of the external wall. Otherwise the wall will require to achieve an FRL of 60/60/60 and any Openings protected in accordance with Clause C4D5. | Further Detail Required |

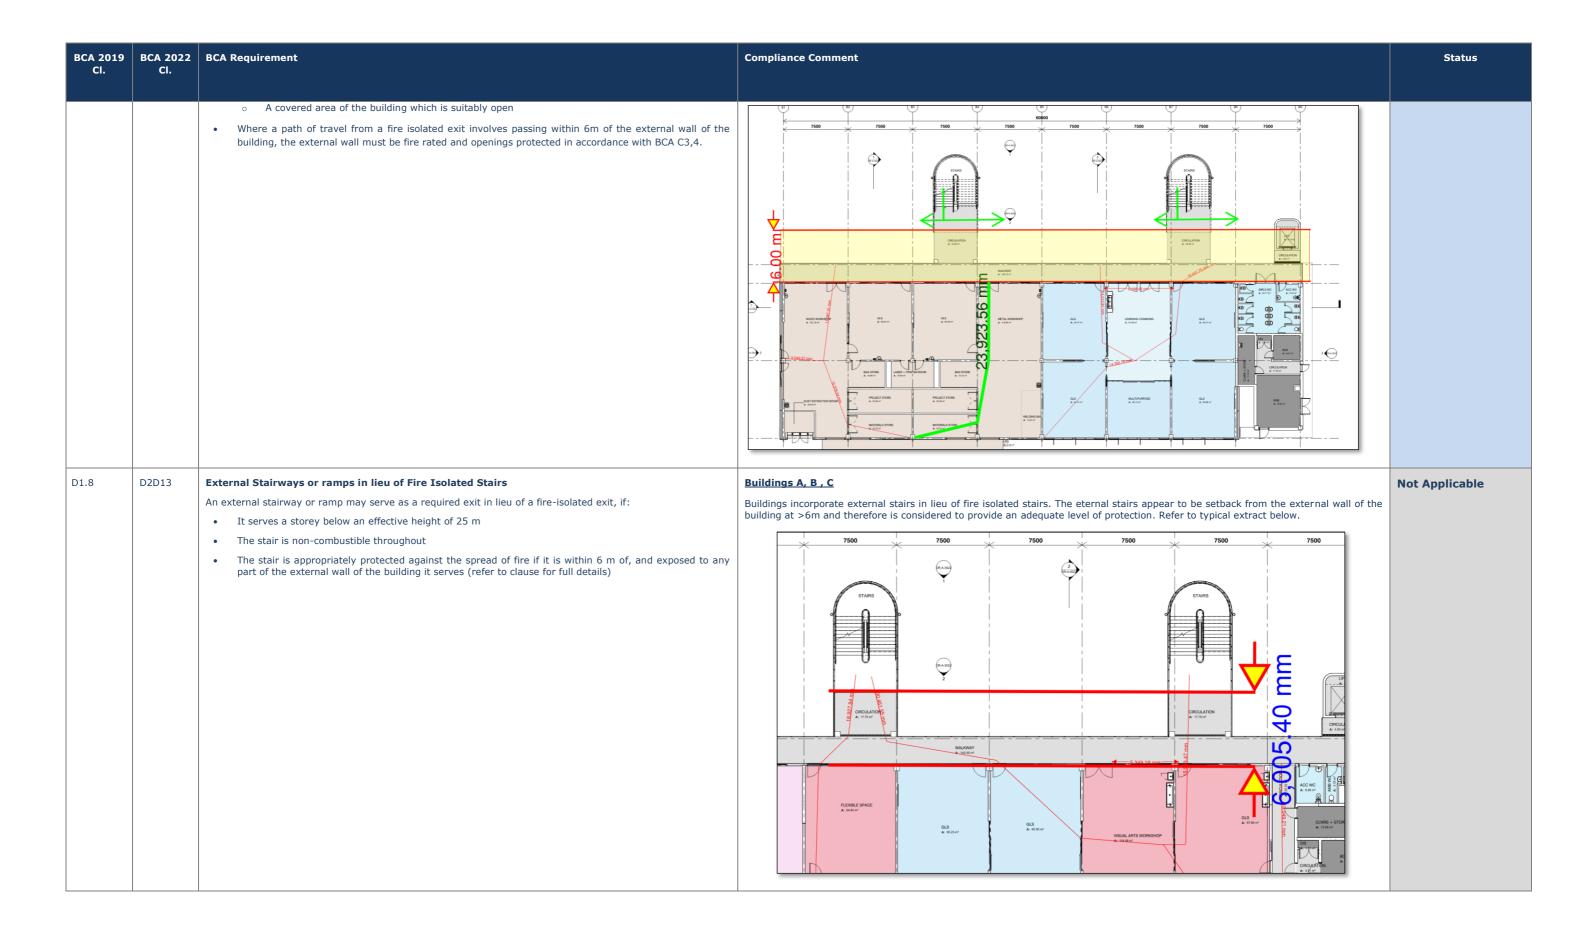

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|--|--|----------------------|
| Ci. | Ci. | | | |
| D1.9 | D2D14 | Travel Via Non-Fire Isolated Stairs & Ramps | No non-fire isolated stairs are proposed for the current design. | Not Applicable |
| | | Non-fire-isolated exits serving as a required exit must provide a continuous measure of travel by its own flights and landings to the level at which egress to a road or open space is provided. | | |
| | | The distance between the doorway of an SOU and the point of egress to a road or open space must not exceed | | |
| | | - 30m for Type C construction | | |
| | | - 60m in any other case. | | |
| | | The distance between any point on the floor and the point of egress to road/open space in a Class 5, 6, 7, 8 or 9 building must not exceed 80m. | | |
| | | • The distance between the point of discharge of a non-fire isolated stair and a doorway leading to road open space must not exceed 15m for Class 2 or 3 buildings, or 20m for Class 5, 6, 7, 8 or 9 buildings | | |
| | | In Class 2 or 3 buildings – non-fire isolated exits must provide separate egress to road/open space and be smoke separated at the level of discharge. | | |
| D1.10 | D2D15 | Discharge of Exits | Hall | Can Readily Comply - |
| | | Exits from the building must be provided with an unobstructed path of travel to the street. Where exits discharge at a level that is different to the street level, compliant stairs and ramps must be provided to the street. | Discharge from exits appears generally compliant with this clause. | Detail |
| | | The width of the external path must be not less than 1m wide (or if the width of the required exits is more than 1m, the width of the external path must be not less than that of the required exit) | | |
| | | Where necessary, exits must be provided with suitable barriers or bollards to prevent vehicles blocking them. | | |
| | | Additional requirements apply to Class 9b buildings containing auditoriums | | |
| D1.11 | D2D16 | Horizontal Exits | Horizontal exits are not relied upon in the Hall and Buildings A, B & C. | Not Applicable |
| | | Horizontal exits must not be used between SOUs or from a childcare centre or primary/secondary school. | | |
| | | Sufficient space must be allocated on either side of the fire wall serving as a horizontal exit. | | |
| | | Additional requirements apply in Class 9a or 9c buildings. | | |
| D1.12 | D2D17 | Non-required Stairways, Ramps or Escalators | There are no non-required stairways, ramps or escalators in the Hall and Buildings A, B & C. | Not Applicable |
| | | An escalator, moving walkway or non-required non fire-isolated stairway or pedestrian ramp— | | |
| | | must not be used between storeys in— | | |
| | | o a patient care area in a Class 9a health-care building; or | | |
| | | o a resident use area in a Class 9c building; and | | |
| | | may connect any number of storeys if it is— | | |
| | | in an open spectator stand or indoor sports stadium; or | | |
| | | o in a carpark or an atrium; or | | |
| | | o outside a building; or | | |
| | | in a Class 5 or 6 building that is sprinklered throughout, where the escalator, walkway, stairway or ramp complies with Specification D1.12; and | | |
| | | except where permitted above must not connect more than— | | |
| | | 3 storeys if each of those storeys is provided with a sprinkler system (other than a FPAA101D system) complying with Specification E1.5 throughout; or | | |
| | | o 2 storeys, | | |
| | | provided that in each case, those storeys must be consecutive, and one of those storeys is situated at a level at which there is direct egress to a road or open space; and | | |
| | | • except where permitted in above must not connect, directly or indirectly, more than 2 storeys at any level in a Class 5, 6, 7, 8 or 9 building and those storeys must be consecutive. | | |
| | | Refer to BCA Specification D1.12 where required. | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|------------------|--|---|----------------|
| D1.13 | D2D18 | Number of Persons Accommodated The number of persons accommodated on each storey can be determined by using the estimates based on floor area in Table D1.13 or other appropriate means of determination can also be used where populations can be more reasonably estimated. | The clause is informational only in nature | Informational |
| D1.14 & D1.15 | D2D19 & D2D20 | Measurement of Distances & Method of Measurement Provides details for how to measure distances for exits. | The clause is informational only in nature | Informational |
| D1.16 | D2D21 | Plant Rooms and lift Motor Rooms: Concession Ladders generally meeting AS1657 can be used for egress for: Plant room less than 100m², can use a ladder for egress Plantroom, Lift Machine Room or Class 8 substation that is 100m² – 200m2 can use a ladder for all but one point of egress Must otherwise meet design requirements of this clause dependant on location | The clause is informational only in nature | Informational |
| D1.17 | D2D22 | Access to lift pits Access to lift pits must: Where pit depth is less than 3m, through the lowest landing doors Where pit depth is more than 3m, by a 600mm x 1980mm access door meeting certain requirements | The clause is informational only in nature | Informational |
| D1.18 | D2D23 | Egress from Early Childhood Centres Every part of a Class 9b early childhood centre must be wholly within a storey that provides direct egress to a road or open space. The requirements of (a) do not apply in a building with a rise in storeys of not more than 2, where the Class 9b early childhood centre is the only use in that building. | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Part D3 - C | Construction o | f Exits | | |
| D2.1 | D3D2 | Application of Part With the exception of certain clauses (relating to stair construction, handrails, balustrades, door hardware and window fall protection, this Part does not apply to the internal parts of a SOU in residential buildings – to be noted. | The clause is informational only in nature | Informational |
| D2.2 | D3D3 | Fire-Isolated stairways and ramps The fire isolated stairs must be of non-combustible construction and be design such that if there is local failure it will not cause structural damage to or impair the fire resistance of the shaft. | There are no fire-isolated exits in the Hall and Buildings A, B & C. | Not Applicable |
| D2.3 | D3D4 | Non-Fire Isolated Stairways & Ramps Must generally be concrete, steel or 44mmm timber. | There are no non fire-isolated exits in the Hall and Buildings A, B & C. | Not Applicable |
| D2.4 | D3D5 | Separation of Rising and Descending Stairs In a fire isolated stair, rising and descending stair flights must have no direct connection, being physically separated by non-combustible smoke proof construction. | There are no fire-isolated exits in the Hall and Buildings A, B & C. | Not Applicable |
| D2.5 | D3D6 | Open Access Ramps and Balconies Where an open access ramp or balcony is provided to meet the smoke hazard management requirements of Table E2.2a, it must— • have ventilation openings to the outside air which— • have a total unobstructed area not less than the floor area of the ramp or balcony; and • are evenly distributed along the open sides of the ramp or balcony; and • not be enclosed on its open sides above a height of 1 m except by an open grille or the like having a free air space of not less than 75% of its area. | Open access ramps/balconies are not relied upon to provide smoke hazard management. | Not Applicable |
| D2.6 | D3D7 | Smoke Lobbies | Smoke lobbies do not appear to be required under BCA D3D7. | Not Applicable |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|--|--|----------------------|
| | | A smoke lobby required by D1.7 must— | | |
| | | have a floor area not less than 6 m2; and | | |
| | | be fire & separated by FRL 60/60/- construction from the occupied areas in the storey by walls which are impervious to smoke | | |
| | | have smoke doors from any occupied area complying with Clause 3 of Specification C3.4 except that the smoke sensing device need only be located on the approach side of the opening; and | | |
| | | be pressurised as part of the exit if the exit is required to be pressurised under E2.2. | | |
| D2.7 | D3D8 | Installations in the Path of Travel | Details for the proposed means of separating equipment to be provided on the architectural plans/specifications. | Can Readily Comply - |
| | | Electrical distribution and telecommunications, boards etc. where located in a path of travel to an exit, must be enclosed in non-combustible construction, with openings suitably smoke sealed. | | Detail |
| | | Gas services must not be located in a required exit | | |
| | | Wiring associated with fire, security, lighting may be installed in a fire isolated exit | | |
| | | Access to service shafts (other than for fire services) must not be provided from a fire isolated exit. | | |
| D2.8 | D3D9 | Enclosure of Space Below Stairs | There does not appear to be any enclosure below any stairs in the buildings. | Not Applicable |
| | | Enclosed cupboards must not be installed in fire isolated stairs and if installed under non-fire isolated stairs must be fire separated with 60/60/60 walls & ceilings with self-closing -/60/30 fire doors. | | |
| D2.9 | D3D10 | Width of Required Stairways & Ramps | Informational. | Informational |
| | | A stair or ramp wider than 2m only counts as 2m for aggregate exit width purposes if there is no dividing handrails. | | |
| D2.10 | D3D11 | Pedestrian Ramps | Pedestrian ramps do not form part of a required exit in the current design. | Not Applicable |
| | | Fire isolated ramps may be used in lieu of fire isolated stairways | | |
| | | Ramps must not exceed a grade of 1:14 where required to be 'accessible', or 1:8 in any other case. | | |
| | | Ramp surface must be slip resistant. | | |
| D2.11 | D3D12 | Fire-Isolated Passageways | There are no fire-isolated passageways in the Hall and Buildings A, B & C. | Not Applicable |
| | | Fire isolated passageways must generally achieve a FRL consistent with the stair/ramp to which it is connected OR 60/60/60 in any other case. | | |
| D2.12 | D3D13 | Roof as Open Space | The roof of the buildings is not relied upon as open space. | Not Applicable |
| | | If an exit discharges to the roof of a building, the roof must achieve a FRL of 120/120/120 and not contain any openings/rooflights etc within 3m of the path of travel. | | |
| D2.13 | D3D14 | Goings & Risers | Details for the proposed goings and risers to be provided on the architectural plans/specifications. | To be addressed in |
| | | To satisfy BCA D3D14, a stairway must have— | | BCA Specification |
| | | Not more than 18 and not less than 2 risers in each flight | | |
| | | Going/riser/quantity dimensions in accordance with BCA Table D3D14 | | |
| | | Constant riser/going dimensions (variation 5mm between treads and 10mm overall permitted) | | |
| | | Required exits must not contain winders in lieu of a quarter landing (up to 3 winders in a quarter landing are permitted in non-required stairs and in residential SOUs') | | |
| | | Solid treads required where stair exceed 10m in height or 3 storeys | | |
| | | No openings that would allow a 125mm sphere to pass through | | |
| | | Slip resistant treads or nosings (per Table D3D15 below) | | |
| | | Where consecutive flights contain more than 36 risers in a Class 9b building, the stair must contain a minimum 30 degree change in direction. | | |
| | | Bottom riser may vary when meeting a public road only | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | | | | | | Compliance Comment | Status |
|-----------------|-----------------|--|-----------------------|-------------------------|--------------------|---------------------|--|--|--------------------------------|
| | | | | | | | | | |
| | | Table D3D14: Riser and going dimensions | | | | | | | |
| | | Stairway location Rise | ser (R) | Going (G) ^{No} | | luantity (2R + G) | | | |
| | | Public 190 | | 355 | | 00 550 | | | |
| | | Private Note 1 190 | 115 | 355 | 240 70 | 00 550 | | | |
| | | Refer to DDA Report for specific | ic accessibility requ | irements to s | some stairs | | | | |
| D2.14 | D3D15 | Landings | | | | | | Details for the proposed stair landing crossfalls and slip resistance to be provided on the architectural plans/specifications. | To be addressed in |
| | | Landings must: | | | | | | | BCA Specification |
| | | Be at least 750mm long preferred top and botton | | | | greater than 18 ri | isers (900mm | | |
| | | Be no steeper than 1:50 |) | | | | | | |
| | | be slip resistant as per BCA Table D3D15 | | | | | | | |
| | | Table D3D15: Slip-resistan | nce classification | | | | | | |
| | | Application Ramp steeper than 1:14 | Dry surface condi | tions | Wet surface of | onditions | | | |
| | | Ramp steeper than 1:20 but not steeper than 1:14 | P3 or R10 | | P4 or R11 | | | | |
| | | Tread or landing surface | P3 or R10 | | P4 or R11 | | \dashv | | |
| | | Nosing or landing edge strip | P3 | | P4 | | | | |
| D2.15 | D3D16 | Thresholds | | | | | Details for any thresholds to be provided on the architectural plans/specifications. | To be addressed in | |
| | | A doorway must generally not and the step is no greater than | | | | | ng externally, | | BCA Specification |
| D2.16 (a), | D3D17 | Barriers to Prevent Falls | | | | | | Details for any barriers to prevent falls to be provided on the architectural plans/specifications. Specifically external balconies/aerial | |
| (b) and (c) | | A continuous barrier must be p | provided along the | side of— | | | | walkways are to be reviewed once further design developed plans are provided. | Detail |
| | | (a) a roof to which general acce | ess is provided; an | d | | | | | |
| | | (b) a stairway or ramp; and | | | | | | | |
| | | (c) a floor, corridor, hallway, balcony, deck, verandah, mezzanine, access bridge or the like; and | | | e or the like; and | | | | |
| | | (d) any delineated path of acce | ess to a building, | | | | | | |
| | | if the trafficable surface is 1 m | or more above the | surface bene | eath. | | | | |
| Table D2.16a | D3D18 | Height of Barriers (1)The height of a barrier required by D3D17 must be not less than the following: | | | | | Details for any barriers to be provided on the architectural plans/specifications. Specifically external balconies/aerial walkways and | | |
| D2.10a | | | | | ng: | | stairways are to be reviewed once further design developed plans are provided. | Detail | |
| | | For stairways or ramps with a gradient of 1:20 or steeper — 865 mm. (a) For landings to a stair or ramp where the barrier is provided along the inside edge of the landing and does | | | | | | | |
| | | (a) For landings to a stair or ra not | amp where the bar | rier is provide | ed along the insid | de edge of the land | ding and does | | |
| | | (b) exceed 500 mm in length – | – 865 mm. | | | | | | |
| | | In front of fixed seating on a m | | , | | 3, | | | |
| | | (c) horizontal projection extenFor all other locations — 1 m. | nds not less than 1 | m outwards f | from the top of th | ne barrier — 700 m | nm. | | |
| | | | | | | | | | |
| Table D2.16a | D3D19 | Openings in Barriers Generally enonings must not al | llow a 125 mm anh | ore to pace th | hrough | | | Details for any barriers to be provided on the architectural plans/specifications. Specifically external balconies/aerial walkways and stairways are to be reviewed once further design developed plans are provided. | Can Readily Comply - Detail |
| | | Generally openings must not al In fire isolated exits (not servin | | | | amn): | | | |
| | | Must not allow a 300mm sphe bottom rail and 460mm between | ere to pass throug | | | | osing line and | | |
| | | l . | | | | | | I control of the second of the | |

| BCA 2019 CI. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|---------------------------|-----------------|---|---|--------------------------------|
| Table D2.16a | D3D20 | Barrier Climbability (1) A barrier required by D3D17, located on a floor more than 4 m above the surface beneath, must not incorporate horizontal or near horizontal elements that could facilitate climbing between 150 mm and 760 mm above the floor. (2) The requirements of (1) do not apply to— fire-isolated stairways, fire-isolated ramps and other areas used primarily for emergency purposes, other than— (a) external stairways; and | Details for any barriers to be provided on the architectural plans/specifications. Specifically external balconies/aerial walkways and stairways are to be reviewed once further design developed plans are provided. | Can Readily Comply - Detail |
| | | (ii) Class 7 (other than carparks) and Class 8 buildings. | | |
| D2.16 (a), (b) and (c) | D3D21 | Wire Barriers Provides requirements for installation and tensioning of wire barriers | Not Applicable. | Not Applicable |
| D2.17 | D3D22 | A handrail is required to at least one side of every stairway or ramp (and to both sides where the stair has a width of 2m or more) Handrails must be at a height of not less than 865mm above the stair nosing line (additional handrail at 665-750mm to be provided in primary schools) The handrail must be continuous between stair flight landings and have no obstructions that will tend to break a hand-hold (except for newel posts, ball type sanctions or the like). Handrails required to assist people with disabilities must comply with BCA D3.3. In a required exit, the handrail must comply with Clause 12 of AS1428.1. This typically requires the handrail to have a continuous height to the stair nosing line & around landings, and also incorporate extensions/terminations at the top and bottom as per AS1428.1. One tread width One tread width DIMENSIONS IN MILLIMETRES FIGURE 28 (in part) HANDRAILS TO STAIRS WITH INTERMEDIATE LANDINGS Additional requirements apply to Class 9a and 9c buildings | The design can readily comply subject to ongoing design detail | Can Readily Comply - Detail |
| D2.18 | D3D23 | Fixed Platforms, Walkways, Stairways & Ladders Informational clause only noting fixed platforms, walkways and ladders for Access can be in accordance with AS1657 to service/plant areas or in low-use areas in a residential SOU. In summary this requires: Risers (R) of 130mm-225mm Goings (G) of 215-355mm Ratio of 2R+G = 540mm-700mm Minimum 600mm clear width, 1m preferred | The design can readily comply subject to ongoing design detail | Can Readily Comply - Detail |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|--|---|--------------------------------|
| | | | | |
| | | Clear overhead height of 2000mm | | |
| | | Landings at top and bottom at least as deep as the stair is wide | | |
| | | Highlighted nosings | | |
| | | Continuous handrail to both sides if stair is >1m in width, at least one handrail if <1m | | |
| | | Guardrailing ≥900mm in height with mid rail at 450mm max spacing or 560mm if no toe-board installed for bottom spacing | | |
| | | Gaps between adjacent guardrails must be between 25mm-50mm | | |
| D2.19 | D3D24 | Doorways & Doors | In this respect, the design currently indicates appropriate compliance for this stage based on the plans submitted. Further design detail will continue to be developed and assessed until final AFC design | Can Readily Comply - Detail |
| | | Doors in required exits must not be fitted with roller shutters/tilt up doors (except in Class 6-8 SOUs with a floor area of not more than 200m², and where only one exit is required, and the door is held open when in use. | | |
| | | Doors in required exits must not be sliding unless the door leads directly to road/open space (and can be manually opened with force less than 110 N) | | |
| | | Where power operated doors are provided they must open automatically on power failure or fire alarm trip and able to be opened manually with force no less than 110N) | | |
| | | Additional requirements apply to Class 9a and 9c buildings. | | |
| D2.20 | D3D25 | Swinging Doors | Doorways serving as required exits are required to swing in the direction of the egress. Further design detail will continue to be developed and assessed until final AFC design | Can Readily Comply - Detail |
| | | Doors gates serving as a required exit for public areas should typically swing in the direction of egress and must generally not impede egress paths. | | |
| | | Swinging doors must not encroach: | | |
| | | - at any part of its swing by more than 500 mm on the required 1m width of the exit and | | |
| | | - when fully open, by no more than 100 mm on the required 1m exit width | | |
| | | Doors can swing against the direction of egress if serving building areas less than 200m², are the only exit and a hold-open device is provided to the door. | | |
| D2.21 | D3D26 | Operation of Latch | Buildings A, B, C Buildings operation of latch details are to be provided on to the plans/specification in subsequent design review. The design can readily comply subject to ongoing design detail | Can Readily Comply - |
| | | • Exit doors and doors in a path of travel to an exit must generally be readily operable without a key from the side that faces a person seeking egress by a single handed downward action or pushing action on a single device which is located between 900mm and 1100mm above the floor. | | Detail |
| | | Some concessions are provided to certain buildings – including doors in a residential SOU, childcare centers, | | |
| | | banks, jails, metal health facilities. Doors which open automatically on the activation of a fire trip are also provided with a concession under this clause. | <u>Hall</u> | Can Readily Comply - |
| | | Additional requirements apply to assembly buildings accommodating more than 100 people (which generally requires that panic bars be provided) | Exit doors are required to be provided with push bar details in accordance with the provisions of this clause. The design can readily comply subject to ongoing design detail | Detail |
| D2.22 | D3D27 | Re-entry from Fire isolated exits | There are no fire-isolated exits in the Hall and Buildings A, B & C. | Not Applicable |
| | | Doors in fire isolated exits in Class 9a/9c buildings and buildings with an effective height exceeding 25m must not be locked from the inside of the exit. | | |
| | | Some exemptions can be applied where security measures are implemented. | | |
| D2.23 | D3D28 | Signs on Doors | In this respect, the design currently indicates appropriate compliance for this stage based on the plans submitted. Further design detail | Can Readily Comply - |
| | | Signage must be provided to fire exit doors. | will continue to be developed and assessed until final AFC design | Detail |
| D2.24 | D3D29 | Protection of openable windows | In this respect, the design currently indicates appropriate compliance for this stage based on the plans submitted. Further design deta | Can Readily Comply - |
| | | This clause applies to all windows serving a bedroom in the Class 2, 3, 4 buildings and in Class 9b buildings. | will continue to be developed and assessed until final AFC design | Detail |
| | | Where the window (serving a floor more than 2m from the surface beneath) has a sill height of less than 1.7m, the openable portion of the window must be fitted with: | | |
| | | A device to restrict the window openings; or | | |
| | | A screen with secure fittings (refer to Clause D2.24 for requirements) | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status | |
|----------------------------------|-----------------|--|---|---|--|
| Ci. | | | | | |
| | | Note balustrading may also be required to windows. | | | |
| Part D4 - | Access for Pe | ople with Disabilities | | | |
| Part D3 | Part D4 | Access for People with Disabilities Access / DDA is not specifically considered by this BCA Report. Refer to separate DDA Report for assessment. | Refer to separate DDA Report for assessment. | Certification by Designer or Specialist | |
| Section F - | - Services & F | - Guinment | | Specialise | |
| Section E - Services & Equipment | | | | | |
| Section E | Section E | Services & Equipment BCA Section E Any new or affected Fire Services must comply with the BCA Section E and relevant Australian Standards. | Fire Services & Equipment The following Fire Services & Equipment are required under the deemed-to-satisfy provisions of the BCA based on its classification and characteristics: | Informational | |
| | | | Fire Hydrants – YES | | |
| | | | Fire Hose Reels – YES (not including classrooms and associated corridors) | | |
| | | | Portable Fire Extinguishers - YES | | |
| | | | Fire Sprinklers – NO (subject to Fire Engineering – see below) | | |
| | | | Fire Control Centre - NO | | |
| | | | Fire Control Room – NO | | |
| | | | Smoke Hazard Management – NO (subject to Fire Engineering – see below) | | |
| | | | Smoke Detectors for Automatic Shutdown of Mechanical - YES | | |
| | | | Emergency Lifts - NO | | |
| | | | Emergency Lighting - YES | | |
| | | | Exit Signage - YES | | |
| | | | Emergency Warning & Intercom System - NO | | |
| | | | See below for details on each of the above where relevant. | | |
| Part E1 – F | Fire Fighting E | Equipment | | | |
| E1.3 | E1D2 | Fire Hydrants | Fire Hydrant Systems | Fire Engineering | |
| | | Fire hydrant coverage meeting AS2419.1 must be confirmed / provided: | There are multiple buildings on the allotment and therefore multiple 'main entrances', hence from a technical standpoint complian with this provision will not be able to be achieved and a fire engineered performance solution will be required to address this DT departure. | | |
| | | to new buildings or new parts that are over 500m² in total floor area | | | |
| | | to any additional floor area in an existing building that is already provided with hydrant coverage | departure. | | |
| | | Hydrant Boosters & Hydrants (where required) must be 10m from the building or adequately protected from fire | | | |
| | | Hydrant Pumprooms (where required) must be accessible from open space or via fire isolated passage | | | |
| | | Coverage and pressure & flows must meet AS2419.1-2005 | | | |
| E1.4 | E1D3 | Fire Hose Reels | Fire Hose Reels | Certification by | |
| | | Where the building is provided with an internal fire hydrant system or incorporates a fire compartment with a floor area of more than 500m ² , it must be provided with a fire hose reel system in accordance with BCA E1.4 and AS2441. | Fire Hose Reels are required to serve the Hall Building and Library under DTS as internal hydrants will be provided. | Designer or | |
| | | | Classrooms and associated corridors are not required to be provided with Fire Hose Reels under E1D3(1)(d). | Specialist | |
| | | Fire Hose Reels must be located: | Details and design certification must be provided by the hydraulic/fire services engineer. | | |
| | | Within 4m of an exit | | | |
| | | Along paths of travel to provide requisite coverage | | | |
| | | Located so they are not pulled through fire or smoke doors | | | |
| | | Note that fire hose reels are <u>not</u> required in a: | | | |
| | 1 | | | | |
| | | Class 2/3/4 building | | | |
| | | Class 2/3/4 building Class 8 electrical substation | | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|------------------------|-----------------|---|--|---|
| | | Class 9b primary or secondary school Classrooms/corridors. | | |
| E1.5 | E1D4 | Sprinklers A building must be provided with a sprinkler system complying with when required by E1D5 to E1D12 as applicable; and comply with Specification 17 and Specification 18 as applicable. | Sprinklers Sprinklers are not required to be provided throughout the Buildings. | Not Applicable |
| Table E1.5 | E1D5 | Sprinkler Alarm Valves must be provided with direct access to a road or open space Where sprinklers are required: all classifications Buildings with an effective height of more than 25m, excluding— an open-deck carpark being a separate building; and a Class 8 electricity network substation, with a floor area not more than 200 m2, located within a multi-classified | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E1.5 | E1D6 | Where sprinklers are required: Class 2 and 3 buildings other than residential care buildings Class 2 or 3 buildings with a rise in storeys of 4 or more and an effective height of not more than 25m. | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E1.5 | E1D7 | Where sprinklers are required: Class 3 building used as a residential care building Class 3 or 9a buildings used as residential aged care; and Any fire compartment containing a Class 3 part used for residential care. | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E1.5 | E1D8 | Where sprinklers are required: Class 6 building Class 6 buildings with floor area of more than 3,500m² or volume of 21,000m³ | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E1.5 | E1D9 | Where sprinklers are required: Class 7a building, other than an open-deck carpark Class 7a (non-open deck) carparks accommodating more than 40 vehicles | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E1.5 | E1D10 | Where sprinklers are required: Class 9a health-care building used as a residential care building, Class 9c buildings | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E1.5 | E1D11 | Where sprinklers are required: Class 9b buildings | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E1.5 | E1D12 | Where sprinklers are required: additional requirement For sprinkler requirements for atriums, see Part G3. For sprinkler requirements for large isolated buildings, see C3D4. | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E1.5 (Note 4) | E1D13 | Where sprinklers are required: occupancies of excessive hazard Buildings with a floor area of more than 2000m ² or volume of more than 12,000m ³ and containing an 'excessive hazard'. | The matter is not applicable &/or not affected by scope. | Not Applicable |
| E1.6 | E1D14 | Portable Fire Extinguishers Portable fire extinguishers are required to serve Class A-Class E fire under BCA E1.6 & AS2444. Note: They are not required for Class A fire where fire hose reels are otherwise provided. | Portable fire extinguisher coverage is required throughout to meet BCA E1.6 & AS2444. Details and design certification must be provided by the hydraulic/fire services engineer. | Certification by Designer or Specialist |
| E1.8 | E1D15 | Fire Control Centres A Fire Control Centre is required where the building has: • An Effective Height over 25m • A floor area over 18,000m² Fire control Centres must meet Clauses 1-5 of BCA Spec E1.8 – see below Spec E1.8 | A fire centre may be required as Buildings A, B & C are considered as a 'United Building' and therefore the total floor area may exceed 18,000m ² . Architect to advise on whether the aggregate floor are exceeds the threshold limit of this clause. | Further Detail Required |

| 201 2010 | | | | |
|-----------------|------------------|---|--|---------------------------------|
| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
| | | | | |
| E1.8 | S19C7 | Fire Control Room | A fire control is not required as the building has an effective height of less than 50m. | Not Applicable |
| Spec E1.8 | S19C1- S19C6 | Fire Control Centres – Specification Summary | A fire centre may be required as Buildings A, B & C are considered as a 'United Building' and therefore the total floor area may exceed 18,000m ² . | Further Detail Required |
| | | | Architect to advise on whether the aggregate floor are exceeds the threshold limit of this clause. | |
| Spec E1.8 | S19C7- S19C13 | Fire Control Room – Specification Summary | The matter is not applicable &/or not affected by scope. | Not Applicable |
| E1.9 | E1D16 | Fire Precautions During Construction | To be noted during construction. | Informational |
| | | Portable fire extinguishers must be provided during construction. | | |
| | | | | |
| E1.10 | E1D17 | Provision for Special Hazards | Fire services/safety engineers to assess and determined whether additional measures are required. | Certification by Designer or |
| | | Additional PFEs may be required should the building contain special hazards. | | Specialist |
| BCA Part E | 2 – Smoke H | azard Management | | |
| E2.1 | E2D2 | Application of Part | The clause is informational only in nature | Informational |
| | | Part E2 does not apply to: | | |
| | | An open deck carpark or open spectator stand | | |
| | | A class 8 electricity network substation (less than 200m² in floor area) within a multi classified building. | | |
| E2.2a & | NSW E2D3 | Smoke Hazard Management | Stage 02 - Hall - Smoke Hazard Management | Certification by |
| E2.2b | | Smoke Hazard Management must be provided per E2D4 to E2D20 depending on the class, rise in stories and nature of the building design, which can require one or more of the following: | As the building is a Class 9b building and incorporates a Stage with an area between 50m ² to 150m ² , smoke hazard management is required under <i>NSW E2D16</i> & <i>NSW E2D17</i> which must either be: | Designer or Specialist |
| | | o Zone Pressurisation | Smoke detection and alarm, or | |
| | | o Smoke Exhaust | Sprinklers, or | |
| | | o Smoke Vents | Stair Pressurisation, or | |
| | | Automatic Smoke Detection & Alarm | Zone Pressurisation, or | |
| | | Smoke Detectors to satisfy Automatic Shutdown of Mechanical (Class 9b only) | Any deletion of rationalisation of smoke hazard management must be addressed via a Fired Engineered Performance Solution | |
| | | Sprinklers (to satisfy smoke hazard management) | | |
| | | Stair Pressurisation | | |
| | | Refer to Tables E2.2a and NSW E2.2b for full details | | |
| | | Smoke detection per AS1670.1 can also be required to allow exit / egress doors to unlock in the event of | | |
| | | emergency under BCA D2.21. | | |
| Table E2.2a | E2D4 | Fire-isolated exits | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2a | E2D5 | Buildings more than 25 m in effective height: Class 2 and 3 buildings and Class 4 part of a building | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2a | E2D6 | Buildings more than 25 m in effective height: Class 5, 6, 7b, 8 or 9b buildings | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2a | E2D7 | Buildings more than 25 m in effective height: Class 9a buildings | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2a | E2D8 | Buildings not more than 25 m in effective height: Class 2 and 3 buildings and Class 4 part of a building | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table | E2D9 | Buildings not more than 25 m in effective height: Class 5, 6, 7b, 8 and 9b buildings | Buildings A, B & C are considered a 'United Building' with a RIS 3. Therefore, the provisions of this clause, do not apply. | Not Applicable |
| E2.2a | | A building not more than 25 m in effective height that— | 3 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - | |
| | | is a Class 5 or 9b school building or part of a building having a rise in storeys of more than 3; or | | |
| | | 1. 2. 2.000 0 of 30 control bananing of part of a bananing nathing a fide in store of or more than 5, of | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|---|--|----------------|
| | | is Class 6, 7b, 8 or 9b building (other than a school) or part of a building having a rise in storeys of more than 2; or | | |
| | | has a rise in storeys of more than 2, and contains— | | |
| | | o a Class 5 or 9b school part; and | | |
| | | o a Class 6, 7b, 8 or 9b (other than a school) part, | | |
| | | must meet the requirements of (2) | | |
| | | A building referred to in (1) must be provided with— | | |
| | | in each required fire-isolated stairway, including any associated fire-isolated passageway or fire-isolated ramp, an automatic air pressurisation system for fire-isolated exits in accordance with AS 1668.1; or | | |
| | | a zone pressurisation system between vertically separated fire compartments in accordance with AS 1668.1, if the building has more than one fire compartment; or | | |
| | | an automatic smoke detection and alarm system complying with Specification 20; or a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17. | | |
| | | For the purposes of (2), vertically separated fire compartments are fire compartments above and below each other, and not fire compartments within the same storey. | | |
| Table E2.2a | E2D10 | Buildings not more than 25 m in effective height: large isolated buildings subject to C3D4 | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2a | E2D11 | Buildings not more than 25 m in effective height: Class 9a and 9c buildings | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2a | E2D12 | Class 7a buildings | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2a | E2D13 | Basements (other than Class 7a buildings) | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2b | E2D14 | Class 6 buildings – in fire compartments more than 2000 m2: Class 6 building (not containing an enclosed common walkway or mall serving more than one Class 6 sole-occupancy unit) | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table E2.2b | E2D15 | Class 6 buildings – in fire compartments more than 2000 m2: Class 6 building (containing an enclosed common walkway or mall) | The matter is not applicable &/or not affected by scope. | Not Applicable |

| BCA 2019 | BCA 2022 | BCA Requirement | Compliance Comment | Status |
|----------------|--------------|---|---|------------------|
| CI. | CI. | | | |
| Table | NSW | Class 9b - assembly buildings: all | Hall | Certification by |
| E2.2b | E2D16 | The following provisions apply to all Class 9b assembly buildings: | The Hall is required to be provided with automatic shutdown of any air-handling system in accordance with this clause. | Designer or |
| | | (a) A building or part of a building used as an assembly building must be provided with automatic shutdown | an automatic smoke exhaust system complying with Specification 21 (including Figure S21C2); or | Specialist |
| | | of any air-handling system (other than non-ducted individual room units with a capacity not more than 1000 L/s and miscellaneous exhaust air systems installed in accordance with Sections 5 and 6 of AS 1668.1) which does not form part of the smoke hazard management system, on the activation of— | Details and design certification must be provided by the Mechanical/fire services engineer. | |
| | | (i) smoke detectors installed complying with S20C6; and | | |
| | | (ii) any other installed fire detection and alarm system, including a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17. | | |
| | | (b) A basement not counted in the rise in storeys in accordance with C2D3, less than 2000 m2 used as an assembly building or part of an assembly building containing an auditorium or other public area, must be equipped with— | | |
| | | (i) an automatic smoke detection system in accordance with Specification 20; or | | |
| | | (ii) an automatic zone pressurisation system in accordance with AS 1668.1 if the basement has more than one fire compartment; or if the basement forms part of a multi fire compartmented building served by the zone pressurisation system; or | | |
| | | (iii) a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17. | | |
| | | (c) Stages and backstages: | | |
| | | (i) For the purposes of this clause, where a stage is separated from the auditorium by a proscenium wall incorporating a proscenium opening, a backstage room or area that is not separated from the stage by construction having an FRL of not less than 60/60/60, is taken to form part of the stage. | | |
| | | (ii) A building or part of a building used as an assembly building which has a stage with a floor area of more than 50 m2 and not more than 150 m2 must, over the stage, be provided with— | | |
| | | (A) an automatic smoke exhaust system complying with Specification 21 (including Figure S21C2); or | | |
| | | (B) roof mounted automatic smoke-and-heat vents complying with NSW I4D59, in a single storey building or the top storey of a multi storey building. | | |
| | | (iii) A building or part of a building used as an assembly building which has a stage with a floor area of more than 150 m2 must, over the stage, be provided with an automatic smoke exhaust system complying with Specification 21 (including Figure S21C2). | | |
| | | (iv) A building or part of a building used as an assembly building which has a stage equipped with means of flying scenery must, over the stage, be provided with an automatic smoke exhaust system complying with Specification 21 (including Figure S21C2). | | |
| Table E2.2b | NSW E2D17 | NSW E2D17 Class 9b – assembly buildings: night clubs, discotheques and the like | The matter is not applicable &/or not affected by scope. | Not Applicable |
| Table | NSW | NSW E2D18 Class 9b – assembly buildings: exhibition halls, museums and art galleries | The Hall for the purposes of the school is not considered to be an assembly building that is used as an exhibition hall, museum, art | Not Applicable |
| E2.2b | E2D18 | A building or part of a building used as an exhibition hall, museum, art gallery or the like, must be provided | gallery or the like and therefore the provisions of this clause do not apply. | |
| | | with— | | |
| | | where the floor area is more than 2000 m2 and not more than 3500 m2— | | |
| | | an automatic smoke exhaust system complying with Specification 21; or | | |
| | | roof mounted automatic smoke-and-heat vents complying with Specification 22 in a single storey building or the top storey of a multi storey building; or | | |
| | | a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17; and | | |
| | | where the floor area is more than 3500 m2, a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17 and— | | |
| | | an automatic smoke exhaust system complying with Specification 21; or | | |
| | | roof mounted automatic smoke-and-heat vents complying with Specification 22, in a single storey building or the top storey of a multi storey building. | | |
| | | | | |
| | | | | |

| BCA 2019 Cl. | BCA 2022 CI. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|--|--|---------------------------|
| Table E2.2b | E2D19 | Class 9b - assembly buildings: theatres and public halls (not listed in E2D18) including lecture theatres and cinema/auditorium complexes | The Hall is less than 2000m² therefore the provisions of this clause do not apply. | Not Applicable |
| | | Unless otherwise described in (2), in a building or part of a building used as an assembly building (not being a night club, discotheque or the like; or an exhibition hall, museum or art gallery) where the floor area of a fire compartment is more than 2000 m2, the fire compartment must be provided with— | | |
| | | • an automatic smoke exhaust system complying with Specification 21; or | | |
| | | roof mounted automatic smoke-and-heat vents complying with Specification 22, in a single storey building or the top storey of a multi storey building; or | | |
| | | • if the floor area of the fire compartment is not more than 5000 m² and the building has a rise in storeys of not more than 2— | | |
| | | o an automatic smoke detection and alarm system complying with Specification 20; or | | |
| | | $_{\circ}$ a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17. | | |
| | | 2. The following buildings are exempt from the provisions of (1): | | |
| | | Sporting complexes, (including sports halls, gymnasiums, swimming pools, ice and roller rinks, and the like) other than indoor sports stadiums with total spectator seating for more than 1000 persons. | | |
| | | Churches and other places used solely for religious worship. | | |
| | | • School classrooms. | | |
| | | A building containing a Class 9b early childhood centre must be provided with an automatic smoke detection and alarm system complying with Specification 20 throughout the whole building, including any part of another Class. | | |
| Table | NSW | Class 9b assembly buildings: other assembly buildings (not listed in E2D16 to E2D19) | The matter is not applicable &/or not affected by scope. | Not Applicable |
| E2.2b | E2D20 | E2D20 does not apply in NSW. This clause is deleted from the BCA in NSW, as requirements for Class 9b – Assembly buildings in NSW are covered under NSW E2D16 to NSW E2D19. | | ., |
| E2.3 | E2D21 | Provision for Special Hazards | Should the Fire Services Engineer deem there are special hazards, additional measures may be required. | Certification by |
| | | Suitable additional provision must be made for smoke hazard management where it is considered that the building incorporates a <i>special hazard</i> , including: | | Designer or Specialist |
| | | special characteristics of the building; or | | |
| | | special function or use of the building; or | | |
| | | • special type or quantity of materials stored, displayed or used in a building; or | | |
| | | • special mix of classifications within a building or fire compartment, which are not addressed in Tables E2.2a and E2.2b | | |
| Part E3 – Li | ift Installatio | ns | | |
| E3.1 | E3D2 | Lift Installations | Lift designer to provide details and design certification during detailed design. | Certification by |
| | | Electrical passenger lifts and electrohydraulic passenger lifts must comply with BCA Spec E3.1 | | Designer or Specialist |
| Spec E3.1 | S24C1- | Lift Installations Specification | | |
| | S24C6 | Lifts under E3D2 must be provided with the features included in BCA Specification S24C1- S24C6 including; | | |
| | | Where exposed to solar radiation, the lift car must have mechanical ventilation at a rate of one air change per minute or mechanical cooling. | | |
| | | • Have an alternative power source for ventilation or mechanical cooling in the event of normal power loss that last for at least 2 hours. | | |
| | | • Contain an emergency lighting system that automatically activates upon failure of the normal lighting supply and provides at least 20 lux of lighting for 2 hours on the alarm initiation button. | | |
| | | Contain cooling of the lift shaft whilst the lift is in service that will- | | |
| | | $_{\odot}$ ensure that a dry bulb air temperature in the lift shaft does not exceed 40°C | | |
| | | if the cooling is by a ventilation system, be provided with an air change rate determined using a temperature rise of no more than 5K. | | |
| | | | | |

| BCA 2019 Cl. | BCA 2022 CI. | BCA Requirement | Compliance Comment | Status |
|--|-----------------|---|---|---|
| E3.2 | E3D3 | Stretcher Facilities in Lifts Where serving a level >12m in effective height, the lift must contain a portion within the internal car dimensions that is 2000mm (deep) x 600mm (wide) to allow for stretcher facilities. Note ASA / ESB prefers that <i>all</i> lifts can accommodate a stretcher. | Lift designer to provide details and design certification during detailed design. | Certification by Designer or Specialist |
| E3.3 | E3D4 | Warning Against the Use of Lifts in Fire A warning sign must be provided near the lift call buttons stating "DO NOT USE LIFTS IF THERE IS A FIRE". | Lift designer to provide details and design certification during detailed design. | Certification by Designer or Specialist |
| E3.4 | E3D5 | Emergency Lifts Emergency lifts are typically required to buildings >25m in effective height. | N/A | Not Applicable |
| E3.5 | E3D6 | Lift Landings Access and egress from lift landings must comply with BCA Section D. Refer to DDA report for full Lift Landing Clearances and requirements for accessibility | Refer to DDA report for full Lift Landing Clearances and requirements for accessibility | Informational |
| E3.6, Table E3.6a, Table E3.6b | E3D7 | Passenger lift types and their limitations In an accessible building, every passenger lift must be one of the following lift types, subject to the limitations (if any) of each lift type: Electric passenger lifts Electrohydraulic passenger lifts Inclined lifts Stairway platform lifts Low-rise platform lift Small-sized, low-speed automatic lift | Lift designer to provide details and design certification during detailed design. | Certification by Designer or Specialist |
| Table E3.6a, Table E3.6b | E3D8 | Accessible features required for passenger lifts In an accessible building, every passenger lift must be one of the types referred to in Table E3D8 and contain all features specified in the clause. | | |
| E3.7 | E3D9 | Fire Service Controls Fire service controls are required to lifts serving >12m in effective height including a fire service recall switch per BCA E3D11 and lift car fire control per BCA E3.10 – see below. | | |
| E3.8 | E3D10 | Residential care buildings Where residents in a Class 9c residential care building are on levels which do not have direct access to a road or open space, the building must be provided with either at least one lift to accommodate a stretcher in accordance with E3D3(2); or a ramp in accordance with AS 1428.1. | | |
| E3.9 | E3D11 | Fire Service Recall Control Switch Fire service recall controls are required at each lift bank where serving an effective height greater than 12m in accordance with this clause. | | |
| E3.10 | E3D12 | Lift Car Fire Service Drive Control Switch Lift car fire service control switches must be provided in accordance with this clause where serving an effective height greater than 12m. | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|--------------------------|------------------------|---|---|---|
| Part E4 – V | isibility in an | Emergency, Exit Signs & Warning Systems | | |
| E4.2, E4.4 | E4D2, E4D4 | Emergency Lighting Emergency lighting must generally be provided throughout stories greater than 300m², and above all required exit stairs and ramps per AS2293.1. | Emergency lighting is required to be provided. Details and design certification must be provided by the electrical/fire services engineer - during detailed design. | Certification by Designer or Specialist |
| 4.5, E4.6 E4.8 | E4D5, E4D6, E4D8 | Exit & Directional Signs Illuminated exit signs is required above all exit doors, stairs and final exit points and where the exit isn't readily apparent, directional exit signage is required per AS2293.1. | Exit signage is required to be provided to the designated exits. Details and design certification must be provided by the electrical/fire services engineer - during detailed design. | Certification by Designer or Specialist |
| Ē4.9 | E4D9 | Sound System & Intercom Systems for Emergency Purposes A sound system and intercom system for emergency purposes complying where applicable with AS 1670.4 must be installed to station buildings with an Effective Height >25m. | A sound system and intercom system for emergency purposes complying with AS 1670.4 is required in the building. | Certification by Designer or Specialist |
| Section F - | Health & Am | nenity | | |
| Part F1 - S | urface water | management, rising damp and external waterproofing | | |
| F1.1 | F1D3 | Stormwater Drainage Stormwater drainage must comply with AS3500.3 | Any new stormwater drainage to comply. Subject to design certification from drainage engineer. | Certification by Designer or Specialist |
| lew to | F1D4 | Exposed joints Exposed joints in the drainage surface on a roof, balcony, podium or similar horizontal surface part of a building must be protected in accordance with Section 2.9 of AS 4654.2, and not be located beneath or run through a planter box, water feature or similar part of the building. | Details and design specification must be provided on plan - during detailed design. | To be addressed i BCA Specification |
| F1.4 | F1D5 | External Above Ground Membranes Waterproof membranes for external above ground use (balconies, terraces etc) must comply with AS4654 Parts 1&2. | Details and design specification must be provided on plan - during detailed design. | To be addressed BCA Specification |
| -1.9 | F1D6 | Damp-proofing To comply with AS/NZS 2904-Damproof courses and flashings. | | |
| F1.10 | F1D7 | Damp-proofing of Floors on Ground To comply with AS2870 – 2011 Residential slabs and footings. | | |
| - 1.12 | F1D8 | Sub-Floor Ventilation Subfloor ventilation openings must be provided to the underside of suspended floors in accordance with this requirement. | | |
| Part F2 – W | et areas and | l overflow protection | | |
| -1.7(a) and (b) | F2D2 | Wet area construction Wet areas must comply with AS3740. | Details and design specification must be provided on plan - during detailed design. | To be addressed i BCA Specification |
| -1.7(c), d) and e) | F2D3 | Rooms containing urinals Specific details on the installation of either a slab, stall or hung urinal are discussed within this clause. | Details and design specification must be provided on plan - during detailed design. | To be addressed BCA Specification |
| F1.11 | F2D4 | Floor wastes In a Class 2 or 3 building or Class 4 part of a building, a bathroom or laundry located at any level above a sole-occupancy unit or public space must have a floor waste | Details and design specification must be provided on plan - during detailed design. | To be addressed i BCA Specification |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|--|--|--------------------------------------|
| CI. | Ci. | | | |
| Part F3 - F | Roof and wall | cladding | | |
| F1.5 | F3D2 | Roof Coverings | Details and design specification must be provided on plan - during detailed design. | To be addressed in |
| | | Roof covering must comply with the following: | | BCA Specification |
| | | AS2049 - 2002 <i>Roof Tiles;</i> and/or | | |
| | | AS/NZS 2908 - 2000 parts 1 and 2 Cellulose cement products; and/or | | |
| | | AS/NZS 1562.2 - 1999 Design and installation of sheet roof and wall cladding –corrugated fibre-reinforced cement and/or | | |
| | | AS1562.1 - 1992 Design and installation of sheet roof and wall cladding -metal and/or | | |
| | | AS/NZS 4256 - 2012 parts 1, 2, 3 and 5 – Plastic roof and wall cladding material | | |
| | | AS1562.3 – 1996 Design and installation of sheet roof and wall cladding –plastics and/or | | |
| | | ASTM D3018-90 - 1994 , Class A ashphalt shingles surfaced with mineral granules | | |
| F1.6 | F3D3 | Sarking Must comply with AS/NZS4200-1994 Parts 1 & 2. | Details and design specification must be provided on plan - during detailed design. | To be addressed in BCA Specification |
| F1.13 | F3D4 | Glazed Assemblies | Details and design specification must be provided on plan - during detailed design. | To be addressed in |
| | | See BCA B1D4 | | BCA Specification |
| New for 2022 | F3D5 | Wall cladding | Details and design specification must be provided on plan - during detailed design. | To be addressed in BCA Specification |
| 2022 | | External wall cladding must comply with one or a combination of the following: | | BCA Specification |
| | | Masonry, including masonry veneer, unreinforced and reinforced masonry: AS 3700. | | |
| | | Autoclaved aerated concrete: AS 5146.3. | | |
| | | Metal wall cladding: AS 1562.1. | | |
| Part F4 - 9 | Sanitary & Oth | her Facilities | | |
| F2.1 | F4D2 | Facilities in residential buildings | The matter is not applicable &/or not affected by scope. | Not Applicable |
| | | Facilities must be provided to residential buildings as follows: | | |
| | | Class 2, 4 & 9c buildings – kitchen, bath/shower, WC, washbasin & laundry facilities + WC & washbasin for employees where >10 SOU's are provided | | |
| | | Class 3 buildings – bath/shower | | |
| F2.2 | F4D3 | Calculation of number of occupants and fixtures | Sanitary facilities calculations could not be concluded as the proposed toilet allocation within the Hall and Buildings A, B & C as plans do | Further Detail |
| | | Number of occupants to be calculated as per BCA D2D18 | not appear to distinguish between staff & students & male or female. | Required |
| | | Sanitary facilities to be generally provided assuming a 50:50 male/female split | Separate sanitary facilities for males & females have not been noted on the plans. | |
| | | A unisex accessible sanitary facility can be counted once for each sex | NOTE: A unisex facility is not strictly permitted as a sanitary compartment under the BCA and would require support via a BCA Performance Solution from the BCA Consultant. | |
| F2.3 | F4D4 | Facilities for Class 3 to 9 Buildings | | |
| | | Facilities to be provided in accordance with BCA F4D4 and Table F4D4, noting: | | |
| | | Separate facilities typically required for males and female (Except accessible toilets which may be unisex) | | |
| | | Separate facilities required for staff and student in schools | | |
| | | Specific kitchen, laundry and bathing facilities required to be provided in Class 9a buildings | | |
| | | Specific facilities are required to be provided in child care centres – including junior toilet pans & basins, kitchen facilities, laundry facilities and nappy changing benches | | |
| F2.4 | F4D5 | Accessible sanitary facilities | | |
| | | In a building required to be accessible— | | |

| BCA 2019 CI. | BCA 2022 CI. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|---|---|---------------|
| | | accessible unisex sanitary compartments must be provided in accessible parts of the building in accordance with F4D6; and | | |
| | | accessible unisex showers must be provided in accordance with F4D7; and | | |
| | | at each bank of toilets where there is one or more toilets in addition to an accessible unisex sanitary compartment at that bank of toilets, not less than one sanitary compartment suitable for a person with an ambulant disability for use by males and one sanitary compartment suitable for a person with an ambulant disability for use by females, must be provided; and | | |
| | | an accessible unisex sanitary compartment must contain a closet pan, washbasin, shelf or bench top and adequate means of disposal of sanitary products; and | | |
| | | the circulation spaces, fixtures and fittings of all accessible sanitary facilities provided in accordance with F4D6 and F4D7 must comply with the requirements of AS 1428.1; and | | |
| | | an accessible unisex sanitary facility must be located so that it can be entered without crossing an area reserved for one sex only; and | | |
| | | where two or more of each type of accessible unisex sanitary facility are provided, the number of left and right handed mirror image facilities must be provided as evenly as possible; and | | |
| | | where male sanitary facilities are provided at a separate location to female sanitary facilities, accessible unisex sanitary facilities are only required at one of those locations; and | | |
| | | an accessible unisex sanitary compartment or an accessible unisex shower need not be provided on a storey or level that is not required by D4D4(f) to be provided with a passenger lift or ramp complying with AS 1428.1. | | |
| Table | F4D6 | Accessible unisex sanitary compartments | Refer to Separate DDA Report Prepared by MSA for DDA Assessment of the project. | Informational |
| F2.4a | | Where required by F4D5(a), the minimum number of accessible unisex sanitary compartments for each class of building is as follows: | | |
| | | For a Class 1b building— | | |
| | | o not less than 1; and | | |
| | | where private accessible unisex sanitary compartments are provided for every accessible bedroom, common accessible unisex sanitary compartments need not be provided. | | |
| | | • For a Class 2 building, where sanitary compartments are provided in common areas, not less than 1. | | |
| | | For Class 3 and Class 9c buildings— | | |
| | | in every accessible sole-occupancy unit provided with sanitary compartments within the accessible sole-(i) occupancy unit, not less than 1; and | | |
| | | at each bank of sanitary compartments containing male and female sanitary compartments provided in common areas, not less than 1. | | |
| | | • For Class 5, 6, 7, 8 or 9 buildings, where F4D4 requires closet pans— | | |
| | | 1 on every storey containing sanitary compartments; and | | |
| | | where a storey has more than 1 bank of sanitary compartments containing male and female sanitary compartments, at not less than 50% of those banks. | | |
| | | For a Class 10a building, at each bank of sanitary compartments containing male and female sanitary compartments, not less than 1. | | |
| Table F2.4b | F4D7 | Accessible unisex showers | Refer to Separate DDA Report Prepared by MSA for DDA Assessment of the project. | Informational |
| 12.70 | | Where required by F4D5(b), the minimum number of accessible unisex showers for each class of building is as | | |
| | | follows: | | |
| | | For a Class 1b building— | | |
| | | o not less than 1; and | | |
| | | where private accessible unisex showers are provided for every accessible bedroom, common accessible unisex showers need not be provided. | | |
| | | For a Class 2 building, where showers are provided in common areas, not less than 1. | | |
| | | For Class 3 and 9c buildings— The state of the s | | |
| | | in every accessible sole-occupancy unit provided with showers within the accessible sole-occupancy unit, not less than 1; and | | |

Matt Shuter & Associates - Building Code + DDA Accessibility + Certifiers

| BCA 2019 | | BCA Requirement | Compliance Comment | Status |
|------------|--------------|--|---|----------------------|
| CI. | CI. | | | |
| | | o 1 for every 10 showers or part thereof provided in common areas | | |
| | | For Class 5, 6, 7, 8 or 9 buildings, where F4D4 requires 1 or more showers, not less than 1 for every 10 showers or part thereof. For a Class 10a building, where showers are provided, 1 for every 10 showers or part thereof. | | |
| F2.5 | F4D8 | Construction of Sanitary Compartments | Details and design specification must be provided on plan - during detailed design. | Can Readily Comply - |
| | | Sanitary compartments must have doors and partitions that separate adjacent compartments and extend— | | Detail |
| | | from floor level to the ceiling in the case of a unisex facility; or to a height of not less than 1.5 m above the floor if primary school children are the principal users; or 1.8 m above the floor in all other cases Does not apply to early childhood centres | | |
| | | The entry door to a fully enclosed sanitary compartment must— | | |
| | | open outwards; orslide; or | | |
| | | be readily removable from the outside of the sanitary compartment, unless there is a clear space of at least 1.2 m, measured in accordance with Figure F2.5, between the closet pan within the sanitary compartment and the doorway. | | |
| F2.6 | F4D9 | Interpretation: Urinals and washbasins | The clause is informational only in nature | Informational |
| | | Urinals may be individual stalls or a length of 600mm in a trough | | |
| | | A closet pan may be used in lieu of a urinal | | |
| | | Washbasins may be single basins or part of a trough provided with a tap | | |
| F2.7 | F4D10 | Microbial (legionella) control | The matter is not applicable &/or not affected by scope. | Not Applicable |
| F2.8 | F4D9 | Waste management | The matter is not applicable &/or not affected by scope. | Not Applicable |
| F2.9 | F4D9 | Accessible adult change facilities | Refer to Separate DDA Report Prepared by MSA for DDA Assessment of the project. | Informational |
| | | One unisex accessible adult change facility must be provided in an accessible part of a— | | |
| | | Class 6 building that is a shopping centre having a design occupancy of not less than 3,500 people, calculated on the basis of the floor area and containing a minimum of 2 sole-occupancy units; and | | |
| | | Class 9b sports venue or the like that— | | |
| | | o has a design occupancy of not less than 35,000 spectators; or | | |
| | | contains a swimming pool that has a perimeter of not less than 70 m and that is required by D4D2 to be accessible; and | | |
| | | museum, art gallery or the like having a design occupancy of not less than 1,500 patrons; and | | |
| | | theatre or the like having a design occupancy of not less than 1,500 patrons; and | | |
| | | passenger use area of an airport terminal building within an airport that accepts domestic and/or international flights that are public transport services as defined in the Disability Standards for Accessible Public Transport 2002. | | |
| BCA Part F | 5 - Room Hei | ghts | | |
| F3.1 | F5D2 | Height of Rooms & Other Spaces | Reflected Ceiling Plans have not been provided. Details and design specification must be provided on plan - during detailed design. | Can Readily Comply - |
| | | BCA requires that all public habitable areas must be typically: | | Detail |
| | | - 2700mm for public areas and corridors serving a Class 9b assembly building with >100 occupants | | |
| | | 2400mm generally for habitable rooms and corridors serving a Class 9b assembly building with <100 occupants | | |
| | | - 2100mm for non-habitable rooms, including bathrooms, storerooms, service rooms | | |
| | | - 2000mm above stairs, ramps & landings | | |
| | | | | |
| | | | | |

| BCA 2019 Cl. | BCA 2022 Cl. | BCA Requirement | Compliance Comment | Status |
|-----------------|-----------------|--|---|---|
| BCA Part F | 6 - Light & Ve | entilation | | |
| F4.1 | F6D2 | Provision of natural light Natural light is required to be provided to habitable/sleeping rooms in Class 2, 3, 4 and 9 buildings. | INFORMATIONAL - the clause is informational only in nature | Informational |
| F4.2 | F6D3 | Methods and extent of natural lighting Natural light must be provided from: Windows (with an aggregate light transmitting area of not less than 10% of the floor area of the area which they serve);or Skylights with an aggregate light transmitting area of not less than 3% of the floor area of the area which they serve; or A combination of both Windows must typically be setback from the boundary/wall of the building or other building on the allotment: Generally at least 1m (or 3m for sleeping rooms in a Class 9a building) 50% of the square room of the height of the wall in which the window ins located. I.e. the higher the wall the greater the setback required. Note in Class 9b childcare centres, at least 50% of the windows must have sill height not greater than 500mm from the floor level. | Natural light appears to be provided to habitable rooms as required. A scheduled or room areas vs window light transmitting areas has not been reviewed – although course calculations indicated general compliance is achieved. | Complies |
| F4.3 | F6D4 | Natural light borrowed from adjoining room This clause allows natural light in Class 2-4 buildings to be borrowed from an adjoining room. The room providing the borrowed light must be provided with windows which have a light transmitting area of at least 10% (or skylights with an area or 3%) of the combined floor area of both rooms. | Borrowed natural light is not currently relied upon. | Not Applicable |
| F4.4 | F6D5 | Artificial Light Artificial lighting is required to all newly created or affected areas in accordance with BCA F4.4 and AS1680.0. | Lighting to AS1680.0 required to all affected areas. See also DDA Report. Subject to certification from the design engineer. | Certification by Designer or Specialist |
| F4.5 | F6D6 | Ventilation of Rooms A habitable room, office, shop, factory, workroom, sanitary compartment, bathroom, shower room, laundry and any other room occupied by a person for any purpose must have natural light amounting to 5% of the floor area of the room served or mechanical ventilation complying with AS/NZS 1668.2. | Ventilation required to all newly created or affected rooms and spaces in accordance with this clause. The mechanical consultant should provide design details and certification confirming compliance with this clause. | Certification by Designer or Specialist |
| F4.6 | F6D7 | Natural Ventilation Natural ventilation must constitute 5% of the floor area of the area serving and open to a suitable outdoor, covered open area or adjacent shared room with suitable natural ventilation openings. | Ventilation required to all newly created or affected rooms and spaces in accordance with this clause. The mechanical consultant should provide design details and certification confirming compliance with this clause. | Certification by Designer or Specialist |
| F4.7 | F6D8 | Ventilation borrowed from adjoining room Natural ventilation can be borrowed from an adjoining room providing adjacent room is provided ventilating area that is 5% (or 10% in Class 5-9 buildings) of the both the subject room and the adjoining room combined. | Borrowed natural ventilation is not currently relied upon. | Certification by Designer or Specialist |
| F4.8 | F6D9 | Restriction of position of water closets and urinals Generally sanitary compartments must <u>not</u> open directly into: A kitchen, pantry, public dining area or restaurant Dormitory in a Class 3 building Room / area used for public assembly Workplace normally occupied by more than 1 person Note comments in F4.9 below. | Generally, design appears compliant. | Can Readily Comply - Detail |

| BCA 2019 | | BCA Requirement | Compliance Comment | Status |
|------------------------|--------------|---|--|---|
| CI. | CI. | | | |
| F4.9 | F6D10 | Airlocks Airlocks can be used between a sanitary compartment and area described in BCA F6D9 above. In a Class 5-9 building: • airlocks must have a floor area of at least 1.1m² and be fitted with self-closing doors. • Alternatively, the sanitary compartment must be provided with mechanical exhaust and the doorway suitably screened from view. | Sanitary Facilities not screened from view The sanitary facilities in Building A Level 1 for both Stage 01 & 02 do not appear to be adequately screened from view COMERGE A STREET PROPERTY AND ASSESSMENT OF THE PROPERTY O | Can Readily Comply - Detail |
| F4.11 | F6D11 | Carparks Every storey of a carpark (except open deck) must be provided with mechanical ventilation complying with AS1668.2 or natural ventilation complying with AS1668.4. | NA - The matter is not applicable &/or not affected by scope. | Non Applicable |
| F4.12 | F6D12 | Kitchen Local Exhaust Commercial kitchens must have exhaust hoods complying with this clause and AS1668.1 & AS1668.2. | The canteen and some classrooms may be subject to this requirement. Mechanical consultant to provide design details and certification during detailed design. | Certification by Designer or Specialist |
| Part F7 - So | ound Transm | ission & Insulation | | |
| Part F5 | F7D2 | Sound Transmission and Insulation This part applies to Class 2, 3 & 9c buildings and provides the requirements for sound insulation must be provided between sole occupancy units (and between units and other parts of the building). | NA - The matter is not applicable &/or not affected by scope. | Not Applicable |
| SECTION G | PROVISION | s | | |
| Part G1 Minor Struc | ctures & Com | ponents | | |
| G1.3 | G1D4 | Outdoor play spaces Any outdoor play space in a Class 9b early childhood centre must be enclosed on all sides with a barrier which complies with AS 1926.1. For the above purposes, AS 1926.1 is applied as if there is a swimming pool located outside the outdoor play space, so that the barrier restricts children from exiting the premises without the knowledge of staff in the centre. The above requirements do not apply to a wall, including doors and windows, which form part of the Class 9b early childhood centre. | NA - The matter is not applicable &/or not affected by scope. | Not Applicable |

| BCA 2019 | BCA 2022 | BCA Requirement | Compliance Comment | Status |
|-------------|--------------|--|--|---------------------------|
| CI. | CI. | Box requirement | Compriance comment | Status |
| | | | | |
| NSW | G1D5 | Provision for cleaning windows | Details and design specification must be provided on plan - during detailed design. | Not Applicable |
| G1.101 | | A building must provide for a safe manner of cleaning any windows located 3 or more storeys above ground level, including: | | |
| | | the windows can be cleaned wholly from within the building; or | | |
| | | provision is made for the cleaning of the windows by a method complying with the Work Health and Safety Act 2011 and regulations made under that Act. | | |
| Part G5 - C | Construction | in Bushfire Prone Areas | | |
| NSW G5.1 | NSW | Application of Part | Where the project is designated in bushfire prone land, certification must be provided by an accredited bushfire consultant. | Certification by |
| 1011 03.1 | G5D2 | The Deemed-to-Satisfy Provisions of this Part apply in a designated bushfire prone area to— | Micro the project is designated in businine profite land, continued by profited by an accreated businine consultant. | Designer or |
| | 0002 | (a) a Class 2 or 3 building; or | | Specialist |
| | | (b) a Class 4 part of a building; or | | |
| | | (c) a Class 9 building that is a special fire protection purpose located in an area subject to a Bushfire Attack | | |
| | | Level (BAL) not exceeding BAL—12.5, determined in accordance with Planning for Bush Fire Protection; | | |
| | | or | | |
| | | (d) a Class 10a building or deck immediately adjacent or connected to a building or part of a type in (a), (b) | | |
| | | or (c). | | |
| NSW | NSW | Protection – Class 9 buildings used as a special fire protection purpose | Where the project is designated in bushfire prone land, certification must be provided by an accredited bushfire consultant. | Certification by |
| G5D4 | G5D4 | In a designated bushfire prone area, a Class 2 building, a Class 3 building, a Class 4 part of a building or a Class 9 building that is a special fire protection purpose or a Class 10a building or deck associated with such a building or part, must comply with the following— | | Designer or Specialist |
| | | (a) AS 3959 except— | | |
| | | (i) as amended by Planning for Bush Fire Protection; and | | |
| | | (ii) for Section 9 Construction for Bushfire Attack Level FZ (BAL-FZ). Buildings subject to BAL-FZ must comply with specific conditions of development consent for construction at this level; or | | |
| | | (b) the requirements of (a) above as modified by the development consent following consultation with the NSW Rural Fire Service under section 4.14 of the Environmental Planning and Assessment Act 1979 if required; or | | |
| | | (c) the requirements of (a) above as modified by development consent with a bushfire safety authority issued under section 100B of the Rural Fires Act 1997 for the purposes of integrated development. | | |
| Part G6 - 0 | Occupiable O | utdoor Area | | |
| Part G6 | Part G6 | Occupiable Outdoor Area - Definition | Informational Clause | Informational |
| art GU | Tare Go | | Informational Clause | Illorinational |
| | | Occupiable outdoor area means a space on a roof, balcony or similar part of a building— | | |
| | | that is open to the sky; and | | |
| | | to which access is provided, other than access only for maintenance; and | | |
| | | that is not open space or directly connected with open space. | | |
| | | Note: An occupiable outdoor area is not a storey for the purposes of Schedule 3 of the NCC/BCA and therefore is not included in the determination of rise in storeys. It <u>is</u> considered a storey for the purposes of other parts detailed below. | | |
| G6.2 | G6D2 | Fire Hazard Properties – Occupiable Outdoor Area | Informational Clause | Informational |
| | | Any lining in an occupiable outdoor area must meet the Fire Hazard Properties requirements of BCA Clause & Specification C1.10 as if it were an internal lining but need not meet the following: | | |
| | | Average specific extinction area. | | |
| | | Smoke-Developed Index. | | |
| | | Smoke development rate. | | |
| | | Smoke growth rate index (SMOGRA RC). | | |
| | | (2.1.2.2.3.1.0.1.2.1.0.1.0.1.0.1.0.1.0.1.0.1.0.1.0 | | |

| BCA 2019 | | BCA Requirement | Compliance Comment | Status |
|-------------|--------------|--|--|------------------|
| CI. | CI. | | | |
| G6.3 | G6D3 | Fire Separation – Occupiable Outdoor Areas | Informational clause. | Informational |
| | | For the purposes of the Deemed-to-Satisfy Provisions of C2.7, C2.8 and C2.9, a reference to a storey includes an occupiable outdoor area, however a fire wall cannot be used to separate an occupiable outdoor area into different fire compartments. | | |
| | | That is, where an occupiable outdoor area has a different classification to the area adjacent or above/below it, it must have any building elements meet the higher FRL of any other classification on the same storey, or have a fire rated floor separating any other classification above or below. | | |
| G6.4 | G6D4 | Provision for Escape – Occupiable Outdoor Areas | These areas have been specifically considered under BCA Part D1 earlier in this report. | Informational |
| | | Must comply with the egress requirements contained in BCA Part D1 "Provision for Escape". | | |
| G6.5 | G6D5 | Construction of Exits – Occupiable Outdoor Areas | These areas have been specifically considered under BCA Part D2 earlier in this report. | Informational |
| | | Must comply with the exit requirements contained in BCA Part D2 "Construction of Exits". | | |
| G6.6 | G6D6 | Fire Fighting Equipment – Occupiable Outdoor Areas | These areas have been specifically considered under BCA Part E1 earlier in this report. | Informational |
| | | For the purposes of BCA Part E1 "Fire Fighting Equipment", occupiable outdoor area is considered a storey so may be required to be provided with fire hydrant, fire hose reel, sprinkler, portable fire extinguisher &/or fire control rooms should BCA Part E1 ordinarily require it based on floor area of a storey or otherwise. See below. | | |
| G6.7 | G6D7 | Lift Installations – Occupiable Outdoor Areas | Noted, informational | Informational |
| | | For the purposes of Part G3 "Lift Installations", a reference to a storey includes an occupiable outdoor area. | | |
| G6.8 | G6D8 | Visibility in an emergency, exit signs and warning systems – Occupiable Outdoor Areas | Noted, informational | Informational |
| | | For the purposes of the Deemed-to-Satisfy Provisions of Part E4, a reference to a storey includes an occupiable outdoor area. | | |
| G6.9 | G6D9 | Light & Ventilation - Occupiable Outdoor Areas | Noted, informational | Informational |
| | | A reference to a room in the following BCA Clauses includes an occupiable outdoor area. | | |
| | | F4.4 Artificial lighting | | |
| | | F4.8 Restriction on location of sanitary compartments | | |
| | | F4.9 Airlocks | | |
| Section J - | Energy Effic | iency | | |
| Section J | Section J | Energy Efficiency BCA Section J | Any new development works must comply with BCA Section J for Energy Efficiency. | Certification by |
| | | New works must comply with the Energy Efficiency requirements of Section J, including: | The design should be reviewed & certified by a suitably qualified Energy Efficiency Consultant during the detailed design. | Designer or |
| | | Part J1 - Energy efficiency performance requirements | | Specialist |
| | | Part J2 - Energy efficiency | | |
| | | Part J3 - Elemental provisions for a sole-occupancy unit of a Class 2 building or a Class 4 part of a building. | | |
| | | Part J4 - Building fabric | | |
| | | Part J5 – Building sealing | | |
| | | Part J6 - Air-conditioning and ventilation | | |
| | | Part J7 - Artificial lighting and power | | |
| | | Part J8 – Heated water supply and swimming pool and spa pool plant | | |
| | | Part J8 – Heated water supply and swimming pool and spa pool plant | | |

7.0 Conclusion

This report assesses the **REF Level Design** for the proposed **New High School at Leppington and Denham Court at 128-134 Rickard Rd, Leppington NSW 2179** against the requirements of the National Construction Code (NCC) / Building Code of Australia (BCA).

The primary purpose of the report is to identify any non-compliances with the deemed-tosatisfy provision of the BCA and provide mitigation measures to best comply with the requirements of the BCA.

Subject to compliance with the mitigation measures of this report, the development can readily comply with the relevant requirements of the BCA. Mitigation measures have been identified as follows:

- Significant BCA matters, being those with the ability to affect the design have been included in Mitigation Measures Table 1.0 below and in the Executive Summary.
- A BCA Compliance Schedule suitable for the current level of design is also contained in in Mitigation Measures Table 6.0 of this report.



Attachment A - Summary of Fire Resistance Levels (Type A)

The following is a summary of the required fire resistance levels of buildings elements for **Type A Construction** (refer to BCA Specification 5 for full requirements & concessions):

Table S5C11a: Type A construction: FRL of loadbearing parts of external walls

| | FRL (in minutes): Structural adequacy/ Integrity / Insulation | | | |
|----------------------|---|---------------------|-------------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Less than 1.5 m | 90/90/90 | 120/120/120 | 180/180/180 | 240/240/240 |
| 1.5 to less than 3 m | 90/60/60 | 120/90/90 | 180/180/120 | 240/240/180 |
| 3 m or more | 90/60/30 | 120/60/30 | 180/120/90 | 240/180/90 |

Table S5C11b: Type A construction: FRL of non-loadbearing parts of external walls

| | FRL (in minutes): Structural adequacy Integrity Insulation | | | | |
|----------------------|---|---------------------|-----------|---------------|--|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 | |
| Less than 1.5 m | -/90/90 | -/120/120 | -/180/180 | -/240/240 | |
| 1.5 to less than 3 m | -/60/60 | -/90/90 | -/180/120 | -/240/180 | |
| 3 m or more | -/-/- | -/-/- | -/-/- | -/-/- | |

Table S5C11c: Type A construction: FRL of external columns not incorporated in an external wall

| ,, | FRL (in minutes): Structural adequacy Integrity Insulation | | | |
|-----------------|---|---------------------|---------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Loadbearing | 90/–/– | 120/–/– | 180/–/– | 240/–/– |
| Non-loadbearing | -/-/- | -/-/- | -/-/- | -/-/- |

Table S5C11d: Type A construction: FRL of common walls and fire walls

| 7- | FRL (in minutes): Structural adequacy / Integrity / Insulation | | | |
|--------------------------------|--|---------------------|-------------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Loadbearing or non-loadbearing | 90/90/90 | 120/120/120 | 180/180/180 | 240/240/240 |

Table S5C11e: Type A construction: FRL of loadbearing internal walls

| Location | FRL (in minutes): Structural adequacy Integrity Insulation | | | |
|---|---|---------------------|-------------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Fire-resisting lift and stair shafts | 90/90/90 | 120/120/120 | 180/120/120 | 240/120/120 |
| Bounding public corridors, public lobbies and the like | 90/90/90 | 120/–/– | 180/–/– | 240/-/- |
| Between or bounding sole-occupancy units | 90/90/90 | 120/-/- | 180/–/– | 240/-/- |
| Ventilating, pipe, garbage, and like <i>shafts</i> not used for the discharge of hot products of combustion | 90/90/90 | 120/90/90 | 180/120/120 | 240/120/120 |

Table S5C11f: Type A construction: FRL of non-loadbearing internal walls

| Location | FRL (in minutes): Structural adequacy Integrity Insulation | | | |
|---|--|---------------------|-----------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Fire-resisting lift and stair shafts | -/90/90 | -/120/120 | -120/120 | -/120/120 |
| Bounding public corridors, public lobbies and the like | -/60/60 | -/-/- | -/-/- | -/-/- |
| Between or bounding sole-occupancy units | -/60/60 | -/-/- | -/-/- | -/-/- |
| Ventilating, pipe, garbage, and like <i>shafts</i> not used for the discharge of hot products of combustion | -/90/90 | -/90/90 | -/120/120 | -/120/120 |

Table S5C11g: Type A construction: FRL of other building elements not covered by Tables S5C11a to S5C11f

| Building element | FRL (in minutes): Structural adequacy Integrity Insulation | | | |
|--|--|---------------------|-------------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Other <i>loadbearing</i> internal walls, internal beams, trusses and columns | 90// | 120/–/– | 180/–/– | 240/–/– |
| Floors | 90/90/90 | 120/120/120 | 180/180/180 | 240/240/240 |
| Roofs | 90/60/30 | 120/60/30 | 180/60/30 | 240/90/60 |

S5C12 Type A fire-resisting construction — concessions for floors

[2019: Spec C1.1: 3.2]

The above should be read in conjunction with the remainder and further concessions contained within Specification 5.



Attachment A - Summary of Fire Resistance Levels (Type C)

The following is a summary of the required fire resistance levels of buildings elements for **Type C Construction** (refer to BCA Specification 5 for full requirements & concessions):

Table S5C24a: Type C construction: FRL of parts of external walls

| | FRL (in minutes): Structural adequacy Integrity Insulation | | | |
|----------------------|--|---------------------|----------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Less than 1.5 m | 90/90/90 | 90/90/90 | 90/90/90 | 90/90/90 |
| 1.5 to less than 3 m | -/-/- | 60/60/60 | 60/60/60 | 60/60/60 |
| 3 m or more | -/-/- | -/-/- | -/-/- | -/-/- |

Table S5C24b: Type C construction: FRL of external columns not incorporated into an external wall

| Distance from a fire-source feature | FRL (in minutes): structural adequacy / Integrity / Insulation | | | |
|-------------------------------------|--|---------------------|---------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Less than 1.5 m | 90/-/- | 90/–/– | 90/-/- | 90/–/– |
| 1.5 to less than 3 m | -/-/- | 60/–/– | 60/–/– | 60/–/– |
| 3 m or more | -/-/- | -/-/- | -/-/- | -/-/- |

Table S5C24c: Type C construction: FRL of common walls and fire walls

| <i>"</i> | FRL (in minutes): Structural adequacy Integrity Insulation | | | |
|--------------------------------|---|---------------------|----------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Loadbearing or non-loadbearing | 90/90/90 | 90/90/90 | 90/90/90 | 90/90/90 |

Table S5C24d: Type C construction: FRL of internal walls

| | FRL (in minutes): Structural adequacy Integrity Insulation | | | |
|--|--|---------------------|----------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Bounding public corridors, public lobbies and the like | 60/60/60 | -/-/- | -/-/- | -/-/- |
| Between or bounding sole-occupancy units | 60/60/60 | -/-/- | -/-/- | -/-/- |
| Bounding a stair if required to be rated | 60/60/60 | 60/60/60 | 60/60/60 | 60/60/60 |

Table S5C24e: Type C construction: FRL of roof

| Location | FRL (in minutes): Structural adequacy Integrity Insulation | | | |
|----------|---|---------------------|---------|---------------|
| | Class 2, 3 or 4 part | Class 5, 7a or 9 | Class 6 | Class 7b or 8 |
| Roofs | -/-/- | -/-/- | -/-/- | -/-/- |

The above should be read in conjunction with the remainder and further concessions contained within Specification 5.



Attachment B – Assessed Plans

The following plans have been assessed for the purposes of this report:

| Prepared By | Design Stage | Date |
|-----------------|-------------------|----------------------------|
| DJRD Architects | REF Design Review | Generally dated 29/11/2024 |

| DRAWING LIST | |
|--|---|
| DRAWING LIST | |
| LHS-DJRD-00-00-REF-A-0000 | COVER PAGE & DRAWING LIST |
| 1 | |
| 0000 - SITE | |
| LHS-DJRD-00-00-REF-A-0100 | SITE SURVEY AND DEPOSITED PLAN |
| LHS-DJRD-00-00-REF-A-0101 | EXISTING SITE PLAN |
| LHS-DJRD-00-00-REF-A-0102 | DEMOLITION PLAN |
| LHS-DJRD-00-00-REF-A-0103 LHS-DJRD-00-00-REF-A-0200 | SITE PLAN |
| LHS-DJRD-00-00-REF-A-0200 LHS-DJRD-00-00-REF-A-0201 | SITE CONTEXT SITE CONSTRAINTS |
| LHS-DJRD-00-00-REF-A-0202 | SITE OPPORTUNITIES |
| LHS-DJRD-00-00-REF-A-0203 | SITE ANALYSIS |
| LHS-DJRD-00-00-REF-A-0230 | SHADOW DIAGRAMS |
| LHS-DJRD-00-00-REF-A-0250 | OVERALL GROUND FLOOR PLAN |
| LHS-DJRD-00-00-REF-A-0251 | OVERALL LEVEL 1 FLOOR PLAN |
| LHS-DJRD-00-00-REF-A-0252 | OVERALL LEVEL 2 FLOOR PLAN |
| LHS-DJRD-00-00-REF-A-0253 | OVERALL ROOF PLAN |
| LHS-DJRD-00-00-REF-A-0260 | GFA AREA CALCULATIONS |
| LHS-DJRD-00-00-REF-A-0300 | CANOPY - TYPICAL DETAILS |
| LHS-DJRD-00-00-REF-A-0350 | ENTRY SIGNAGE |
| LHS-DJRD-00-00-REF-A-8601 LHS-DJRD-00-00-REF-A-8602 | 3D IMAGES - AERIAL 3D IMAGES - ENTRY AND EXTERIOR FINISHES |
| 18 | 3D IMAGES - ENTRY AND EXTERIOR FINISHES |
| | |
| 1000 - GA PLANS LHS-DJRD-B00A-GF-REF-A-1010 | BUILDING A - GROUND FLOOR PLAN |
| LHS-DJRD-B00A-L1-REF-A-1011 | BUILDING A - LEVEL 1 FLOOR PLAN |
| LHS-DJRD-B00A-L2-REF-A-1012 | BUILDING A - LEVEL 2 FLOOR PLAN |
| LHS-DJRD-B00A-RF-REF-A-1013 | BUILDING A - ROOF PLAN |
| LHS-DJRD-B00B-GF-REF-A-1020 | BUILDING B - GROUND FLOOR PLAN |
| LHS-DJRD-B00B-L1-REF-A-1021 | BUILDING B - LEVEL 1 FLOOR PLAN |
| LHS-DJRD-B00B-L2-REF-A-1022 | BUILDING B - LEVEL 2 FLOOR PLAN |
| LHS-DJRD-B00B-RF-REF-A-1023 | BUILDING B - ROOF PLAN |
| LHS-DJRD-B00C-GF-REF-A-1030 | BUILDING C - GROUND FLOOR PLAN |
| LHS-DJRD-B00C-L1-REF-A-1031 | BUILDING C - LEVEL 1 FLOOR PLAN |
| LHS-DJRD-B00C-L2-REF-A-1032 | BUILDING C - LEVEL 2 FLOOR PLAN |
| LHS-DJRD-B00C-RF-REF-A-1033 12 | BUILDING C - ROOF PLAN |
| 2000 FLEWATIONS | |
| 3000 - ELEVATIONS LHS-DJRD-00-00-REF-A-3001 | SITE ELEVATIONS |
| LHS-DJRD-B00A-ZZ-REF-A-3011 | BUILDING A - ELEVATIONS - SHEET 1 |
| LHS-DJRD-B00A-ZZ-REF-A-3012 | BUILDING A - ELEVATIONS - SHEET 2 |
| LHS-DJRD-B00B-ZZ-REF-A-3021 | BUILDING B - ELEVATIONS - SHEET 1 |
| LHS-DJRD-B00B-ZZ-REF-A-3022 | BUILDING B - ELEVATIONS - SHEET 2 |
| LHS-DJRD-B00C-ZZ-REF-A-3031 | BUILDING C - ELEVATIONS - SHEET 1 |
| LHS-DJRD-B00C-ZZ-REF-A-3032 | BUILDING C - ELEVATIONS - SHEET 2 |
| 7 | |
| 4000 - SECTIONS | |
| LHS-DJRD-00-00-REF-A-4001 | SITE SECTIONS |
| LHS-DJRD-B00A-ZZ-REF-A-4011 | BUILDING A - SECTIONS - SHEET 1 |
| LHS-DJRD-B00B-ZZ-REF-A-4021 | BUILDING B - SECTIONS - SHEET 1 |
| LHS-DJRD-B00C-ZZ-REF-A-4031 | BUILDING C - SECTIONS - SHEET |
| 4 | |