

Dwelling Ar	reas
Area Name	Area m2
BALCONY (BED 1)	37.36
BALCONY (SITTING)	12.58
FIRST FLOOR	171.90
GARAGE	41.35
GROUND FLOOR	156.92
OUTDOOR LIVING	40.69
PORCH	5.54
	466.34 m²

SCALE BAR 1:100 0 1,000 2,000 3,000 4,000mm

TAYLORED DESIGNS & DRAFTING

Phone: 0401 482 401

Copyright. ©

This plan is the propery of Taylored Designs & Drafting and may not be used in whole or part

Capyright. ©

Email: info@tayloreddesigns.com.au

This plan is the propery of Taylored Designs & Drafting and may not be used in whole or part

This plan is the propery of Taylored Designs & Drafting and may not be used in whole or part

Capyright. ©

3. ALL BOUNDARY CLEARENCES MUST BE VERIFIED BEFOR OF BUILDING WORKS BY REGISTERED SURVEYOR.

4. BUILDER IS TO STRICTLY COMPLY WITH ALL RELEVANT BO FAUSTRALIA CONSTRUCTION REQUIREMENTS AND AU

5. IN CASE OF ALTERATIONS OR DISCREPANCIES NOTIFY TAYLORED DESIGNS & DRAFTING IMMEDIATELY.

GENERAL NOTES

1. LEVELS SHOWN ARE APPROXIMATE AND TO BE CONFIRMED
ON SITE BY SURVEYOR.
2. ENGINEERS DRAWINGS ARE REQUIRED AND THOSE DRAWINGS
MUST TAKE PREFERENCE TO THESE DRAWINGS.
3. ALL BOUNDARY CLEARENCES MUST BE VERIFIED BEFORE COMMENCEMENT
OF BUILDING WORKS BY REGISTERED SURVEYOR.
4. BUILDER IS TO STRICTLY COMPLY WITH ALL RELEVANT BUILDING CODE
OF AUSTRALIA CONSTRUCTION REQUIREMENTS AND AUSTRALIAN STANDARDS.

FIGURED DIMENSIONS TO BE USED IN PREFERENCE TO SCALING THIS DRAWING DO NOT ASSUME - IF IN DOUBT ASK.

Two Storey Dwelling


CLIENT:

AT:
Lot: 29, DP: 30534
No.2 Garden Place,
Picnic Point NSW 2213

Marcello Bortone

JOB NO: 240109 DATE: 240109 18.11.24 MT

Sheet Size: LGA: Canterbury-Bankstown 4 of 10

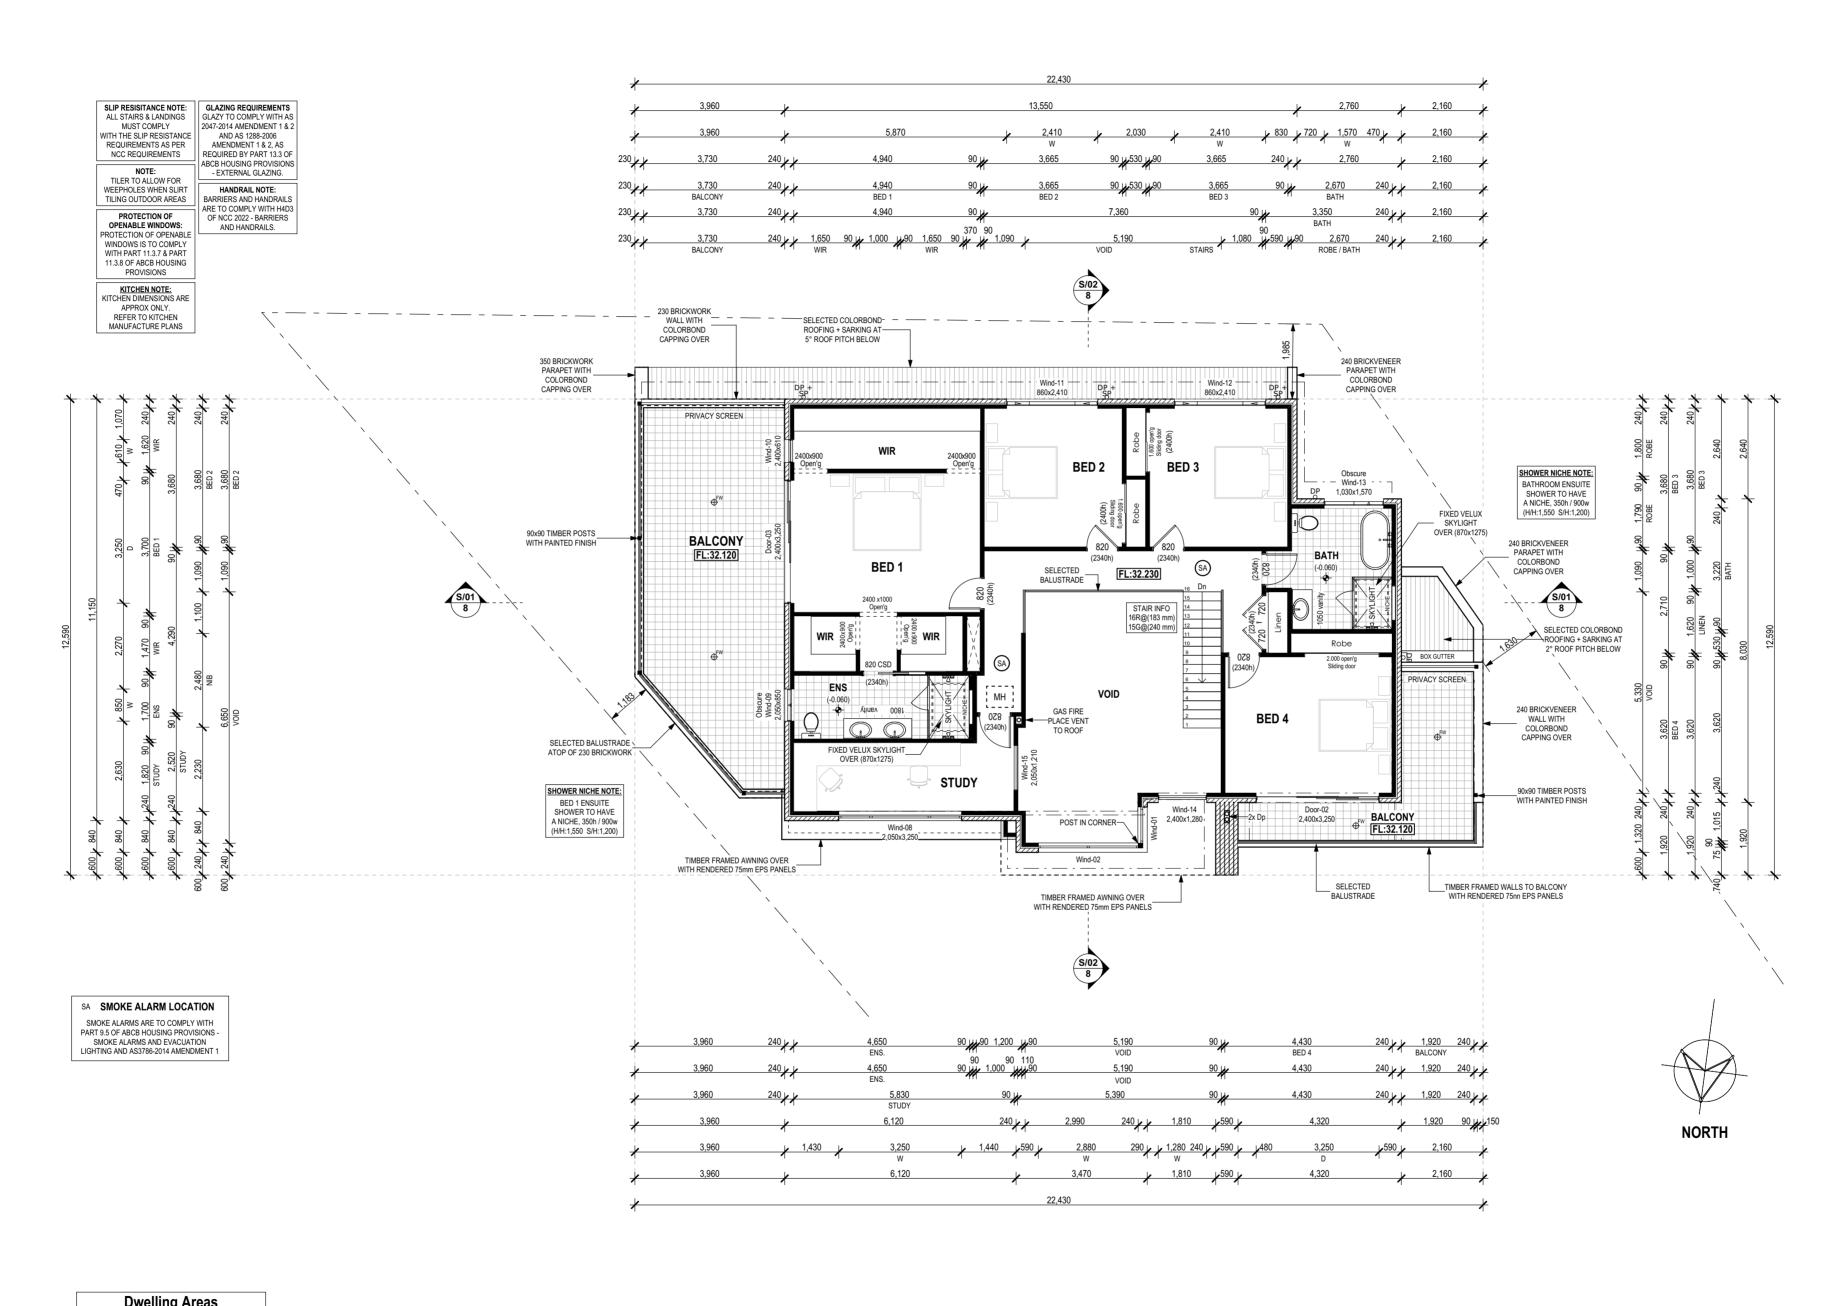

Dwelling Al	cas
Area Name	Area m2
BALCONY (BED 1)	37.36
BALCONY (SITTING)	12.58
FIRST FLOOR	171.90
GARAGE	41.35
GROUND FLOOR	156.92
OUTDOOR LIVING	40.69
PORCH	5.54
	466.34 m ²

1,000 2,000 3,000 4,000mm

SCALE BAR 1:100

DESIGNS & DRAFTING Phone: 0401 482 401 Email: info@tayloreddesigns.com.au

Copyright. © This plan is the propery of Taylored Designs & Drafting and may not be used in whole or part

GENERAL NOTES	R
LEVELS SHOWN ARE APPROXIMATE AND TO BE CONFIRMED ON SITE BY SURVEYOR.	
ENGINEERS DRAWINGS ARE REQUIRED AND THOSE DRAWINGS MUST TAKE PREFERENCE TO THESE DRAWINGS.	
ALL BOUNDARY CLEARENCES MUST BE VERIFIED BEFORE COMMENCEMENT OF BUILDING WORKS BY REGISTERED SURVEYOR.	
4. BUILDER IS TO STRICTLY COMPLY WITH ALL RELEVANT BUILDING CODE	
OF AUSTRALIA CONSTRUCTION REQUIREMENTS AND AUSTRALIAN STANDARDS. 5. IN CASE OF ALTERATIONS OR DISCREPANCIES	
NOTIFY TAYLORED DESIGNS & DRAFTING IMMEDIATELY.	

	REF:	DATE:	AMENDMENT:	PRO	POSED:	Two S
	Α	18.11.24	PRELIMINARY PLANS			
	В	10.12.24	PLAN AMENDMENTS	AT:		
	С	05.02.25	DA PLANS]	Lot: 29, DP	: 30534
١T					No.2 Garde	n Place
					NO.2 Garde	ii i iace,
RDS.				1	Picnic Point	NSW 22
				1		

FIGURED DIMENSIONS TO BE USED IN PREFERENCE TO SCALING THIS DRAWING DO NOT ASSUME - IF IN DOUBT ASK.


MT

5 of 10

Marcello Bortone DRAWN:

,	JOB NO:	DATE:	Ī
No.2 Garden Place,	240109	18.11.24	
Picnic Point NSW 2213	Sheet Size:	LGA:	Ī
10111011 011111111111111111111111111111	A2	Canterbury-Bankstown	

Two Storey Dwelling

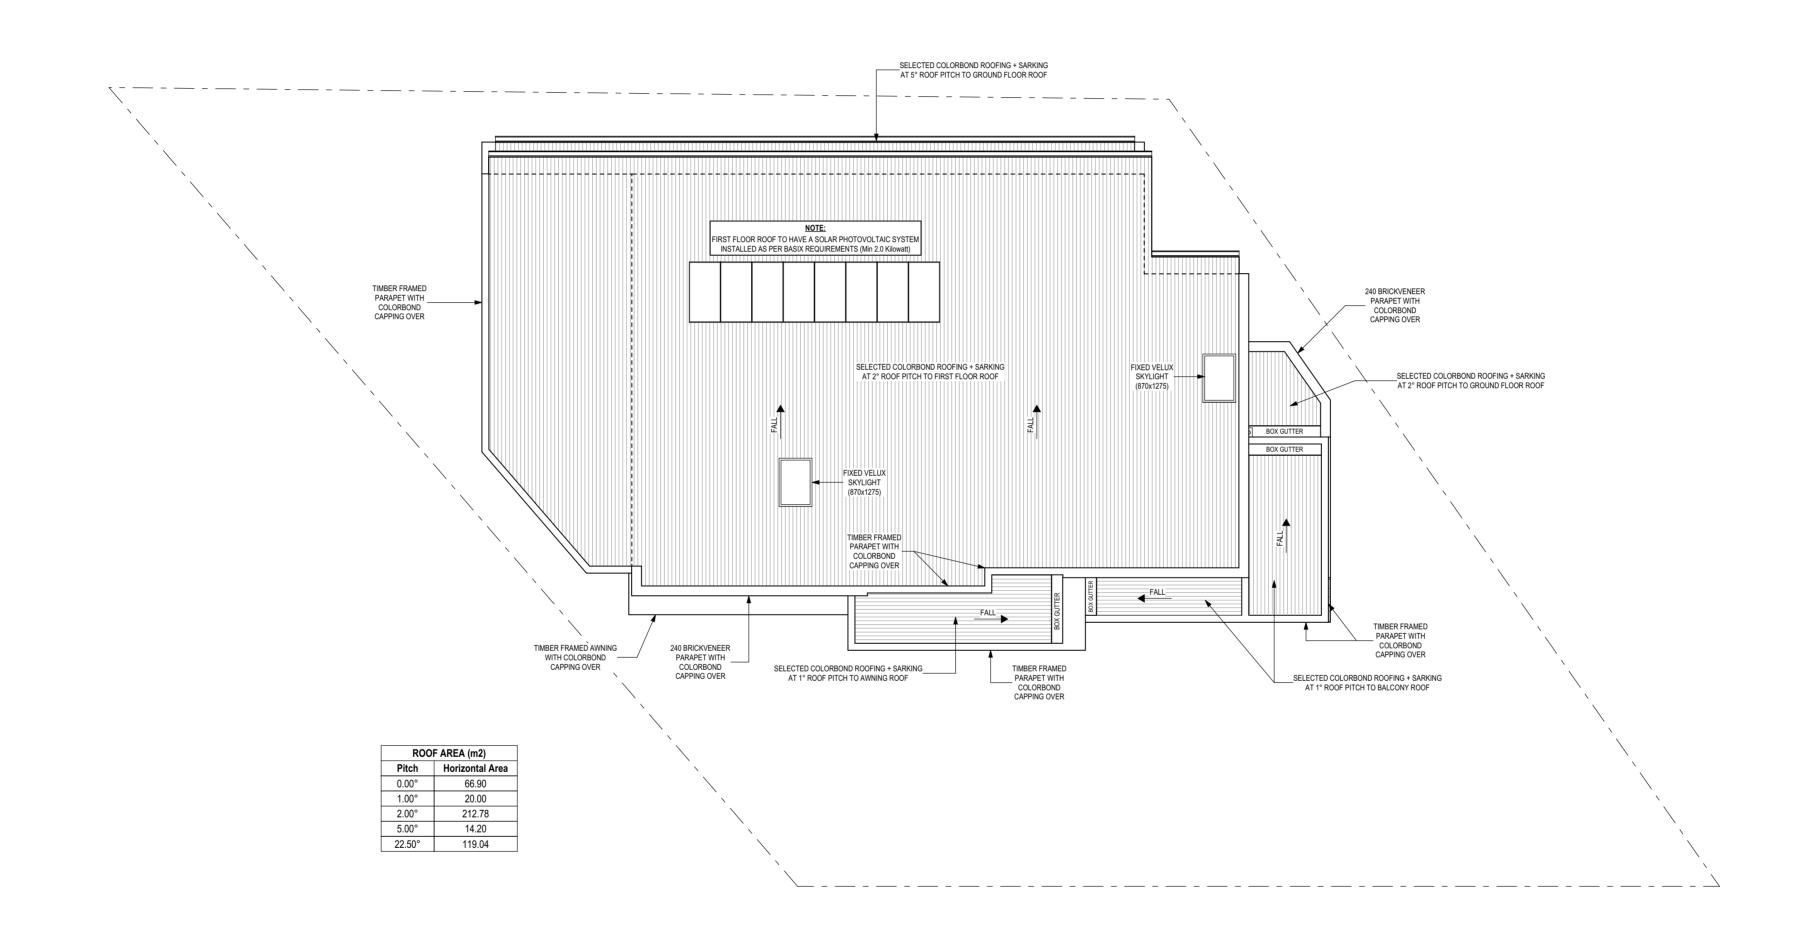

SCALE BAR 1:100

0 1,000 2,000 3,000 4,000mm

FIGURED DIMENSIONS TO BE USED IN PREFERENCE TO SCALING THIS DRAWING DO NOT ASSUME - IF IN DOUBT ASK.


6 of 10



GENERAL NOTES
LEVELS SHOWN ARE APPROXIMATE AND TO BE CONFIRMED ON SITE BY SURVEYOR.
ENGINEERS DRAWINGS ARE REQUIRED AND THOSE DRAWINGS MUST TAKE PREFERENCE TO THESE DRAWINGS.
ALL BOUNDARY CLEARENCES MUST BE VERIFIED BEFORE COMMENCEMENT OF BUILDING WORKS BY REGISTERED SURVEYOR.
BUILDER IS TO STRICTLY COMPLY WITH ALL RELEVANT BUILDING CODE OF AUSTRALIA CONSTRUCTION REQUIREMENTS AND AUSTRALIAN STANDARDS.
IN CASE OF ALTERATIONS OR DISCREPANCIES NOTIFY TAYLORED DESIGNS & DRAFTING IMMEDIATELY.

PROPOSE	AMENDMENT:	DATE:	REF:
	PRELIMINARY PLANS	18.11.24	Α
AT: 1.44.0	PLAN AMENDMENTS	10.12.24	В
Lot: 29	DA PLANS	05.02.25	С
No.2 (
110.2			
Picnic			

POSED:	Two Storey Dwelling	CLIENT:		
Lot: 29, DP: 3	30534	M	arcello Bo	ortone
No.2 Garden		JOB NO : 240109	DATE: 18.11.24	DRAWN: MT
Picnic Point N	NSW 2213	Sheet Size: A2	LGA: Canterbury-Bankstown	Sheet: 6 of 10

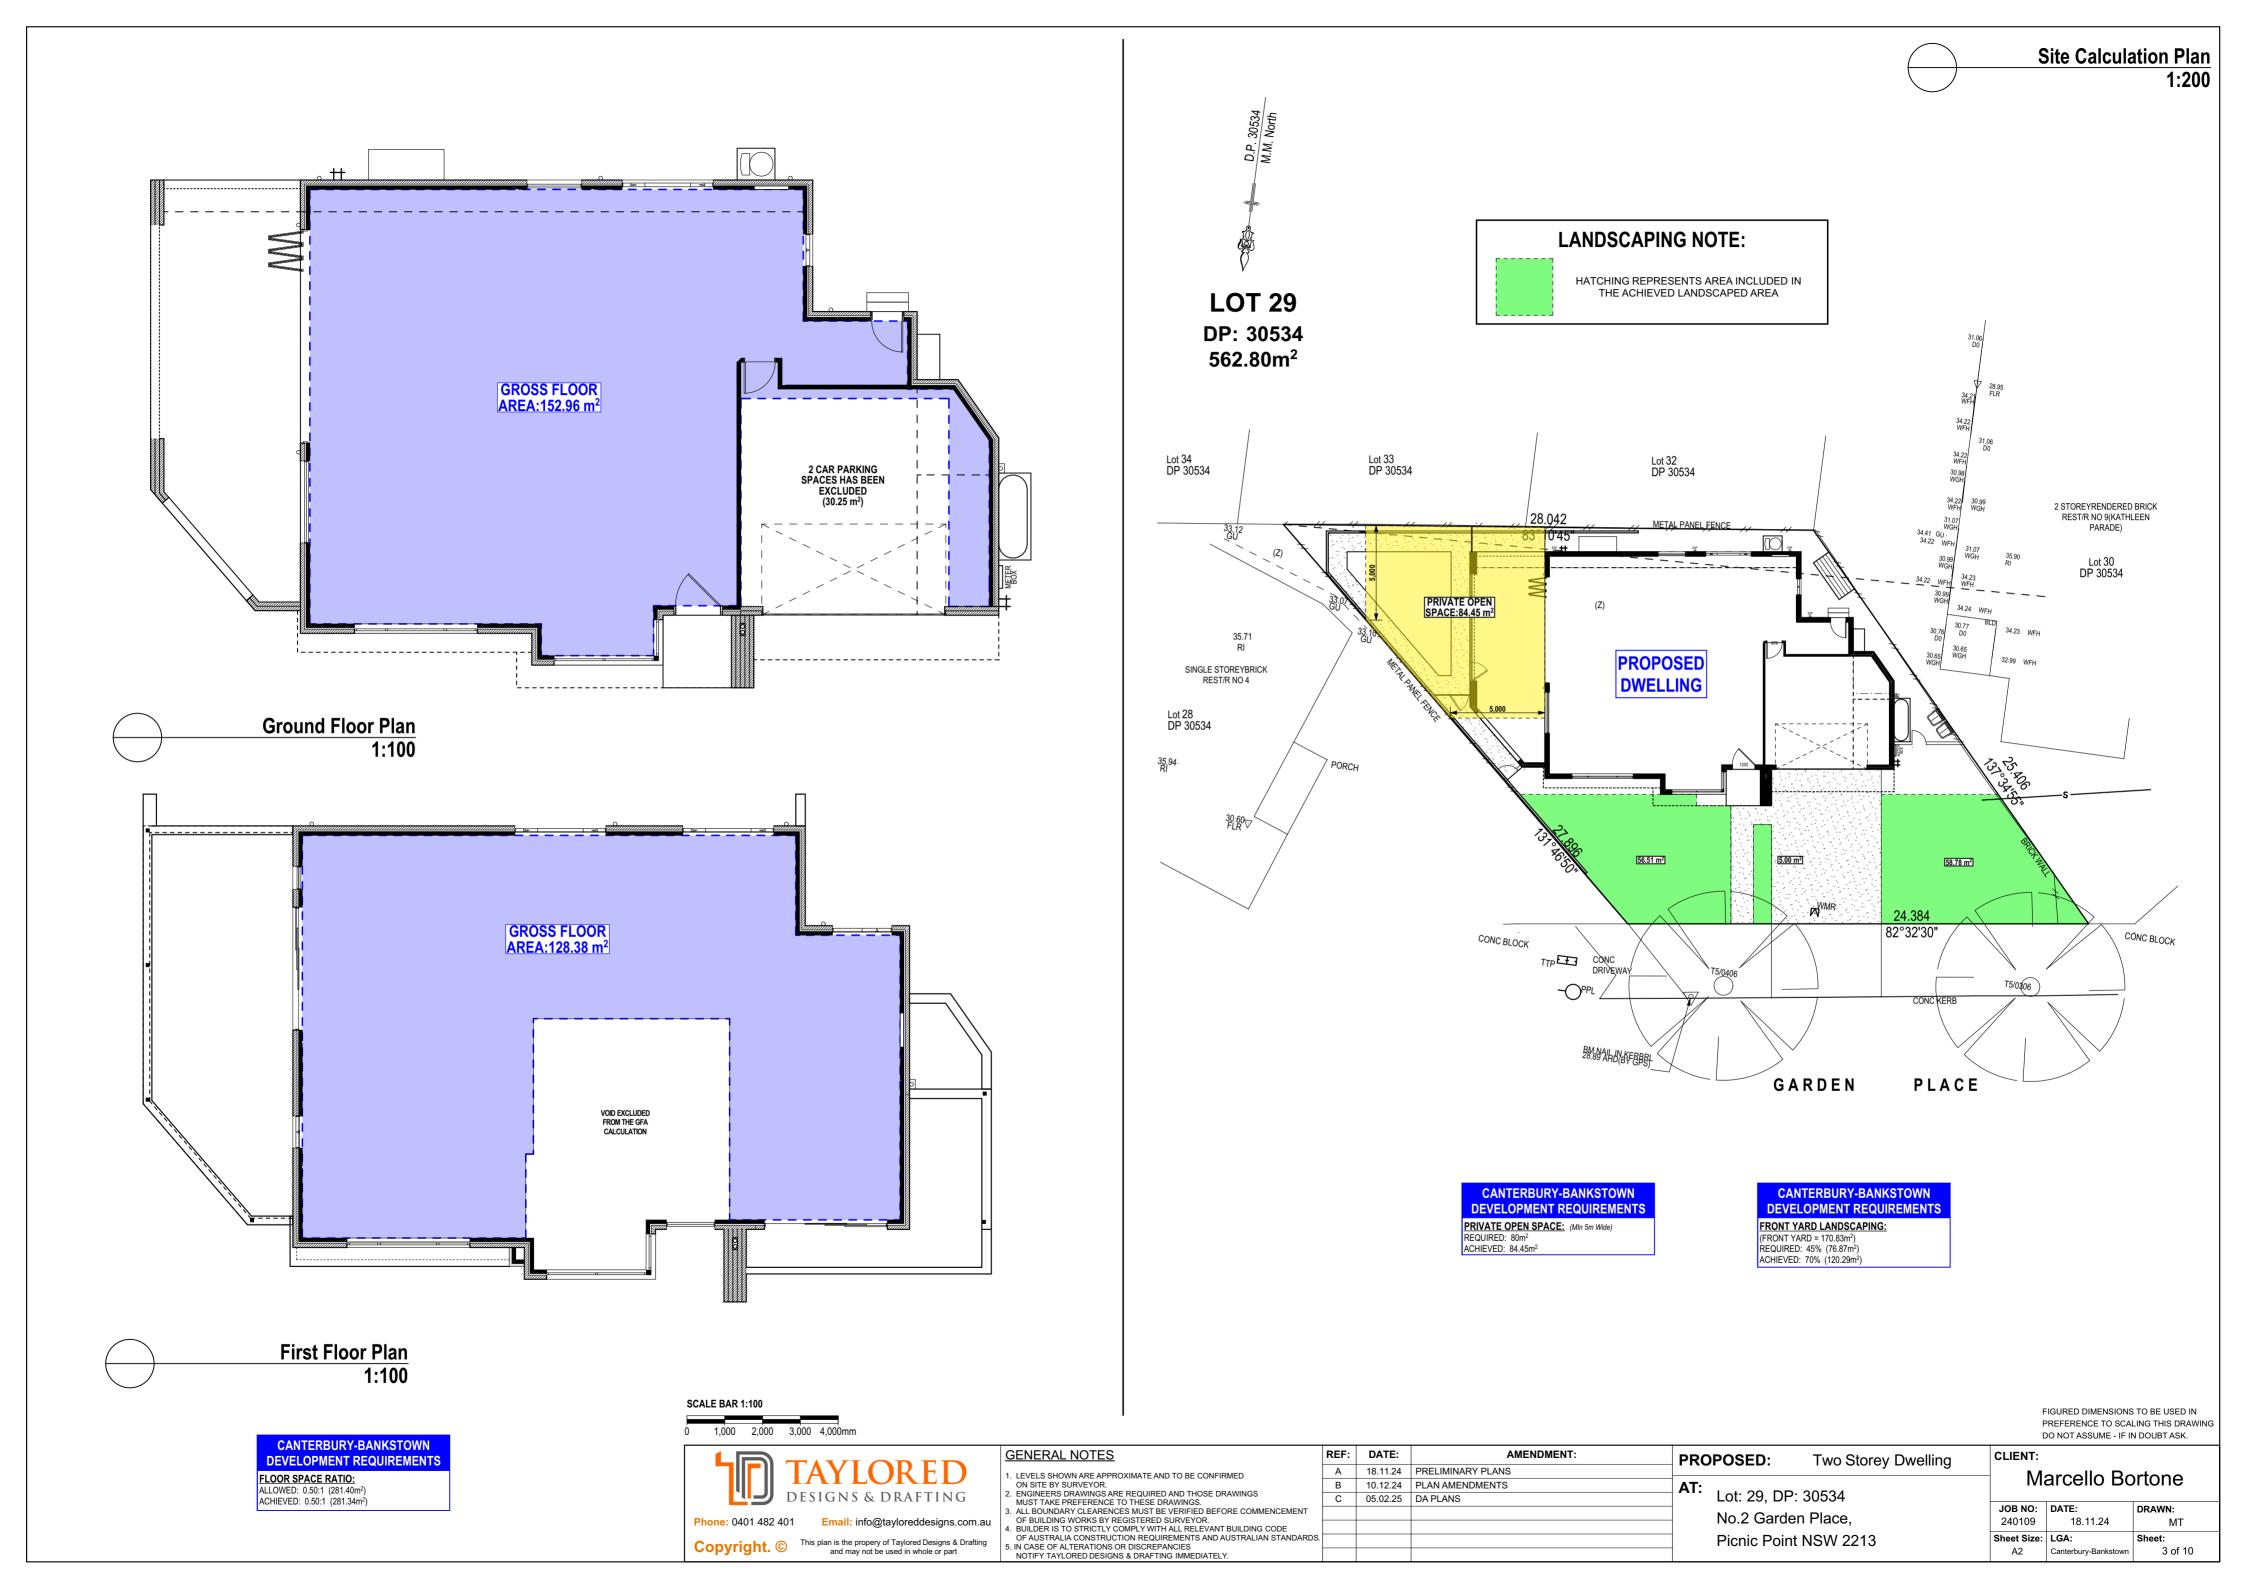



Single Dwelling

Certificate number: 1780197S_02

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at www.basix.nsw.gov.au

Date of issue: Monday, 20 January 2025
To be valid, this certificate must be submitted with a development application or lodged with a complying development certificate application within 3 months of the date of issue.

All Shower Heads:

4 star (> 4.5 but <= 6 L/min)

Landscape connection:

Natural lighting: As per BASIX Certificate Artificial lighting: As per BASIX Certificate

Pool pump rating – Single Speed

Must have no heating

Pool pump on timer

Rainwater tank size min - 2000 litres

Rainwater tank to collect run off from at least 60m² of roof area

Hot water system: Electric heat pump with a performance of 31-35 STC's or better

Must install fixed outdoor clothes drying line as part of the development.

Bathroom ventilation system: Individual fan, ducted to façade or roof; manual switch on/off Kitchen ventilation system: Individual fan, ducted to façade or roof; manual switch on/off Laundry ventilation system: Individual fan, ducted to façade or roof; manual switch on/off Cooling system: 1 Phase air-conditioning (3 Star) in at least 1 living/bed area (zoned) **Heating system:** 1 Phase air-conditioning (3 Star) in at least 1 living/bed area (zoned)

WATER:

All Toilet Flushing

Systems:

4 Star

Toilet connection:

ENERGY:

Alternative energy: Must install a photovoltaic system with the capacity to generate at least 2.0 peak kilowatts of electricity.

The swimming pool must not have a volume greater than 29 kilolitres



Fixtures

Alternative

source

Swimming

Pool

Swimming Pool:

Dwelling @ 2 Garden Place, Pic	nic Point 02		
	Dwelling @ 2 Garden Place, Picnic Point_02		
2 GARDEN Place PICNIC POIN	2 GARDEN Place PICNIC POINT 2213		
Canterbury-Bankstown Council			
Deposited Plan DP30534			
29			
-			
dwelling house (detached)			
5			
✓ 41	Target 40		
✓ Pass	Target Pass		
✓ 79	Target 72		
✓ -47	Target n/a		
	Canterbury-Bankstown Council Deposited Plan DP30534 29 - dwelling house (detached) 5 41 Pass 79		

All Kitchen Taps:

4 Star

Laundry connection:

All Bathroom Taps:

4 Star

Pool top up:

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Do-it-yourself Method			
General features			
The dwelling must be a Class 1 dwelling according to the National Construction Code, and must not have more than 2 storeys.	~	~	~
The conditioned floor area of the dwelling must not exceed 300 square metres.	~	~	~
The dwelling must not contain open mezzanine area exceeding 25 square metres.	~	~	~
The dwelling must not contain third level habitable attic room.	~	~	~
Floor, walls and ceiling/roof			
The applicant must construct the floor(s), walls, and ceiling/roof of the dwelling in accordance with the specifications listed in the table below.	~	~	~
The applicant must adopt one of the options listed in the tables below to address thermal bridging in metal framed floor(s), walls and ceiling/roof of the dwelling.	~	~	~
The applicant must show through receipts that the materials purchased for construction are consistent with the specifications listed in the tables below.			~

Construction	Area - m²	Additional insulation required	Options to address thermal bridging	Other specifications
floor - concrete slab on ground, waffle pod slab.	143	nil;not specified	nil	
floor - above habitable rooms or mezzanine, particle board; frame: timber - untreated softwood	127	nil;none	nil	
floor - suspended floor above garage, particle board; frame: timber - untreated softwood.	35	nil;none	nil	
garage floor - concrete slab on ground, waffle pod slab.	38	none	nil	
external wall: brick veneer; frame: timber - untreated softwood.	all external walls	2.64 (or 2.70 including construction); fibreglass batts or roll	nil	wall colour: Medium (solar absorptance 0.48-0.7)
external garage wall: brick veneer; frame: timber - untreated softwood.	24	fibreglass batts or roll	nil	
internal wall shared with garage: plasterboard; frame: timber - untreated softwood.	29	nil;none	nil	
internal wall: plasterboard; frame: timber - untreated softwood.	206	none	nil	
ceiling and roof - flat ceiling / flat roof, framed - metal roof, timber - untreated softwood.	245	ceiling: 5.7 (up), roof: foil backed blanket ;ceiling: fibreglass batts or roll; roof: foil backed blanket.	nil	roof colour: medium (solar absorptance 0.48-0.59); 0.5 to \leq 1.0% of ceiling area uninsulated

	Note	• Insulation specified in this Certificate must be installed in accordance with the ABCB Housing Provisions (Part 13.2.2) of the National Construction Code.
	Note	• If the additional ceiling insulation listed in the table above is greater than R3.0, refer to the ABCB Housing Provisions (Part 13.2.3 (6)) of the National Construction Code.
[Note	• In some climate zones, insulation should be installed with due consideration of condensation and associated interaction with adjoining building materials.
[Note	• Thermal breaks must be installed in metal framed walls and applicable roofs in accordance with the ABCB Housing Provisions of the National Construction Code.

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Ceiling fans			
The applicant must install at least one ceiling fan in at least one daytime habitable space, such as living room.	~	~	<
The minimum number and diameter of ceiling fans in a daytime habitable space must be installed in accordance with the ABCB Housing Provisions (Part 13.5.2) of the National Construction Code .	~	~	~


Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Glazed windows, doors and skylights			
The applicant must install the windows, glazed doors and shading devices described in the table below, in accordance with the specifications listed in the table. Relevant overshadowing specifications must be satisfied for each glazed window and door.	~	~	~
The dwelling may have 1 skylight (<0.7 square metres) which is not listed in the table.	~	~	~
The following requirements must also be satisfied in relation to each window and glazed door:	~	~	~
The applicant must install windows and glazed doors in accordance with the height and width, frame and glazing types listed in the table.	~	~	~
• Each window and glazed door must have a U- value no greater than that listed and a Solar Heat Gain Coefficient (SHGC) within the range listed. Total system U values and SHGC must be calculated in accordance with National Fenestration Rating Council (NFRC) conditions.		~	~
The applicant must install the skylights described in the table below, in accordance with the specifications listed in the table. Total skylight area must not exceed 3 square metres (the 3 square metre limit does not include the optional additional skylight of less than 0.7 square metres that does not have to be listed in the table).	~	~	~

	,		
Skylight no.	Maximum area (m²)	Skylight specification	Shading device
S01	1.11	aluminium, single clear (U: <=7.3, SHGC: 0.75 - 0.83)	no shading
S02	1.11	aluminium, single clear (U: <=7.3, SHGC: 0.75 - 0.83)	no shading

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
North facing		`			
GW02	5300.00	2640.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 600 mm, 145 mm above head of window or glazed door	not overshadowed
GW03	2400.00	3250.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 500 mm, 125 mm above head of window or glazed door	not overshadowed
FW14	2400.00	1280.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 1920 mm, 125 mm above head of window or glazed door	not overshadowed
FW08	2050.00	3250.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 325 mm, 125 mm above head of window or glazed door	not overshadowed
FD02	2400.00	3250.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 1180 mm, 125 mm above head of window or glazed door	not overshadowed
East facing					
GW04	2400.00	2170.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 3635 mm, 0 mm above head of window or glazed door	not overshadowed
GD01	2400.00	5650.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 3960 mm, 0 mm above head of window or glazed door	not overshadowed
FW09	2050.00	850.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 3315 mm, 125 mm above head of window or glazed door	not overshadowed
FW10	2400.00	610.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 3960 mm, 125 mm above head of window or glazed door	not overshadowed
FD03	2400.00	3250.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 3960 mm, 125 mm above head of window or glazed door	not overshadowed
South facing					
GW05	430.00	1450.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	none	not overshadowed
GW06	860.00	2410.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	none	not overshadowed
FW11	860.00	2410.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	eave 450 mm, 330 mm above head of window or glazed door	not overshadowed
FW12	860.00	2410.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	eave 450 mm, 330 mm above head of window or glazed door	not overshadowed
FW13	1030.00	570.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	eave 450 mm, 425 mm above head of window or glazed door	not overshadowed
West facing		•			·
GW01	5300.00	960.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	solid overhang 2400 mm, 145 mm above head of window or glazed door	not overshadowed
GW07	1030.00	850.00	aluminium, single glazed (U-value: <=6.5, SHGC: 0.60 - 0.74)	none	not overshadowed

FIGURED DIMENSIONS TO BE USED IN PREFERENCE TO SCALING THIS DRAWING DO NOT ASSUME - IF IN DOUBT ASK.

10 of 10



DESIGNS & DRAFTING

Phone: 0401 482 401 Email: info@tayloreddesigns.com.au

Copyright. © This plan is the propery of Taylored Designs & Drafting and may not be used in whole or part

GENERAL NOTES

5. IN CASE OF ALTERATIONS OR DISCREPANCIES NOTIFY TAYLORED DESIGNS & DRAFTING IMMEDIATELY.

 LEVELS SHOWN ARE APPROXIMATE AND TO BE CONFIRMED ON SITE BY SURVEYOR.
 ENGINEERS DRAWINGS ARE REQUIRED AND THOSE DRAWINGS MUST TAKE PREFERENCE TO THESE DRAWINGS. MUST TAKE PREFERENCE TO THESE DRAWINGS.

3. ALL BOUNDARY CLEARENCES MUST BE VERIFIED BEFORE COMMENCEMENT
OF BUILDING WORKS BY REGISTERED SURVEYOR.

4. BUILDER IS TO STRICTLY COMPLY WITH ALL RELEVANT BUILDING CODE
OF AUSTRALIA CONSTRUCTION REQUIREMENTS AND AUSTRALIAN STANDARDS.

REF: DATE: AMENDMENT: 18.11.24 PRELIMINARY PLANS 10.12.24 PLAN AMENDMENTS C 05.02.25 DA PLANS

PROPOSED: Two Storey Dwelling Marcello Bortone AT: Lot: 29, DP: 30534 DRAWN: No.2 Garden Place, 240109 18.11.24 MT Sheet Size: LGA: Picnic Point NSW 2213

A2

Canterbury-Banks