
MAGNA-FLÓ




 Heavy duty locking ring
Non-corrosive Hi impact Polymers used in manufacture
Multiple choice outlet ports for installation

Swimming Pool & Spa Equipment

Magna-Flo Dynamic Cartridge Filters

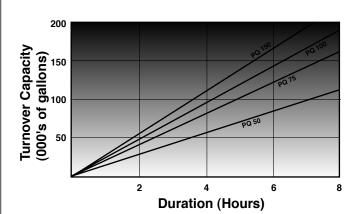

PR CODE	SQ/FT	HEIGHT	WIDTH	WEIGHT	FLOW RATE	PRESSURE	PUMP SIZE
5016126	50 sq/ft	525mm	265mm Top 285mm Btm	6.35Kgs	189Litres	250KPA	0.75 HP
5016127	75 sq/ft	645mm	265mm Top 285mm Btm	7.93Kgs	246Litres	250KPA	0.75 - 1HP
5016128	100 sq/t	645mm	265mm Top 285mm Btm	7.93Kgs	246Litres	250KPA	1 - 1.25 HP
5016129	150 sq/ft	889mm	265mm Top 285mm Btm	9.97Kgs	318Litres	250KPA	1.25 - 1.5HP
5016130	200 sq/ft	1155mm	265mm Top 285mm Btm	12.47Kgs	401 Litres	250KPA	1.5 - 2 HP

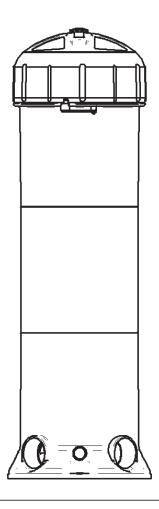

Specifications:

- Robust Lockring mechanism.
- Fast easy access to the element for maintenance, and a safe reliable method of sealing the lid.
- Dupont Reemay Element offers years of fine grade filtration.
- Automatic air bleeding eliminates the need for continual manual bleeding.
- Pressure tested to 300KPA. Where maximum operating pressure is 250KPA.
- Internal automatic pressure release valve prevents damage to pump & filter in the event of a blockage.
- Choice of four different outlet ports for ease of installation.
- 50mm ports for water connection provide fast easy installation and capacity for high flow rates.
- Four sizes to choose from ensures you can get the right size for your application.
- Warranty. The Cartridge filter is covered by a limited 5 year Warranty. Cartridges are an expendable item.



Unit 4 / 1 Prosperity Parade Warriewood NSW 2102 Ph: 1300 731 905 Email: sales@poolranger.com.au Web: www.poolranger.com.au