

BASIX[®]Certificate

Building Sustainability Index www.basix.nsw.gov.au

Multi Dwelling

Certificate number: 1784375M

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at www.basix.nsw.gov.au

Secretary

Date of issue: Thursday, 20 February 2025

To be valid, this certificate must be submitted with a development application or lodged with a complying development certificate application within 3 months of the date of issue.



When submitting this BASIX certificate with a development application or complying development certificate application, it must be accompanied by NatHERS certificate 0011738780.

Project summary

Project name	Darren Wamsley - 97 Wingham Road
Street address	97 WINGHAM ROAD TAREE 2430
Local Government Area	MID-COAST
Plan type and plan number	Deposited Plan 20629
Lot No.	2
Section no.	-
No. of residential flat buildings	0
Residential flat buildings: no. of dwellings	0
Multi-dwelling housing: no. of dwellings	3
No. of single dwelling houses	0

Project score

Water	✓ 40	Target 40
Thermal Performance	✓ Pass	Target Pass
Energy	✓ 70	Target 70
Materials	✓ -58	Target n/a

Certificate Prepared by

Name / Company Name: Concept Designs Australia

ABN (if applicable):

Description of project

Project address	
Project name	Darren Wamsley - 97 Wingham Road
Street address	97 WINGHAM ROAD TAREE 2430
Local Government Area	MID-COAST
Plan type and plan number	Deposited Plan 20629
Lot No.	2
Section no.	-
Project type	
No. of residential flat buildings	0
Residential flat buildings: no. of dwellings	0
Multi-dwelling housing: no. of dwellings	3
No. of single dwelling houses	0
Site details	
Site area (m²)	1246
Roof area (m²)	355.8
Non-residential floor area (m²)	0
Residential car spaces	3
Non-residential car spaces	0

Common area landscape		
Common area lawn (m²)	0	
Common area garden (m²)	0	
Area of indigenous or low water use species (m²)	0	
Assessor details and thermal loads		
Assessor number	10137	
Certificate number	0011738780	
Climate zone	15	
Project score		
Water	✓ 40	Target 40
Thermal Performance	✓ Pass	Target Pass
Energy	✓ 70	Target 70
Materials	✓ -58	Target n/a

Description of project

The tables below describe the dwellings and common areas within the project

Multi-dwelling houses

Dwelling no.	No. of bedrooms	Conditioned floor area (m²)	Unconditioned floor area (m²)	Area of garden & lawn (m²)	Indigenous species (min area m²)
1	2	136.2	7.7	37.2	0

Dwelling no.	No. of bedrooms	Conditioned floor area (m²)	Unconditioned floor area (m²)	Area of garden & lawn (m²)	Indigenous species (min area m²)
2	2	136.2	7.7	60.1	0.0

Dwelling no.	No. of bedrooms	Conditioned floor area (m²)	Unconditioned floor area (m²)	Area of garden & lawn (m²)	Indigenous species (min area m²)
3	2	127.4	15.2	125.6	0.0

No common areas specified.

Schedule of BASIX commitments

1. Commitments for multi-dwelling housing

(a) Dwellings

- (i) Water
- (ii) Energy
- (iii) Thermal Performance and Materials

2. Commitments for single dwelling houses

(a) Dwellings

- (i) Water
- (ii) Energy
- (iii) Thermal Performance and Materials

3. Commitments for common areas and central systems/facilities for the development (non-building specific)

(b) Common areas and central systems/facilities

- (i) Water
- (ii) Energy

Schedule of BASIX commitments

The commitments set out below regulate how the proposed development is to be carried out. It is a condition of any development consent granted, or complying development certificate issued, for the proposed development, that BASIX commitments be complied with.

1. Commitments for multi-dwelling housing

(a) Dwellings

(i) Water	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must comply with the commitments listed below in carrying out the development of a dwelling listed in a table below.			
(b) The applicant must plant indigenous or low water use species of vegetation throughout the area of land specified for the dwelling in the "Indigenous species" column of the table below, as private landscaping for that dwelling. (This area of indigenous vegetation is to be contained within the "Area of garden and lawn" for the dwelling specified in the "Description of Project" table).	✓	✓	
(c) If a rating is specified in the table below for a fixture or appliance to be installed in the dwelling, the applicant must ensure that each such fixture and appliance meets the rating specified for it.		✓	✓
(d) The applicant must install an on demand hot water recirculation system which regulates all hot water use throughout the dwelling, where indicated for a dwelling in the "HW recirculation or diversion" column of the table below.		✓	✓
(e) The applicant must install: <div style="margin-left: 20px;">(aa) a hot water diversion system to all showers, kitchen sinks and all basins in the dwelling, where indicated for a dwelling in the "HW recirculation or diversion" column of the table below; and</div> <div style="margin-left: 20px;">(bb) a separate diversion tank (or tanks) connected to the hot water diversion systems of at least 100 litres. The applicant must connect the hot water diversion tank to all toilets in the dwelling.</div>		✓ ✓	✓ ✓
(e) The applicant must not install a private swimming pool or spa for the dwelling, with a volume exceeding that specified for it in the table below.	✓	✓	
(f) If specified in the table, that pool or spa (or both) must have a pool cover or shading (or both).		✓	
(g) The pool or spa must be located as specified in the table.	✓	✓	
(h) The applicant must install, for the dwelling, each alternative water supply system, with the specified size, listed for that dwelling in the table below. Each system must be configured to collect run-off from the areas specified (excluding any area which supplies any other alternative water supply system), and to divert overflow as specified. Each system must be connected as specified.	✓	✓	✓

	Fixtures					Appliances		Individual pool				Individual spa		
Dwelling no.	All shower-heads	All toilet flushing systems	All kitchen taps	All bathroom taps	HW recirculation or diversion	All clothes washers	All dish-washers	Volume (max volume)	Pool cover	Pool location	Pool shaded	Volume (max volume)	Spa cover	Spa shaded
All dwellings	3 star (> 7.5 but <= 9 L/min)	3 star	3 star	3 star	-	-	-	-	-	-	-	-	-	-

	Alternative water source							
Dwelling no.	Alternative water supply systems	Size	Configuration	Landscape connection	Toilet connection (s)	Laundry connection	Pool top-up	Spa top-up
All dwellings	Individual water tank (No. 1)	Tank size (min) 2000 liters	To collect run-off from at least: 80 square metres of roof area; 0 square metres of impervious area; 0 square metres of garden and lawn area; and 0 square metres of planter box area.	yes	yes	yes	no	no

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must comply with the commitments listed below in carrying out the development of a dwelling listed in a table below.			
(b) The applicant must install each hot water system specified for the dwelling in the table below, so that the dwelling's hot water is supplied by that system. If the table specifies a central hot water system for the dwelling, then the applicant must connect that central system to the dwelling, so that the dwelling's hot water is supplied by that central system.	✓	✓	✓
(c) The applicant must install, in each bathroom, kitchen and laundry of the dwelling, the ventilation system specified for that room in the table below. Each such ventilation system must have the operation control specified for it in the table.		✓	✓
(d) The applicant must install the cooling and heating system/s specified for the dwelling under the "Living areas" and "Bedroom areas" headings of the "Cooling" and "Heating" columns in the table below, in/for at least 1 living/bedroom area of the dwelling. If no cooling or heating system is specified in the table for "Living areas" or "Bedroom areas", then no systems may be installed in any such areas. If the term "zoned" is specified beside an air conditioning system, then the system must provide for day/night zoning between living areas and bedrooms.		✓	✓
(e) This commitment applies to each room or area of the dwelling which is referred to in a heading to the "Artificial lighting" column of the table below (but only to the extent specified for that room or area). The applicant must ensure that the "primary type of artificial lighting" for each such room in the dwelling is fluorescent lighting or light emitting diode (LED) lighting. If the term "dedicated" is specified for a particular room or area, then the light fittings in that room or area must only be capable of being used for fluorescent lighting or light emitting diode (LED) lighting.		✓	✓

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(f) This commitment applies to each room or area of the dwelling which is referred to in a heading to the "Natural lighting" column of the table below (but only to the extent specified for that room or area). The applicant must ensure that each such room or area is fitted with a window and/or skylight.	✓	✓	✓
(g) This commitment applies if the applicant installs a water heating system for the dwelling's pool or spa. The applicant must: (aa) install the system specified for the pool in the "Individual Pool" column of the table below (or alternatively must not install any system for the pool). If specified, the applicant must install a timer, to control the pool's pump; and (bb) install the system specified for the spa in the "Individual Spa" column of the table below (or alternatively must not install any system for the spa). If specified, the applicant must install a timer to control the spa's pump.		✓ ✓	
(h) The applicant must install in the dwelling: (aa) the kitchen cook-top and oven specified for that dwelling in the "Appliances & other efficiency measures" column of the table below; (bb) each appliance for which a rating is specified for that dwelling in the "Appliances & other efficiency measures" column of the table, and ensure that the appliance has that minimum rating; and (cc) any clothes drying line specified for the dwelling in the "Appliances & other efficiency measures" column of the table.		✓ ✓ ✓	✓
(i) If specified in the table, the applicant must carry out the development so that each refrigerator space in the dwelling is "well ventilated".		✓	
(j) The applicant must install the photovoltaic system specified for the dwelling under the "Photovoltaic system" heading of the "Alternative energy" column of the table below, and connect the system to that dwelling's electrical system.	✓	✓	✓

	Hot water	Bathroom ventilation system		Kitchen ventilation system		Laundry ventilation system	
Dwelling no.	Hot water system	Each bathroom	Operation control	Each kitchen	Operation control	Each laundry	Operation control
All dwellings	gas instantaneous - 4 star	individual fan, ducted to façade or roof	manual switch on/off	individual fan, ducted to façade or roof	manual switch on/off	natural ventilation only, or no laundry	-

	Cooling		Heating		Natural lighting	
Dwelling no.	living areas	bedroom areas	living areas	bedroom areas	No. of bathrooms or toilets	Main kitchen
3	1-phase airconditioning - non ducted / 3 star (average zone)	no individual system	1-phase airconditioning - non ducted / 3 star (average zone)	no individual system	2	yes

	Cooling		Heating		Natural lighting	
Dwelling no.	living areas	bedroom areas	living areas	bedroom areas	No. of bathrooms or toilets	Main kitchen
All other dwellings	1-phase airconditioning - non ducted / 3 star (average zone)	no individual system	1-phase airconditioning - non ducted / 3 star (average zone)	no individual system	1	yes

	Individual pool			Individual spa		Appliances other efficiency measures				
Dwelling no.	Pool heating system	Pool Pump	Timer	Spa heating system	Timer	Kitchen cooktop/oven	Dishwasher	Clothes dryer	Indoor or sheltered clothes drying line	Private outdoor or unsheltered clothes drying line
All dwellings	-	-	-	-	-	gas cooktop & electric oven	-	-	no	yes

	Alternative energy		
Dwelling no.	Photovoltaic system (min rated electrical output in peak kW)	Photovoltaic collector installation	Orientation inputs
All dwellings	-	-	-

(iii) Thermal Performance and Materials	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must attach the certificate referred to under "Assessor details" on the front page of this BASIX certificate (the "Assessor Certificate") to the development application and construction certificate application for the proposed development (or, if the applicant is applying for a complying development certificate for the proposed development, to that application). The applicant must also attach the Assessor Certificate to the application for a final occupation certificate for the proposed development.			
(b) The Assessor Certificate must have been issued by an Accredited Assessor in accordance with the Thermal Comfort Protocol.			
(c) The details of the proposed development on the Assessor Certificate must be consistent with the details shown in this BASIX Certificate, including the details shown in the "Thermal Loads" table below.			
(d) The applicant must show on the plans accompanying the development application for the proposed development, all matters which the Thermal Comfort Protocol requires to be shown on those plans. Those plans must bear a stamp of endorsement from the Accredited Assessor, to certify that this is the case.	✓		

(iii) Thermal Performance and Materials	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(e) The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), all thermal performance specifications set out in the Assessor Certificate, and all aspects of the proposed development which were used to calculate those specifications.		✓	
(f) The applicant must construct the development in accordance with all thermal performance specifications set out in the Assessor Certificate, and in accordance with those aspects of the development application or application for a complying development certificate which were used to calculate those specifications.		✓	✓
(g) Where there is an in-slab heating or cooling system, the applicant must: (aa) Install insulation with an R-value of not less than 1.0 around the vertical edges of the perimeter of the slab; or (bb) On a suspended floor, install insulation with an R-value of not less than 1.0 underneath the slab and around the vertical edges of the perimeter of the slab.	✓	✓	✓
(h) The applicant must construct the floors and walls of the development in accordance with the specifications listed in the table below.	✓	✓	✓
(i) The applicant must show on The plans accompanying The development application for The proposed development, The locations of ceiling fans set out in The Assessor Certificate.	✓		
(j) The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), the locations of ceiling fans set out in the Assessor Certificate.		✓	

	Thermal loads		
Dwelling no.	Area adjusted heating load (in MJ/m ² /yr)	Area adjusted cooling load (in MJ/m ² /yr)	Area adjusted total load (in MJ/m ² /yr)
1	32.7	18.2	50.900
2	25.2	19.3	44.500
All other dwellings	23.9	27.0	50.900

	Construction of floors and walls				
Dwelling no.	Concrete slab on ground (m ²)	Suspended floor with open subfloor (m ²)	Suspended floor with enclosed subfloor (m ²)	Suspended floor above garage (m ²)	Primarily rammed earth or mudbrick walls
All dwellings	65.2	-	-	21.6	no

	Floor types									
	Concrete slab on ground				Suspended floor above enclosed subfloor			Suspended floor above open subfloor		
Dwelling no.	Area (m²)	Insulation	Low emissions option	Dematerialisation	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation
All dwellings	65.2	polystyrene	-	waffle pod slab	-	-	-	-	-	-

	Floor types										
	First floor above habitable rooms or mezzanine			Suspended floor above garage			Garage floor				
Dwelling no.	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation	Low emissions option	Dematerialisation
3	particle board, frame: timber - H2 treated softwood	55.8	-	particle board, frame: timber - H2 treated softwood	21.6	fibreglass batts or roll	concrete slab on ground	21.6	polystyrene	-	waffle pod slab
All other dwellings	particle board, frame: timber - H2 treated softwood	57.1	-	particle board, frame: timber - H2 treated softwood	21.6	fibreglass batts or roll	concrete slab on ground	21.6	polystyrene	-	waffle pod slab

	External walls								
	External wall type 1					External wall type 2			
Dwelling no.	Wall type	Area (m²)	Insulation	Low emissions option	Wall type	Area (m²)	Insulation	Low emissions option	
1	brick veneer, frame : timber - H2 treated softwood	105.9	fibreglass batts or roll	-	-	-	-	-	-
2	brick veneer, frame : timber - H2 treated softwood	79.9	fibreglass batts or roll	-	-	-	-	-	-
All other dwellings	brick veneer, frame : timber	129.7	fibreglass batts or roll	-	-	-	-	-	-

	External walls							
	External wall type 1				External wall type 2			
Dwelling no.	Wall type	Area (m²)	Insulation	Low emissions option	Wall type	Area (m²)	Insulation	Low emissions option
	- H2 treated softwood							

	External walls							
	External wall type 3				External wall type 4			
Dwelling no.	Wall type	Area (m²)	Insulation	Low emissions option	Wall type	Area (m²)	Insulation	Low emissions option
All dwellings	-	-	-	-	-	-	-	-

	Internal walls								
	Internal walls shared with garage			Internal wall type 1			Internal wall type 2		
Dwelling no.	Wall type	Area (m²)	Insulation	Wall type	Area (m²)	Insulation	Wall type	Area (m²)	Insulation
1	plasterboard, frame: timber - H2 treated softwood	24.4	fibreglass batts or roll	plasterboard, frame: timber - H2 treated softwood	82.7	-	cavity brick wall	55.5	-
2	plasterboard, frame: timber - H2 treated softwood	24.4	fibreglass batts or roll	plasterboard, frame: timber - H2 treated softwood	82.7	-	cavity brick wall	97.9	-
All other dwellings	plasterboard, frame: timber - H2 treated softwood	24.4	fibreglass batts or roll	plasterboard, frame: timber - H2 treated softwood	45.9	-	plasterboard, frame: timber - H2 treated softwood	36.8	fibreglass batts or roll

	Ceiling and roof								
	Flat ceiling / pitched roof			Raked ceiling / pitched or skillion roof			Flat ceiling / flat roof		
Dwelling no.	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation
1	framed - metal roof,	119.2	Ceiling: fibreglass batts or	-	-	Ceiling:,Roof:	-	-	Ceiling:,Roof:

Ceiling and roof									
Flat ceiling / pitched roof				Raked ceiling / pitched or skillion roof			Flat ceiling / flat roof		
Dwelling no.	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation
	frame: timber - H2 treated softwood		roll, Roof: foil backed blanket						
2	framed - metal roof, frame: timber - H2 treated softwood	116.5	Ceiling: fibreglass batts or roll, Roof: foil backed blanket	-	-	Ceiling:, Roof:	-	-	Ceiling:, Roof:
All other dwellings	framed - metal roof, frame: timber - H2 treated softwood	120.1	Ceiling: fibreglass batts or roll, Roof: foil backed blanket	-	-	Ceiling:, Roof:	-	-	Ceiling:, Roof:

Glazing type				Frame types				
Dwelling no.	Single glazing (m²)	Double glazing (m²)	Triple glazing (m²)	Aluminium frames (m²)	Timber frames (m²)	uPVC frames (m²)	Steel frames (m²)	Composite frames (m²)
3	26.1	5.8	-	31.9	-	-	-	-
All other dwellings	26.1	-	-	26.1	-	-	-	-

2. Commitments for single dwelling houses

(a) Dwellings

(i) Water	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must comply with the commitments listed below in carrying out the development of a dwelling listed in a table below.			
(b) The applicant must plant indigenous or low water use species of vegetation throughout the area of land specified for the dwelling in the "Indigenous species" column of the table below, as private landscaping for that dwelling. (This area of indigenous vegetation is to be contained within the "Area of garden and lawn" for the dwelling specified in the "Description of Project" table).	✓	✓	
(c) If a rating is specified in the table below for a fixture or appliance to be installed in the dwelling, the applicant must ensure that each such fixture and appliance meets the rating specified for it.		✓	✓
(d) The applicant must install an on demand hot water recirculation system which regulates all hot water use throughout the dwelling, where indicated for a dwelling in the "HW recirculation or diversion" column of the table below.		✓	✓
(e) The applicant must install: <ul style="list-style-type: none"> (aa) a hot water diversion system to all showers, kitchen sinks and all basins in the dwelling, where indicated for a dwelling in the "HW recirculation or diversion" column of the table below; and (bb) a separate diversion tank (or tanks) connected to the hot water diversion systems of at least 100 litres. The applicant must connect the hot water diversion tank to all toilets in the dwelling. 		✓ ✓	✓ ✓
(e) The applicant must not install a private swimming pool or spa for the dwelling, with a volume exceeding that specified for it in the table below.	✓	✓	
(f) If specified in the table, that pool or spa (or both) must have a pool cover or shading (or both).		✓	
(g) The pool or spa must be located as specified in the table.	✓	✓	
(h) The applicant must install, for the dwelling, each alternative water supply system, with the specified size, listed for that dwelling in the table below. Each system must be configured to collect run-off from the areas specified (excluding any area which supplies any other alternative water supply system), and to divert overflow as specified. Each system must be connected as specified.	✓	✓	✓
(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must comply with the commitments listed below in carrying out the development of a dwelling listed in a table below.			
(b) The applicant must install each hot water system specified for the dwelling in the table below, so that the dwelling's hot water is supplied by that system. If the table specifies a central hot water system for the dwelling, then the applicant must connect that central system to the dwelling, so that the dwelling's hot water is supplied by that central system.	✓	✓	✓
(c) The applicant must install, in each bathroom, kitchen and laundry of the dwelling, the ventilation system specified for that room in the table below. Each such ventilation system must have the operation control specified for it in the table.		✓	✓

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(d) The applicant must install the cooling and heating system/s specified for the dwelling under the "Living areas" and "Bedroom areas" headings of the "Cooling" and "Heating" columns in the table below, in/for at least 1 living/bedroom area of the dwelling. If no cooling or heating system is specified in the table for "Living areas" or "Bedroom areas", then no systems may be installed in any such areas. If the term "zoned" is specified beside an air conditioning system, then the system must provide for day/night zoning between living areas and bedrooms.		✓	✓
(e) This commitment applies to each room or area of the dwelling which is referred to in a heading to the "Artificial lighting" column of the table below (but only to the extent specified for that room or area). The applicant must ensure that the "primary type of artificial lighting" for each such room in the dwelling is fluorescent lighting or light emitting diode (LED) lighting. If the term "dedicated" is specified for a particular room or area, then the light fittings in that room or area must only be capable of being used for fluorescent lighting or light emitting diode (LED) lighting.		✓	✓
(f) This commitment applies to each room or area of the dwelling which is referred to in a heading to the "Natural lighting" column of the table below (but only to the extent specified for that room or area). The applicant must ensure that each such room or area is fitted with a window and/or skylight.	✓	✓	✓
(g) This commitment applies if the applicant installs a water heating system for the dwelling's pool or spa. The applicant must: (aa) install the system specified for the pool in the "Individual Pool" column of the table below (or alternatively must not install any system for the pool). If specified, the applicant must install a timer, to control the pool's pump; and (bb) install the system specified for the spa in the "Individual Spa" column of the table below (or alternatively must not install any system for the spa). If specified, the applicant must install a timer to control the spa's pump.		✓ ✓	
(h) The applicant must install in the dwelling: (aa) the kitchen cook-top and oven specified for that dwelling in the "Appliances & other efficiency measures" column of the table below; (bb) each appliance for which a rating is specified for that dwelling in the "Appliances & other efficiency measures" column of the table, and ensure that the appliance has that minimum rating; and (cc) any clothes drying line specified for the dwelling in the "Appliances & other efficiency measures" column of the table.		✓ ✓ ✓	✓
(i) If specified in the table, the applicant must carry out the development so that each refrigerator space in the dwelling is "well ventilated".		✓	
(j) The applicant must install the photovoltaic system specified for the dwelling under the "Photovoltaic system" heading of the "Alternative energy" column of the table below, and connect the system to that dwelling's electrical system.	✓	✓	✓
(iii) Thermal Performance and Materials	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must attach the certificate referred to under "Assessor details" on the front page of this BASIX certificate (the "Assessor Certificate") to the development application and construction certificate application for the proposed development (or, if the applicant is applying for a complying development certificate for the proposed development, to that application). The applicant must also attach the Assessor Certificate to the application for a final occupation certificate for the proposed development.			

(iii) Thermal Performance and Materials	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(b) The Assessor Certificate must have been issued by an Accredited Assessor in accordance with the Thermal Comfort Protocol.			
(c) The details of the proposed development on the Assessor Certificate must be consistent with the details shown in this BASIX Certificate, including the details shown in the "Thermal Loads" table below.			
(d) The applicant must show on the plans accompanying the development application for the proposed development, all matters which the Thermal Comfort Protocol requires to be shown on those plans. Those plans must bear a stamp of endorsement from the Accredited Assessor, to certify that this is the case.	✓		
(e) The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), all thermal performance specifications set out in the Assessor Certificate, and all aspects of the proposed development which were used to calculate those specifications.		✓	
(f) The applicant must construct the development in accordance with all thermal performance specifications set out in the Assessor Certificate, and in accordance with those aspects of the development application or application for a complying development certificate which were used to calculate those specifications.		✓	✓
(g) Where there is an in-slab heating or cooling system, the applicant must: (aa) Install insulation with an R-value of not less than 1.0 around the vertical edges of the perimeter of the slab; or (bb) On a suspended floor, install insulation with an R-value of not less than 1.0 underneath the slab and around the vertical edges of the perimeter of the slab.	✓	✓	✓
(h) The applicant must construct the floors and walls of the development in accordance with the specifications listed in the table below.	✓	✓	✓
(i) The applicant must show on The plans accompanying The development application for The proposed development, The locations of ceiling fans set out in The Assessor Certificate.	✓		
(j) The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), the locations of ceiling fans set out in the Assessor Certificate.		✓	

3. Commitments for common areas and central systems/facilities for the development (non-building specific)

(b) Common areas and central systems/facilities

(i) Water	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) If, in carrying out the development, the applicant installs a showerhead, toilet, tap or clothes washer into a common area, then that item must meet the specifications listed for it in the table.		✓	✓
(b) The applicant must install (or ensure that the development is serviced by) the alternative water supply system(s) specified in the "Central systems" column of the table below. In each case, the system must be sized, be configured, and be connected, as specified in the table.	✓	✓	✓
(c) A swimming pool or spa listed in the table must not have a volume (in kLs) greater than that specified for the pool or spa in the table.	✓	✓	
(d) A pool or spa listed in the table must have a cover or shading if specified for the pool or spa in the table.		✓	
(e) The applicant must install each fire sprinkler system listed in the table so that the system is configured as specified in the table.		✓	✓
(f) The applicant must ensure that the central cooling system for a cooling tower is configured as specified in the table.		✓	✓

Common area	Showerheads rating	Toilets rating	Taps rating	Clothes washers rating
All common areas	no common facility	no common facility	no common facility	no common laundry facility

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) If, in carrying out the development, the applicant installs a ventilation system to service a common area specified in the table below, then that ventilation system must be of the type specified for that common area, and must meet the efficiency measure specified.		✓	✓
(b) In carrying out the development, the applicant must install, as the "primary type of artificial lighting" for each common area specified in the table below, the lighting specified for that common area. This lighting must meet the efficiency measure specified. The applicant must also install a centralised lighting control system or Building Management System (BMS) for the common area, where specified.		✓	✓
(c) The applicant must install the systems and fixtures specified in the "Central energy systems" column of the table below. In each case, the system or fixture must be of the type, and meet the specifications, listed for it in the table.	✓	✓	✓

Central energy systems	Type	Specification
Other	-	-

Notes

1. In these commitments, "applicant" means the person carrying out the development.
2. The applicant must identify each dwelling, building and common area listed in this certificate, on the plans accompanying any development application, and on the plans and specifications accompanying the application for a construction certificate / complying development certificate, for the proposed development, using the same identifying letter or reference as is given to that dwelling, building or common area in this certificate.
3. This note applies if the proposed development involves the erection of a building for both residential and non-residential purposes (or the change of use of a building for both residential and non-residential purposes). Commitments in this certificate which are specified to apply to a "common area" of a building or the development, apply only to that part of the building or development to be used for residential purposes.
4. If this certificate lists a central system as a commitment for a dwelling or building, and that system will also service any other dwelling or building within the development, then that system need only be installed once (even if it is separately listed as a commitment for that other dwelling or building).
5. If a star or other rating is specified in a commitment, this is a minimum rating.
6. All alternative water systems to be installed under these commitments (if any), must be installed in accordance with the requirements of all applicable regulatory authorities. NOTE: NSW Health does not recommend that stormwater, recycled water or private dam water be used to irrigate edible plants which are consumed raw, or that rainwater be used for human consumption in areas with potable water supply.

Legend

1. Commitments identified with a "✔" in the "Show on DA plans" column must be shown on the plans accompanying the development application for the proposed development (if a development application is to be lodged for the proposed development).
2. Commitments identified with a "✔" in the "Show on CC/CDC plans and specs" column must be shown in the plans and specifications accompanying the application for a construction certificate / complying development certificate for the proposed development.
3. Commitments identified with a "✔" in the "Certifier check" column must be certified by a certifying authority as having been fulfilled. (Note: a certifying authority must not issue an occupation certificate (either interim or final) for a building listed in this certificate, or for any part of such a building, unless it is satisfied that each of the commitments whose fulfilment it is required to monitor in relation to the building or part, has been fulfilled).

Nationwide House Energy Rating Scheme®

Multiple Class 1 dwellings Summary

NatHERS® Certificate No. 0011738780

Generated on 20 Feb 2025 using BERS Pro v5.2.4 (3.23)

Property

Address 97 Wingham Road,
TAREE , NSW , 2430

Lot/DP Lot 4 DP 801616

NatHERS Climate Zone 15 Williamtown



Accredited assessor

Name Leanne Houseman

Business name Concept Designs Australia

Email leanne.cdaus@outlook.com

Phone 0408864184

Accreditation No. 10137

Assessor Accrediting Organisation
HERA



Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=OEsVUjPPp. When using either link, ensure you are visiting hstar.com.au



National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Summary of all dwellings

Certificate number and link	Unit Number	Heating load (load limit) [MJ/m ² /p.a.]	Cooling load (load limit) [MJ/m ² /p.a.]	Total load [MJ/m ² /p.a.]	Star Rating	Whole of Home Rating
0011738671	1	32.7 (N/A)	18.2 (N/A)	50.8	7	0
0011738705	2	25.2 (N/A)	19.3 (N/A)	44.5	7.4	0

Summary of all dwellings (continued)

Certificate number and link	Unit Number	Heating load (load limit) [MJ/m ² /p.a.]	Cooling load (load limit) [MJ/m ² /p.a.]	Total load [MJ/m ² /p.a.]	Star Rating	Whole of Home Rating
0011738770	3	23.9 (N/A)	27.0 (N/A)	50.9	7	0

Explanatory notes

About this ratings

Individual unit ratings are listed in the 'Summary of all dwellings' section of this Certificate.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the energy loads and societal cost. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy production and storage to estimate the homes societal cost .

For more details about an individual dwelling's assessment, refer to the individual dwelling's NatHERS Certificate (accessible via link).

Accredited Assessors

For high quality NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Licensed assessors in the Australian Capital Territory (ACT) can produce assessments for regulatory purposes only, using endorsed software, as listed on the ACT licensing register.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in certificates is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy use, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor while using the NatHERS accredited software tool are presented in this report and further details or data files may be available from the assessor.

Nationwide House Energy Rating Scheme®

NatHERS® Certificate No. 0011738671

Generated on 20 Feb 2025 using BERS Pro v5.2.4 (3.23)

Property

Address Unit 1, 97 Wingham Road,
TAREE, NSW, 2430

Lot/DP Lot 4 DP 801616

NCC class* 1a

Floor/all Floors G of 2 floors

Type New Home

Plans

Main plan -

Prepared by Tim Cross Building Design and Drafting

Construction and environment

Assessed floor area [m2]*	Exposure type
Conditioned* 136.2	Suburban
Unconditioned* 8.2	NatHERS climate zone
Total 165.5	15 Williamstown
Garage 21.1	



Accredited assessor

Name Leanne Houseman

Business name Concept Designs Australia

Email leanne.cdaus@outlook.com

Phone 0408864184

Accreditation No. 10137

Assessor Accrediting Organisation

HERA

Declaration of interest Declaration completed: no conflicts

NCC Requirements

NCC provisions Volume Two

Strate/Territory variation Yes

National Construction Code (NCC) requirements


The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

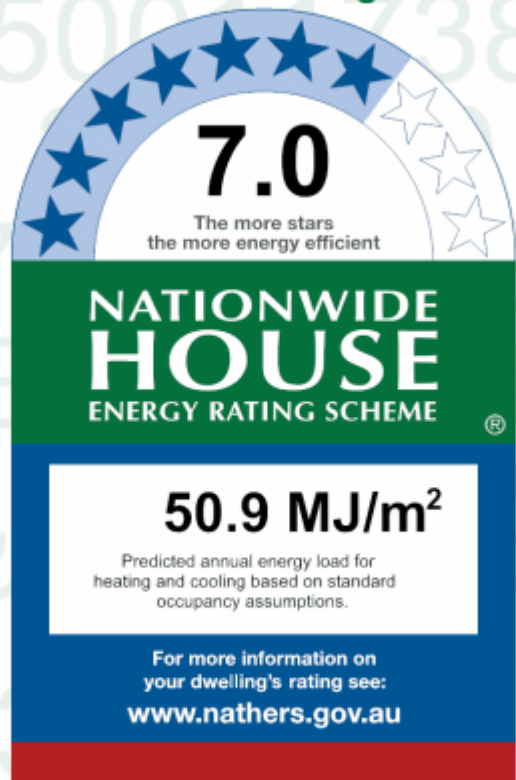

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	32.7	18.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	CSOG
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home
performance rating
generated for this
certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=HVcdVdzJj. When using either link, ensure you are visiting hstar.com.au



About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable



Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate



Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other

Additional NCC requirements for thermal performance (not included in the NatHERS assessment)

Thermal bridging

Does the dwelling meet the NCC requirement for thermal bridging?

☐ ☐ ☐ ☐

Insulation installation method

Has the insulation been installed according to the NCC requirements?

☐ ☐ ☐

Building sealing

Does the dwelling meet the NCC requirements for Building Sealing?

☐ ☐ ☐ ☐

Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)

Appliances

Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Additional NCC Requirements for Services (not included in the NatHERS assessment)

Does the lighting meet the artificial lighting requirements specified in the NCC?

☐ ☐ ☐ ☐

Does the hot water system meet the additional requirements specified in the NCC?

☐ ☐ ☐ ☐

Provisional values* check

Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?

☐ ☐ ☐ ☐

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Vapour barrier to be added to external wall insulation.

Room schedule

Room	Zone Type	Area [m ²]
Garage	Garage	21.08
Media/Laundry	Living	31.78
Bath	Daytime	8.11
Bedroom 2	Bedroom	12.81
Entry	Daytime	6.25
Stair	Daytime	4.62
Kitchen/Living	Kitchen/Living	50.47
Study	Daytime	8.66
Ensuite	Unconditioned	8.23
WIR	Nighttime	5.85
Main Bed	Bedroom	12.39

Window and glazed door type and performance

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-002-01 A	Aluminium B SG Clear	6.7	0.70	0.67	0.74
ALM-001-01 A	Aluminium A SG Clear	6.7	0.57	0.54	0.60

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door schedule

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Media/Laundry	ALM-002-01 A	n/a	2100	2400	Sliding	45	N	No
Media/Laundry	ALM-002-01 A	n/a	900	1500	Sliding	45	N	No
Bedroom 2	ALM-002-01 A	n/a	1200	2400	Sliding	45	S	No
Entry	ALM-001-01 A	n/a	2100	1640	Casement	90	S	No
Kitchen/Living	ALM-002-01 A	n/a	1200	2400	Sliding	10	S	No

* Refer to glossary.



Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-002-01 A	n/a	1200	1200	Sliding	45	N	No
Study	ALM-002-01 A	n/a	2100	2100	Sliding	45	N	No
Ensuite	ALM-002-01 A	n/a	1000	1800	Sliding	10	N	No
Main Bed	ALM-002-01 A	n/a	1200	2400	Sliding	10	S	No

Roof window* type and performance value

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* schedule

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* type and performance

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* schedule

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m ²]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door schedule

Location	Height [mm]	Width [mm]	Opening %	Orientation
Garage	2400	3100	90	S



External wall type

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Timber Stud Frame Brick Veneer	0.85		No insulation	No
EW-2	Timber Stud Frame Brick Veneer	0.85		Bulk Insulation R2	No

External wall schedule

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Garage	EW-1	2806	3595	S	0	No
Garage	EW-1	2806	5995	W	0	No
Media/Laundry	EW-2	2720	1995	W	0	No
Media/Laundry	EW-2	2720	2900	N	0	No
Media/Laundry	EW-2	2721	6800	N	2000	No
Bedroom 2	EW-2	2720	3700	S	0	No
Bedroom 2	EW-2	2720	1300	W	0	No
Bedroom 2	EW-2	2721	1200	W	2500	No
Entry	EW-2	2720	2390	S	1300	No
Kitchen/Living	EW-2	2570	3700	S	550	No
Kitchen/Living	EW-2	2570	2500	W	450	No
Kitchen/Living	EW-2	2570	2395	S	550	No
Kitchen/Living	EW-2	2570	3195	N	2550	No
Study	EW-2	2570	3490	N	2550	No
Ensuite	EW-2	2570	2795	W	450	No
Ensuite	EW-2	2570	2995	N	450	No
WIR	EW-2	2570	1690	W	450	No
Main Bed	EW-2	2570	3595	S	550	Yes
Main Bed	EW-2	2570	3495	W	450	No

Internal wall type

Wall ID	Wall type	Area [m ²]	Bulk insulation
IW-001	Timber Stud Frame, Direct Fix Plasterboard	16.32	Bulk Insulation, No Air Gap R2
IW-002	Cavity brick, plasterboard	43.31	No Insulation



Wall ID	Wall type	Area [m ²]	Bulk insulation
IW-003	Timber Stud Frame, Direct Fix Plasterboard	97.78	No insulation

Floor type

Location	Construction	Area [m ²]	Sub-floor ventilation	Added insulation [R-value]	Covering
Garage	Waffle pod slab 225 mm 100mm	21.01	None	No Insulation	Bare
Media/Laundry	Waffle pod slab 225 mm 100mm	31.78	None	No Insulation	Vinyl 3mm
Bath	Waffle pod slab 225 mm 100mm	8.11	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Waffle pod slab 225 mm 100mm	12.81	None	No Insulation	Vinyl 3mm
Entry	Waffle pod slab 225 mm 100mm	6.25	None	No Insulation	Vinyl 3mm
Stair	Waffle pod slab 225 mm 100mm	4.62	None	No Insulation	Vinyl 3mm
Kitchen/Living / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	12.67		No Insulation	Vinyl 3mm
Kitchen/Living / Bath	Timber Framed Timber Above Plasterboard 19mm	3.28		No Insulation	Vinyl 3mm
Kitchen/Living / Bedroom 2	Timber Framed Timber Above Plasterboard 19mm	7.82		No Insulation	Vinyl 3mm
Kitchen/Living / Entry	Timber Framed Timber Above Plasterboard 19mm	1.48		No Insulation	Vinyl 3mm
Kitchen/Living / Stair	Timber Framed Timber Above Plasterboard 19mm	0.00		No Insulation	Vinyl 3mm
Study / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	8.18		No Insulation	Vinyl 3mm
Ensuite / Garage	Timber Framed Timber Above Plasterboard 19mm	2.23		Bulk Insulation R2	Ceramic Tiles 8mm
Ensuite / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	5.82		No Insulation	Ceramic Tiles 8mm
WIR / Garage	Timber Framed Timber Above Plasterboard 19mm	5.85		Bulk Insulation R2	Vinyl 3mm
Main Bed / Garage	Timber Framed Timber Above Plasterboard 19mm	12.39		Bulk Insulation R2	Vinyl 3mm

Ceiling type

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Garage	Timber Framed Timber Above Plasterboard	Bulk Insulation R2	



Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Media/Laundry	Timber Framed Timber Above Plasterboard	No Insulation	
Bath	Timber Framed Timber Above Plasterboard	No Insulation	
Bedroom 2	Timber Framed Timber Above Plasterboard	No Insulation	
Entry	Timber Framed Timber Above Plasterboard	No Insulation	
Stair	Timber Framed Timber Above Plasterboard	No Insulation	
Kitchen/Living	Plasterboard on Timber	Bulk Insulation R3	
Study	Plasterboard on Timber	Bulk Insulation R3	
Ensuite	Plasterboard on Timber	Bulk Insulation R3	
WIR	Plasterboard on Timber	Bulk Insulation R3	
Main Bed	Plasterboard on Timber	Bulk Insulation R3	

Ceiling penetrations*

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Garage	2	Downlights - LED	100	Sealed
Media/Laundry	4	Downlights - LED	100	Sealed
Bath	1	Exhaust Fans	300	Sealed
Entry	2	Downlights - LED	100	Sealed
Kitchen/Living	8	Downlights - LED	100	Sealed
Study	1	Downlights - LED	100	Sealed
Ensuite	1	Exhaust Fans	300	Sealed
WIR	1	Downlights - LED	100	Sealed

Ceiling fans

Location	Quantity	Diameter [mm]
Media/Laundry	1	1200
Bedroom 2	1	1200
Kitchen/Living	1	1200
Main Bed	1	1200

Roof type

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Corrugated Iron Timber Frame	No Insulation, Only an Air Gap	0.50	Medium



Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Corrugated Iron Timber Frame	Bulk, Reflective Side Down, No Air Gap Above R1.3	0.85	Dark

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
No Data Available				

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m² is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		



Battery Schedule

System Type	Size [Battery Storage Capacity]
No Data Available	



Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the home's energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and

are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your home's rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au .
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheathing or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®

NatHERS® Certificate No. 0011738705

Generated on 20 Feb 2025 using BERS Pro v5.2.4 (3.23)

Property

Address Unit 2, 97 Wingham Road,
TAREE, NSW, 2430

Lot/DP Lot 4 DP 801616

NCC class* 1a

Floor/all Floors G of 2 floors

Type New Home

Plans

Main plan -

Prepared by Tim Cross Building Design and Drafting

Construction and environment

Assessed floor area [m2]*	Exposure type
Conditioned* 136.2	Suburban
Unconditioned* 8.2	NatHERS climate zone
Total 165.5	15 Williamstown
Garage 21.1	



Accredited assessor

Name Leanne Houseman

Business name Concept Designs Australia

Email leanne.cdaus@outlook.com

Phone 0408864184

Accreditation No. 10137

Assessor Accrediting Organisation

HERA

Declaration of interest Declaration completed: no conflicts

NCC Requirements

NCC provisions Volume Two

Strate/Territory variation Yes

National Construction Code (NCC) requirements


The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

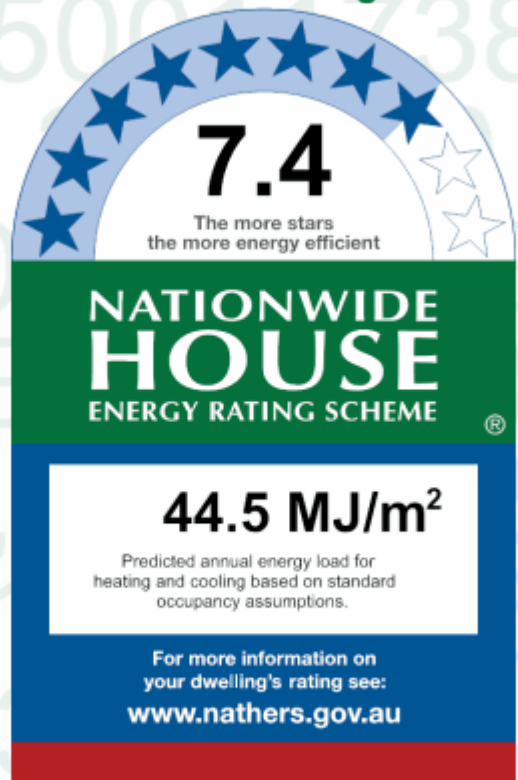

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	25.2	19.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	CSOG
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home
performance rating
generated for this
certificate.

Verification

To verify this certificate,
scan the QR code or visit
[hstar.com.au/QR/Generate?](http://hstar.com.au/QR/Generate?p=vEQNxuzxJ)
p=vEQNxuzxJ.
When using either link,
ensure you are visiting
hstar.com.au



About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable



Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		Occupancy/Other
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other

Additional NCC requirements for thermal performance (not included in the NatHERS assessment)

Thermal bridging

Does the dwelling meet the NCC requirement for thermal bridging?

☐ ☐ ☐ ☐

Insulation installation method

Has the insulation been installed according to the NCC requirements?

☐ ☐ ☐

Building sealing

Does the dwelling meet the NCC requirements for Building Sealing?

☐ ☐ ☐ ☐

Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)

Appliances

Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Additional NCC Requirements for Services (not included in the NatHERS assessment)

Does the lighting meet the artificial lighting requirements specified in the NCC?

☐ ☐ ☐ ☐

Does the hot water system meet the additional requirements specified in the NCC?

☐ ☐ ☐ ☐

Provisional values* check

Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?

☐ ☐ ☐ ☐

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Vapour barrier to be added to external wall insulation.

Room schedule

Room	Zone Type	Area [m ²]
Garage	Garage	21.08
Media/Laundry	Living	31.78
Bath	Daytime	8.11
Bedroom 2	Bedroom	12.81
Entry	Daytime	6.25
Stair	Daytime	4.62
Kitchen/Living	Kitchen/Living	50.47
Study	Daytime	8.66
Ensuite	Unconditioned	8.23
WIR	Nighttime	5.85
Main Bed	Bedroom	12.39

Window and glazed door type and performance

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-002-01 A	Aluminium B SG Clear	6.7	0.70	0.67	0.74
ALM-001-01 A	Aluminium A SG Clear	6.7	0.57	0.54	0.60

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door schedule

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Media/Laundry	ALM-002-01 A	n/a	2100	2400	Sliding	45	S	No
Media/Laundry	ALM-002-01 A	n/a	900	1500	Sliding	45	S	No
Bedroom 2	ALM-002-01 A	n/a	1200	2400	Sliding	45	N	No
Entry	ALM-001-01 A	n/a	2100	1640	Casement	90	N	No
Kitchen/Living	ALM-002-01 A	n/a	1200	2400	Sliding	10	N	No

* Refer to glossary.



Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-002-01 A	n/a	1200	1200	Sliding	45	S	No
Study	ALM-002-01 A	n/a	2100	2100	Sliding	45	S	No
Ensuite	ALM-002-01 A	n/a	1000	1800	Sliding	10	S	No
Main Bed	ALM-002-01 A	n/a	1200	2400	Sliding	10	N	No

Roof window* type and performance value

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* schedule

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* type and performance

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* schedule

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m ²]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door schedule

Location	Height [mm]	Width [mm]	Opening %	Orientation
Garage	2400	3100	90	N



External wall type

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Timber Stud Frame Brick Veneer	0.85		No insulation	No
EW-2	Timber Stud Frame Brick Veneer	0.85		Bulk Insulation R2	No

External wall schedule

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Garage	EW-1	2892	3595	N	0	No
Media/Laundry	EW-2	2720	2900	S	0	No
Media/Laundry	EW-2	2721	6800	S	2000	No
Bedroom 2	EW-2	2720	3700	N	0	No
Bedroom 2	EW-2	2720	1300	E	0	No
Bedroom 2	EW-2	2721	1200	E	2500	No
Entry	EW-2	2720	2390	N	1300	Yes
Kitchen/Living	EW-2	2570	3700	N	450	No
Kitchen/Living	EW-2	2570	2500	E	450	No
Kitchen/Living	EW-2	2570	2395	N	450	No
Kitchen/Living	EW-2	2570	3195	S	2550	No
Study	EW-2	2570	3490	S	2550	No
Ensuite	EW-2	2570	2995	S	550	No
Main Bed	EW-2	2570	3595	N	450	Yes

Internal wall type

Wall ID	Wall type	Area [m ²]	Bulk insulation
IW-001	Timber Stud Frame, Direct Fix Plasterboard	16.32	Bulk Insulation, No Air Gap R2
IW-002	Cavity brick, plasterboard	81.55	No Insulation
IW-003	Timber Stud Frame, Direct Fix Plasterboard	97.78	No insulation



Floor type

Location	Construction	Area [m ²]	Sub-floor ventilation	Added insulation [R-value]	Covering
Garage	Waffle pod slab 225 mm 100mm	21.01	None	No Insulation	Bare
Media/Laundry	Waffle pod slab 225 mm 100mm	31.78	None	No Insulation	Vinyl 3mm
Bath	Waffle pod slab 225 mm 100mm	8.11	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Waffle pod slab 225 mm 100mm	12.81	None	No Insulation	Vinyl 3mm
Entry	Waffle pod slab 225 mm 100mm	6.25	None	No Insulation	Vinyl 3mm
Stair	Waffle pod slab 225 mm 100mm	4.62	None	No Insulation	Vinyl 3mm
Kitchen/Living / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	12.67		No Insulation	Vinyl 3mm
Kitchen/Living / Bath	Timber Framed Timber Above Plasterboard 19mm	3.28		No Insulation	Vinyl 3mm
Kitchen/Living / Bedroom 2	Timber Framed Timber Above Plasterboard 19mm	7.82		No Insulation	Vinyl 3mm
Kitchen/Living / Entry	Timber Framed Timber Above Plasterboard 19mm	1.48		No Insulation	Vinyl 3mm
Kitchen/Living / Stair	Timber Framed Timber Above Plasterboard 19mm	0.00		No Insulation	Vinyl 3mm
Study / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	8.18		No Insulation	Vinyl 3mm
Ensuite / Garage	Timber Framed Timber Above Plasterboard 19mm	2.23		Bulk Insulation R2	Ceramic Tiles 8mm
Ensuite / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	5.82		No Insulation	Ceramic Tiles 8mm
WIR / Garage	Timber Framed Timber Above Plasterboard 19mm	5.85		Bulk Insulation R2	Vinyl 3mm
Main Bed / Garage	Timber Framed Timber Above Plasterboard 19mm	12.39		Bulk Insulation R2	Vinyl 3mm

Ceiling type

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Garage	Timber Framed Timber Above Plasterboard	Bulk Insulation R2	
Media/Laundry	Timber Framed Timber Above Plasterboard	No Insulation	
Bath	Timber Framed Timber Above Plasterboard	No Insulation	



Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 2	Timber Framed Timber Above Plasterboard	No Insulation	
Entry	Timber Framed Timber Above Plasterboard	No Insulation	
Stair	Timber Framed Timber Above Plasterboard	No Insulation	
Kitchen/Living	Plasterboard on Timber	Bulk Insulation R3	
Study	Plasterboard on Timber	Bulk Insulation R3	
Ensuite	Plasterboard on Timber	Bulk Insulation R3	
WIR	Plasterboard on Timber	Bulk Insulation R3	
Main Bed	Plasterboard on Timber	Bulk Insulation R3	

Ceiling penetrations*

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Garage	2	Downlights - LED	100	Sealed
Media/Laundry	4	Downlights - LED	100	Sealed
Bath	1	Exhaust Fans	300	Sealed
Entry	2	Downlights - LED	100	Sealed
Kitchen/Living	8	Downlights - LED	100	Sealed
Study	1	Downlights - LED	100	Sealed
Ensuite	1	Exhaust Fans	300	Sealed
WIR	1	Downlights - LED	100	Sealed

Ceiling fans

Location	Quantity	Diameter [mm]
Media/Laundry	1	1200
Bedroom 2	1	1200
Kitchen/Living	1	1200
Main Bed	1	1200

Roof type

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Corrugated Iron Timber Frame	No Insulation, Only an Air Gap	0.50	Medium
Corrugated Iron Timber Frame	Bulk, Reflective Side Down, No Air Gap Above R1.3	0.85	Dark



Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
No Data Available				

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m² is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		



Battery Schedule

System Type	Size [Battery Storage Capacity]
No Data Available	



Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the home's energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and

are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your home's rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au .
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheathing or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®

NatHERS® Certificate No. 0011738770

Generated on 20 Feb 2025 using BERS Pro v5.2.4 (3.23)

Property

Address Unit 3, 97 Wingham Road,
TAREE, NSW, 2430

Lot/DP Lot 4 DP 801616

NCC class* 1a

Floor/all Floors G of 2 floors

Type New Home

Plans

Main plan -

Prepared by Tim Cross Building Design and Drafting

Construction and environment

Assessed floor area [m2]*	Exposure type
Conditioned* 127.4	Suburban
Unconditioned* 15.8	NatHERS climate zone
Total 164.2	15 Williamstown
Garage 21.0	



Accredited assessor

Name Leanne Houseman

Business name Concept Designs Australia

Email leanne.cdaus@outlook.com

Phone 0408864184

Accreditation No. 10137

Assessor Accrediting Organisation

HERA

Declaration of interest Declaration completed: no conflicts

NCC Requirements

NCC provisions Volume Two

Strate/Territory variation Yes

National Construction Code (NCC) requirements


The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

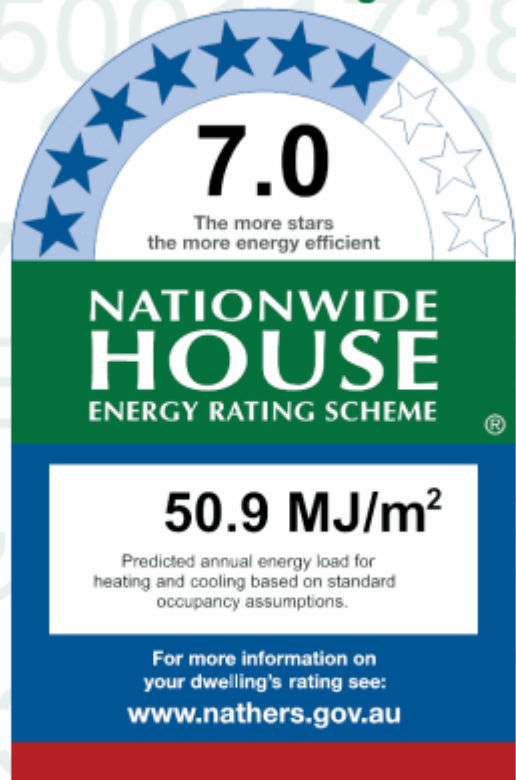

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	23.9	27.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	CSOG
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home
performance rating
generated for this
certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=IUQbnYxmm. When using either link, ensure you are visiting hstar.com.au



About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABC Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable



Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate



Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other

Additional NCC requirements for thermal performance (not included in the NatHERS assessment)

Thermal bridging

Does the dwelling meet the NCC requirement for thermal bridging?

☐ ☐ ☐ ☐

Insulation installation method

Has the insulation been installed according to the NCC requirements?

☐ ☐ ☐

Building sealing

Does the dwelling meet the NCC requirements for Building Sealing?

☐ ☐ ☐ ☐

Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)

Appliances

Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Additional NCC Requirements for Services (not included in the NatHERS assessment)

Does the lighting meet the artificial lighting requirements specified in the NCC?

☐ ☐ ☐ ☐

Does the hot water system meet the additional requirements specified in the NCC?

☐ ☐ ☐ ☐

Provisional values* check

Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?

☐ ☐ ☐ ☐

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Vapour barrier to be added to external wall insulation.

Room schedule

Room	Zone Type	Area [m ²]
Garage	Garage	20.98
Media/Laundry	Living	31.63
Bath	Unconditioned	7.77
Bedroom 2	Bedroom	12.68
Entry	Daytime	6.13
Stair	Daytime	4.58
Kitchen/Living	Kitchen/Living	50.47
Study	Daytime	8.56
Ensuite	Unconditioned	8.03
WIR	Nighttime	5.75
Main Bed	Bedroom	12.39

Window and glazed door type and performance

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-002-03 A	Aluminium B SG High Solar Gain Low-E	5.4	0.58	0.55	0.61
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-002-01 A	Aluminium B SG Clear	6.7	0.70	0.67	0.74
ALM-001-03 A	Aluminium A SG High Solar Gain Low-E	5.4	0.49	0.47	0.51

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door schedule

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Media/Laundry	ALM-002-03 A	n/a	1200	1800	Sliding	45	E	No
Media/Laundry	ALM-004-03 A	n/a	2100	2400	Sliding	45	S	No



Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Media/Laundry	ALM-004-03 A	n/a	900	1500	Sliding	45	S	No
Bath	ALM-002-01 A	n/a	900	1800	Sliding	45	E	No
Bedroom 2	ALM-002-03 A	n/a	1200	2400	Sliding	45	N	No
Entry	ALM-001-03 A	n/a	2100	1640	Casement	90	N	No
Kitchen/Living	ALM-002-03 A	n/a	1200	1200	Sliding	45	S	No
Kitchen/Living	ALM-002-03 A	n/a	1200	2400	Sliding	10	N	No
Kitchen/Living	ALM-002-03 A	n/a	600	900	Sliding	10	E	No
Kitchen/Living	ALM-002-03 A	n/a	1800	800	Double Hung	10	E	No
Study	ALM-002-03 A	n/a	2100	2100	Sliding	45	S	No
Ensuite	ALM-002-01 A	n/a	1000	1800	Sliding	10	S	No
Main Bed	ALM-002-03 A	n/a	1200	2400	Sliding	10	N	No

Roof window* type and performance value

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* schedule

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* type and performance

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		



Skylight* schedule

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m ²]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door schedule

Location	Height [mm]	Width [mm]	Opening %	Orientation
Garage	2400	3100	90	N

External wall type

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Timber Stud Frame Brick Veneer	0.85		No insulation	No
EW-2	Timber Stud Frame Brick Veneer	0.85		Bulk Insulation R2.5	No

External wall schedule

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Garage	EW-1	2892	3595	N	0	No
Media/Laundry	EW-2	2720	4495	E	0	No
Media/Laundry	EW-2	2721	6800	S	2000	No
Media/Laundry	EW-2	2720	2900	S	0	No
Bath	EW-2	2720	2490	E	0	No
Bedroom 2	EW-2	2721	1200	W	2500	No
Bedroom 2	EW-2	2720	1300	W	0	No
Bedroom 2	EW-2	2720	3700	N	0	No
Bedroom 2	EW-2	2720	3495	E	0	No
Entry	EW-2	2720	2390	N	1300	Yes
Kitchen/Living	EW-2	2570	3195	S	2550	No
Kitchen/Living	EW-2	2570	2395	N	450	No
Kitchen/Living	EW-2	2570	2500	W	450	No
Kitchen/Living	EW-2	2570	3700	N	450	No
Kitchen/Living	EW-2	2570	10500	E	450	No
Study	EW-2	2570	3490	S	2550	No



Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ensuite	EW-2	2570	2995	S	550	No
Main Bed	EW-2	2570	3595	N	450	Yes

Internal wall type

Wall ID	Wall type	Area [m ²]	Bulk insulation
IW-001	Cavity brick, plasterboard	26.00	No Insulation
IW-002	Timber Stud Frame, Direct Fix Plasterboard	64.41	Bulk Insulation, No Air Gap R2.5
IW-003	Timber Stud Frame, Direct Fix Plasterboard	61.11	No insulation

Floor type

Location	Construction	Area [m ²]	Sub-floor ventilation	Added insulation [R-value]	Covering
Garage	Waffle pod slab 225 mm 100mm	20.95	None	No Insulation	Bare
Media/Laundry	Waffle pod slab 225 mm 100mm	31.63	None	No Insulation	Vinyl 3mm
Bath	Waffle pod slab 225 mm 100mm	7.77	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Waffle pod slab 225 mm 100mm	12.68	None	No Insulation	Vinyl 3mm
Entry	Waffle pod slab 225 mm 100mm	6.13	None	No Insulation	Vinyl 3mm
Stair	Waffle pod slab 225 mm 100mm	4.58	None	No Insulation	Vinyl 3mm
Kitchen/Living / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	12.68		No Insulation	Vinyl 3mm
Kitchen/Living / Bath	Timber Framed Timber Above Plasterboard 19mm	3.28		No Insulation	Vinyl 3mm
Kitchen/Living / Bedroom 2	Timber Framed Timber Above Plasterboard 19mm	7.83		No Insulation	Vinyl 3mm
Kitchen/Living / Entry	Timber Framed Timber Above Plasterboard 19mm	1.47		No Insulation	Vinyl 3mm
Kitchen/Living / Stair	Timber Framed Timber Above Plasterboard 19mm	0.00		No Insulation	Vinyl 3mm
Study / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	8.08		No Insulation	Vinyl 3mm
Ensuite / Garage	Timber Framed Timber Above Plasterboard 19mm	2.03		Bulk Insulation R4	Ceramic Tiles 8mm
Ensuite / Media/Laundry	Timber Framed Timber Above Plasterboard 19mm	5.62		No Insulation	Ceramic Tiles 8mm



Location	Construction	Area [m ²]	Sub-floor ventilation	Added insulation [R-value]	Covering
WIR / Garage	Timber Framed Timber Above Plasterboard 19mm	5.74		Bulk Insulation R4	Vinyl 3mm
Main Bed / Garage	Timber Framed Timber Above Plasterboard 19mm	12.39		Bulk Insulation R4	Vinyl 3mm

Ceiling type

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Garage	Timber Framed Timber Above Plasterboard	Bulk Insulation R4	
Media/Laundry	Timber Framed Timber Above Plasterboard	No Insulation	
Bath	Timber Framed Timber Above Plasterboard	No Insulation	
Bedroom 2	Timber Framed Timber Above Plasterboard	No Insulation	
Entry	Timber Framed Timber Above Plasterboard	No Insulation	
Stair	Timber Framed Timber Above Plasterboard	No Insulation	
Kitchen/Living	Plasterboard on Timber	Bulk Insulation R4	
Study	Plasterboard on Timber	Bulk Insulation R4	
Ensuite	Plasterboard on Timber	Bulk Insulation R4	
WIR	Plasterboard on Timber	Bulk Insulation R4	
Main Bed	Plasterboard on Timber	Bulk Insulation R4	

Ceiling penetrations*

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Garage	2	Downlights - LED	100	Sealed
Media/Laundry	4	Downlights - LED	100	Sealed
Bath	1	Exhaust Fans	300	Sealed
Entry	2	Downlights - LED	100	Sealed
Kitchen/Living	8	Downlights - LED	100	Sealed
Study	1	Downlights - LED	100	Sealed
Ensuite	1	Exhaust Fans	300	Sealed
WIR	1	Downlights - LED	100	Sealed

Ceiling fans

Location	Quantity	Diameter [mm]
Media/Laundry	1	1200
Bedroom 2	1	1200
Kitchen/Living	1	1200
Main Bed	1	1200

Roof type

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Corrugated Iron Timber Frame	No Insulation, Only an Air Gap	0.50	Medium
Corrugated Iron Timber Frame	Bulk, Reflective Side Down, No Air Gap Above R1.3	0.85	Dark

Thermal bridging schedule for steel frame elements

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
No Data Available				

Appliance schedule

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m² is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				



Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy Schedule

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery Schedule

System Type	Size [Battery Storage Capacity]
No Data Available	



Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the home's energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and

are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your home's rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au .
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the operability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheathing or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.