

Padstow Property Investment

19-23 Segers Ave, Padstow

Acoustic DA Assessment

Author	Fu Siong Hie, B.Eng, MAAS Principal Consultant
Document Reference:	SYD2024-1157-R001C
Date	22/04/2025
Comments:	Final

Table of Contents

1	Introduction	4
2	Noise Criteria	5
2.1	Residential Internal Noise Levels.....	5
2.2	Sound Insulation Requirement (Part F7 NCC/BCA)	6
2.3	Noise Survey and Project Specific Limits.....	8
2.3.1	Traffic Noise Levels	8
2.3.2	Project Noise Limits	9
3	Assessment and Recommendations.....	10
3.1	Façade Glazing Requirements	10
3.2	Building Façade Construction	10
3.3	Mechanical Services	10
4	Conclusion	11
	Appendix A – Acoustic Terminology.....	12
	Appendix B – Architectural Drawings.....	13
	Appendix C – Noise Logger Results	14

Index of Figures

Figure 1 – Site Location, Nearest Residents and Noise Logger Position 4

Index of Tables

Table 1— Recommended Internal Design Noise Levels (AS/NZS 2107) 5

Table 2 - NCC Part F7 Requirements (Class 2 or 3)..... 6

Table 3 – Measured Ambient and Traffic Noise and Levels, dBA 8

Table 4— EPA Noise Limits for Development, dBA 9

Table 5 – Schedule of Window and Glazing (R_w)..... 10

Table 6 – External Façade Construction (R_w)..... 10

1 Introduction

The following report has been prepared by Acouras Consultancy on behalf of Padstow Property Investment to assess the potential for noise impact associated with the 19-23 Segers Ave, Padstow. The mixed-use development will include:

- Two (2) levels of basement carpark.
- Residential apartment on ground level to level 6.

The proposed residential development is surrounded by existing residential dwellings and Padstow Public School is located opposite Segers Ave. The site location is shown in Figure 1.



Figure 1 – Site Location, Nearest Residents and Noise Logger Position

2 Noise Criteria

The following standards and guidelines are applicable to this project:

- NCC/BCA Part F7.
- NSW EPA “Noise Policy for Industry” (NPfI).
- Australian standard AS/NZS 2107-2016: Acoustics – Recommended design sound levels and reverberation times for building interiors.
- Australian standard AS 1055-2018: Acoustics – Description and measurement of environmental noise - General procedures.

2.1 Residential Internal Noise Levels

For road traffic noise, Table 1 presents the recommended internal design noise levels in accordance with AS 2107 – 2016 for acceptable internal noise levels within residential buildings.

Table 1— Recommended Internal Design Noise Levels (AS/NZS 2107)

Type of occupancy/activity	Design sound level ($L_{Aeq,t}$) range
Living areas	30 to 40
Sleeping areas (night time)	30 to 35
Work areas	35 to 40
Apartment common areas, corridors, lobbies (e.g. foyer, lift lobby)	45 to 50
Enclosed Carparks	< 65

2.2 Sound Insulation Requirement (Part F7 NCC/BCA)

For sound transmission and insulation between sole occupancy units (SOU) within the same development, walls and floors to be constructed in accordance with requirements of Part F7 of the Building Code of Australia (BCA). Sound insulation requirements are summarised in Table 2.

Table 2 - NCC Part F7 Requirements (Class 2 or 3)

Building Element	Minimum NCC Part F7 Requirements
Sound Insulation Rating of Walls (Class 2 or 3)	
Walls between separate sole occupancy units.	Rw + Ctr 50 (airborne)
Walls between wet areas (bathrooms, sanitary compartment, laundry or kitchen) and a habitable room (other than kitchen) in adjoining apartments.	Rw + Ctr 50 (airborne) & of discontinuous construction
Walls between sole occupancy unit and stairway, public corridors, public lobby or the like or parts of a different classification.	Rw 50 (airborne)
Walls between a plant room or lift shaft and a sole occupancy unit.	Rw 50 (airborne) & of discontinuous construction
Sound Insulation Rating of Floors (Class 2 or 3)	
Floors between sole occupancy units or between a sole occupancy unit and plant room, lift shaft, stairway, public corridor, public lobby or the like.	Rw + Ctr 50 (airborne) & Ln,w + CI < 62 (impact)
Apartment Entry Doors (Class 2 or 3)	
A door incorporated in a wall that separates a sole-occupancy unit from a stairway, public corridor, public lobby or the like.	Rw 30 (airborne)
Services (Class 2, 3 or 9c)	
If a storm water pipe, a duct, soil, waste or water supply pipe including a duct or pipe that is located in a wall or floor cavity serves or passes through more than one sole occupancy unit must be separated:	
if the adjacent room is a habitable room (other than a kitchen); or	Rw + Ctr 40
if the room is a kitchen or non-habitable room	Rw + Ctr 25

Construction Deemed to Satisfy

The forms of construction must be installed as follows:

- (a) Masonry—Units must be laid with all joints filled solid, including those between the masonry and any adjoining construction.
- (b) Concrete slabs—Joints between concrete slabs or panels and any adjoining construction must be filled solid.
- (c) Sheeting materials—
 - (i) if one layer is required on both sides of a wall, it must be fastened to the studs with joints staggered on opposite sides; and
 - (ii) if two layers are required, the second layer must be fastened over the first layer so that the joints do not coincide with those of the first layer; and
 - (iii) joints between sheets or between sheets and any adjoining construction must be taped and filled solid.
- (d) Timber or steel-framed construction—perimeter framing members must be securely fixed to the adjoining structure and—
 - (i) bedded in resilient compound; or
 - (ii) the joints must be caulked so that there are no voids between the framing members and the adjoining structure.
- (e) Services—
 - (i) Services must not be chased into concrete or masonry elements.
 - (ii) A door or panel required to have a certain $R_w + C_{tr}$ that provides access to a duct, pipe or other service must—
 - (A) not open into any habitable room (other than a kitchen); and
 - (B) be firmly fixed so as to overlap the frame or rebate of the frame by not less than 10 mm, be fitted with a sealing gasket along all edges and be constructed of—
 - (aa) wood, particleboard or blockboard not less than 33 mm thick; or
 - (bb) compressed fibre reinforced cement sheeting not less than 9 mm thick; or
 - (cc) other suitable material with a mass per unit area not less than 24.4 kg/m²
 - (iii) A water supply pipe must—
 - (A) only be installed in the cavity of discontinuous construction; and
 - (B) in the case of a pipe that serves only one sole-occupancy unit, not be fixed to the wall leaf on the side adjoining any other sole-occupancy unit and have a clearance not less than 10 mm to the other wall leaf.
 - (iv) Electrical outlets must be offset from each other—
 - (A) in masonry walling, not less than 100 mm; and
 - (B) in timber or steel framed walling, not less than 300 mm.

2.3 Noise Survey and Project Specific Limits

An unattended noise survey was carried out at the site to measure the background and ambient noise levels. Noise monitoring was conducted between Thursday 13th to Wednesday 19th March 2025. The monitor was positioned at the front of the existing house as shown in Figure 1.

Measurements were conducted using the following equipment:

- SVAN 977C Type 1 Real time Analyser/Noise Logger. Serial No. 98078.
- SVAN SV30A Type 1 Sound Level Calibrator. Serial No. 31830.

Noise monitoring was conducted in general accordance with Australian standard AS 1055-2018: Acoustics-Description and measurement of environmental noise-General procedures.

The noise analyser was calibrated immediately before and after measurements were taken with no discernible differences between these two recorded levels. The sound analyser is Type 1 and complies with Australian standard AS1259.2: 1990.

2.3.1 Traffic Noise Levels

Table 3 presents a summary of the measured ambient noise level and traffic noise impacting the development.

Table 3 – Measured Ambient and Traffic Noise and Levels, dBA

Location	Period	Average L_{eq} (Period)	Highest L_{eq} 1hr
Segers Ave	Day (07:00-22:00)	50	55
	Night (22:00-07:00)	47	52

2.3.2 Project Noise Limits

Table 4 presents a summary of the measured background noise level and the allowable intrusive noise limit for this project in accordance with the EPA NPfI. The amenity criteria are based on a suburban receiver.

Table 4—EPA Noise Limits for Development, dBA

Receiver		Time Period	Existing Noise Levels			NSW EPA NPI		Project Noise Trigger Level Leq(15min)
			Leq (period)	RBL	ANL	Project ANL ¹ Leq(15min)	Intrusiveness Criteria, Leq(15min)	
L1	Residential	Day	51	38	55	53	43	43
		Evening	50	39	45	43	44	43
		Night	47	39	40	38	44	38

At the detailed design stage, the design and selection of the mechanical equipment required to service the proposed development will be required to achieve the EPA noise limits as presented in the table above.

During the monitoring period any adverse weather condition have been excluded. The noise logger results are presented in Appendix C.

¹ Project ANL is recommended ANL minus 5 dB(A) and plus 3 dB(A), to convert from a period level to a 15-minute level.

3 Assessment and Recommendations

3.1 Façade Glazing Requirements

Acoustic glazing for the apartments are given in Table 5 are required to reduce noise impact on the internal occupants and should result in noise levels within such units in accordance with the Australian Standard AS/NZS 2107:2016.

Table 5 – Schedule of Window and Glazing (R_w)

Level	Apartment	Space	Glazing Thickness	Minimum R_w (Glazing+Frame)
All	All	Living, Dining & Kitchen	6.38mm lam	30
		Bedroom	6.38mm lam	30

All other non-habitable spaces, such as bathrooms and laundries require minimum 6mm monolithic glass (R_w 28).

All Windows/doors should be well sealed (air tight) when closed with good acoustic seals around the top and bottom sliders. Mohair seals are not considered to be acoustic seals.

3.2 Building Façade Construction

To provide sufficient acoustic attention of noise, the general external construction of the proposed building would need to be constructed as detailed in Table 6.

Table 6 – External Façade Construction (R_w)

Building Element	Proposed Construction	Minimum R_w
External Wall	Masonry or cavity brick	45
Roof and ceiling	Concrete with a plasterboard cavity ceiling	45

3.3 Mechanical Services

At the DA stage, the design and selection of mechanical equipment has not been finalised. Following the DA approval of the proposed development, during the Construction Certification Stage a detail assessment of all mechanical plant and equipment will be conducted to ensure compliance with the EPA noise criteria. Typical acoustic measures may include the construction of acoustic barriers, enclosures, attenuators and/or acoustic louvres.

4 Conclusion

An acoustic assessment of the proposed development has been carried out in accordance with the requirements of Canterbury-Bankstown Council, BCA Part F7, NSW EPA NPfl and the Australian Standards AS/NZS 2107:2016.

An environmental noise survey of the site has been conducted and the noise limiting criteria for mechanical plant/equipment noise emission has been determined based on the EPA NPfl. The limits are presented in Table 4.

Construction for glazing, external walls and the roof/ceiling systems have been provided to achieve the internal noise criteria and are detailed in Section 3.1 and Section 3.2 based on the impact of surrounding traffic and ambient noise.

Providing the recommendations in this report are implemented, the noise from the proposed development is predicted to comply with acoustic requirements of the Canterbury-Bankstown Council, BCA Part F7, EPA NPfl and relevant Australian Standards.

Appendix A – Acoustic Terminology

Decibel, dB: A dimensionless unit which denotes the ratio between two quantities that are proportional to power, energy or intensity. One of these quantities is a designated reference by which all other quantities of identical units are divided. The sound pressure level in decibels is equal to 10 times the logarithm (to the base 10) of the ratio between the pressure squared divided by the reference pressure squared. The reference pressure used in acoustics is 20 micro Pascals.

A-WEIGHTING: A measure of sound pressure level designed to reflect the response of the human ear, which does not respond equally to all frequencies. To describe sound in a manner representative of the human ear's response it is necessary to reduce the effects of the low and high frequencies with respect to medium frequencies. The resultant sound level is said to be A-weighted, and the units are in decibels (dBA). The A-weighted sound level is also called the noise level.

Sound Pressure Level, L_p (dB), of a sound: 20 times the logarithm to the base 10 of the ratio of the r.m.s. sound pressure to the reference sound pressure of 20 micro Pascals. Sound pressure level is measured using a microphone and a sound level meter, and varies with distance from the source and the environment.

Ambient Noise/Sound: All noise level present in a given environment, usually being a composite of sounds from many sources far and near. Traffic, HVAC, masking sound or even low-level background music can contribute to ambient level of noise or sound.

Percentile Level - L_{90} , L_{10} , etc: A statistical measurement giving the sound pressure level which is exceeded for the given percentile of an observation period, e.g. L_{90} is the level which is exceeded for 90% of a measurement period. L_{90} is commonly referred to as the "background" sound level.

Background Noise (L_{90}): The sum total of all unwanted residual noise generated from all direct and reflected sound sources in a space that can represent an interface to, or interfere with good listening and speech intelligibility.

Rating Background Level – RBL: Method for determining the existing background noise level which involves calculating the tenth percentile from the L_{A90} measurements. This value gives the Assessment Background Noise Level (ABL). Rating Background Level is the median of the overall ABL.




$L_{AEQ,T}$: Equivalent continuous A-weighted sound pressure level. The value of the A-weighted sound pressure level of a continuous steady sound that, within a measurement time interval T, has the same A-weighted sound energy as the actual time-varying sound.

Appendix B – Architectural Drawings

This assessment was based on the following architectural drawings provided by Zhinar Architects.

Drawing	Issue	Date	Description
DA-002	P4	28/02/2025	Site Analysis
DA-100	P4	28/02/2025	Basement 2
DA-101	P4	28/02/2025	Basement 1
DA-102	P4	28/02/2025	Ground Floor
DA-103	P4	28/02/2025	Level 1-3 Floor
DA-104	P4	28/02/2025	Level 4-5 Floor
DA-105	P4	28/02/2025	Level 6 Floor
DA-106	P4	28/02/2025	Roof/Site Plan
DA-200	P4	28/02/2025	North Elevation
DA-201	P4	28/02/2025	South Elevation
DA-202	P4	28/02/2025	East Elevation
DA-203	P4	28/02/2025	West Elevation – Segers Ave
DA-204	P4	28/02/2025	West Elevation – Streetscape

Appendix C – Noise Logger Results

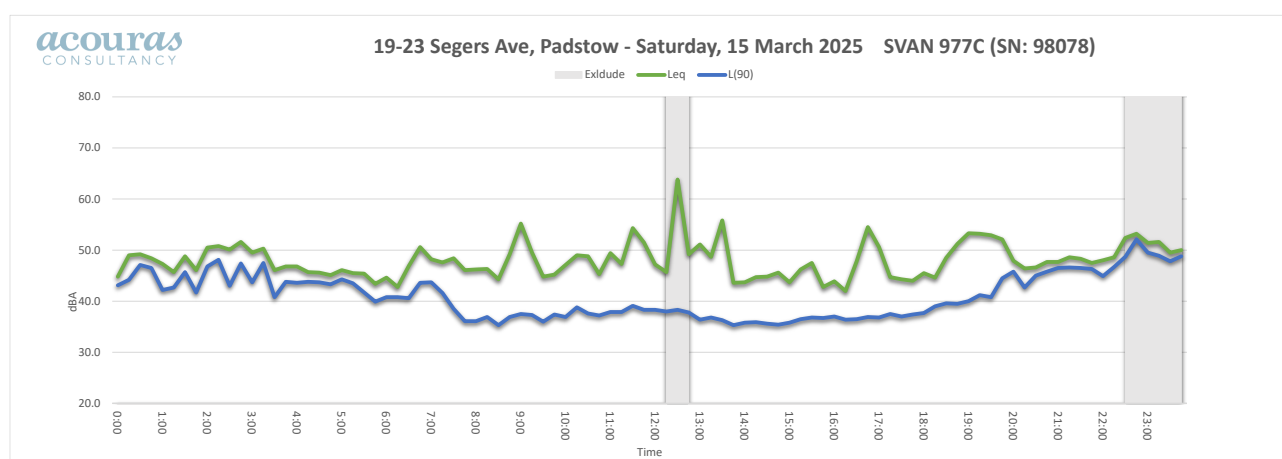
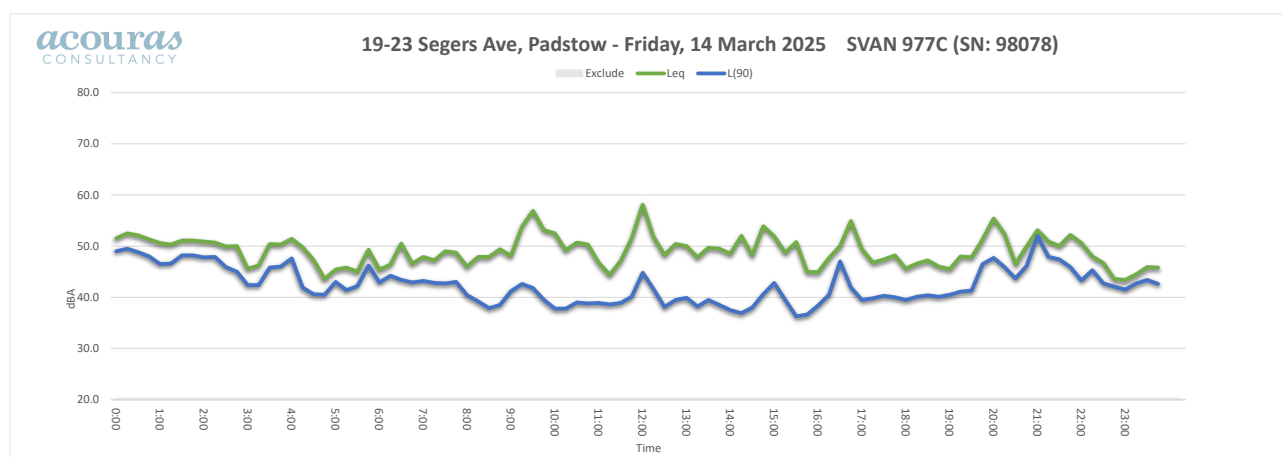
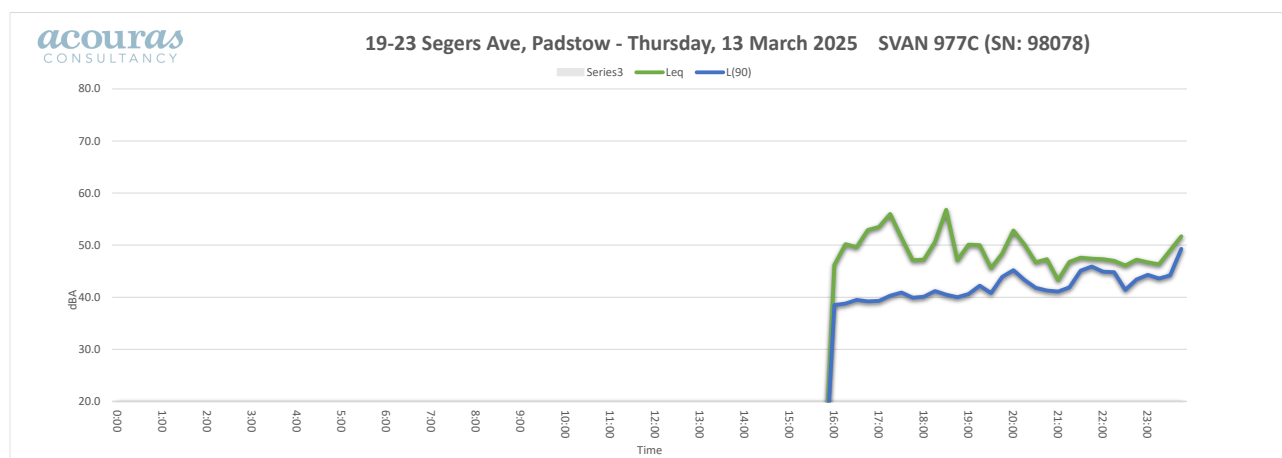


PADSTOW PROPERTY INVESTMENT

19-23 SEGERS AVE, PADSTOW - ACOUSTIC DA ASSESSMENT

SYD2024-1157-R001C

22/04/2025

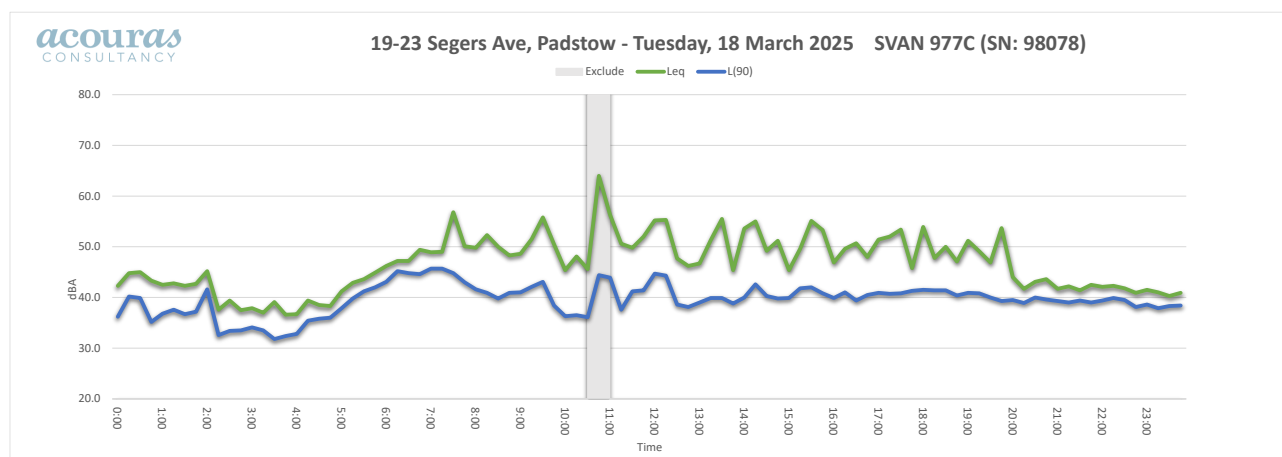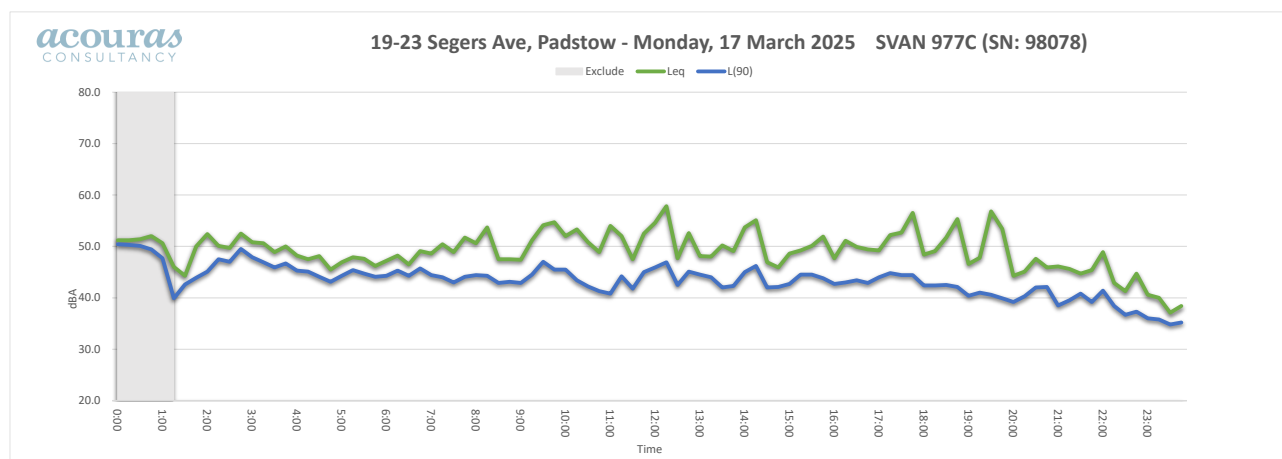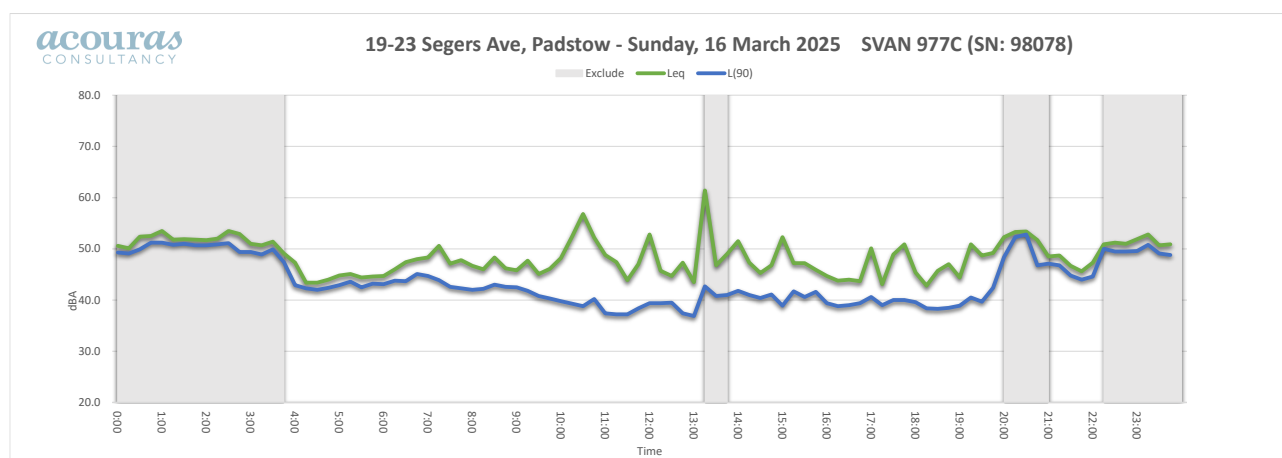

PADSTOW PROPERTY INVESTMENT

19-23 SEGERS AVE, PADSTOW - ACOUSTIC DA ASSESSMENT

SYD2024-1157-R001C

22/04/2025

