

BASIC SPECS


Importance Level: 2
 Shed Usage: Domestic
 Shielding: 1.0
 Wind Region:
 Region A0; T.C. - 2.00
 Design Wind Speed: 41m/s
 Pitch: 30.0
 Width: 8000
 Length: 16000
 Height: 3000
 Max Height: 5309
 Maximum Bay Size: 4000
 Base Connection:
 U Strip on Concrete
 100mm Concrete Floor Req
 Standard Frame: C20019
 Serviceability Tests Passed
 Purlin: TH7575
 Girt: TH7575
 Girt: TH7575
 Roof Sheeting: Corro 0.42
 Coverage 762
 Wall Sheeting: Corro 0.42
 Coverage 762
 Right Shift Gable
 Right Garaport Bays: 2
 Right Garaport Infill: No




Elevations

Silvaline Gable Garage
Customer Name: - Buffalo Built Stuart Smyth
Site Address: - 14 Nyhan Street, Holbrook NSW


QikShed Version 3.1 - [20/03/25]
Invoice No: - 0
Order No: - SLVHA2-325202013
Date Proc: - 08/05/25

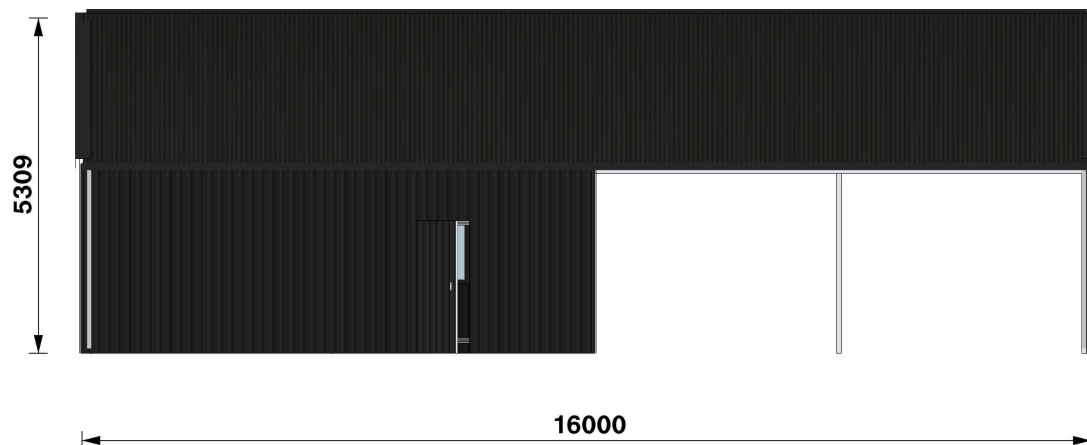


Front

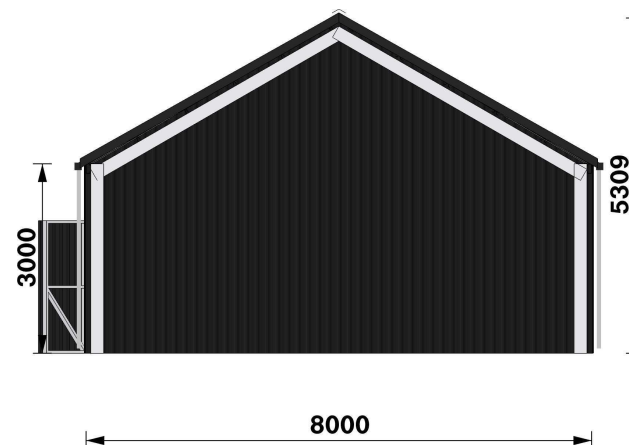

Right

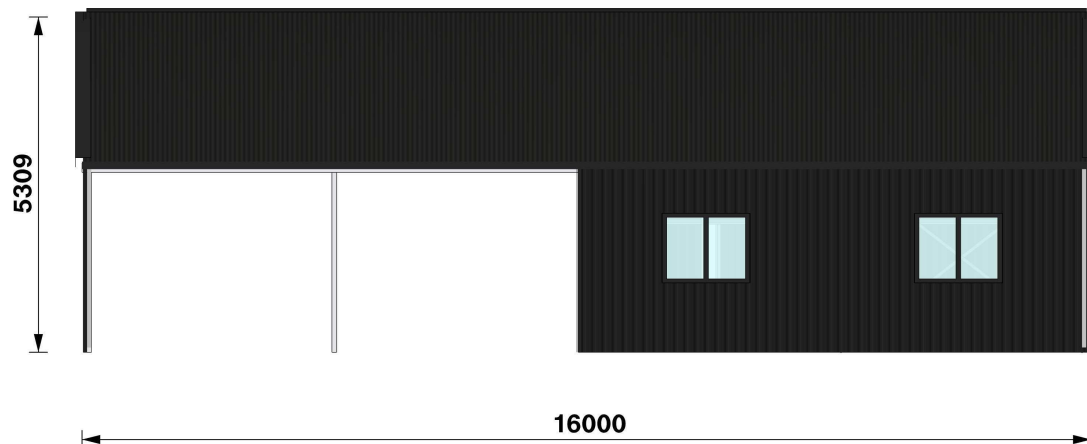

Back

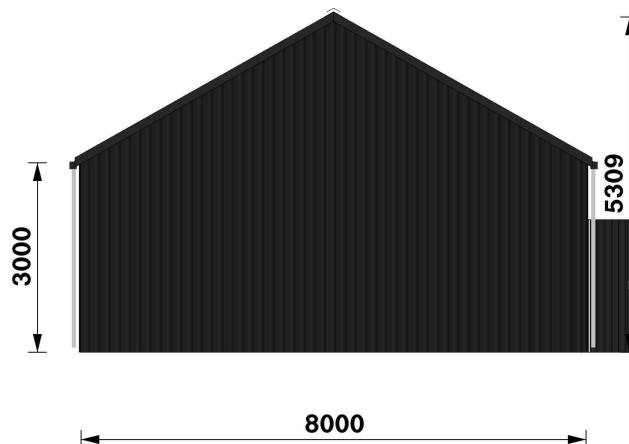

Left

BASIC SPECS

Importance Level: 2
Shed Usage: Domestic
Shielding: 1.0
Wind Region:
Region A0; T.C. - 2.00
Design Wind Speed: 41m/s
Pitch: 30.0
Width: 8000
Length: 16000
Height: 3000
Max Height: 5309
Maximum Bay Size: 4000
Base Connection:
U Strip on Concrete
100mm Concrete Floor Req
Standard Frame: C20019
Serviceability Tests Passed
Purlin: TH7575
Girt: TH7575
Girt: TH7575
Roof Sheeting: Corro 0.42
Coverage 762
Wall Sheeting: Corro 0.42
Coverage 762
Right Shift Gable
Right Garaport Bays: 2
Right Garaport Infill: No

Presentation Only; Not for Construction Purposes.

Page 3 of 12