


## LEGEND / FINISHES SCHEDULE

	EXISTING RL EXISTING TREE TO BE REMOVED NOTE: All noxious weeds on the site shall be removed and destroyed as per their classification under the noxious weeds Act. EXISTING TREE TO BE RETAINED AND SHALL BE PROTECTED DURING CONSTRUCTION IN ACCORDANCE WITH AS 4970-2009 TREE PRUNING SHALL BE IN ACCORDANCE WITH AS 4373 PROPOSED TREES, SHRUBS & GROUND COVER (REFER NO. TO PLANT SCHEDULE)
	BOUNDARY FENCE
	MULCHED GARDEN BED 900 WIDE MIN. OR AS SHOWN ON PLAN REFER TO DETAIL 1 & 2
	SELECTED METAL GARDEN EDGE OR AS SELECTED REFER TO DETAIL 1
	LAWN AREA SIR WALTER BUFFALO REFER TO DETAIL 1 All turf area shall be finished level with adjoining surfaces and also fall evenly to approved point of drainage discharge.
	PERMEABLE PEBBLE AREA SELECTED 100 DEPTH RIVER PEBBLES WITH WEED MAT UNDER
	DRIVEWAY / PATH SELECTED STENCILED OR COLOURED CONCRETE TO AUST. STANDARDS
	PATIO / TERRACE / PATH SELECTED TILES TO AUST. STANDARDS
	SELECTED CLOTHES LINE SHALL BE AT LEAST 16 LINEAL METRES TO MANUF. DETAIL
	SELECTED LETTER BOX TO AUST POST REQUIREMENTS AND TO AS/NZS 4253:1994
	SELECTED ILLUMINATION ILLUMINATION SHALL BE DESIGNED BY A QUALIFIED LIGHTING CONSULTANT AND WITH AS 4282, AS 1680 & AS 1158 IN ACCORDANCE
	DRAINAGE REFER TO ENGINEER PLANS FOR DETAILS NOTE: PROVIDE SELECTED HEEL GUARD GRATES TO PITS ON TRAFFICABLE AREAS - TO MANUF. DETAIL


ITEM	MATERIAL
SOIL DETAIL 1 & 2	NOTE: ALL SOIL TYPE AS PER AUST. NATIVE LANDSCAPE SUPPLY OR EQUIVALENT AND SHALL BE IN ACCORDANCE WITH AS 4419 AND AS 4454 FOR SOIL CONDITIONERS AND COMPOSTS
LAWN AREA	1st QUALITY TOP SOIL
NATIVE GARDEN BED	NATIVE GARDEN MIX
EXOTIC GARDEN BED	ORGANIC GARDEN MIX
MULCH	SELECTED HARD WOOD CHIP SHALL BE IN ACCORDANCE WITH AS 4454 NOTE: PROVIDE DECORATIVE GRAVEL TO OSD / RAIN GARDEN AREA REFER TO DETAIL 1 & 2
PLANT MATERIAL	AS PER PLANT SCHEDULE REFER TO DETAIL 2
GARDEN EDGE	SELECTED METAL EDGING OR AS SELECTED REFER TO DETAIL 1
FENCE SIDES & REAR BOUNDARY	1800 HIGH LAPPED & CAPPED TIMBER FENCE OR 1800 HIGH COLOURBOND UNLESS THE TYPE OF MATERIAL IS STIPULATED IN ANY FLOOD STUDY PREPARE FOR THE SITE NOTE: SIDE FENCES ARE TO BE TAPER FROM THE FRONT BUILDING LINE TO BE NOT MORE THAN 900mm HIGH AT THE FRONT BOUNDARY
COURTYARD SEPERATION FENCE	1800 HIGH LAPPED & CAPPED TIMBER FENCE OR 1800 HIGH COLOURBOND
FRONT	REFER TO ARCHITECT'S DETAIL

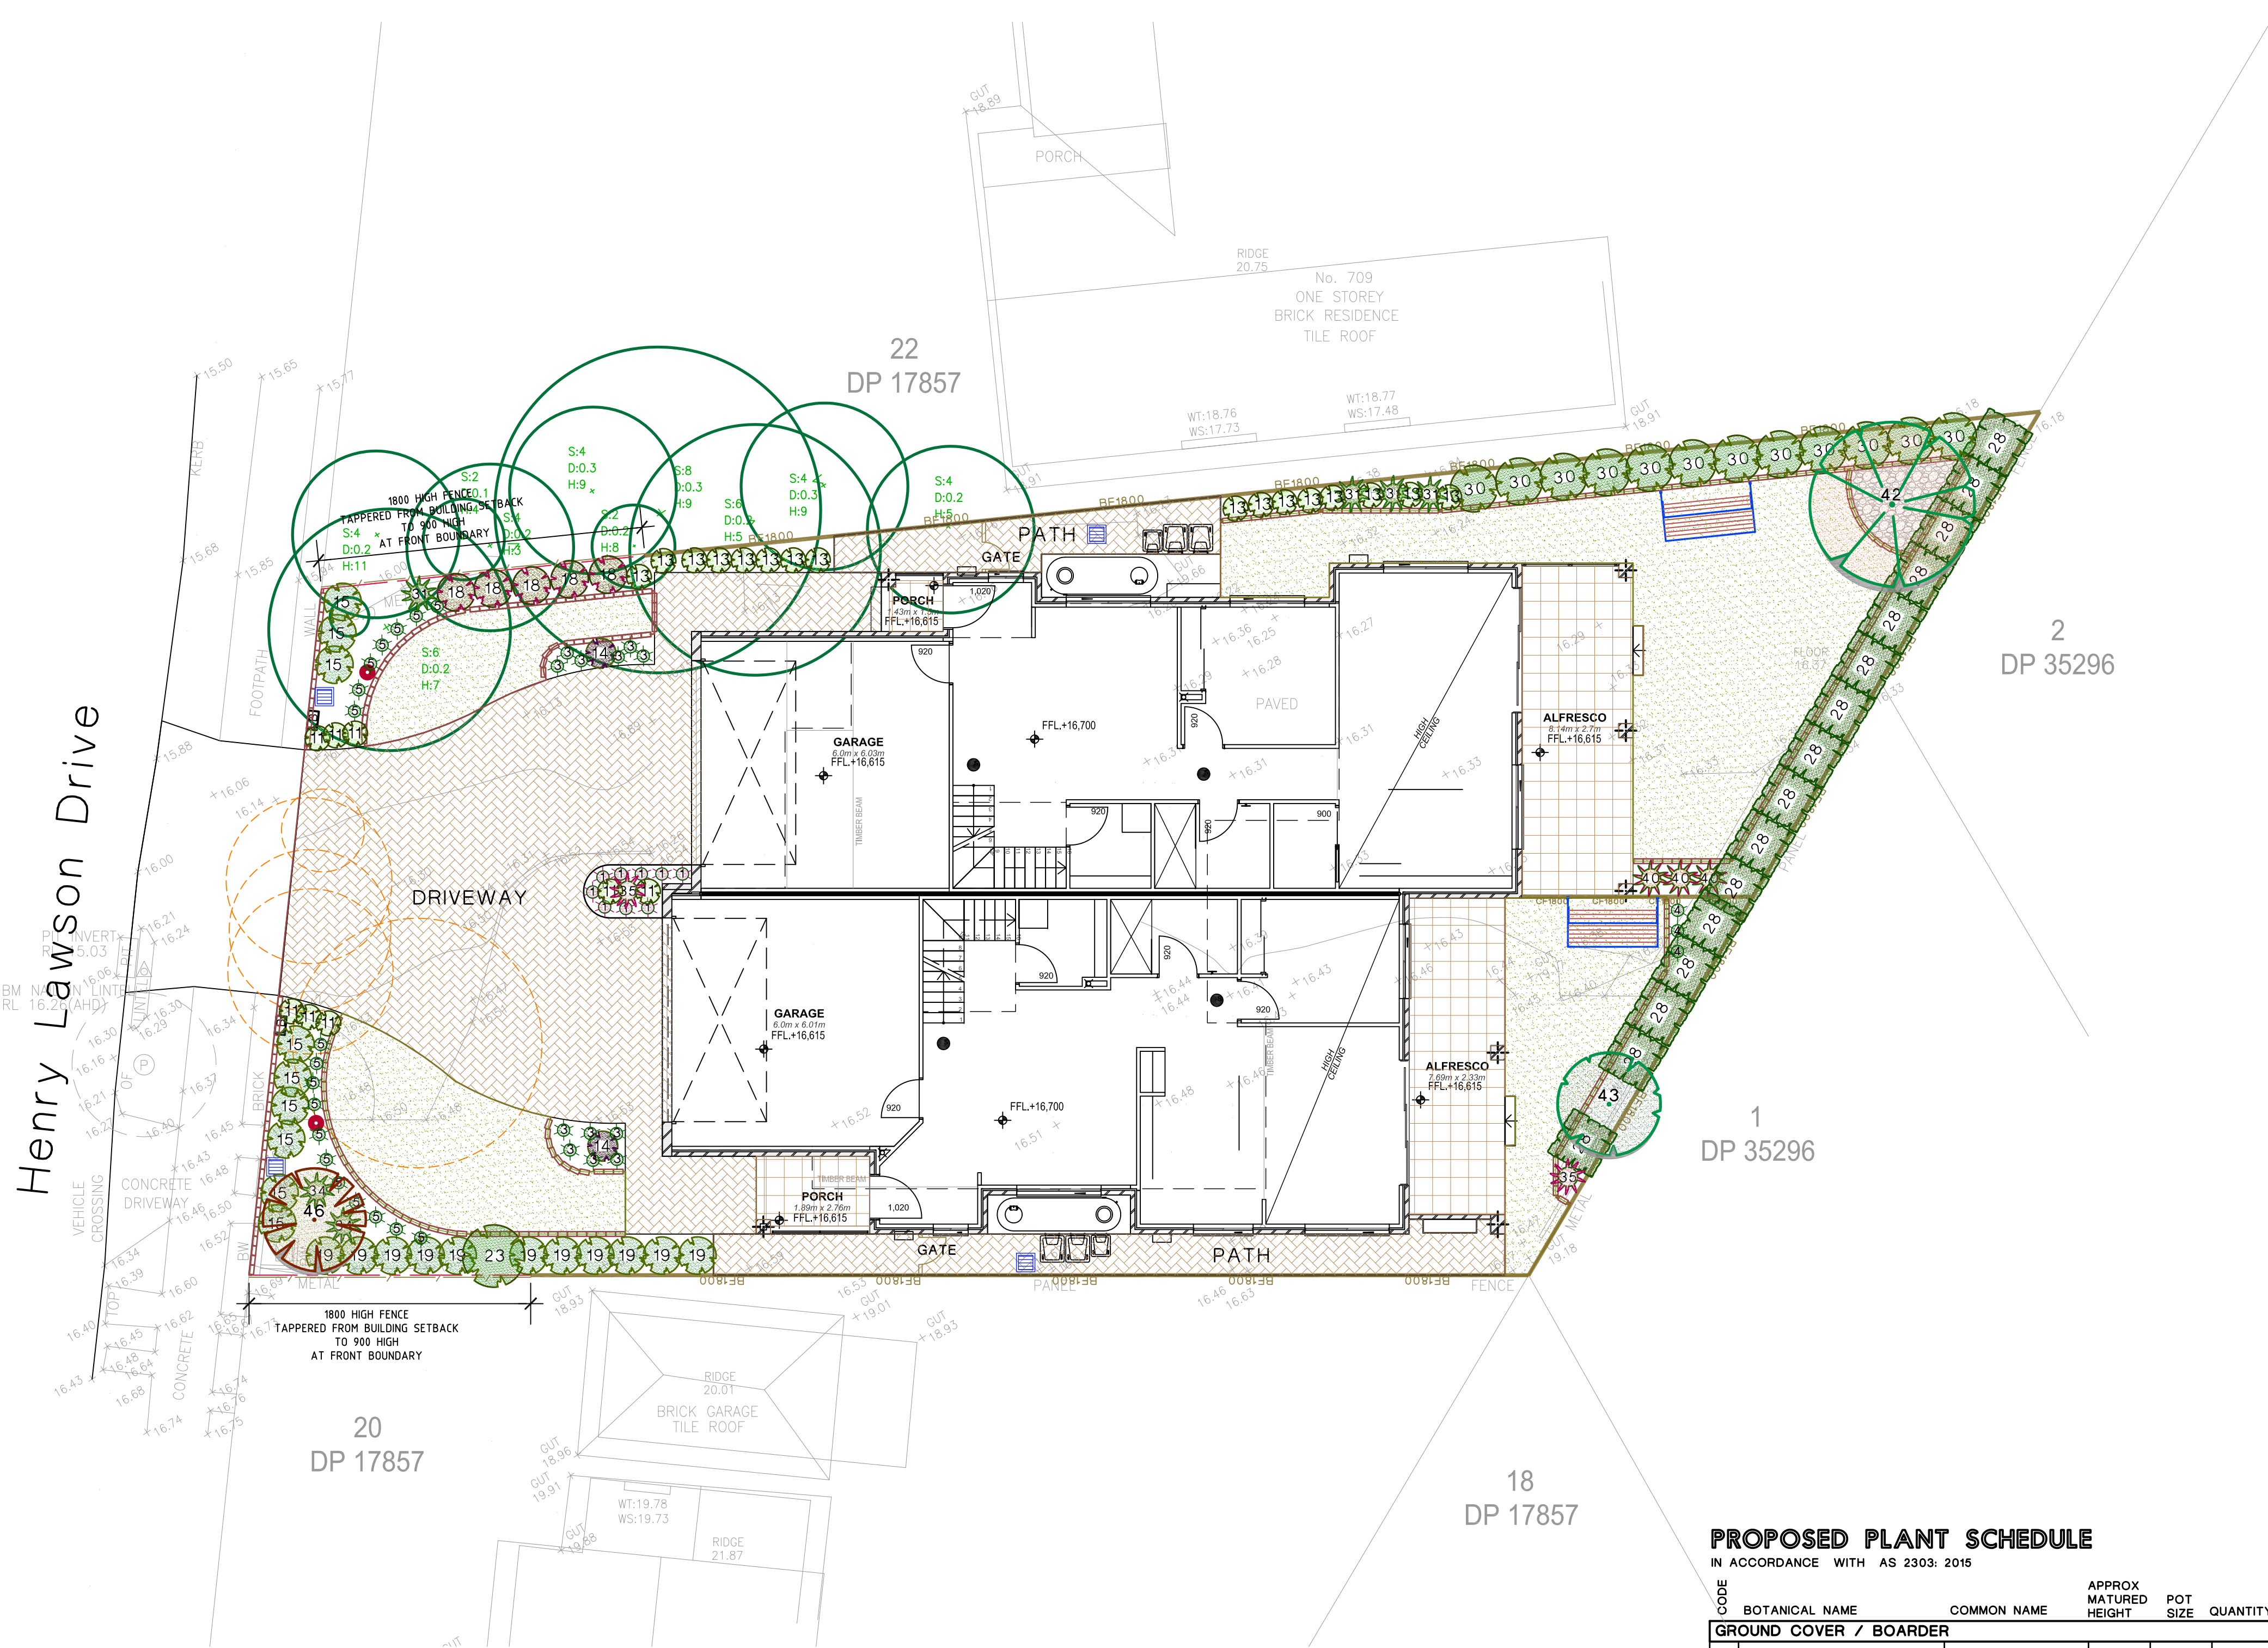

## PROPOSED PLANT SCHEDULE

IN ACCORDANCE WITH AS 2303: 2015

CODE	BOTANICAL NAME	COMMON NAME	APPROX MATURED HEIGHT	POT SIZE	QUANTITY
GROUND COVER / BORDER					
1	Alternanthera 'Little Ruby'	Little Ruby	0.2	150mm	9
3	Viola hederacea	Native Violet	hanging	150mm	12
4	Liriope muscari 'Just Right'	Just Right Liriope	0.5	150mm	3
5	Dianella tasmanica 'Destiny'	Destiny Flax Lily	0.4	150mm	18
LOW SHRUBS					
11	Westringia Ozbreed Aussie Box	Aussie Box Westringia	0.5	200mm	8
13	Philodendron Xanadu	Xanadu	0.7	200mm	16
14	Syzygium 'Standard'	Lilly pilly Standard	1.2	200mm	2
15	Callistemon Great Balls of Fire	Great Balls of Fire	2	200mm	9
18	Dodonaea viscosa 'Purpurea'	Purple-leaved Hop bush	2	200mm	5
19	Acmena 'Allyn's Magic'	Lilly pilly	1.5	200mm	11
TALL SHRUBS					
23	Backhousia myrtifolia	Grey Myrtle	3	200mm	1
28	Pittosporum tenuifolium 'Silver Sheen'	Pittosporum Silver Sheen	3	200mm	16
30	Syzygium 'Cascade'	Cascade Lilly Pilly	2.5	200mm	12
FEATURE SHRUBS					
31	Cordyline stricta	Slender palm lily	3	200mm	4
34	Phormium tenax purpurea	Dianella	1.2	200mm	2
35	Cordyline 'Red Sensation'	Red Sensation	1.2	25 L	2
40	Alpinia zerumbet variegata	Variegated Shell Ginger	1.5	200mm	3
TREES					
42	Pyrus calleryana	Calleryana pear	13	25 L	1
43	Elaeocarpus reticulatus	Blueberry Ash	8	45 L	1
46	Lagerstroemia indica 'Indian Summer'	Crape Myrtle	5	45 L	1

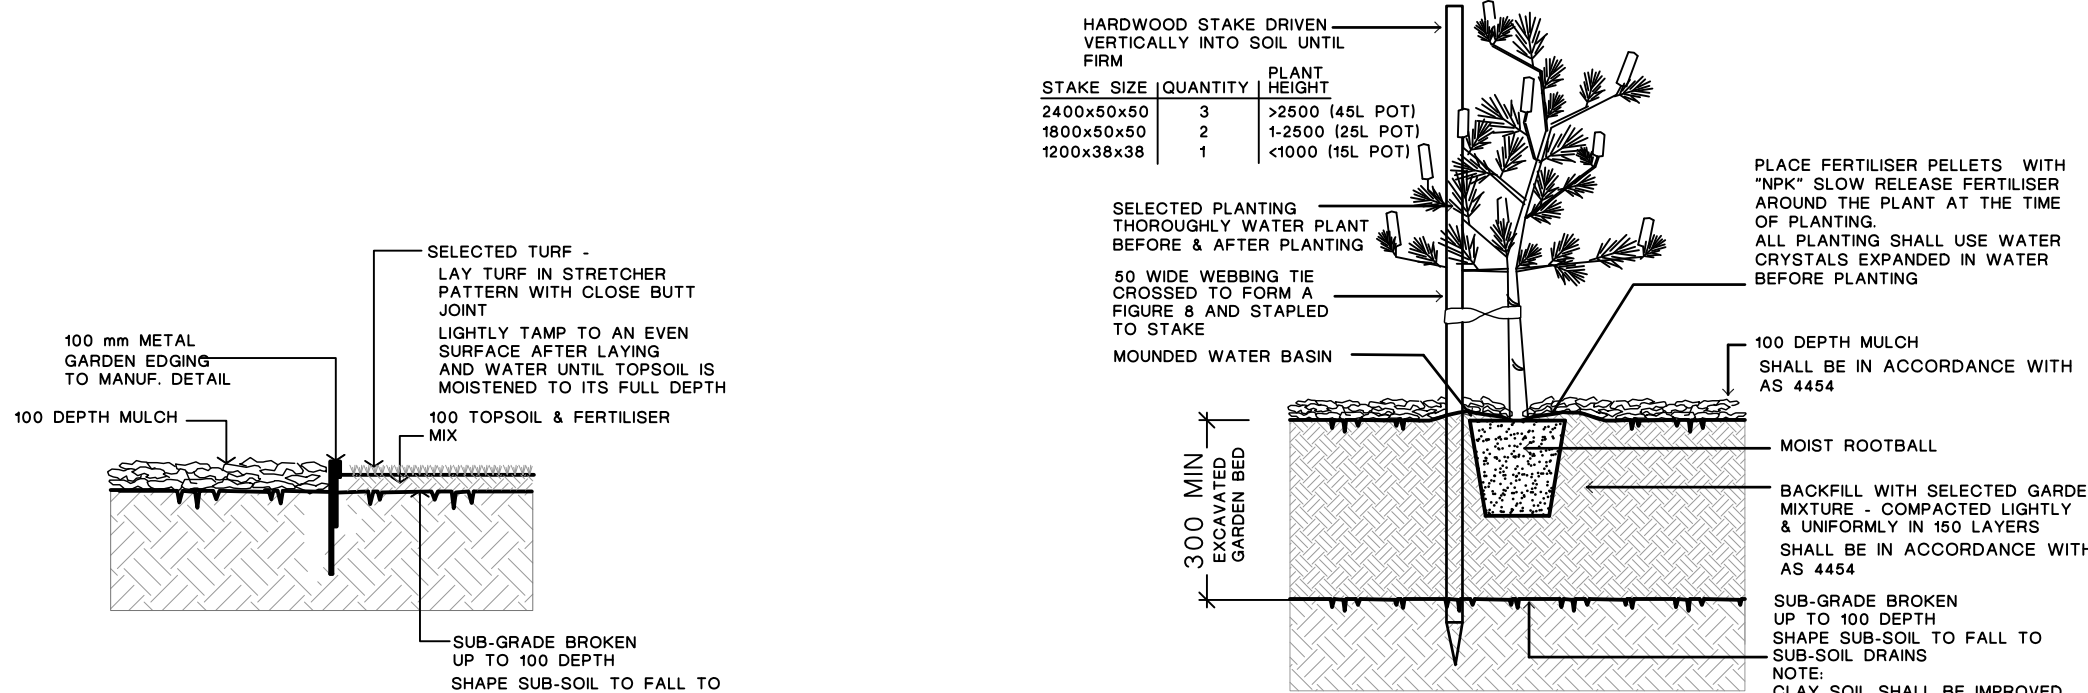

## 1. TURF &amp; METAL GARDEN EDGE DETAIL

NOTE:  
ALIGNMENT OF METAL EDGE SHALL BE EVEN & FREE FROM DIPS AND HUMPS.  
ALL TURFED AREAS SHALL BE FINISHED LEVEL WITH ADJOINING SURFACES AND ALSO FALL EVENLY TO APPROVED POINTS OF DRAINAGE DISCHARGE

## 2. TREE &amp; SHRUB PLANTING IN GARDEN BED

NOTE:  
DO NOT PLANT IN UNSUITABLE WEATHER CONDITIONS SUCH AS EXTREME HEAT, COLD, WIND OR RAIN. CLAY SOIL IS TO BE TREATED WITH CLAY BREAKER AND ORGANIC COMPOST.  
ALL SOIL TYPE AS PER AUST. NATIVE LANDSCAPE SUPPLY OR EQUIVALENT AND SHALL BE IN ACCORDANCE WITH AS 4419


REV	DESCRIPTION	REVISION DATE
A	DA ISSUE	23.2.22

## NOTE:

- In the event of any inconsistency between the architectural plans and stormwater plans, The architectural plan shall prevail to the extent of the inconsistency
- All landscape works shall be carried out by members of the LANDSCAPE CONTRACTORS ASSOCIATION of AUSTRALIA.
- Contractors must verify all dimensions at the site before commencing any work or making any shop drawings which must be approved before manufacturing.
- Do not scale drawing, if in doubt - ASK
- This drawing is to be read in conjunction with Architectural, Hydraulic and survey plans
- All Existing trees to remain shall be protected as per arborist report & council requirements
- All pruning shall be in accordance with the AS 4373
- Thoroughly eradicate weeds from all garden areas.
- No variation to the works to be carried out without prior approval from owner.
- All materials to be the best of their respective kinds and shall comply with approved sample type submitted or specified.
- Substitution of plant species or varieties will not be permitted.
- Unless otherwise specified or directed, all instructions are to be issued by the consulting landscape designer.
- All storm water outlets & surface run off shall be to Hydraulic Engineers detail.
- Provide sub-soil drainage to garden beds & lawn areas where required - To be confirmed on site.
- Refer to survey plan for position of all existing services.
- Refer to Architectural elevations & Sections for existing and proposed ground lines.
- All landscape works shall comply with all councils DA & CC conditions and all relevant "AUSTRALIAN STANDARDS" and AUS SPEC NO.1 Specification C273-Landscaping.
- Irrigation system - If required, shall be designed & installed to comply with AS 2698, AS 2698.1-1994, AS 2698.2-1995, AS 2698.3-1990, water board and other relevant authority regulations.

## MAINTENANCE

- All landscape works are to be maintained for a period of 12 months (or as required by council DA Consent) by landscape contractor after final completion AND shall be maintained at all times in a suitable manner. Replace all plants which have failed with the same species. Mulch is to be maintained at specified depth. All plants and turf shall be watered on a regular basis to maintain moisture levels required for optimum growth. All garden areas are to be maintained free from weeds.



## PROPOSED DUPLEX

711 Henry Lawson Drive,  
East Hills

ARCHITECT:



DRAWING TITLE

LANDSCAPE CONCEPT  
PLAN

DRAWN	FF	SCALE	1:100@A1 OR 1:200@A3	REV.	
DRAWING NUMBER	22029 DA 1				A
MEMBER	Fiona Fong Associate Member Australian Institute Landscape Designers & Managers Ltd of Membership No. 193				