

BUSHFIRE ASSESSMENT REPORT (BAR)

RURAL SUBDVISION (5 LOTS INTO 2 LOTS) (PBP, 2019, PART 5 – RESIDENTIAL AND RURAL RESIDENTIAL SUBDIVISIONS)

708 - 710 Allyn River Road, Allynbrook NSW, 2311 (LOT 78, 86, 87, 88 DP752469 & LOT 130 DP752443)



Table 1 – Document Version and Disclaimer

No:	Reference:	Author :	Reviewer:
Version 1	22/10/4_BAR_ 708-710 Allyn River Road_V1	T.T	МВ

Disclaimer:

This document may only be used for the purpose for which it was commissioned and in accordance with the contract between Perception Planning and the client. The scope of services has been defined in consultation with the client with consideration to time, budgetary constraints and the availability of reports and other data relating to the site. Changes to information, legislation and schedule are made on an ongoing basis in consultation with the client. Stakeholders should therefore obtain up-to-date information.

Perception Planning accepts no liability or responsibility whatsover for, or in respect of, any use of or reliance upon this report and its supporting material by any third party. Information provided is not identified to be suitable for legal advice in relation to any matter. Unauthorised use of this report in any form is prohibited.

Any recommendation or advice expressed in this report is made in good faith. It should be borne in mind that the measures recommended in this report cannot guarantee that a building will survive a bushfire event on every occasion. This is due to the degree of vegetation management, the unpredictable behaviour of bushfires and extreme weather conditions. As such, the author is not liable to any person for any damage or loss whatsoever which has occurred or may occur in relation to the person acting or not acting based on the recommendations of this report. It should not be considered safe to inhabit the development at times of bushfire risk. It is strongly recommended that you are away from the area at times of advised risk.

This bush fire assessment report shall remain valid for 12 months from the date of issue.

Notwithstanding the precautions adopted, it should always be remembered that bushfires burn under a wide range of conditions and an element of risk, no matter how small, always remains and although the standard is designed to improve the performance of such buildings, there can be no guarantee because of the variable nature of bushfires that anyone building will withstand bushfire attack on every occasion. This report provides the above required information to assist Council and the RFS in determining compliance in accordance with the PBP and AS 3959-2018. Council is the final consenting authority and the future construction works must comply with the recommendations included in the Council's Notice of Determination for the development.

EXECUTIVE SUMMARY

Perception Planning Pty Ltd has been engaged by Shaune Speed (the client) to prepare a Bushfire Assessment Report (this Report) for a Rural Subdivision, 5 Lots into 2 Lots (the development) at 708 - 710 Allyn River Road, Allynbrook NSW 2311 (Lot 78, 86, 87, 88 DP752469 & Lot 130 DP752443) (the site).

The development is defined as 'rural residential subdivision' under Rural Fire Service, 2019, 'Planning for Bushfire Protection' (PBP) and defined as 'integrated development' under the Environmental Planning & Assessment Act 1979 (s4.46). It therefore will be referred to the NSW RFS for the issue of a Bush Fire Safety Authority (BFSA) under the Rural Fires Act 1997 (s100b).

The site is an existing property, which is 80km or a 85-minute drive to the North of the centre of Newcastle and is located within the Dungog Local Government Area (LGA). The site is identified as Bushfire Prone Land (BPL), being Vegetation Category 1 and Vegetation Category 2 and Buffer under the Environmental Planning & Assessment Act 1979 (s10.3) (EPA&A).

A Dial Before You Dig (DBYD) request identified that mains electricity and water is located in the road reserve. A Deposited Plan (DP) was also obtained from 'NSW Land Registry Services', which identified a restriction in relation to an Easement to drain water 6m wide along the Eastern boundary of the lot.

This BAR identifies that the predominant bushfire hazard is located to the East of the site. The Building Envelopes (BE) within Lot 1 and Lot 2 is able to achieve BAL-29 Refer to (Figure 3) for APZ Map. The siting of future dwellings within the BE's is not currently known, and conditions may change in the future. Accordingly, each future dwelling house will be subject to a separate BAR to determine the exact BAL. The BAR provides a series of recommendations in relation to the specific Bushfire Protection Measures (BPM)s based on the assessment of this infill development, Refer to Tables 2 – 10.

TABLE OF CONTENTS

EXEC		3		
1.0	INTRODUCTION	5		
1.1	SITE PARTICULARS	5		
1.2	Current Land Use	5		
1.2	SCOPE	5		
1.3	PROPOSAL	5		
2.0	ASSESSMENT10	C		
2.1	VEGETATION ASSESSMENT10	C		
2.2	SLOPE ASSESSMENT10	C		
2.3	DETERMINATION OF FIRE DANGER INDEX (FDI)10	C		
2.4	DETERMINATION OF BUSHFIRE ATTACK LEVEL (BAL)10	C		
3.0	BUSHFIRE PROTECTION MEASURES AND RECOMMENDATIONS	2		
3.1	ASSET PROTECTION ZONES	2		
3.2	ACCESS	3		
3.3	SERVICES – WATER, ELECTRICTY AND GAS1	6		
4.0	CONCLUSION	8		
REFE	RENCE LIST	Э		
ΑΤΤΑ	CHMENT 1 – AHMIS RESULTS	C		
ΑΤΤΑ	CHMENT 2 – SUBDIVISION PLANS	1		
ΑΤΤΑ	ATTACHMENT 3: CONSTRUCTION REQUIREMENTS TABLE			
ΑΤΤΑ	ATTACHMENT 4: APPENDIX 4 – ASSET PROTECTION ZONES			

1.0 INTRODUCTION

1.1 SITE PARTICULARS

Address:	708 - 710 Allyn River Road, NSW 2311
Legal Description:	(Lot 78, 86, 87, 88 DP752469 & Lot 130 DP752443)
Total Area:	116Ha (Approximate)
Local Government Area:	Dungog
Fire Danger Index:	100 - Greater Hunter
Boundaries: Land Zoned:	RU1 – Primary Production surrounding the site.

1.2 Current Land Use

Vacant Land. Dungog is characterised by rural residential development. The site has access off Allan River Road via an unsealed public road. Refer to (Figure 1) for Site Locality, (Figure 2) for Subdivision and Building Envelope Map and (Figure 3) APZ Map for Building Envelopes.

1.2 SCOPE


The scope of this BAR is to identify the bush fire hazard and provide measures to assist Council and the RFS that the identified fire hazard would be reduced to a level that is considered necessary to provide adequate protection to life and property.


This BAR provides the required information to assist Council and the RFS in determining compliance in accordance with the PBP-2019 and AS3959-2018. Council is the final consenting authority and the future construction works must comply with the conditions listed in the Notice of Determination issued by Council.


The site is mapped as containing Biodiversity Values under the Biodiversity Conservation Act 2016. This will not impact property access or APZs. Refer to (Figure 4). A basic search of the AHIMS database identified zero sites and/or places (ATTACHMENT 1). The site is identified as BPL, being Vegetation Category 1, Vegetation Category 2 and Buffer.


1.3 PROPOSAL

The proposal is for a 'residential and rural subdivisions' Under the Environmental Planning and Assessment Act 1979, 'subdivision' is defined as 'the division of land into two or more parts that, after the division, would be adopted for separate occupation, use or disposition', which includes boundary adjustments (PBP, 2019, p.40). The development involves the subdivision of 5 existing lots into two lots (Lot 1 and Lot 2), refer to (ATTACHMENT 2) for architectural plans; an illustration of site location is provided as (FIGURE 1).

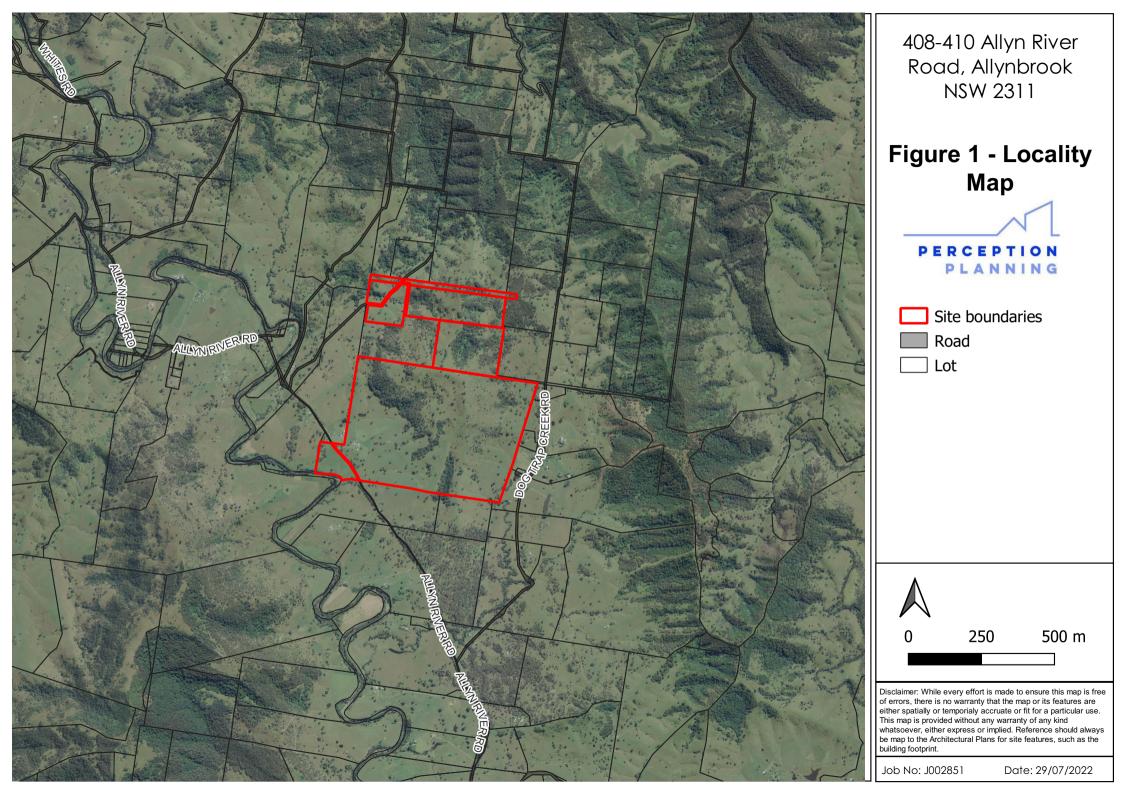

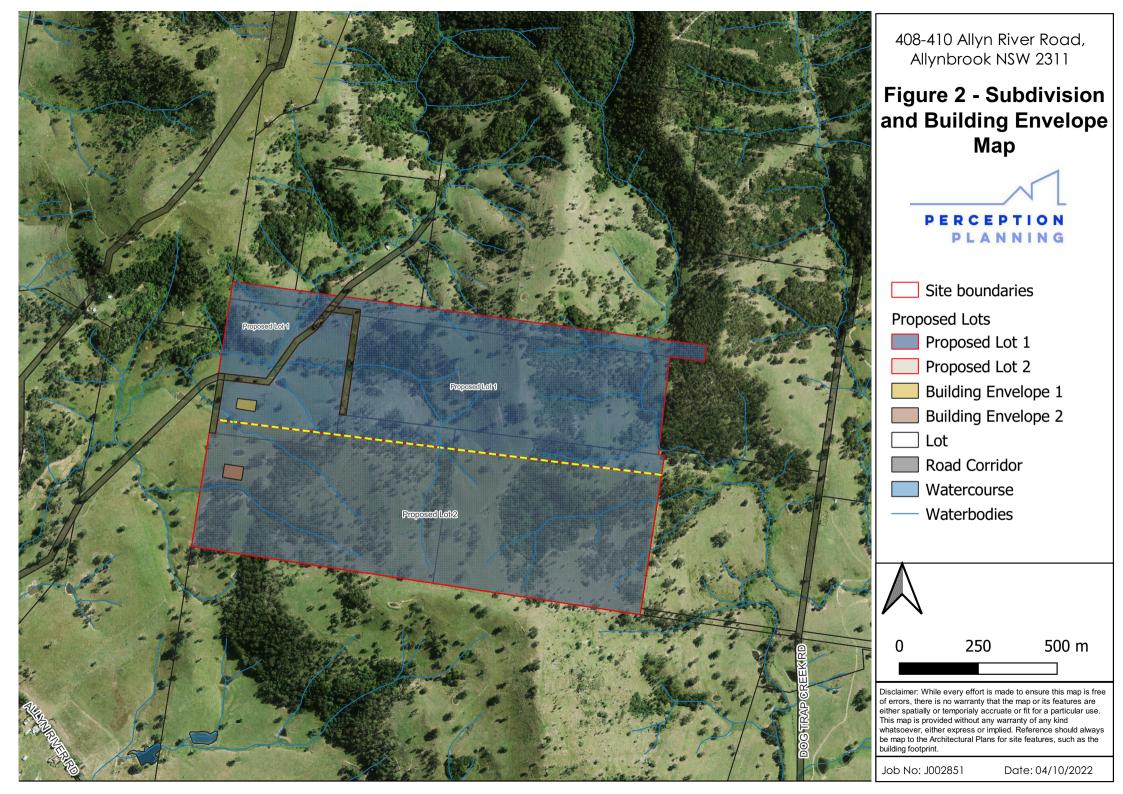

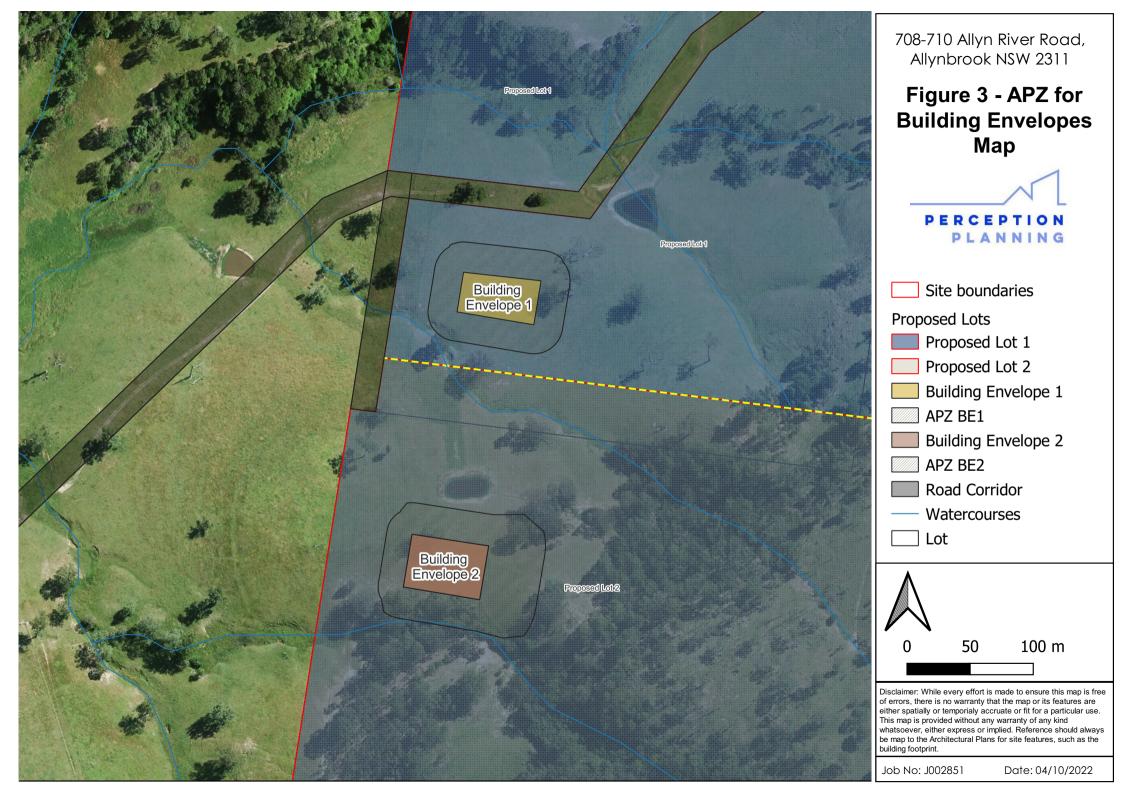

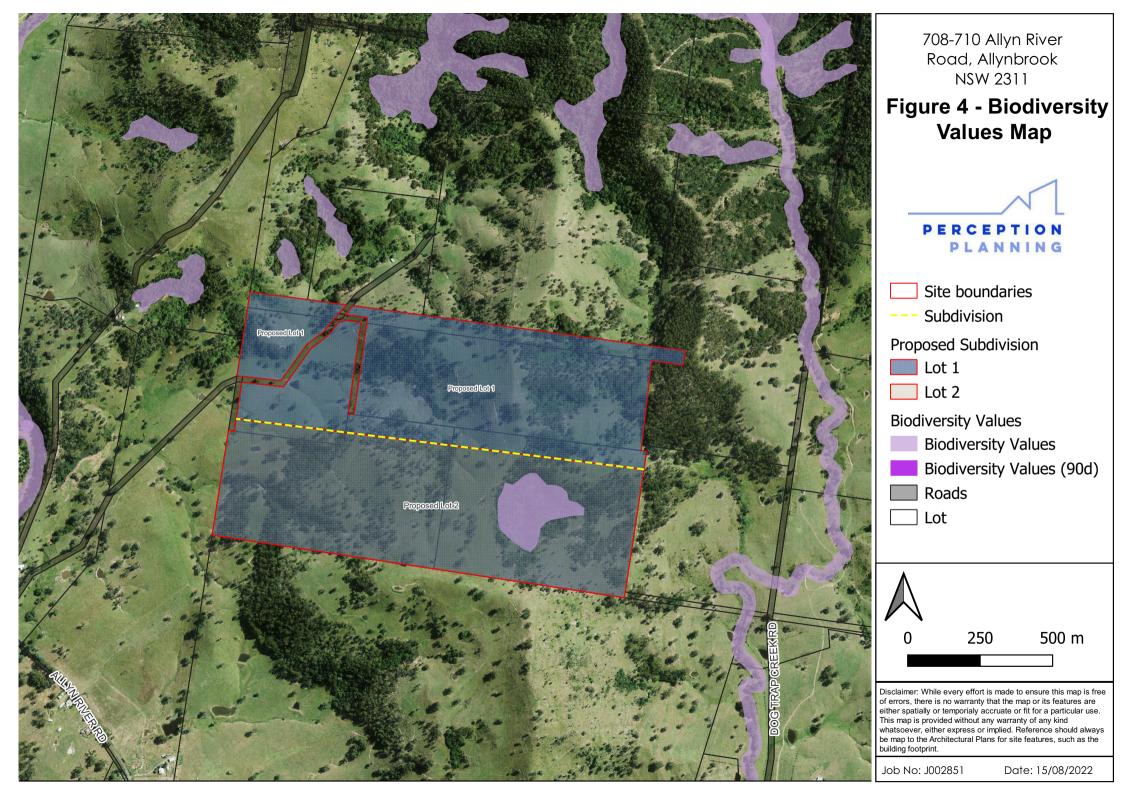

2.0 ASSESSMENT

2.1 VEGETATION ASSESSMENT

The vegetation was determined by the following methods:

- 1. NearMap to identify vegetation cover;
- 2. Site Survey completed by Pace Land Surveying
- 3. Sharing and Enabling Environmental Data (SEED) Portal to identify Vegetation Classification, Biodiversity Value and Bushfire Prone Land Map;
- 4. Vegetation formation using Keith, 2004, 'Ocean Shores to Desert Dunes'.

The predominant vegetation formation within 140m in all directions around the subdivided Lots is identified as Hunter-Macleay Dry Sclerophyll Forest (DSF) with a Surface & Elevated Fuel Load of 14t/ha and a Total Fuel Load of 24.6t/ha in accordance with the RFS, March 2019, 'Comprehensive Fuel Loads',

The removal of native flora or fauna will not be required for the subdivision however may be required for potential future dwellings, including the establishment of APZs.

2.2 SLOPE ASSESSMENT

The effective slope was determined by the following methods:

- Elevation, Depth and Slope Spatial Map Viewer to identify 2m Contours;
- Site Survey completed by Pace Land Surveying

The effective slope of the land within 140m to the Eastern elevation is Upslope for Lot 1 and Downslope (10-15°) for Lot 2. The effective slope and vegetation is indicated in the below tables for Lot 1 and Lot 2.

2.3 DETERMINATION OF FIRE DANGER INDEX (FDI)

The FDI was determined by identifying the FDI rating within PBP (Part A1.6) (p.84). The FDI is 100 - Greater Hunter.

2.4 DETERMINATION OF BUSHFIRE ATTACK LEVEL (BAL)

The assessment of vegetation and slope has been used to calculate the following BALs for Building Envelope 1and Building Envelope 2 – See Table 4 and Table 5, respectively.

Direction	Vegetation	Slope (°)	APZ to be managed as an IPA	BAL according to PBP 2019
Transect 1 (N)	Woodland	Downslope (10-15°)	>25m	BAL-29
Transect 2 (E)	Forest	Upslope	>24m	BAL-29
Transect 3 (S)	Rainforest	Downslope (10-15°)	>23m	BAL-29
Transect 4 (W)	Forest	Upslope	>24m	BAL-29

Table 4 – BAL for Building Envelope 1

Table 5 – BAL r Building Envelope 2

Direction	Vegetation	Slope (°)	APZ to be managed as an IPA	BAL according to PBP 2019
Transect 1 (N)	Woodland	Downslope (10-15°)	>25m	BAL-29
Transect 2 (E)	Forest	Downslope (10-15°)	>45m	BAL-29
Transect 3 (S)	Woodland	Downslope (10-15°)	>25m	BAL-29
Transect 4 (W)	Woodland	Downslope (5- 10°)	>20m	BAL-29

To Note: The siting of future dwellings is not currently known within the Building Envelopes, and conditions may change in the future. Accordingly, each future dwelling house will be subject to a separate BAR to determine the exact BAL.

The removal of native flora or fauna will not be required to achieve the proposed subdivision however, may be required for future development including the establishment of APZs. Any future development can be constructed to BAL-29 with the abovementioned APZs for Building Envelope 1 and Building Envelope 2 in accordance with the National Construction Code (NCC) except for the construction requirements of the RFS, 2019, 'Planning for Bushfire Protection' (Clause 7.5.2 – NSW State Variations).

3.0 BUSHFIRE PROTECTION MEASURES AND RECOMMENDATIONS

3.1 ASSET PROTECTION ZONES

The RFS, 2019, PBP states that the intent of these Bushfire Protection Measures is 'to minimise the risk of bush fire attack and provide protection for emergency services personnel, residents and others assisting firefighting activities'.

Performance Criteria	Acceptable Solution	Response
Potential building footprints must not be exposed to radiant heat levels exceeding 29kW/m2 on each proposed lot.	APZs are provided in accordance with tables A1.12.2 and A1.12.3 based on FFDI.	Complies with Acceptable Solution - This BAR identifies that the APZs have been calculated in accordance with tables A1.12.2 to demonstrate that the lot configuration and any future dwellings within the Lots may be capable of achieving BAL-29 or less.
APZs are managed and maintained to prevent the spread of a fire to the building.	APZs are managed in accordance with the requirements of Appendix 4 of PBP.	Complies with Acceptable Solution - APZs are managed in accordance with the requirements of Appendix 4 of PBP, refer to (Attachment 4).
 The APZ is provided in perpetuity. APZ maintenance is practical, soil stability is not compromised and the potential for crown fires is minimised. APZ maintenance is practical, soil stability is not compromised and the potential for crown fires is minimised. APZ maintenance of the development site. 		Complies with Acceptable Solution - The APZs are entirely within the boundaries of the site. APZs are located on lands with a slope less than 18 degrees.
Landscaping is designed and managed to minimise flame contact and radiant heat to buildings, and the potential for wind- driven embers to cause ignitions.	 Landscaping is in accordance with Appendix 4; and Fencing is constructed in accordance with section 7.6 	Complies with Acceptable Solution - Landscaping and fencing are to be in accordance with Appendix 4 and Section 7.6, respectively. The BALs achievable were assessed as BAL-29 and therefore the fencing and gates are to be hard-wood or non- combustible material in accordance with PBP (7.6 – Fences and gates).

Table 7 - Compliance with PBP for Asset Protection Zones

3.2 ACCESS

Performance Criteria	Acceptable Solutions	Response
Firefighting vehicles are provided with safe, all-weather access to structures.	 Property access roads are two-wheel, all weather roads. Perimeter roads are provided for residential subdivisions of 3 or more allotments. Subdivisions of three or more allotments have more than one access in and out of the development. Traffic management devices are constructed to not prohibit access by emergency services vehicles. Maximum grades for sealed roads do not exceed 15 degrees and an average grade of not more than 10 degrees or other gradient specified by road design standards, whichever is the lesser gradient. All roads are through roads. Dead end roads are not recommended, but if unavoidable, are not more than 200 metres in length, incorporate a minimum 12 metres outer radius turning circle, and are clearly sign posted as a dead end. Where kerb and guttering are provided on perimeter roads, roll top kerbing should be used to the hazard side of the road. Where access/egress can only be achieved through forest, woodland and heath vegetation, secondary access roads are no less than 3.5 metres wide and have designated parking bays with hydrants located outside of these areas to ensure accessibility to reticulated water for fire suppression. 	Complies with Acceptable Solution – The property access road is to be 250mm gravel well graded with a maximum 75mm aggregate minimum California Beading Ratio (CBR) > 15% compared to 100% Standard to ensure two-wheel drive, all weather access. Perimeter roads are not required because the subdivision is for less than 3 allotments.
The capacity of access roads is adequate for firefighting vehicles.	The capacity of road surfaces and any bridges/causeways is sufficient to carry fully loaded firefighting vehicles (up to 23 tonnes), bridges and causeways are to clearly indicate load rating.	Complies with Acceptable Solution – Road surfaces and causeways is sufficient to carry fully loaded firefighting vehicles (up to 23 tonnes).

Table 8 – Compliance with PBP for Access

There is appropriate access to water supply. Hydrants are located outside of parking reserves and road carriageways to ensure accessibility to reticulated water for fire suppression. Complies with Acceptable Solution - Hydrants are provided in accordance with the relevant clauses of AS2419.1:2005. There is suitable access for a Category 1 fire appliance to within 4m of the static water supply where no reticulated supply is available. There is suitable access for a Category 1 fire appliance to within 4m of the static water supply where no reticulated supply is available. PERIMTER ROADS Are two-way sealed roads. Not Applicable - Access roads are designed to allow safe acreases and egress for firefighting vehicles while residents are located clear of parking areas. Are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Not Applicable - Pursument for emergency service or accessfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided outside of the carriageway width. Not Applicable - NON-PERIMETER ROADS Minimum 5.5m carriageway width kerb to kerb. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided outside of the carriageway width. Not Applicable - No non-perimeter roads are evacuating. Minimum 5.5m carriageway width kerb to kerb. Parking is provided outside of the carriageway width. Not Applicable - No cares of are designed to allow safe acress an	Performance Criteria	Acceptable Solutions	Response
Instants are provided in reducting the second structure of the	access to water	reserves and road carriageways to ensure accessibility to reticulated water for fire	Acceptable
PERIMTER ROADSAre two-way sealed roads. supply where no reticulated supply is available.Not Applicable – No perimeter roads are proposed.Access roads are designed to allow safe access and egress for frefighting wehicles while residents are evacuating a suell as providing a safe operational emergency service personnel during firefighting and emergency management on the interface.Are two-way sealed roads. Minimum 8 m carriageway width kerb to kerb. Parking is provided outside of the carriageway width. Hydrants are located clear of parking areas. Are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The maximum grade road is 15 degrees and average grade of not more than 10 degrees. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable – No non-perimeter roads are proposed.Non-PERIMETER ROADSMinimum 5.5m carriageway width kerb to kerb. Parking is provided outside of the carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have			access for a
Access roads are designed to allow safe access and egress for firefighting vehicles while residents are evacuating as well as providing a safe environment for emergency service personnel during firefighting and emergency management on the interface.Are two-way sealed roads. Minimum 8 m carriageway width. Kerb to kers at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided outside of the carriageway width.Not Applicable – No perimeter roads are proposed.NOLNotage and the seare linked to the interface.Notage and carriageway width.Notage and are proposed.Notage and the seare linked to the interface.Are through roads, and these are linked to the interface access and egrees for preventanging obstructions, including tree branches, is provided.Not Applicable – No non-perimeter roads are provided outside of the carriageway width.Access roads are designed to allow safe access and egrees for inferighting vehicles while residents are evacuating.Minimum 5.5m carriageway width kerb to kerb.Not Applicable – No non-perimeter roads are proposed.Access roads are designed to allow safe access and egrees for interfacting vehicles while residents are evacuating.Minimum 5.5m carriageway width kerb to kerb.Not Applicable – No non-perimeter roads are proposed.Access roads are degrees and access and egrees for interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall		appliance to within 4m of the static water supply where no reticulated supply is	appliance to within 4m of the static water supply where no reticulated
Access roads are designed to allow safe access and egress for firefighting vehicles while residents are evacuating as well as providing a safe operational emrgency service personnel during firefighting and emergency management on the 	PERIMTER ROADS		
access and egress for firefighting vehicles while residents are evacuating as well as providing a safe operational environment for emergency service personnel during firefighting and emergency management on the interface.No perimeter roads are proposed.No perimeter roads are proposed.NON-PERIMETER ROADSCurves of roads have a minimum inner status overhanging obstructions, including tree branches, is provided outside of the carriageway width.No perimeter roads are proposed.NON-PERIMETER ROADSAccess roads are designed to allow safe avcauating.Minimum 5.5m carriageway width kerb to kerb.Not Applicable – No non-perimeter roads, and these are linked to the interval of no greater than 500m.Access roads are designed to allow safe avcauating.Minimum 5.5m carriageway width kerb to kerb.Not Applicable – No non-perimeter roads, and these are linked to the internal road system at an interval of no greater than 500m.Curves of roads have a minimum inner radius of firefighting vehicles while residents are evacuating.Minimum 5.5m carriageway width kerb to kerb.Not Applicable – No non-perimeter roads are proposed.No curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable – No non-perimeter <b< td=""><td>Access roads are</td><td>Are two-way sealed roads.</td><td>Not Applicable –</td></b<>	Access roads are	Are two-way sealed roads.	Not Applicable –
evacuating as well as providing a safe operational environment for emergency service personnel during firefighting and emergency management on the interface.Hydrants are located clear of parking areas. Are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The maximum grade road is 15 degrees and average grade of not more than 10 degrees. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided outside of the carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m.Not Applicable – No non-perimeter roads are proposed.Access roads are designed to allow safe access roads are evacuating.Minimum 5.5m carriageway width kerb to kerb. Parking is provided outside of the carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable – No anon-perimeter roads are proposed.	access and egress for firefighting vehicles	Parking is provided outside of the	
operational environment for emergency service personnel during firefighting and emergency management on the interface.internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The maximum grade road is 15 degrees and average grade of not more than 10 degrees. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable – Non-PERIMETER ROADSAccess roads are designed to allow safe access and egress for firefighting vehicles while residents are evacuating.Minimum 5.5m carriageway width kerb to kerb. Parking is provided outside of the carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable – No non-perimeter roads are proposed.		Hydrants are located clear of parking areas.	
personnel during firefighting and emergency management on the interface.Construction interer a minimum miner radius of 6m.The maximum grade road is 15 degrees and average grade of not more than 10 degrees. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable – No non-perimeter roads are proposed.Access roads are designed to allow safe access and egress for firefighting vehicles while residents are evacuating.Minimum 5.5m carriageway width kerb to kerb. Parking is provided outside of the carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m.Not Applicable – No non-perimeter roads are proposed.The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable – No non-perimeter roads are proposed.	operational environment for	internal road system at an interval of no	
emergency management on the interface.The maximum grade road is 15 degrees and average grade of not more than 10 degrees. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable - Not Applicable - No non-perimeter roads are parking is provided outside of the carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable - No non-perimeter roads are proposed.	personnel during		
interface.The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable –NON-PERIMETER ROADSMinimum 5.5m carriageway width kerb to kerb.Not Applicable –Access roads are designed to allow safe access and egress for firefighting vehicles while residents are evacuating.Minimum 5.5m carriageway width kerb to kerb.Not Applicable – No non-perimeter roads are proposed.Access roads are designed to allow safe access and egress for firefighting vehicles while residents are evacuating.Minimum 5.5m carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.	emergency		
overhanging obstructions, including tree branches, is provided.Not Applicable -NON-PERIMETER ROADSMinimum 5.5m carriageway width kerb to kerb.Not Applicable -Access roads are designed to allow safe access and egress for firefighting vehicles while residents are evacuating.Minimum 5.5m carriageway width kerb to kerb.Not Applicable -Parking is provided outside of the carriageway width.Parking is provided outside of the carriageway width.No non-perimeter roads are proposed.Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m.No non-perimeter roads are proposed.Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees.A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Hot any overhanging obstructions, including tree branches, is provided.		-	
Access roads are designed to allow safe access and egress for firefighting vehicles while residents are evacuating.Minimum 5.5m carriageway width kerb to kerb.Not Applicable – No non-perimeter roads are proposed.Parking is provided outside of the carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.Not Applicable – No non-perimeter roads are proposed.		overhanging obstructions, including tree	
 designed to allow safe access and egress for firefighting vehicles while residents are evacuating. Parking is provided outside of the carriageway width. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided. 	NON-PERIMETER ROA	ADS	
firefighting vehicles while residents are evacuating. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.		a i	
evacuating. Hydrants are located clear of parking areas. Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.	firefighting vehicles		roads are
 Roads are through roads, and these are linked to the internal road system at an interval of no greater than 500m. Curves of roads have a minimum inner radius of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided. 		Hydrants are located clear of parking areas.	proposed.
of 6m. The road crossfall does not exceed 3 degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.		linked to the internal road system at an	
degrees. A minimum vertical clearance of 4m to any overhanging obstructions, including tree branches, is provided.			
overhanging obstructions, including tree branches, is provided.			
PROPERTY ACCESS		overhanging obstructions, including tree	
	PROPERTY ACCESS		1

Performance Criteria	Acceptable Solutions	Response
Performance Criteria Firefighting vehicles can access the dwelling and exit the property safely.	There are no specific access requirements in an urban area where an unobstructed path (no greater than 70m) is provided between the most distant external part of the proposed dwelling and the nearest part of the public access road (where the road speed limit is not greater than 70 kph) that supports the operational use of emergency firefighting vehicles. In circumstances where this cannot occur, the following requirements apply: Minimum 4m carriageway width In forest, woodland and heath situations, rural property roads have passing bays every 200m that are 20m long by 2m wide, making a minimum trafficable width of 6m, at the passing bay A minimum vertical clearance of 4m to any overhanding obstructions, including tree branches. Property access must provide a suitable turning head in accordance with Appendix 3. Curves have a minimum inner radius of 6m and are minimal in number to allow for rapid access and egress. The minimum distance between inner and	Response Complies with Acceptable Solution – Minimum 4m carriageway width In forest, woodland and heath situations, rural property roads have passing bays every 200m that are 20m long by 2m wide, making a minimum trafficable width of 6m, at the passing bay A minimum vertical clearance of 4m to any overhanding obstructions, including tree branches.

3.3 SERVICES – WATER, ELECTRICTY AND GAS

Performance Solutions	Acceptable Solutions	Response
An adequate water supply is provided for firefighting purposes.	-Reticulated water is provided to the development, where available, and -A static water supply is provided where no reticulated water is available. -Static water supplies shall comply with Table 5.3d.	 Complies with Acceptable Solution– A static water supply is to be provided where no reticulated water is available for future development for each lot. Static water supplies shall comply with Table 5.3d being: Large rural/lifestyle lots (>10,000m²) are to provide 20,000L/lot
Water supplies are located at regular intervals. The water supply is accessible and reliable for firefighting purposes	Fire hydrant spacing, design and sizing comply with the relevant clauses of AS 2419.1:2005. Hydrants are not located within any road carriageway. Reticulated water supply to urban subdivisions uses a ring main system for areas with perimeter roads.	Not Applicable – No fire hydrants within road reserve.
Flows and pressure are appropriate.	Fire hydrant flows and pressures comply with the relevant clauses of AS 2419.1:2005.	Not Applicable – No fire hydrants within road reserve.
The integrity of the water supply is maintained.	All above-ground water service pipes external to the building are metal, including and up to any taps.	Complies with Acceptable Solution – All above-ground water service pipes external to the building are to be metal, including and up to any taps.

Table 9 – Compliance with PBP for Water Supplies

Performance Solutions	Acceptable Solutions	Response
location of electricity services limits the possibility of ignition of surrounding bush land or the fabric of buildings	-where practicable, electrical transmission lines are underground; where overhead, electrical transmission lines are proposed as follows: lines are installed with short pole spacing of 30m, unless crossing gullies, gorges or riparian areas; and no part of a tree is closer to a power line than the distance set out in ISSC3 Guideline for Managing Vegetation Near Power Lines.	Complies with Acceptable Solution – Electricity services are to comply with acceptable solution for future development.

Performance Solutions	Acceptable Solutions	Response
location and design of gas services will not lead to ignition of surrounding bushland or the fabric of buildings.	reticulated or bottled gas is installed and maintained in accordance with AS/NZS 1596:2014 - <i>The storage and</i> <i>handling of LP Gas</i> , the requirements of relevant authorities, and metal piping is used; all fixed gas cylinders are kept clear of all flammable materials to a distance of 10m and shielded on the hazard side; connections to and from gas cylinders are metal; polymer- sheathed flexible gas supply lines are not used; and above-ground gas	Complies with Acceptable Solution – Gas services are to comply with acceptable solution for future development.

Table 11 – Compliance with PBP for Gas Supplies

4.0CONCLUSION

Perception Planning Pty Ltd has been engaged by Shaune Speed (the client) to prepare a Bushfire Assessment Report (this Report) for a Rural Subdivision, 5 Lots into 2 Lots (the development) at 708 - 710 Allyn River Road, Allynbrook NSW 2311 (Lot 78, 86, 87, 88 DP752469 & Lot 130 DP752443) (the site).

This BAR identifies that the predominant bushfire hazard is located to the East of the site. The Building Envelopes (BE) within Lot 1 and Lot 2 is able to achieve BAL-29 Refer to (Figure 3) for APZ Map. The siting of future dwellings within the BE's is not currently known, and conditions may change in the future. Accordingly, each future dwelling house will be subject to a separate BAR to determine the exact BAL.

The BAR provides a series of recommendations in relation to the specific Bushfire Protection Measures (BPM)s based on the assessment of this infill development, Refer to Tables 2 - 10. These include:

- The BR identifies the proposed subdivision is able to achieve 29kW/m², resulting in BAL-29. However, all future dwellings within building envelopes will be subject to a separate Bushfire Assessment Report (BAR) at a future point in time and so different variables (e.g., Fire Danger Index, vegetation classification, data available on slope, etc). may be used that mean the dwelling may not be able to achieve 29kW/m². Refer to (ATTACHMENT 3) for Construction Requirements Table.
- A 20,000L static water supply tank must be provided on site; a connection for firefighting purposes is located within the IPA or non-hazard side and away from the structure; 65mm Storz outlet with a ball valve is fitted to the outlet; ball valve and pipes are adequate for water flow and are metal; supply pipes from tank to ball valve have the same bore size to ensure flow volume.
- The development is located in a bushfire prone area and therefore it is recommended that the current and future occupants prepare a Bushfire Survival Plan. A Guide to prepare this plan is available from the NSW RFS Website www.rfs.nsw.gov.au

REFERENCE LIST

Australian Standard AS3959 – Construction of Buildings in Bushfire Prone Areas (AS3959), viewed 4 October 2022, < <u>http://www.as3959.com.au/</u>>

Dial Before You Dig, 2019, 'Lodge an Inquiry', viewed 4 October 2022, < onecall.1100.com.au>

Keith, 2004, 'Ocean Shore to Desert Dunes'. Published by the Department of Environment and Conservation (NSW) July 2004. PO Box 1967, Hurstville, NSW, 2220

NSW Government, 2015, 'E-Planning Portal', viewed 4 October 2022, < https://www.planningportal.nsw.gov.au/find-a-property

NSW Government, 2019, 'Biodiversity Vales Map and Threshold Tool', viewed 4 October 2022, <u>www.lmbc.nsw.gov.au</u>

NSW Government, 2019, 'Sharing and Enabling Environmental Data (SEED)', viewed 4 October 2022 <geo.seed.nsw.gov.au>

NSW Office of Environment, 2016, 'Aboriginal Heritage Information Management System (AHIMS)', viewed 4 October 2022, <u>http://www.environment.nsw.gov.au</u>

Rural Fire Service, 2016, 'NSW Rural Fire Service – Guide for Bush Fire Prone Land Mapping', viewed 4 October 2022<u>http://www.rfs.nsw.gov.au</u>

Rural Fire Service, 2019, 'Planning for Bushfire Protection', viewed 4 October 2022, < <u>http://www.rfs.nsw.gov.au</u>>

Rural Fire Service, March 2019, 'Comprehensive Fuel Loads', viewed 4 October 2022, <u>http://www.rfs.nsw.gov.au</u>

ATTACHMENT 1 – AHMIS RESULTS



AHIMS Web Services (AWS) Search Result

Date: 15 December 2020

Erin Daniel PO Box 61 Dungog New South Wales 2420 Attention: Erin Daniel Email: erin@perceptionplanning.com.au


Dear Sir or Madam:

AHIMS Web Service search for the following area at Lat, Long From : -32.3818, 151.5443 - Lat, Long To : -32.3638, 151.5623 with a Buffer of 50 meters, conducted by Erin Daniel on 15 December 2020.

The context area of your search is shown in the map below. Please note that the map does not accurately display the exact boundaries of the search as defined in the paragraph above. The map is to be used for general reference purposes only.



A search of the Office of the Environment and Heritage AHIMS Web Services (Aboriginal Heritage Information Management System) has shown that:




If your search shows Aboriginal sites or places what should you do?

- You must do an extensive search if AHIMS has shown that there are Aboriginal sites or places recorded in the search area.
- If you are checking AHIMS as a part of your due diligence, refer to the next steps of the Due Diligence Code of practice.
- You can get further information about Aboriginal places by looking at the gazettal notice that declared it. Aboriginal places gazetted after 2001 are available on the NSW Government Gazette (http://www.nsw.gov.au/gazette) website. Gazettal notices published prior to 2001 can be obtained from Office of Environment and Heritage's Aboriginal Heritage Information Unit upon request

Important information about your AHIMS search


- The information derived from the AHIMS search is only to be used for the purpose for which it was requested. It is not be made available to the public.
- AHIMS records information about Aboriginal sites that have been provided to Office of Environment and Heritage and Aboriginal places that have been declared by the Minister;
- Information recorded on AHIMS may vary in its accuracy and may not be up to date .Location details are recorded as grid references and it is important to note that there may be errors or omissions in these recordings,
- Some parts of New South Wales have not been investigated in detail and there may be fewer records of Aboriginal sites in those areas. These areas may contain Aboriginal sites which are not recorded on AHIMS.
- Aboriginal objects are protected under the National Parks and Wildlife Act 1974 even if they are not recorded as a site on AHIMS.
- This search can form part of your due diligence and remains valid for 12 months.

ATTACHMENT 2 – SUBDIVISION PLANS

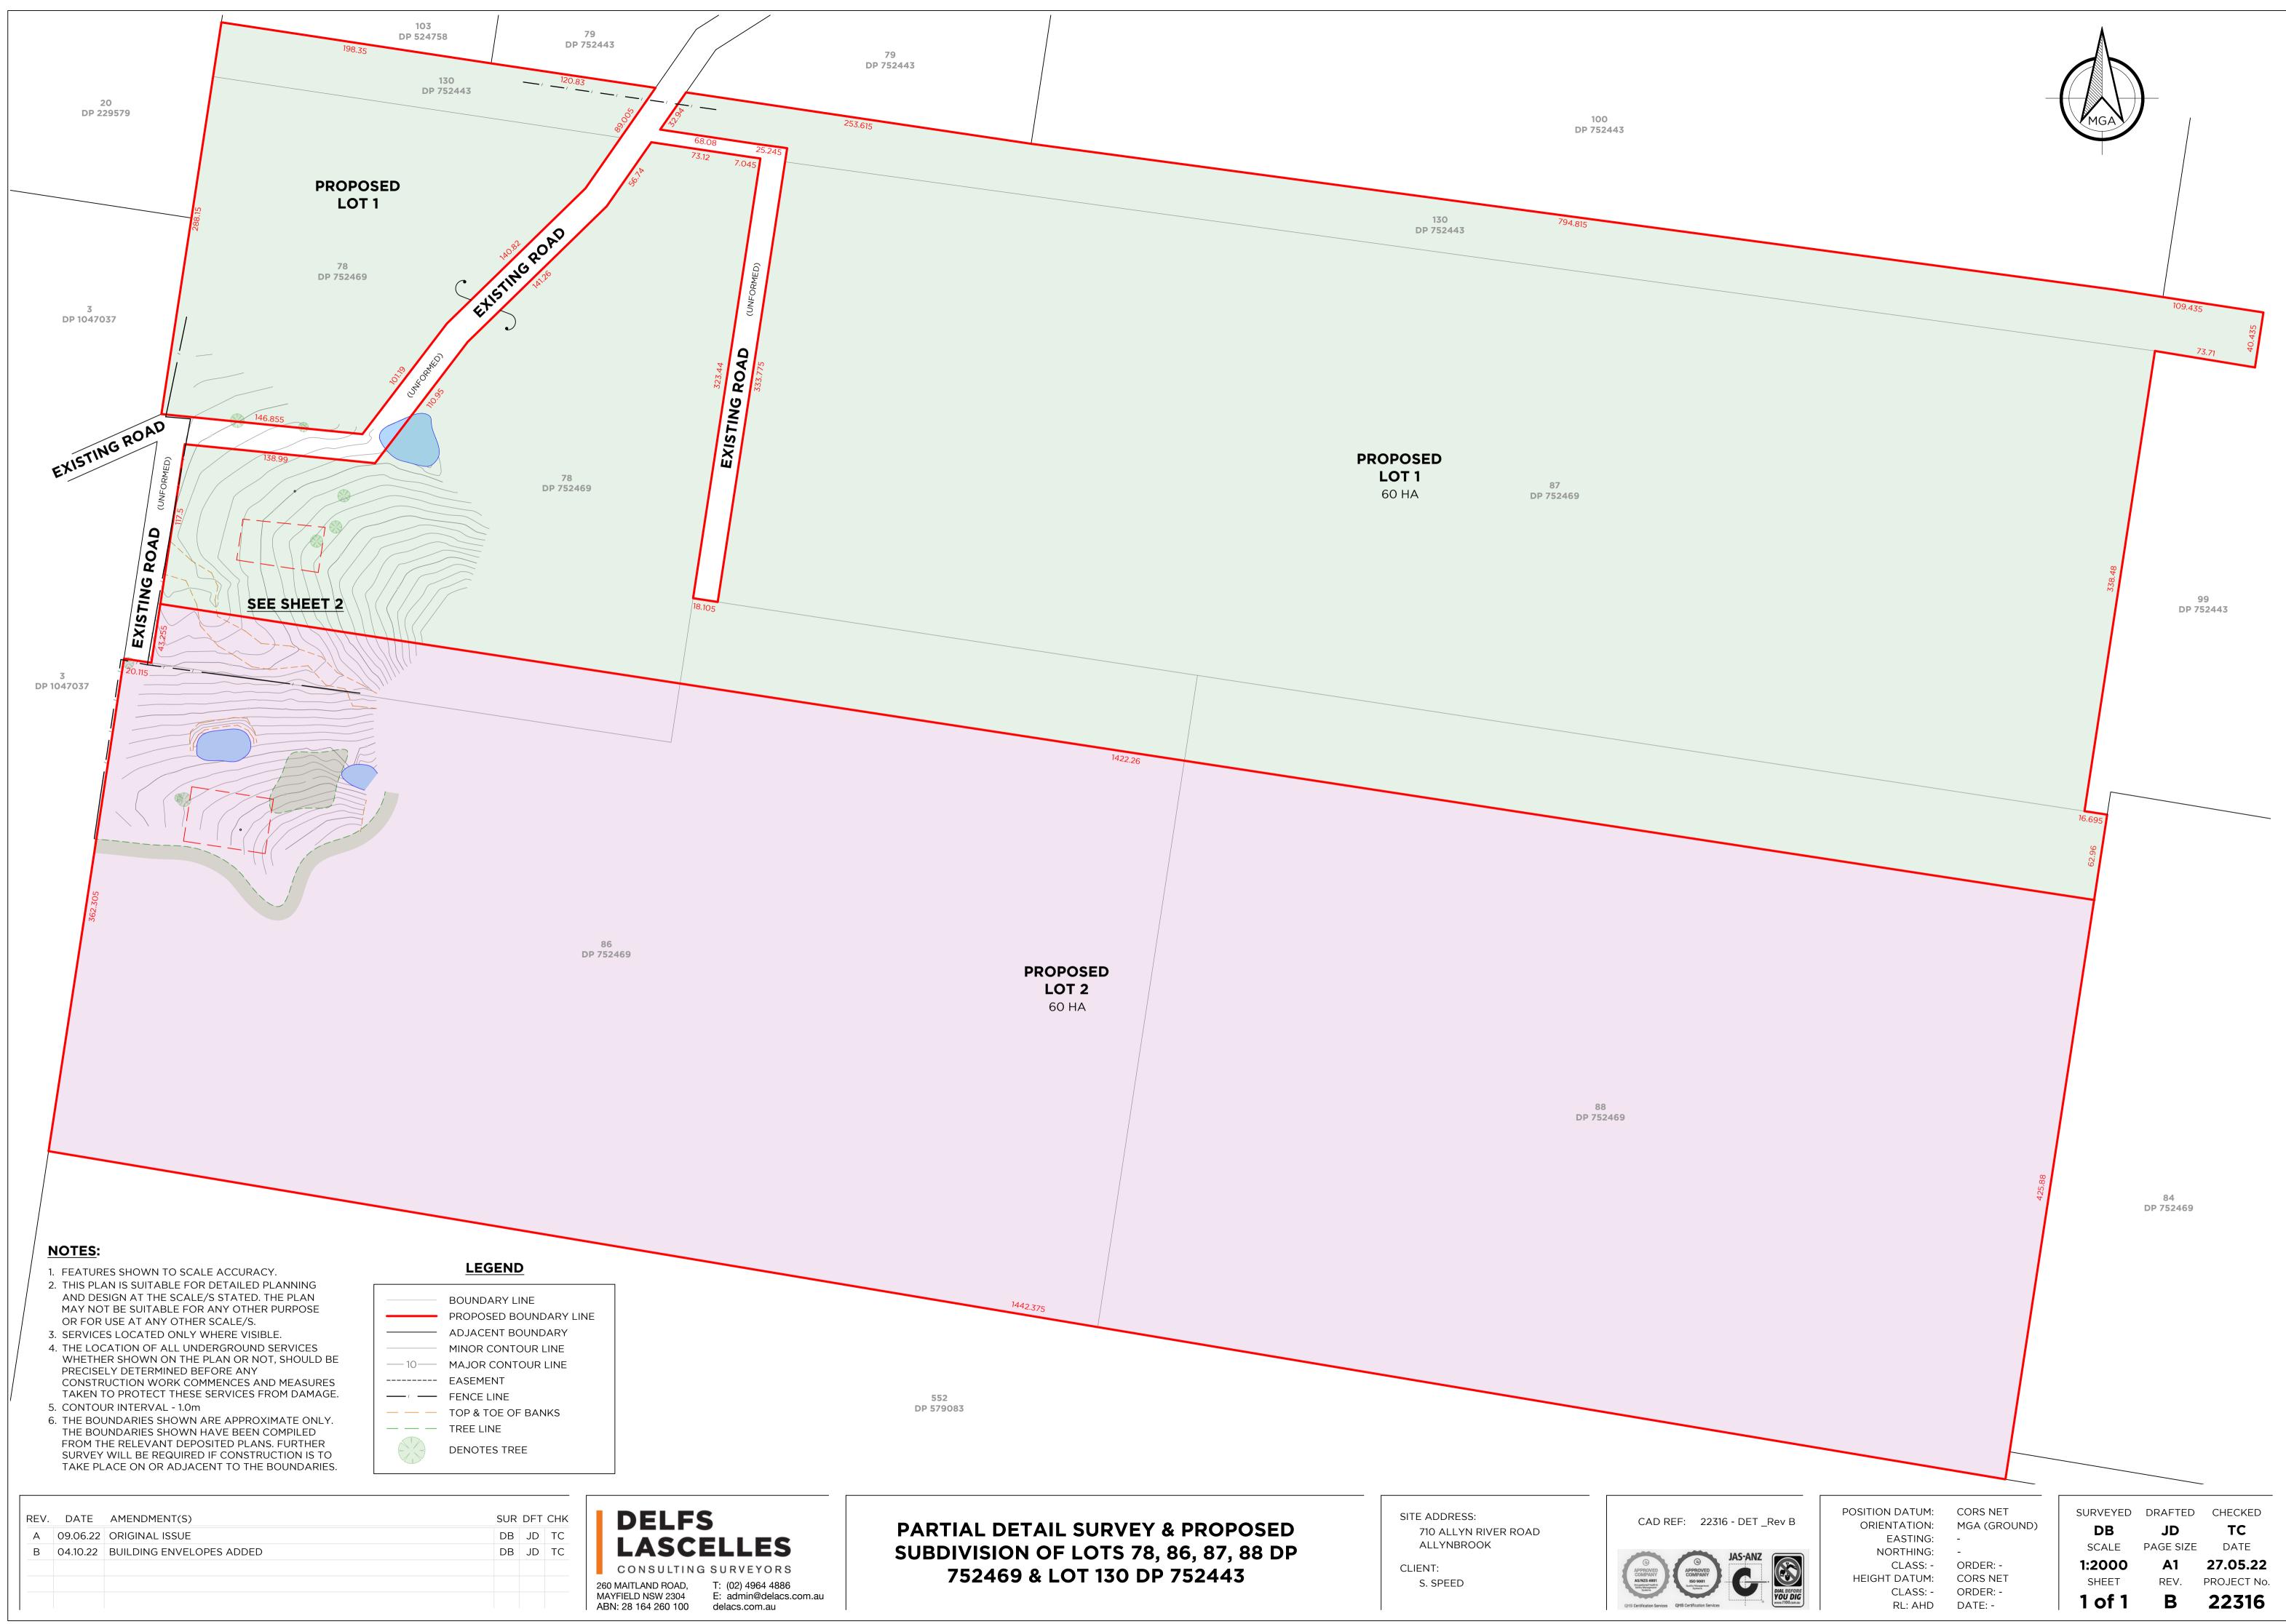

REV.	DATE	AMENDMENT(S)	SUR	DFT	СНК
А	09.06.22	ORIGINAL ISSUE	DB	JD	ТС
В	04.10.22	BUILDING ENVELOPES ADDED	DB	JD	ТC



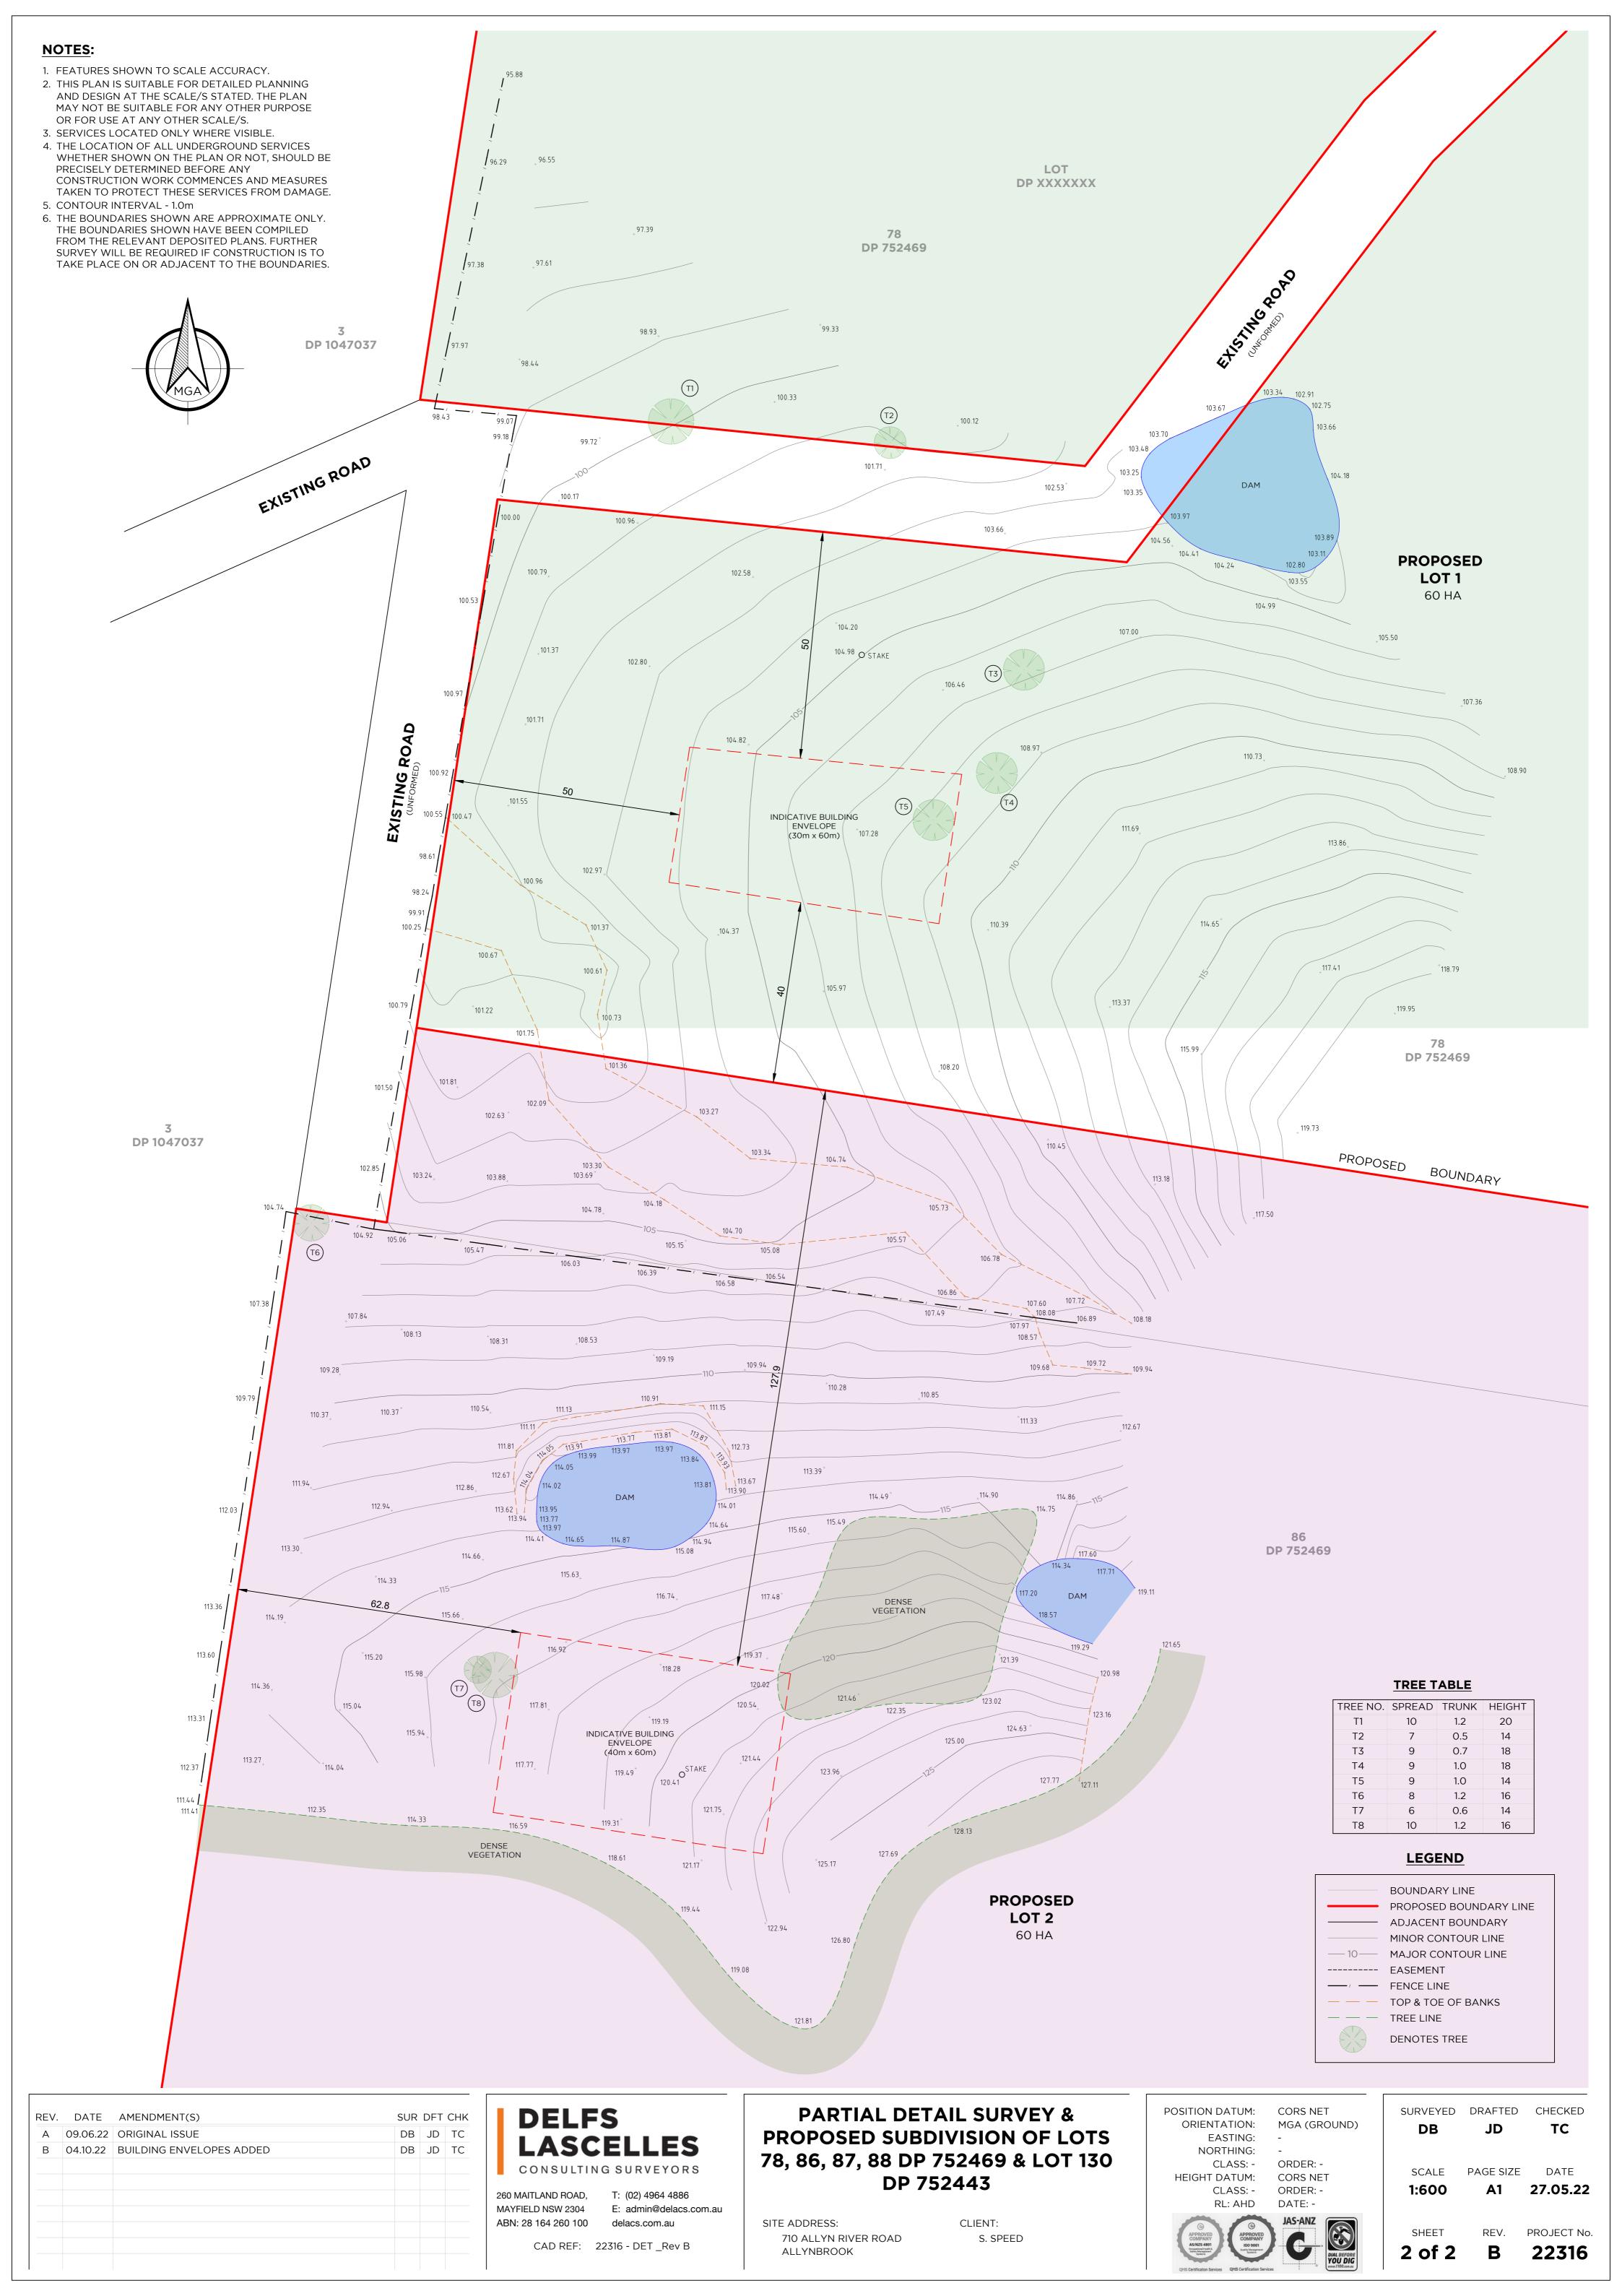

ATTACHMENT 3: CONSTRUCTION REQUIREMENTS TABLE

PERCEPTION PLANNING	BAL-LOW	BAL-12.5	BAL-19	BAL-29	BAL-40	BAL-Flame Zone	
SUBFLOOR SUPPORTS	No Construction Requirements	No Construction Requirements	No Construction Requirements	enclosed by external wall or by steel, bronze or aluminium mesh. where the subfloor is unenclosed, support posts, columns, stumps, piers and poles shall be of non- combustible material or fire- resistant timber.	Subfloor space enclosed with a wall, sarking not required, where subfloor Unenclosed, support posts, columns, stumps, piers to be non- combustible material or tested for bushfire resistance to as 1530.8.1.	subfloor supports- enclosed by external wall = no construction requirements. Subfloor space unenclosed incl. support posts, columns, stumps, piers and poles to be non-combustible with an frl of 30/-/- or be tested for bushfire resistance to as 1530.8.2.	
FLOORS	No Construction Requirements	No Construction Requirements	No Construction Requirements	concrete slab on ground or enclosure by external wall, metal mesh with 2mm aperture for elevated floors above 400mm. If <400mm above finished ground level, Bearers and joists to be non- combustible, fire-resistant timber, flooring the same or protected and lined on the underside with sarking or mineral wool insulation.	concrete slab on ground or enclosure by external wall. Unenclosed subfloor space, bearers, joists and flooring to be protection of underside with a non-combustible material such as fibre cement sheet or metal or be non- combustible or be tested for bushfire resistance to as 1530.8.1	concrete slab on ground – no construction requirements. Enclosed subfloor space by external wall. Unenclosed subfloor space an FRL of 30/30/30 or protection of underside with 30-minute incipient spread of fire system or be tested for bushfire resistance to as 1530.8.2.	
EXTERNAL WALLS	No Construction Requirements	Same as BAL-19	Exposed external wall that is <400mm from ground or above decks to be of non-combustible material min 90mm thick Or timber logs (high density) Or fixed cladding that is non- combunstible, fire resistant, 6mm fibre cement. all joints to be less than 3mm & vents to be screened.	non-combustible material – min 90mm thick - (masonry, brick veneer, mud brick, aerated concrete, concrete), timber framed, steel framed walls sarked on the outside and clad with 6mm fibre cement or steel sheeting or bushfire resistant timber. All joints covered, sealed and overlapped <3mm & vents to be screened with mesh	non-combustible material (Masonry, brick veneer, mud brick, aerated concrete, concrete), timber framed, steel framed walls sarked on the outside and clad with 9mm fibre cement sheeting or steel sheeting to be tested for bushfire resistance to as 1530.8.1. All joints covered, sealed and overlapped <3mm & vents to be screened with mesh.	non-combustible material (masonry, brick veneer, mud brick, aerated concrete, concrete) with a min 90mm thick OR a system with an FRL of -/30/30 when tested from outside OR be tested for bushfire resistance to as 1530.8.2.	
EXTERNAL WINDOWS	No Construction Requirements	Bushfire shutter Or external screens covering entire assemble Or window frame <400mm from ground: material bushfire resistant or metal/metal-reinforced uPVC. Glazing grade A safety glass min 4mm thick. No require. For	Bushfire shutter Or external screens covering entire assemble Or window frame <400mm from ground: material bushfire resistant or metal/metal-reinforced uPVC. Glazing is toughened glass 5mm thick with openable	Bushfire shutter or frames & joinery bushfire resisting timber metal or uPVC, glazing 5mm toughened glass or double glazed external panel, where screen glazing <400mm off ground or <400mm above decks and extending >110mm	Bushfire shutter conforms with clause 3.7 & 8.5.1 Or window frames and hardware to be metal. Glazing 6mm toughened glass. fixed and openable portion screened with steel or bronze mesh.	protected by bushfire shutter to conform with 3.7, Openable portion of window to be screened with steel or bronze mesh internally or externally with 3.6 and FRL of -/30/- OR be tested for bushfire resistance to as 1530.8.2.	

		seals or hardware. Openable portion of window to be screened internally.	portion of windows screened internally or externally Or annealed glass may be used to AS1288 standards with fixed & openable windows screened externally only. No require, for seals.	in width from window frame = glazing is to be externally screened.		
EXTERNAL DOORS – French doors, panel fold, bi-fold and sliding	No Construction Requirements	As for BAL-19, except that door framing can be naturally fire resistant (high density) timber	Protected by bushfire shutters Or by external screens Or door material being non- combustible, solid timber with framing made from metal, fire resistant timber or uPVC. Glazing toughened glass 5mm thick. No requir for hardware or screens.	Protected by bushfire shutters Or by external screens Or door material being non- combustible, solid timber with framing made from metal, fire resistant timber or uPVC. Metal hardware and trims, Doors with glazing shall be toughened glass 6mm thick. Doors tight fitting and weather stirps or seals installed.	Protected by bushfire shutters with 3.7 Or door panel non- combustible or 35mm solid timber protected by screened with steel or bronze mesh, metal framed, hardware material to be metal. Glazing toughened glass 6mm thick. Doors tight fitting with weather strips at base.	Protected by bushfire shutter with 3.7 OR door frames and doors with glazed panels to have FRL of min -/30/- OR conform with AS1530.8.2 tested from outside. tight- fitting with weather strips at base and seals shall not compromise the FRL or performance achieved in AS1530.4.
ROOFS	No Construction Requirements	Non-combustible covering. roof/wall junction sealed. openings fitted with non- combustible ember guards. Tiled and sheet roofs to be fully sarked. Verandah, carport or awning roof connected to main roof shall meet require. Of main roof, if separated from main, shall be non- combustible.	Roof tiles, sheets and covering to be non-combustible. roof/wall junction sealed. openings fitted with non- combustible ember guards. roof to be fully sarked. Verandah, carport or awning roof connected to main roof shall meet require. Of main roof, if separated from main, shall be non-combustible covering.	non-combustible covering. roof/wall junction sealed. openings fitted with non- combustible ember guards. Tiled and sheet roofs to be fully sarked. Sheet roofs sealed at fascia by mesh, mineral wool. Verandah, carport or awning roof connected to main roof shall meet require. Of main roof, if separated from main, shall be non-combustible or fire resisting timber.	All types of roofs shall be non combustible, junction sealed by fascia and eaves linings or sealing wall and underside of roof. openings fitted with non- combustible ember guards. roof to be fully sarked and roof mounted evaporative coolers NOT permitted. No requir for downspipes, if installed to be non-combustible.	Roof with FRL of 30/30/30 or tested for bushfire resistance to as 1530.8.2. Roof junction sealed by fascia and eaves linings or sealing wall and underside of roof. openings fitted with non-combustible ember guards. Roof to be fully sarked and roof mounted evaporative coolers NOT permitted. Verandah, carport or awning roof connected to main roof shall meet require. Of main roof, if separated from main, shall be non-combustible mat OR timber rafters lined with fibre-cement sheet of min form thick OR AS1530.8.2
VERANDAHS, DECKS ETC	Same as BAL-29	Same as BAL-29	Same as BAL-29	enclosed subfloor space conforms with clause 7.4, All openings protected in accordance 3.6 to be made of resistant steel or bronze. Enclosed no requirement for supports or framing. Unenclosed subfloor space supports, framing, decking, balustrades, verandah posts to be non-combustible or bushfire resistant timber.	No requirement to enclosed subfloor space except for decking, stair treads to be non- combustible OR Fibre-cement sheet OR AS1530.8.2 Unenclosed subfloor space supports, framing and decking to be non-combustible or system conforming with AS1530.8.1. Balustrades & handrails <125mm from glazing or combustible wall shall be of non-combustible. Verandah posts, non- combustible.	No requirement to enclosed subfloor space except for decking, stair treads to be non- combustible OR Fibre-cement sheet OR AS1530.8.2 Unenclosed subfloor space supports, framing and decking to be non-combustible or system conforming with AS1530.8.1. Balustrades & handrails <125mm from ANY glazing to be non-combustible. Verandah posts, non- combustible.

ATTACHMENT 4: APPENDIX 4 – ASSET PROTECTION ZONES



APPENDIX 4 ASSET PROTECTION ZONE REQUIREMENTS

In combination with other BPMs, a bush fire hazard can be reduced by implementing simple steps to reduce vegetation levels. This can be done by designing and managing landscaping to implement an APZ around the property.

Careful attention should be paid to species selection, their location relative to their flammability, minimising continuity of vegetation (horizontally and vertically), and ongoing maintenance to remove flammable fuels (leaf litter, twigs and debris).

This Appendix sets the standards which need to be met within an APZ.

A4.1 Asset Protection Zones

An APZ is a fuel-reduced area surrounding a building or structure. It is located between the building or structure and the bush fire hazard.

For a complete guide to APZs and landscaping, download the NSW RFS document *Standards for Asset Protection Zones* at the NSW RFS Website www.rfs.nsw.gov.au.

An APZ provides:

- a buffer zone between a bush fire hazard and an asset;
- an area of reduced bush fire fuel that allows for suppression of fire;
- an area from which backburning or hazard reduction can be conducted; and
- an area which allows emergency services access and provides a relatively safe area for firefighters and home owners to defend their property.

Bush fire fuels should be minimised within an APZ. This is so that the vegetation within the zone does not provide a path for the spread of fire to the building, either from the ground level or through the tree canopy.

An APZ, if designed correctly and maintained regularly, will reduce the risk of:

- direct flame contact on the building;
- damage to the building asset from intense radiant heat; and
- > ember attack.

The methodology for calculating the required APZ distance is contained within Appendix 1. The width of the APZ required will depend upon the development type and bush fire threat. APZs for new development are set out within Chapters 5, 6 and 7 of this document.

In forest vegetation, the APZ can be made up of an Inner Protection Area (IPA) and an Outer Protection Area (OPA).

A4.1.1 Inner Protection Areas (IPAs)

The IPA is the area closest to the building and creates a fuel-managed area which can minimise the impact of direct flame contact and radiant heat on the development and act as a defendable space. Vegetation within the IPA should be kept to a minimum level. Litter fuels within the IPA should be kept below 1cm in height and be discontinuous.

In practical terms the IPA is typically the curtilage around the building, consisting of a mown lawn and well maintained gardens.

When establishing and maintaining an IPA the following requirements apply:

Trees

- tree canopy cover should be less than 15% at maturity;
- trees at maturity should not touch or overhang the building;
- Iower limbs should be removed up to a height of 2m above the ground;
- tree canopies should be separated by 2 to 5m; and
- > preference should be given to smooth barked and evergreen trees.

Shrubs

- create large discontinuities or gaps in the vegetation to slow down or break the progress of fire towards buildings should be provided;
- shrubs should not be located under trees;
- shrubs should not form more than 10% ground cover; and
- clumps of shrubs should be separated from exposed windows and doors by a distance of at least twice the height of the vegetation.

Grass

- grass should be kept mown (as a guide grass should be kept to no more than 100mm in height); and
- > leaves and vegetation debris should be removed.

A4.1.2 Outer Protection Areas (OPAs)

An OPA is located between the IPA and the unmanaged vegetation. It is an area where there is maintenance of the understorey and some separation in the canopy. The reduction of fuel in this area aims to decrease the intensity of an approaching fire and restricts the potential for fire spread from crowns; reducing the level of direct flame, radiant heat and ember attack on the IPA.

Because of the nature of an OPA, they are only applicable in forest vegetation.

When establishing and maintaining an OPA the following requirements apply:

Trees

- tree canopy cover should be less than 30%; and
- > canopies should be separated by 2 to 5m.

Shrubs

- > shrubs should not form a continuous canopy; and
- shrubs should form no more than 20% of ground cover.

Grass


- grass should be kept mown to a height of less than 100mm; and
- > leaf and other debris should be removed.


An APZ should be maintained in perpetuity to ensure ongoing protection from the impact of bush fires. Maintenance of the IPA and OPA as described above should be undertaken regularly, particularly in advance of the bush fire season.



Figure A4.1

Typlical Inner and Outer Protection Areas.

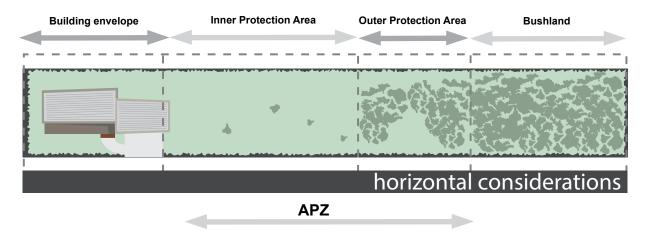

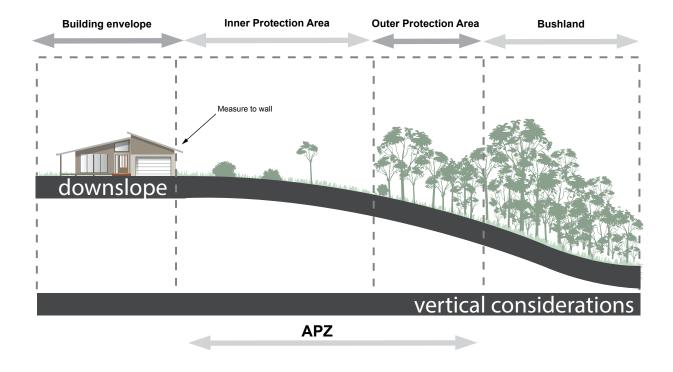



Perception Planning Pty Ltd. PO Box 107, Clarence Town, NSW, 2324 Phone: 04 1155 1433 Email: admin@perceptionplanning.com.au