







LEVEL 2 PLAN

1:200

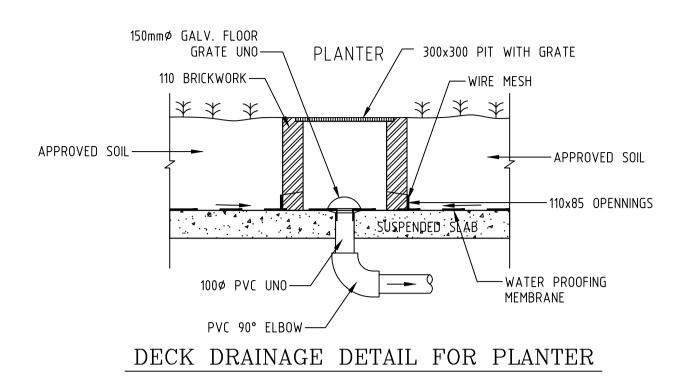

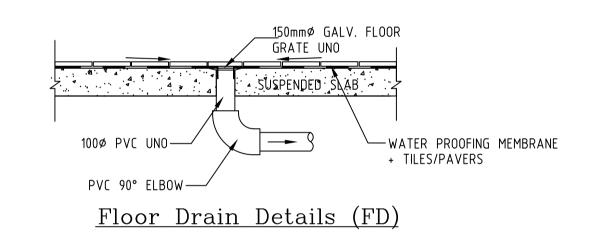

NOTES

1. THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ARCHITECTURAL DRAWINGS, STRUCTURAL DRAWINGS AND THE SPECIFICATON.

2. PRIOR TO COMMENCEMENT OF WORKS THE CONTRACTOR SHALL

2. PRIOR TO COMMENCEMENT OF WORKS THE CONTRACTOR SHALL SATISFY HIMSELF OF THE CORRECT LOCATION OF EXISTING SERVICES WHETHER INDICATED OR NOT ON THE PLANS. ANY DAMAGE TO EXISTING SERVICES SHALL BE RECTIFIED AT THE CONTRACTORS EXPENSE.

3. TRAFFIC MANAGEMENT MEASURES HAVE TO BE IMPLEMENTED AND MAINTAINED DURING CONSTRUCTON, ALL IN ACCORDANCE WITH COUNCIL'S REQUIREMENTS. THE CONTRACTOR SHALL MAINTAIN SAFE PEDESTRIAN ACCESS ALONG THE FOOTPATH.

4. THE CONTRACTOR SHALL EFFECT TEMPORARY DRAINAGE MEASURES TO AVOID LOCALISED PONDING OF SURFACE RUN-OFF.

5. REFER TO ARCHITECT'S DRAWINGS FOR ALL DETAILS (LEVELS, GRADING ETC.) OF DRIVEWAYS, CONCRETE AND PAVED AREAS, AND RETAINING WALL TYPES ADN LOCATIONS.

6. REFER TO LANDSCAPE ARCHITECT'S DRAWINGS FOR DETAILS AND EXTENT OF ALL LANDSCAPED AREAS.
7. ALL SWD PIPES ARE UPVC AT 1.0% MINIMUM GRADE (UNO).
8. SWD PITS CAN BE PRE-CAST SIZED AS FOLLOWS:

450mm SQ. UP TO 600mm DEEP 600mm SQ. UP TO 1000mm DEEP


9. ALL PITS LOCATED IN TRAFFICABLE AREAS, (IE, DRIVEWAYS)
TO HAVE MEDIUM DUTY GRATED COVERS SUITABLE FOR
WITHSTANDING LOADS ASSOCIATED WITH SMALL TRUCKS.
10. PROVIDE STEP IRONS TO ALL PITS GREATER THAN 1.2m DEEP.
11. THE CONTRACTOR SHALL IMPLEMENT ALL SOIL EROSION AND
SEDIMENT CONTROL MEASURES PRIOR TO COMMENCEMENT OF
WORKS.

12. TOPSOIL SHALL BE STRIPPED DN STOCKPILED OUTSIDE HAZARD AREAS SUCH AS DRAINAGE LINES. THIS TOPSOIL IS TO BE RESPREAD LATER ON AREAS TO BE REVEGETATED.

13. THE CONTRACTOR SHALL REGULARLY MAINTAIN ALL SEDIMENT AND EROSION CONTROL DEVICES AND REMOVE ACCUMULATED SILT FROM SUCH DEVICES. ALL SILT REMOVED SHALL BE DISPOSED OF AS DIRECTED BY THE SUPERINTENDENT. THE PERIOD FOR MAINTAINING THESE DEVICES SHALL BE AT LEAST UNTIL ALL DISTURBED AREAS ARE REVEGETATED AND FURTHER AS MAY BE DIRECTED BY THE SUPERINTENDENT OR COUNCIL.

14. THE CONTRACTOR SHALL MAINTAIN DUST CONTROL UNTIL FINAL COMPLETION OF WORKS.

NOTE: CONNECT ALL FLOOR DRAINS AND DOWN PIPES TO OSD TANK.



Project	Designed by	Title	Scale
	N.SHAHID Drawn by		AS SHOWN
PROPOSED DEVELOPMENT	'		Job No.
NO.10-12 PARMAL AVENUE,	N.SHAHID	HYDRAULIC DETAILS	2023213
· · · · · · · · · · · · · · · · · · ·	Checked by		
PADSTOW.	M. ZAIOOR		Drawing No. F
	Date		2023213 H03
	10/07/2023		1

111.111.21.21								
	No.	Date	Revision	Ву	No.	Date	Revision	Ву
	1	12/09/2023	Amended as per updated architectural plans.	N.S				