


LEGEND- DEMOLITION- SITE PLAN	
	EXISTING ELEMENTS
	DEMOLISHED ELEMENTS
	TREES TO BE RETAINED
	TREES TO BE REMOVED. REFER LANDSCAPE MANGEMENT & PROTECTION PLAN FOR MORE DETAILS
TF—TF—TF	TEMPORARY FENCE DURING CONSTRUCTION
SW—SW	EXISTING STORM WATER
	SEDIMENT CONTROL
Tpf—Tpf	TREE PROTECTION FENCE

- NOTES - SEDIMENT & EROSION CONTROL**
- SEDIMENT CONTROLS MUST BE IN PLACE PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS & INSPECTED DAILY
 - SEDIMENT CONTROLS MUST BE RETAINED UNTIL RE-VEGETATION IS FULLY ESTABLISHED AFTER THE BUILDING COMPLETION
 - LOCATE STOCK PILES AWAY FROM DRAINAGE LINES & SURFACE FLOW PATHS. CONTOURED STRIATIONS OR FURROWS TO BE PROVIDED TO STOCK PILES TO MINIMISE EROSION
 - STABILISED CONSTRUCTION ENTRANCE TO BE ERECTED PRIOR TO ACCESS TO SITE BY CONSTRUCTION VEHICLES. AGGREGATE TO BE TURNED WHEN SEDIMENT BUILDS UP AND RENEWED WHEN REQUIRED
 - BUILDER IS TO ESTABLISH A MAINTENANCE PROGRAM FOR SEDIMENT & EROSION CONTROL DEVICES TO ENSURE INSPECTION AFTER SIGNIFICANT RAINFALL AND THAT ANY REPAIRS NECESSARY ARE QUICKLY ATTENDED TO.
 - ENVIRONMENT PROTECTION AGREEMENT TO BE TAKEN OUT BY BUILDING CONTRACTOR WITH ENVIRONMENT PROTECTION AUTHORITY
 - ALL NEW CONSTRUCTION WORK MUST BE CONTAINED WITHIN THE SITE EXCEPT FOR APPROVED SERVICE CONNECTIONS AND ROADWORKS.
 - LIMIT ACCESS TO SITE DURING AND IMMEDIATELY AFTER WET WEATHER
 - REGULARLY REMOVE ANY SOIL FROM ROADS ADJACENT TO THE SITE
 - NO STORAGE OF CONSTRUCTION MATERIALS, PARKING OF VEHICLES NOR EQUIPMENT PERMITTED OUTSIDE OF BLOCK WITHOUT THE LOCAL COUNCIL APPROVAL
 - NO SITE SHEDS, STORAGE SHEDS, SITE AMENITIES TO BE ERECTED OUTSIDE OF BLOCK WITHOUT THE LOCAL COUNCIL APPROVAL.
 - PROVIDE KERBSIDE FILTER ROLL TO AFFECTED EXISTING SUMPS
 - KERBSIDE FILTER ROLL TO BE REMOVED, CLEANED & REINSTATED ON A WEEKLY BASIS AT A MINIMUM. TRAPPED SEDIMENT IN SUMPS ALSO TO BE REMOVED. CLEANING IS ALSO TO TAKE PLACE IMMEDIATELY AFTER PERIODS OF RAINFALL DURING CONSTRUCTION
 - ALL SERVICE TRENCHES TO BE BACK FILLED WITH 24 HOURS OF INSPECTION
 - EXCESS SOIL IS TO DISPOSED AT THE LOCAL COUNCIL APPROVED LOCATION
 - THE SITE FOREMAN IS TO CONTACT THE LOCAL COUNCIL TO ARRANGE A SITE INSPECTION & ENDORSEMENT OF SEDIMENT & EROSION CONTROL MEASURES PRIOR TO WORKS COMMENCING
 - THE SITE FOREMAN IS TO CONTACT THE LOCAL COUNCIL TO DISCUSS ANY PROPOSED MAJOR CHANGES TO THE SEDIMENT & EROSION CONTROLS ON SITE PRIOR TO IMPLEMENTING THE CHANGES
 - THE SITE FOREMAN WILL ENSURE CONTRACTORS ACCESS & EXIT THE SITE USING ONLY LOCAL COUNCIL APPROVED ACCESS/EXIT POINTS
 - ALL MEASURES TO COMPLY WITH LOCAL COUNCIL DEVELOPMENT CONTROL PLAN & IN PLACE PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS & CHECKED DAILY.

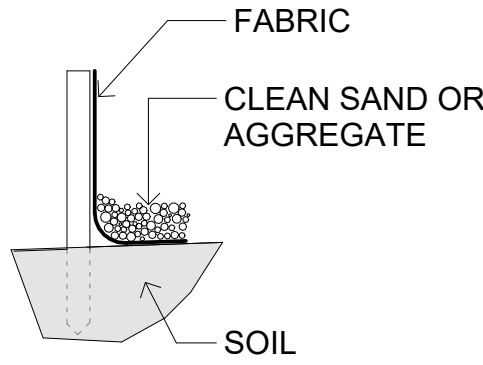

CONSTRUCT A SEDIMENT BARRIER PARALLEL TO THE CONTOURS OF THE SITE.

- DRIVE STAR PICKETS OR EQUAL INTO GROUND, 2.5 METRES APART(MAX)
- FIX SELF-SUPPORTING GEOTEXTILE TO UPSLOPE SIDE OF POST WITH WIRE TIES OR AS RECOMMENDED BY GEOTEXTILE MANUFACTURER.
- JOIN SECTIONS OF FABRIC AT A SUPPORT POST WITH A 150mm OVERLAP.
- BACKFILL THE FABRIC AND COMPACT IT THOROUGHLY OVER THE GEOTEXTILE.

1 SITE - WASTE CONTROL MANAGEMENT PLAN
A205 1:100

Revision.	Date.	Description.
A	01-12-23	FOR DA APPROVAL
B	14-12-23	DRAFT FOR REVIEW
C	15-01-24	REVISED DA SET



Architecture
Interiors
Access
Heritage

Client:
HENNESSY CATHOLIC COLLEGE

Project Title:
ADMINISTRATION BUILDING

DP 1195788 LOT 1 SUBURB Hilltops Council
9 RIPON STREET YOUNG NSW 2594

Design Project Manager.
DT

Project Delivery leader.
SE

Quality Manager.
DT

Drawn.
FR

Drawing Title:
EROSION AND SEDIMENT CONTROL AND WASTE MANAGEMENT PLAN


Scale:
As indicated

Project.
2106.02

Sheet Size:
A1

Drawing.
A010

Revision.
C

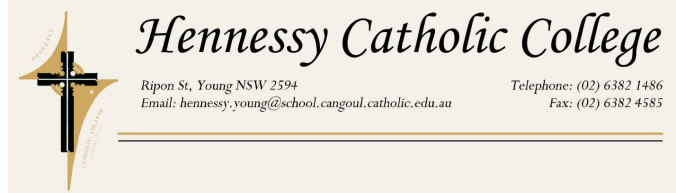

0 1 2 3 4 5 6 7 8 m
SCALE: 1:100 @ ORIGINAL SCALE



DEVELOPMENT APPLICATION

All dimensions in millimetres. Do not scale drawing. All dimensions and levels to be verified on site by contractor before commencing work or preparation of shop drawings, where provide, drawings must be read in conjunction with specification and schedules.

© Copyright