


CONST. MANAGEMENT LEGEND:



SEDIMENT CONTROL NOTES

1. ALL SEDIMENT DAMS AND TRAPS SHALL BE CLEANED WHEN THE STRUCTURES ARE A MAXIMUM OF 60 % FULL OF SOIL & DEBRIS.
2. SAND BAGS SHALL BE WELL PACKED AGAINST ADJOINING BAGS.
3. FILTER SHALL BE CONSTRUCTED BY REMOVING & WRAPPING GRATE IN FILTER FABRIC (PROPEX OR APPROVED EQUIVALENT) WITH MINIMUM 75mm FREE FABRIC OUTSIDE ALL EDGES OF GRATE WHEN IT IS REINSTALLED.
4. ALL EROSION AND SEDIMENTATION CONTROL MEASURES, INCLUDING REVEGETATION AND STORAGE OF SOIL AND TOPSOIL, SHALL BE




SEDIMENT DAM

1. ALL EROSION AND SEDIMENTATION CONTROL MEASURES, INCLUDING REVEGETATION AND STORAGE OF SOIL AND TOPSOIL, SHALL BE IMPLEMENTED TO THE STANDARDS OF THE SOIL CONSERVATION OF NSW.
2. ALL DRAINAGE WORKS SHALL BE CONSTRUCTED AND STABILIZED AS EARLY AS POSSIBLE DURING DEVELOPMENT.
3. SEDIMENT TRAPS SHALL BE CONSTRUCTED AROUND ALL INLET PITS, CONSISTING OF 300mm WIDE X 300mm DEEP TRENCH.
4. ALL SEDIMENT BASINS AND TRAPS SHALL BE CLEANED WHEN THE STRUCTURES ARE A MAXIMUM OF 60 % FULL OF SOIL MATERIALS, INCLUDING THE MAINTENANCE PERIOD.
5. ALL DISTURBED AREAS SHALL BE REVEGETATED AS SOON AS THE RELEVANT WORKS ARE COMPLETED.
6. SOIL AND TOPSOIL STOCKPILES SHALL BE LOCATED AWAY FROM DRAINAGE LINES AND AREA WHERE WATER MAY CONCENTRATE.
7. FILTER SHALL BE CONSTRUCTED BY STRETCHING A FILTER FABRIC (PROPEX OR APPROVED EQUIVALENT) BETWEEN POST AT 2.0m CENTRES. FABRIC SHALL BE BURIED 150mm ALONG ITS LOWER


EROSION CONTROL NOTES

1. All erosion and sediment control measures to be installed prior to any site disturbance.
2. All control measure to be inspected and maintained daily by site manager.
3. Stripping of grass and other vegetation shall be kept to a minimum.
4. Topsoil from all areas that will be that will be disturbed to be stripped and stockpiled, and to be kept clear from gutters, drains, stormwater, and footpaths.
5. Drainage to be connected to storm water as soon as possible.
6. Road and footpath to be kept clean, and must be swept daily.
7. All sediment control structures must be inspected after rainfall for any structural damage, all trapped sediment will be removed to a nominated stockpile.



1. Erect silt fence and gravel drain
2. Demolish existing structures
3. Excavate strip footings, according to enginners details.
4. Finish construction
5. Finish landscaping.
6. Silt fences are not to be removed until all construction and vegetation has been completed.

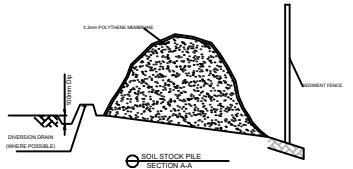

SEDIMENT FENCE



WASTE MANAGEMENT PLAN/
EROSION SEDIMENT CONTROL PLAN

WASTE MANAGEMENT PLAN		DESIGNED BY: ALI DAMAJ (M.Sc.Arch)	LOT 19 IN DP 35673 LOCATED AT 197 WELLINGTON ROAD, CHESTER HILL ISSUED FOR DA SUBMISSION	AD ARCH M: 0491 075 774 E: aly.damaj@gmail.com	
		NORTH DIRECTION:			
DATE DRAWN:	21.02.2024				
SHEET:	17 OF 24				