

PROJECT: TAMWORTH AQUATIC CENTRE

PROJECT NUMBER: 230459


DRAWING TITLE: PRELIM BULK EARTHWORKS

ENGINEER: NH

VERSION: B DATE: 06/06/24



Level 7, 176 Wellington Parade,
East Melbourne, VIC, Australia 3002

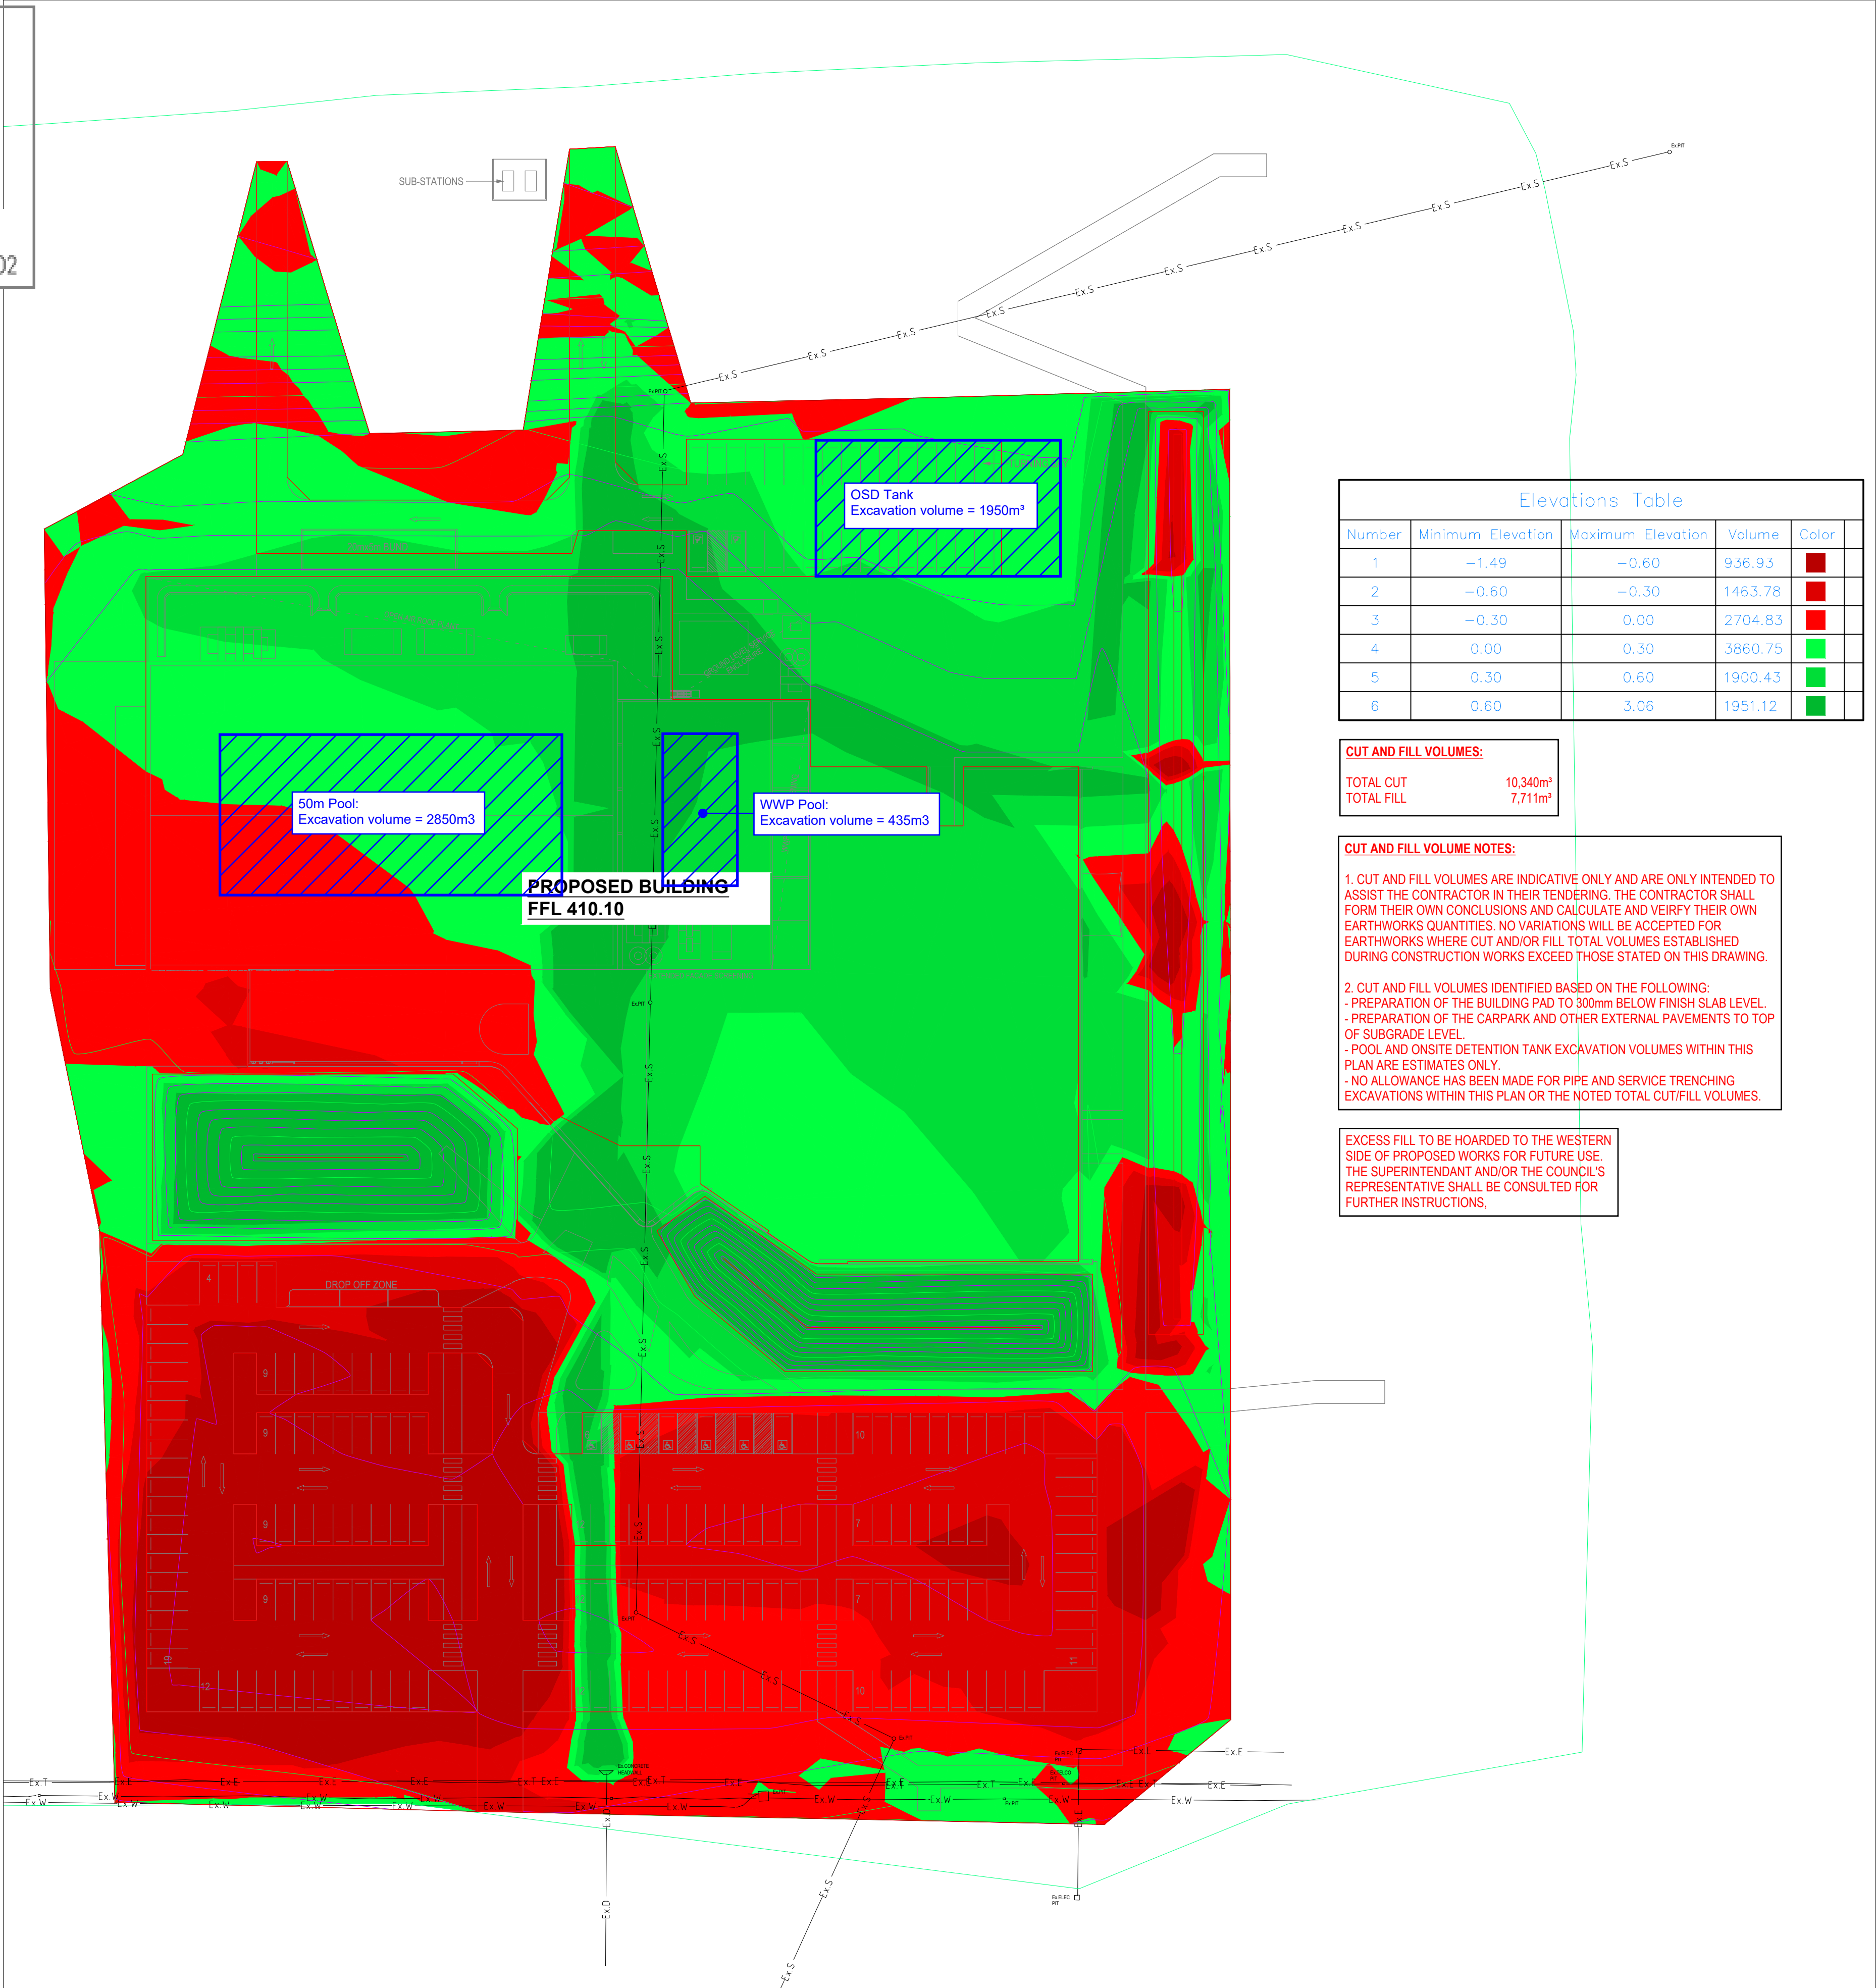

Elevations Table					
Number	Minimum Elevation	Maximum Elevation	Volume	Color	
1	-1.49	-0.60	936.93	Red	
2	-0.60	-0.30	1463.78	Red	
3	-0.30	0.00	2704.83	Red	
4	0.00	0.30	3860.75	Green	
5	0.30	0.60	1900.43	Green	
6	0.60	3.06	1951.12	Green	

CUT AND FILL VOLUMES:	
TOTAL CUT	10,340m³
TOTAL FILL	7,711m³

CUT AND FILL VOLUME NOTES:

1. CUT AND FILL VOLUMES ARE INDICATIVE ONLY AND ARE ONLY INTENDED TO ASSIST THE CONTRACTOR IN THEIR TENDERING. THE CONTRACTOR SHALL FORM THEIR OWN CONCLUSIONS AND CALCULATE AND VERIFY THEIR OWN EARTHWORKS QUANTITIES. NO VARIATIONS WILL BE ACCEPTED FOR EARTHWORKS WHERE CUT AND/OR FILL TOTAL VOLUMES ESTABLISHED DURING CONSTRUCTION WORKS EXCEED THOSE STATED ON THIS DRAWING.

2. CUT AND FILL VOLUMES IDENTIFIED BASED ON THE FOLLOWING:

- PREPARATION OF THE BUILDING PAD TO 300mm BELOW FINISH SLAB LEVEL.
- PREPARATION OF THE CARPARK AND OTHER EXTERNAL PAVEMENTS TO TOP OF SUBGRADE LEVEL.
- POOL AND ONSITE DETENTION TANK EXCAVATION VOLUMES WITHIN THIS PLAN ARE ESTIMATES ONLY.
- NO ALLOWANCE HAS BEEN MADE FOR PIPE AND SERVICE TRENCHING EXCAVATIONS WITHIN THIS PLAN OR THE NOTED TOTAL CUT/FILL VOLUMES.

EXCESS FILL TO BE HOARDED TO THE WESTERN SIDE OF PROPOSED WORKS FOR FUTURE USE. THE SUPERINTENDANT AND/OR THE COUNCIL'S REPRESENTATIVE SHALL BE CONSULTED FOR FURTHER INSTRUCTIONS.