



CUMBERLAND
CITY COUNCIL

PART F1-19

80 BETTY CUTHBERT
DRIVE, LIDCOMBE

1. Introduction

1.1 Purpose of this DCP

The purpose of this Development Control Plan ('DCP') is to outline the 'site specific controls' (the detailed planning and design framework) that relates to 80 Betty Cuthbert Drive (refer to **Figure 1**) which is located south of the Lidcombe town centre. Where there is inconsistency between this document and provisions contained elsewhere in the Cumberland Development Control Plan 2021, the site-specific controls contained in this document shall apply to the extent of the inconsistency.

1.2 Land to which this Part applies

This section applies to the site referred to as 80 Betty Cuthbert Drive, containing the following three (3) lots – Lots 74 and 75 in DP 1141724 and Lot 475 in DP 45747. The site has a total area of 58,818 sqm.

Figure 1 Site Aerial



1.3 Relationship to Cumberland Development Control Plan 2021

The controls contained in this part are supplementary to and shall be read in conjunction with the following relevant parts of Cumberland DCP 2021.

- Part A – Introduction and General Controls
- Part B – Development in Residential zones
- Part C – Development in Business zones

- Part E – Other land use-based development controls
- Part G - Miscellaneous Development Controls

Where there is an inconsistency between this DCP Part and provisions contained elsewhere in Cumberland DCP 2021, the provisions of this Part shall prevail.

2 Vision and general objectives

2.1 Vision

Provide a mix of residential, educational and health services within a landscaped setting to complement and enhance the Lidcombe area.

2.2 General objectives

- O1. Assist in creating a 30-minute city where residents are close to jobs, education, health facilities and other services.
- O2. Exemplify a thriving community where residents live in healthy and highly connected neighbourhood served by well-maintained public spaces and facilities.
- O3. Facilitate the opportunity for residents to choose from a variety of housing choices to range of income levels and lifestyles.
- O4. Provide a highly connected, safe and permeable network with convenient access to public transport, public spaces and facilities, and amenities.
- O5. Provide opportunities to extend the pedestrian and cycle routes beyond the site.
- O6. Celebrate the natural environment through conservation of important trees and maintain the existing landscaped character of surrounding residential areas.
- O7. Prioritise healthy living, including design to mitigate and adapt to heat, and design for active transport.
- O8. Buildings are sited, positioned and designed to maximise climatic responsiveness and provide high levels of desirable solar access and natural ventilation.

2.3 Indicative Master Plan

The vision and principles for the site as identified above are spatially expressed in the urban structure for the precinct as shown in **Figure 2**. To ensure that development provides key elements, where variations to the master plan are proposed, the development application is to demonstrate how the vision and principles have been achieved.

Figure 2 Indicative Master Plan



3 Specific objectives and controls

3.1 Land use

Objectives

- O1. Educational Establishment - Providing a future educational establishment on an existing government site to meet the current educational demands of the Lidcombe area and surrounding areas.
- O2. MSL Health Facility - Provide a fit for purpose facility for the care, support and treatment for multiple sclerosis and other neurological conditions
- O3. Residential - Provide additional residential facilities within an existing residential area to contribute towards housing targets set by State Government
- O4. Road Reserve - Provide efficient infrastructure to enable possibility to accommodate buses for the future educational facility and connect to the existing road network.
- O5. Stormwater Basins - To reduce the rate of stormwater runoff discharged to the public drainage network from development

Figure 3 Indicative Land Uses



3.2 Movement Network and Street Layout


Objectives

- O1. Create a safe and permeable road network that caters for pedestrians, cyclists and vehicles.
- O2. Provide opportunities to extend the pedestrian and cycle routes beyond the site boundaries.

Controls

- C1. Vehicular movement and directions are in accordance with the Access and Movement Network in **Figure 4** and associated indicative street sections.
- C2. A signalised intersection on Joseph Street is required prior to the operation of any educational establishment on site.

Figure 4 Access and Movement Network

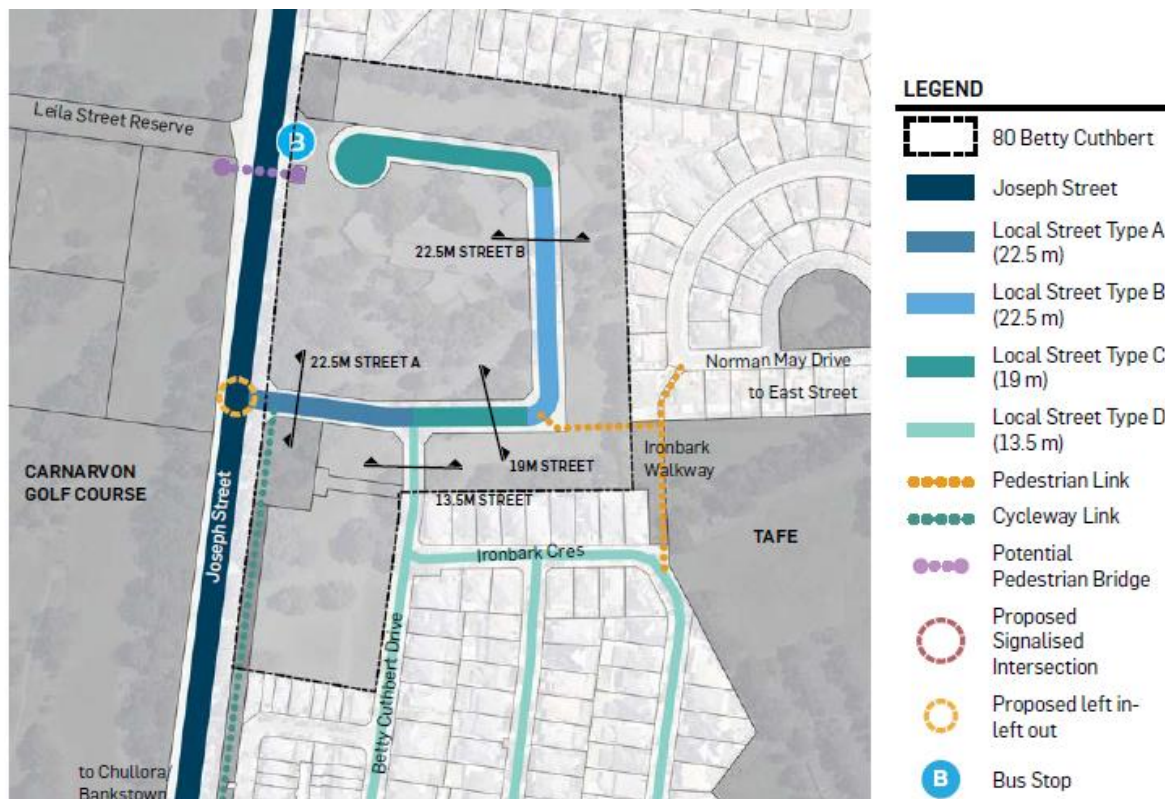

3.3 Pedestrian and cycle circulation

Objectives

- O1. Encourage and facilitate walking and cycling within the site and the general neighbourhood.
- O2. Encourage use by pedestrian and cyclist use of the site by:
 - providing footpaths on all streets on the site;
 - providing safe and high amenity pedestrian linkages connecting all major activities and open spaces;

- designing for safe on-street cycling conditions along residential streets;
- providing bicycle parking at key locations;
- providing new pedestrian and cycle access to adjoining housing development to the south and east
- allowing for future pedestrian/cycle links to adjoining sites and regional routes and integrating accessibility for the mobility impaired.

Controls

- C1. Pedestrian and cycle routes shall be provided in accordance with the Access and Movement Network in **Figure 4**.
- C2. Streetscaping/public domain design shall strengthen the connection within the site and to surrounding residential development and other local amenities.

3.4 Parking

Objectives

- O1. Maintain high amenity of the residential neighbourhoods by ensuring that adequate provision is made for adequate parking is provided across the precinct.

Controls

- C1. Parking should be consistent with the parking rates identified in Part G of the Cumberland DCP
- C2. Public parking spaces shall be provided in addition to the resident parking provided for each dwelling.
- C3. Public domain, street and landscape design shall clearly delineate parking areas.

Figure 5 Local Street A (22.5 metre road) indicative section

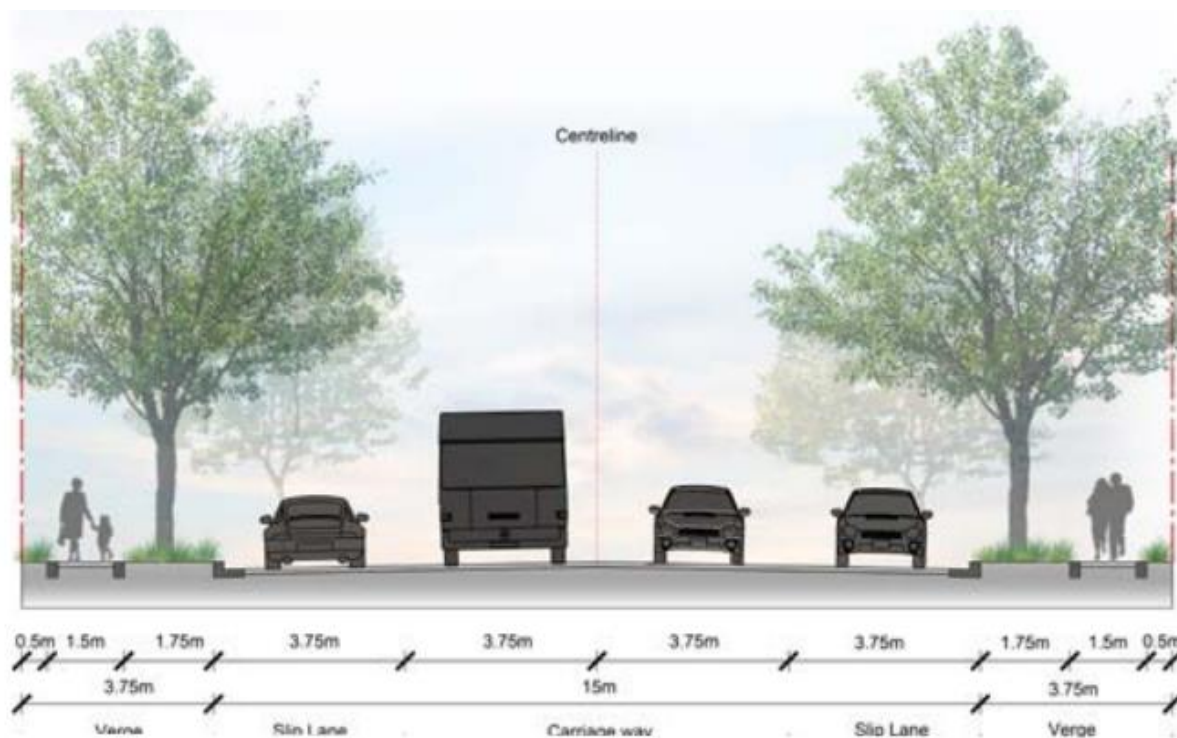


Figure 6 Local Street B (22.5 metre road) indicative section

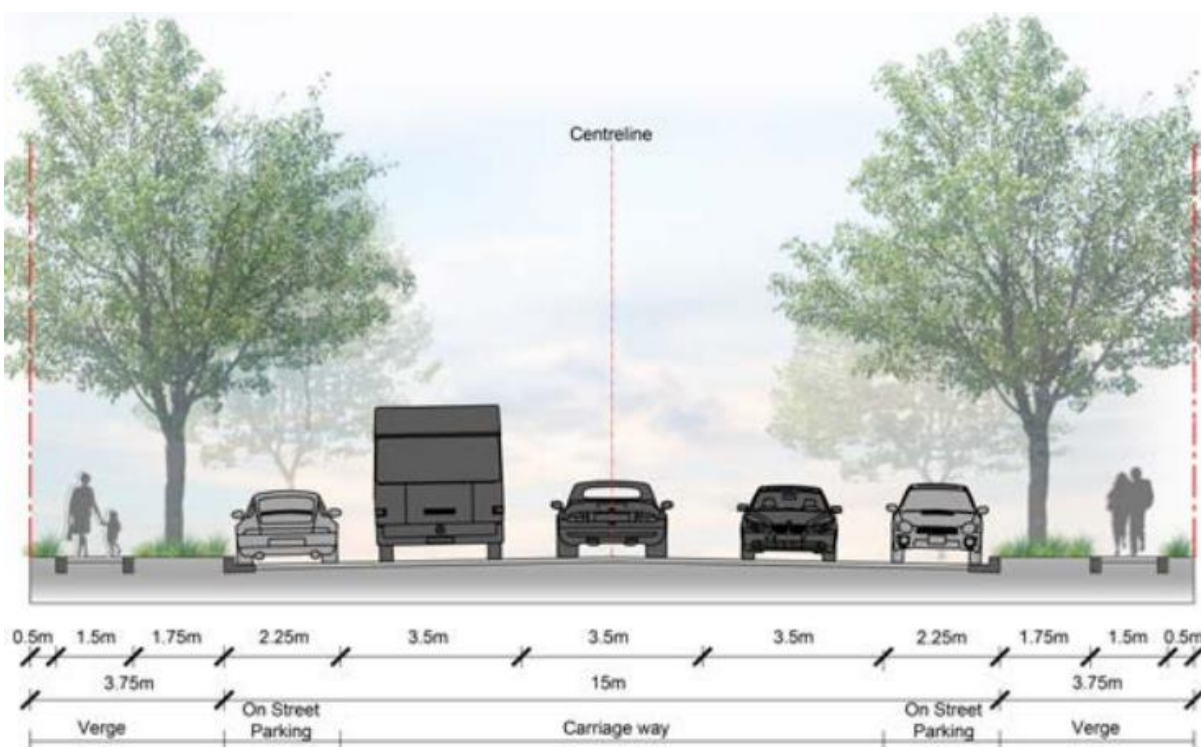


Figure 7 Local Street Type C (19 metre road) indicative section



Figure 8 Local Road Type D (13.5 metre road) indicative section



3.5 Landscape and Public Domain

Objectives

- O1. Retain high and medium value trees where possible subject to future educational establishment, MSL and residential development.
- O2. Extend streetscape character of Betty Cuthbert Drive and establish the streetscape character to the future educational establishment perimeter street.
- O3. Provide a consistent landscape buffer along Joseph Street to reflect the Botanica interface.

Controls

- C1. All development is to be consistent with the Landscape and Public Domain Strategy in **Figure 9**.
- C2. Retention of trees shall consider:
 - the safe useful life expectancy (assessed by a qualified arborist) and estimated future lifespan;
 - the current and future amenity and contribution to the landscape that the tree provides;
 - management and safety issues associated with retention
 - preliminary tree retention mapping in **Figures 10 – 15**.
- C3. Landscape design of private lots and retained existing trees shall contribute to the landscape amenity of the neighbourhood and precinct landscape framework.
- C4. Based on the preliminary tree retention mapping in **Figures 10 – 15**.
 - 'medium retention value trees' should be retained wherever possible but should not be a constraint on the development.
 - 'high retention value trees' are considered important for retention and should be retained and protected wherever possible. All opportunities for retaining these subject trees using design modification and tree sensitive construction techniques should be explored.
- C5. Street patterns and street tree planting shall be strong components of the landscape framework.
- C6. Streetscape planting shall ensure the coherence of new plantings and continuity with key elements and themes of the existing landscape and surrounding residential developments.

Figure 9 Landscape and Public Domain Strategy



Figure 10 Tree Retention Value Reference Map

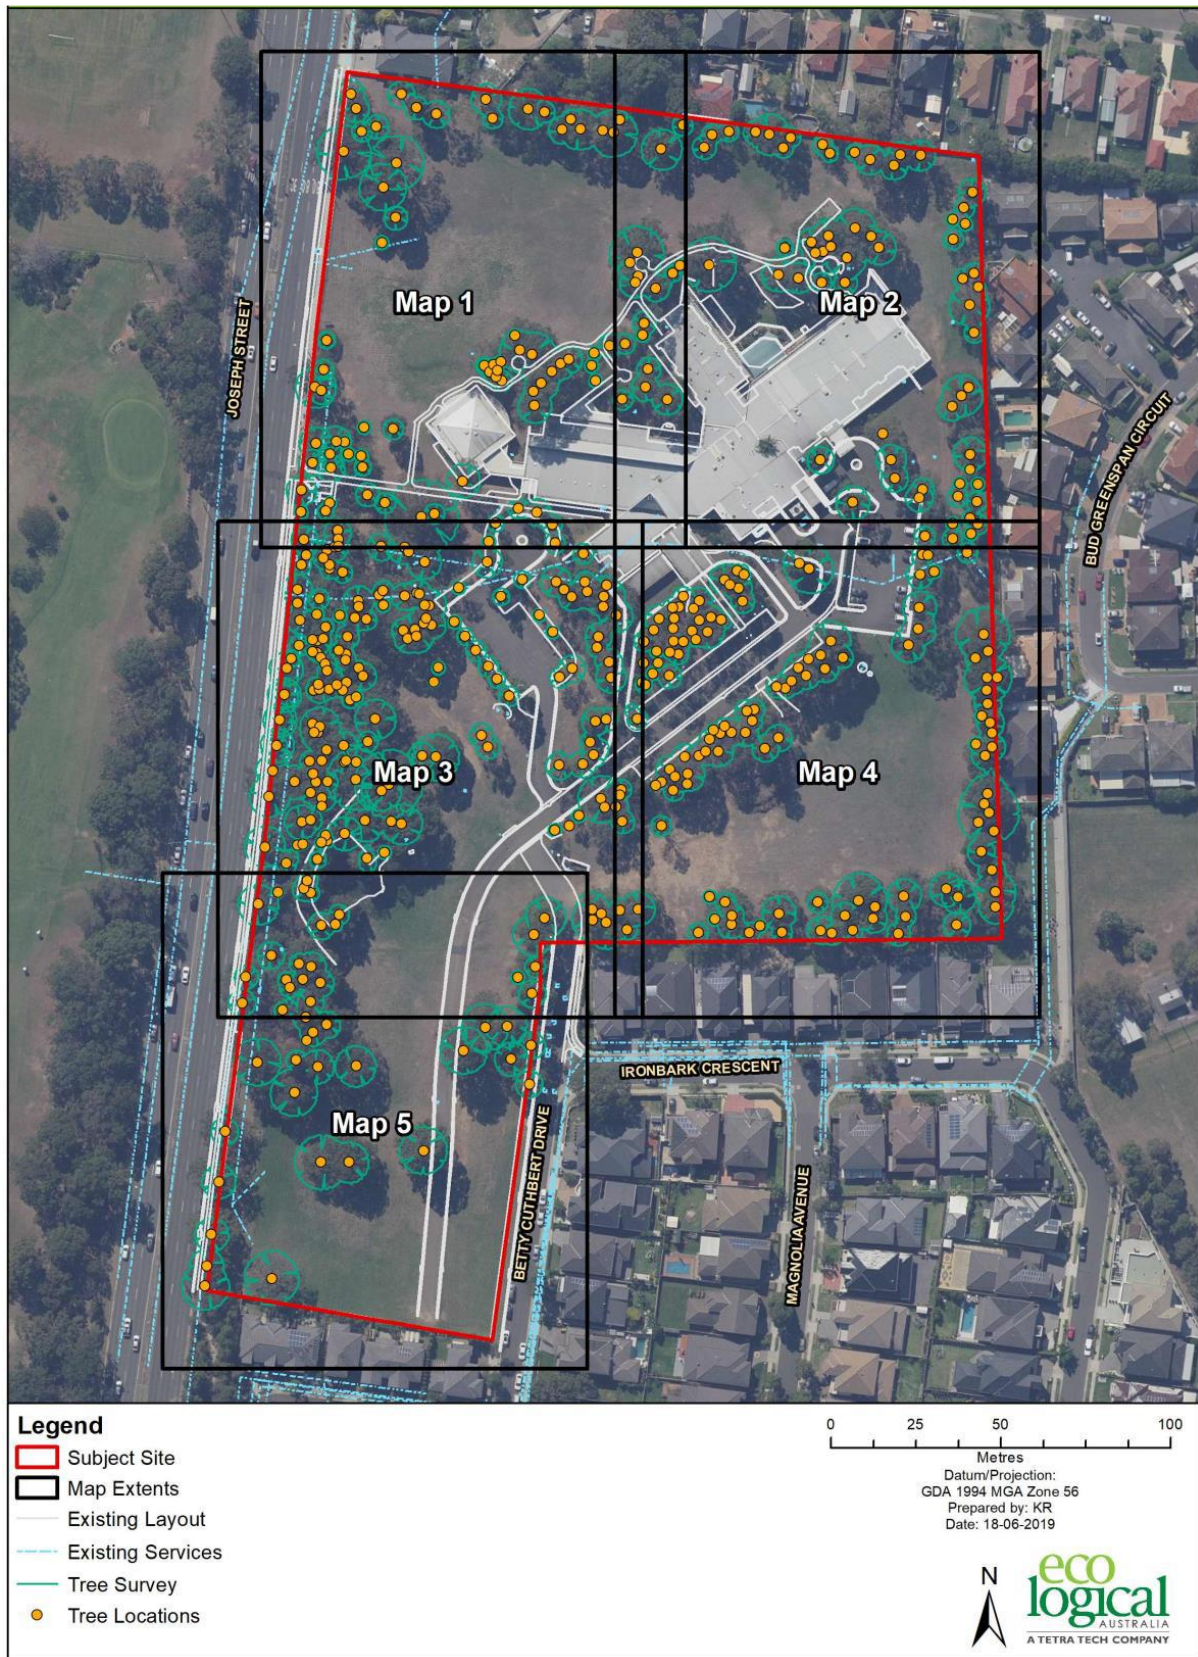


Figure 11 Tree Retention Values – Map 1

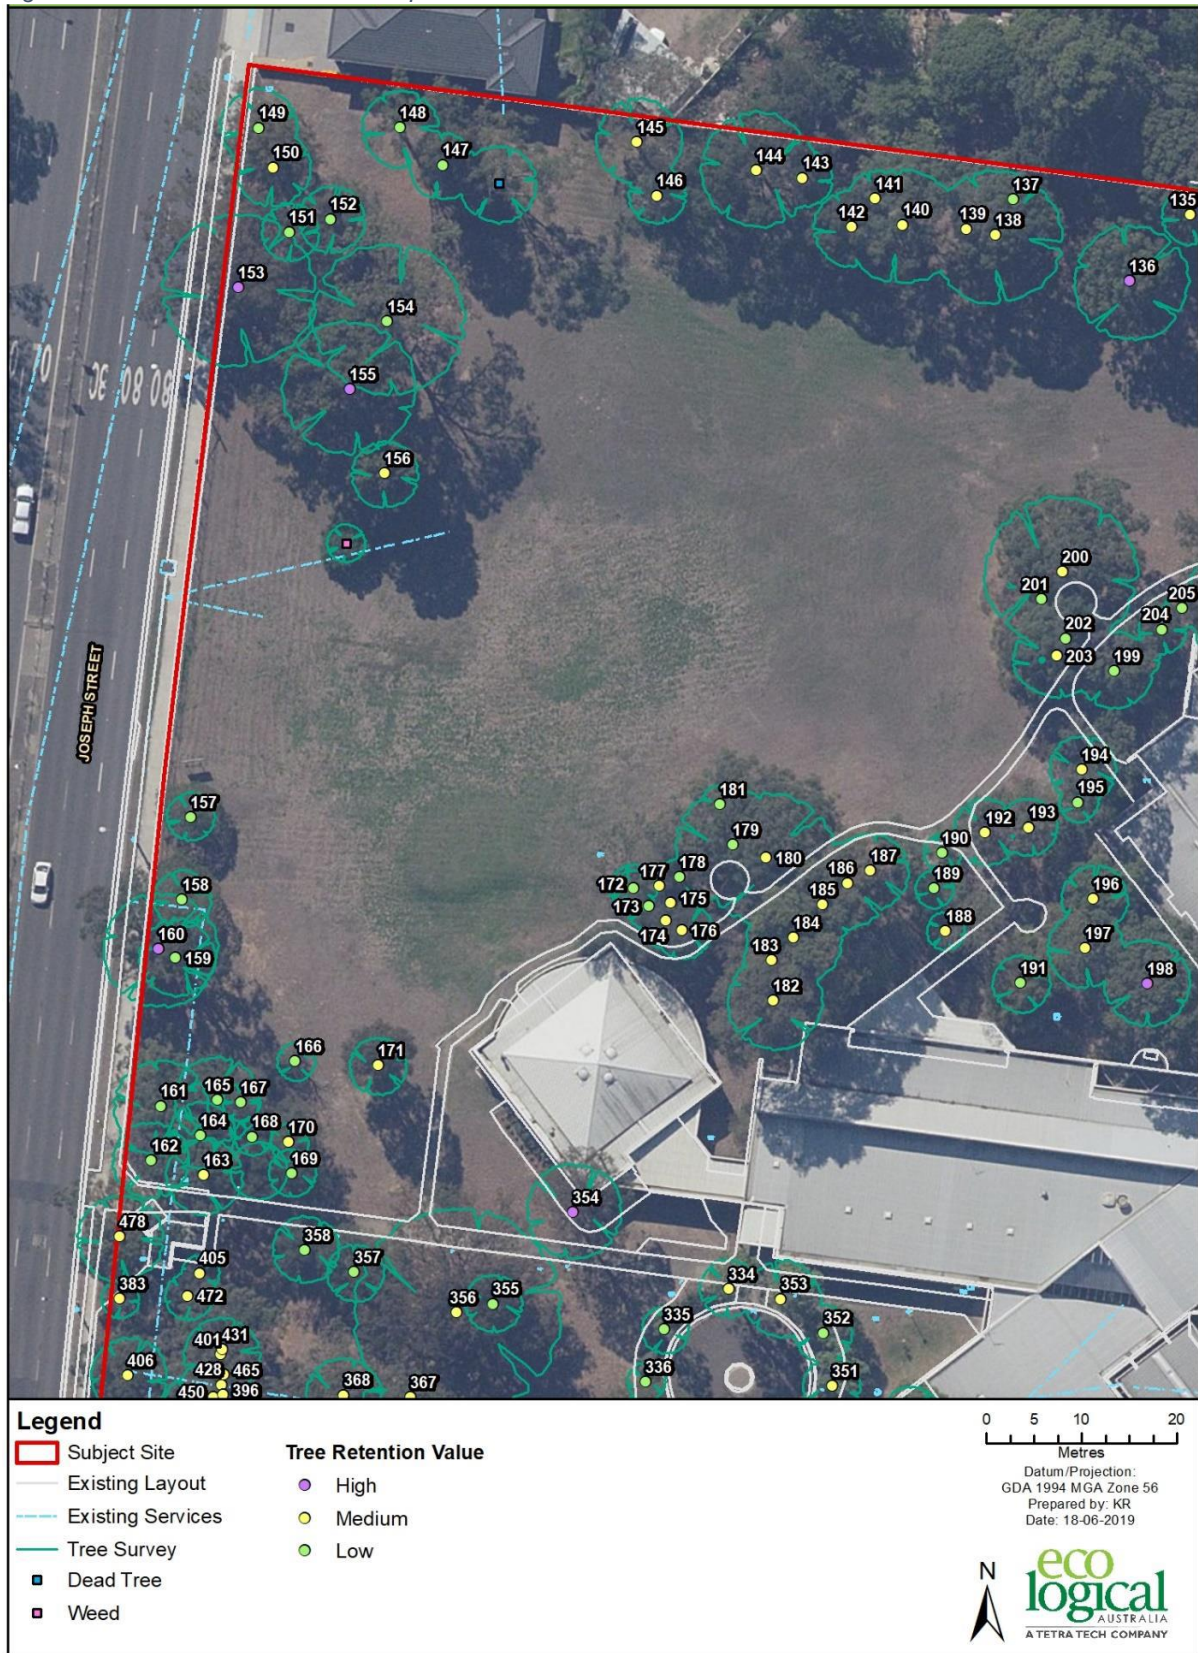


Figure 12 Tree Retention Values – Map 2



Figure 13 Tree Retention Values – Map 3

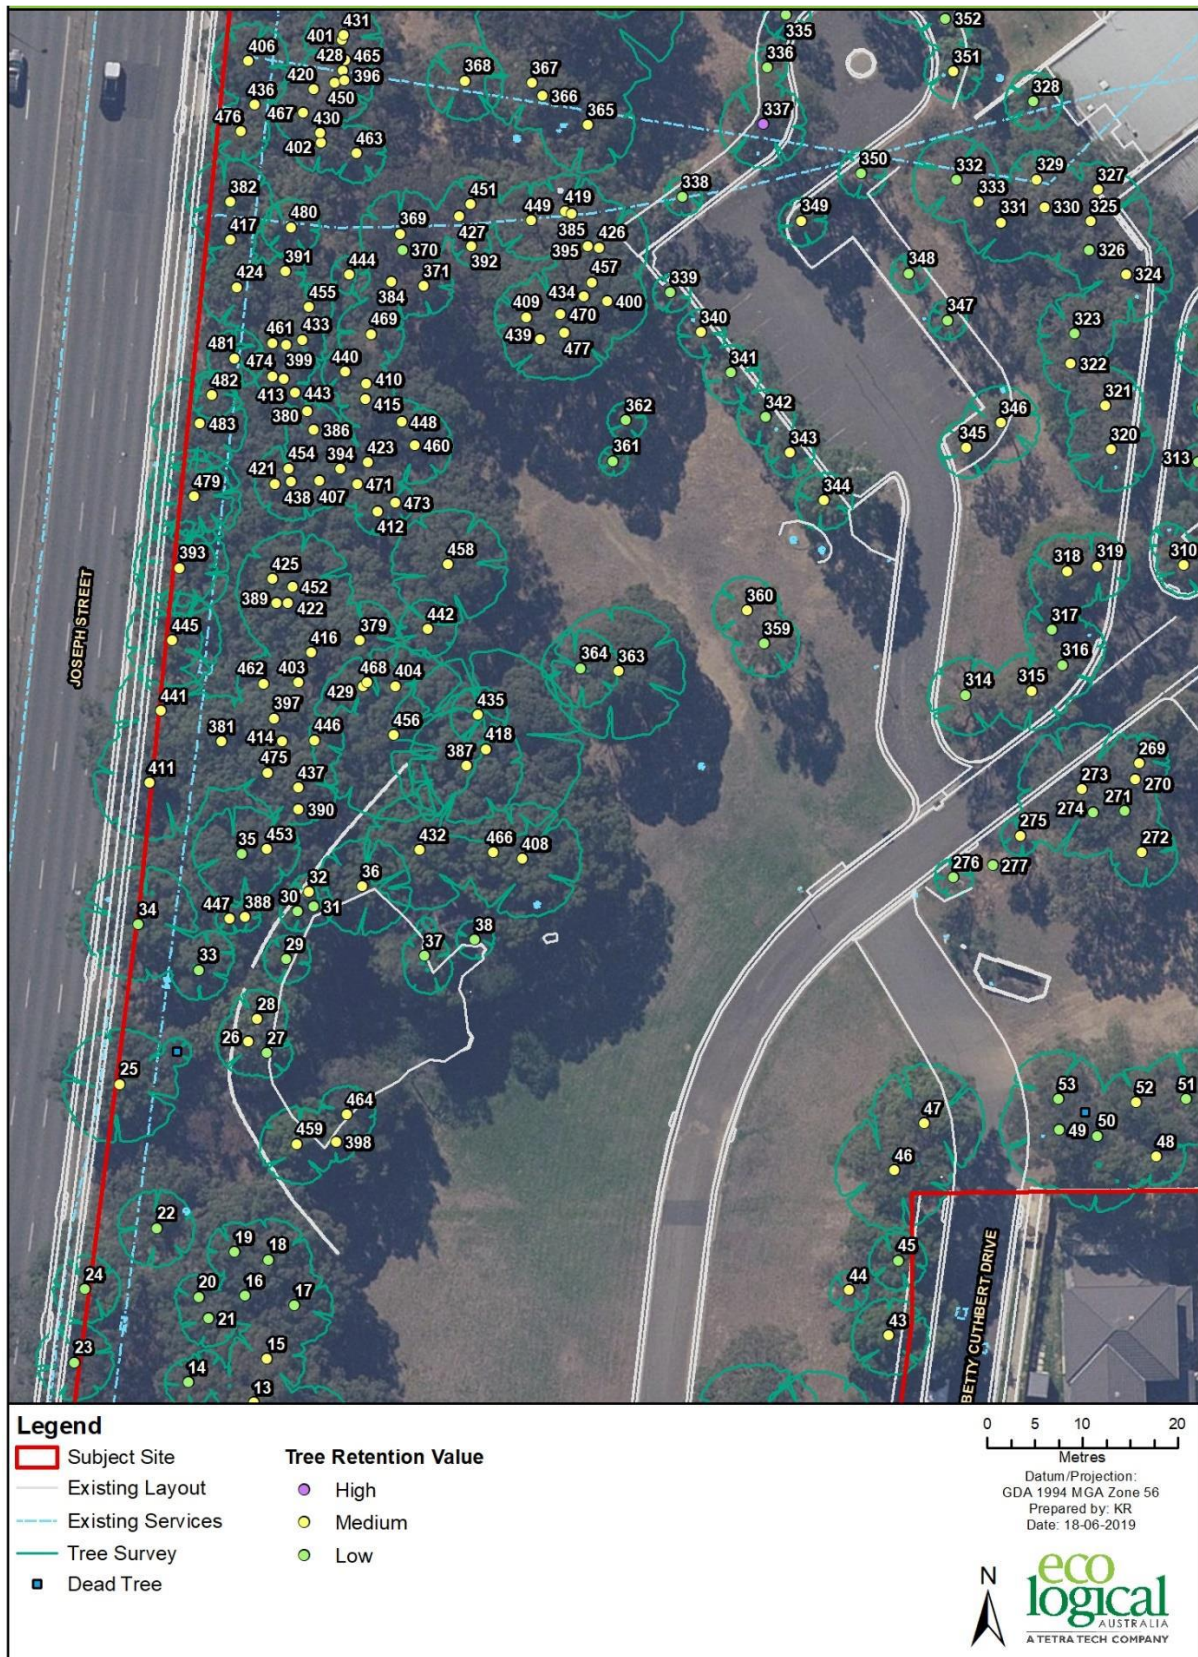


Figure 14 Tree Retention Values – Map 4

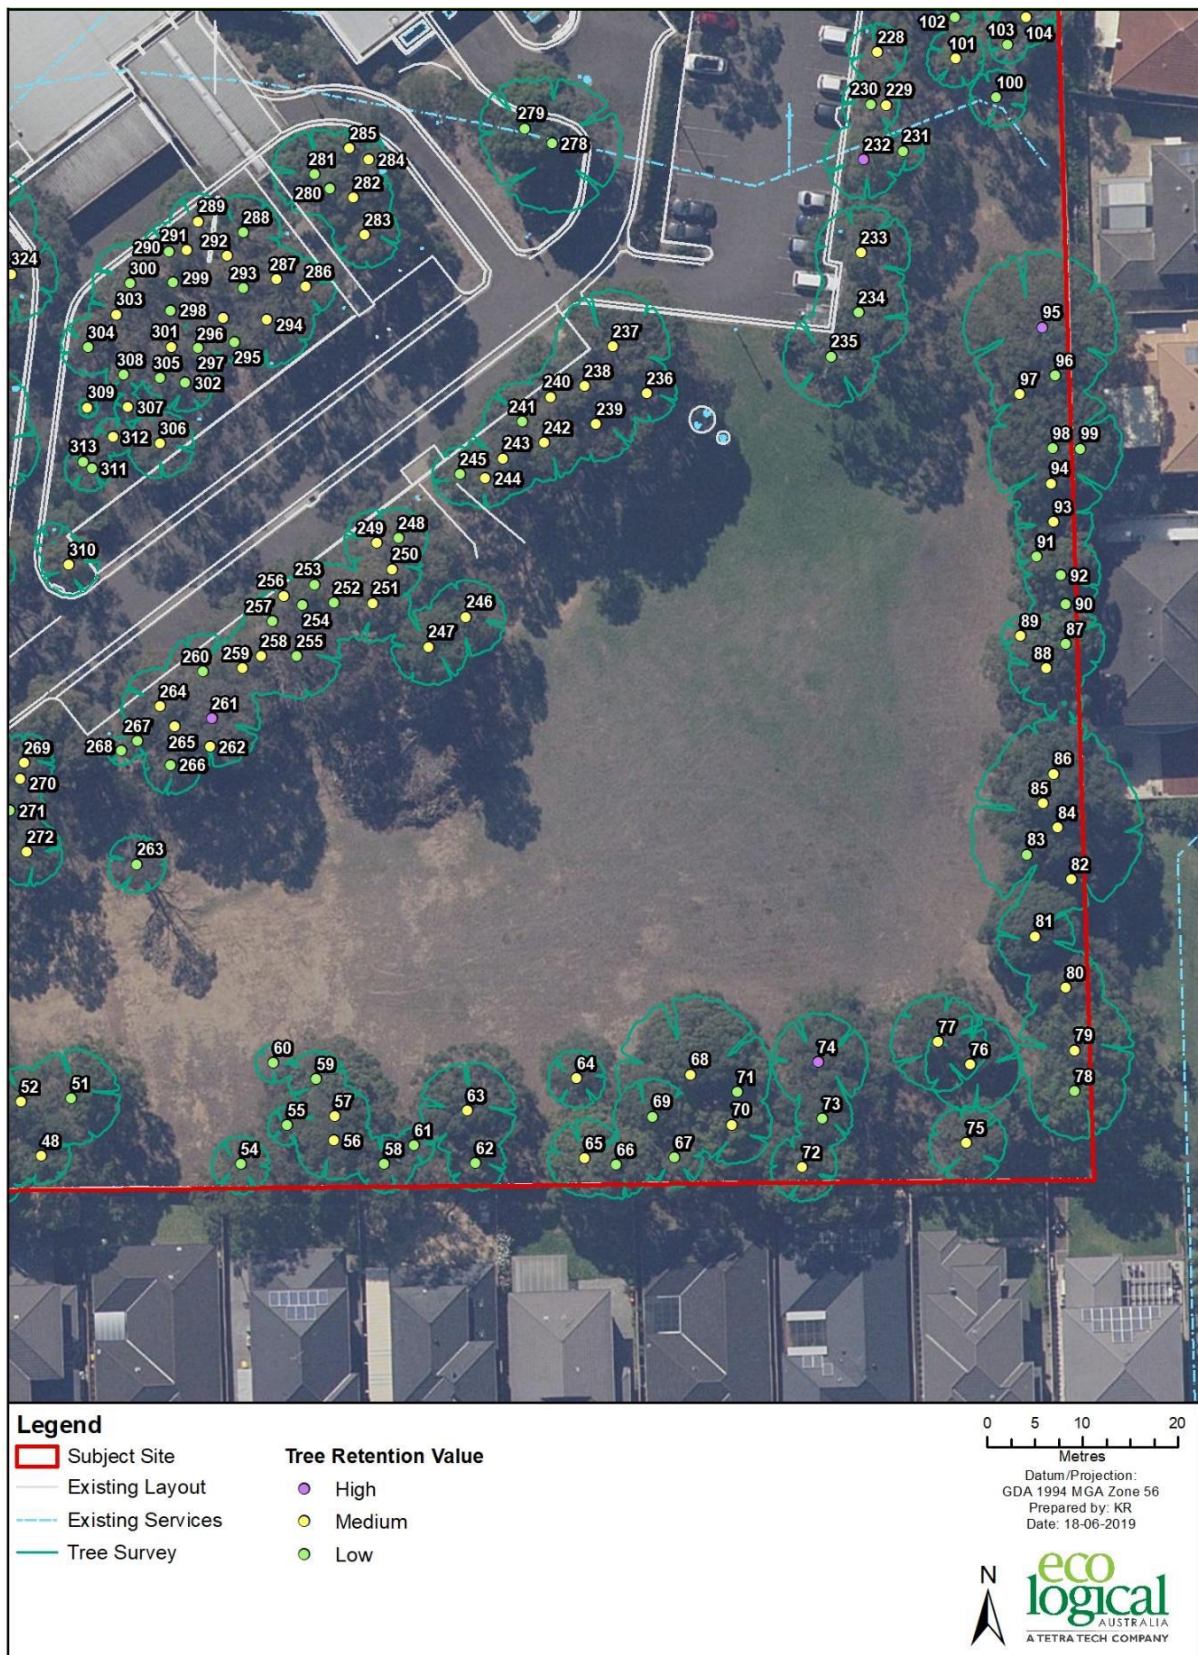


Figure 15 Tree Retention Values – Map 5



4 General Residential Controls

This section recognises that a range of densities is required to create a diverse built form that provides a wide choice of housing types.

A range of densities across the site is occurring and is further anticipated, and concentration of certain types is encouraged where it may be appropriate to create areas of distinct character where all other urban design, built form and housing controls can be met.

The private domain is to provide a high level of amenity to residents. The private domain includes private open space as well as the interface between private open space and dwelling interiors. Adequate solar access and privacy are fundamental qualities of the private domain.

To guide the built form and character of the private domain and to ensure that a high quality environment is created the following principles are to be met:

- Enable flexibility in the choice of housing design and siting of a dwelling house as well as suitable space available for other activities normally associated with the use of a dwelling house.
- Provide an appropriate level of amenity for new and existing residential areas.
- Ensure appropriate levels of service for utilities and the road network are achieved and to optimise existing infrastructure.
- Adequately consider environmental constraints and impacts including flooding, drainage, vegetation, erosion on a proposed subdivision.
- Ensure the proposed development lot is of sufficient size to accommodate the form of dwelling house proposed.

4.1 Site Planning Controls

This section sets out the objectives, performance criteria and development standards that relate to site planning and subdivision development.

Objective

O1. The site planning and subdivision controls are to ensure that:

- interference with the topography is minimised;
- the topography can be clearly read and understood;
- the subdivision patterns set up regular rows of buildings and spaces and are suitable for the dwelling types;
- a system of vehicular access to properties contributes to rather than dictates the resolution of the street; and
- there are precincts/streets with a range of discrete characters.

Controls

C1. The street and block pattern shall:

- relate to the building types;

- minimise cut and fill;
- enable small increments of change between buildings;
- enable the street hierarchy to be reinforced by the building types;
- set up an appropriate spacing between buildings;
- create a regular pattern of driveway access from the street;
- provide views and vistas;
- reinforce the qualities of the site; and
- have the potential to provide external linkages over time.

4.1.1 Subdivision, allotment planning, size and shape

Objectives

- O1. Subdivision provides for a variety of housing types to meet a variety of housing needs including meeting the needs of the aged and people with a disability.
- O2. The allotment size and shape is adequate to contain the particular housing type, open space and car parking (with the required amenity).
- O3. The allotment size and shape sets up a regular subdivision pattern related to the particular dwelling type, the street hierarchy and the block and street pattern.
- O4. The allotment size and shape allows for buildings to align with the street system.
- O5. Subdivision makes provision for dwelling houses and multi dwelling housing such as:
 - detached housing;
 - semi detached/zero lot line houses; and
 - terrace houses.
- O6. Individual allotments permit sufficient area commensurate with the dwelling type to allow for useable outdoor open space and solar access as required elsewhere in this Part.
- O7. The allotments and the location of the buildings are organised to set up regular patterns of buildings and space.
- O8. The allotments enable a range of housing types and spatial distribution.
- O9. The irregular shaped and sized allotments provide the opportunity for specific design solutions.
- O10. The allotments are predominantly rectangular.
- O11. The allotments which provide the higher density are located around the open space system.
- O12. The allotments are located so that the dwellings relate to the street hierarchy.

Controls

- C1. Level changes along a street block shall be made incrementally with minimal cut and fill.
- C2. Housing types shall be built to a height of up to 3 storeys where it is necessary to define and balance the spatial system.
- C3. Minimum lot frontages for each of the dwelling types are set out in Table 1 below.

Table 1 Minimum subdivision standards for individual dwelling types

	Detached	Semi-detached / zero lot line houses	Terrace houses & town houses
Minimum frontage width at building line (m)	12*	7.5	6
*may be reduced to 10m if the dwelling has a garage that is accessed from the rear of the property			

- C4. Strata titling of studio accommodation shall be considered where the following outcomes are provided:
 - both the primary residence and the studio have individual frontage to a public road;
 - a minimum of 1 covered off-street car parking space is provided for the studio in addition to car parking required for the principal residence;
 - the studio accommodation has a minimum habitable floor area of 45sqm;
 - the studio accommodation has a balcony or private courtyard (designed to eliminate overlooking) of minimum 8sqm and a minimum depth of 2m;
 - the allotment on which the studio accommodation is located has a minimum width of 10m and a maximum area of 55sqm; and
 - the privacy of the principal residence's rear yard and adjoining allotments is not compromised.

4.1.2 Water Quantity Planning Controls

On-site detention (OSD) is required to be designed for each lot to ensure peak flow rates at any point within the downstream drainage system do not increase as a result of development during all storm events up to the 100-year ARI, with the following requirements:

- Permissible site discharge (PSD) - 100L/s/Ha
- Site storage requirement (SSR) - Minimum of 455m³/Ha

Objectives

- O1. The drainage strategy takes into account a total catchment management approach such that downstream drainage systems are not impacted adversely through alteration to existing drainage flows from the site.

- O2. Drainage systems and ground surface areas are to be protected from pollutants and soil erosion. Pollutant and sediment control measures are required for all subdivision applications.
- O3. The drainage works for the site are to preserve the effectiveness of existing downstream flood mitigation and drainage works.
- O4. Proposed development is not to increase downstream flooding or increase pollutants on a total site performance basis. Off-site mitigation measures will be accepted as meeting this criteria subject to satisfactory arrangements with the affected landowner.
- O5. Stormwater infrastructure is to be designed to be aesthetically pleasing and landscaped so as to serve a dual function as a continuation of the open space and stormwater management.

Controls

- C1. Stormwater runoff from all new roof areas shall be routed through the OSD system. Runoff entering the site from upstream properties shall be directed bypassing the on-site detention system.
- C2. A portion of the new impervious areas (excluding roof areas) shall discharge directly to road drainage system if it cannot be drained to the storage facility, provided the PSD is reduced to compensate for the smaller catchment.
- C3. No more than 15% of the total site area shall be permitted to bypass the detention system.
- C4. The maximum desirable extent of impervious surfaces bypassing the detention system is 15% of the total impervious site area.

4.2 Residential Dwelling Controls

4.2.1 Dwelling design and form

Objectives

- O1. Housing variation caters for a socio-economically diverse community.
- O2. Ensure dwellings and garages are designed with regard to site conditions and minimise impact on landform.
- O3. Ensure dwelling and garage design has regard to the amenity of adjoining development and surrounding properties.
- O4. Ensure that dwellings have a high level of internal and external amenity.
- O5. Denser housing forms are to be located around open space and on wide verges.
- O6. Dwelling groups are not composed of different dwelling types (e.g., terrace dwellings are to stand alone as one group).
- O7. Taller or raised housing forms are to be located where land slopes away from an open space or across the width of the street.
- O8. Where land slopes along the street, dwellings to follow the slope of the land.

- O9. Floor to ceiling heights to enable good light penetration and cross ventilation.
- O10. Ensure that groupings of similar types of dwellings create areas of a particular identity in the built form and streetscape.
- O11. Ensure that dwelling design and types reinforce corners, the street, and open space hierarchy.
- O12. Dwellings and garages are designed with regard to the site conditions and minimise the impact on landform.

Controls

- C1. A minimum of 20% of the total number of dwellings shall be detached dwellings.
- C2. The building height controls and floor to ceiling controls applicable to buildings are set out in the Table 2 below.

Table 2 Floor to ceiling heights

	Levels	Minimum	Maximum
Dwellings	Ground floor	2.7m	3m
	1 st and 2 nd floor	2.4m	2.7m

- C3. The maximum building depth of any second or third storey components of dwellings shall be 14m.
- C4. Stairs, verandahs, entry features, courtyard walls, balconies, carports and porticos may encroach within the primary building line by not more than 2m provided the design, materials, colour and construction match the main dwelling.
- C5. Dwellings shall be predominantly 2 storeys with some component of single storey. 3 storey dwellings shall be considered if they are on sites where it can be demonstrated that it enhances the streetscape and/or legibility.
- C6. The floor level of any dwelling shall be a minimum of 500mm above the 1% AEP level of any adjacent drainage easement or water course or OSD facility.
- C7. Garage door openings fronting a public road shall be not be more than 5m wide or 50% of the frontage width of the allotment measured at the building alignment, whichever is the greater.
- C8. Garage door fronts shall be setback a minimum of 5.5m from the street boundary and 1.5m back from the front dwelling façade.
- C9. Garages, particularly doors, carports and parking areas shall be detailed to reduce their visual impact and add interest at ground level. The materials used in the garage shall complement those of the house.
- C10. Garage and carport design shall be in the same application as the dwelling even if it is to be constructed at a later date.

- C11. Carports shall be designed so that secondary elements do not dominate the dwelling façade.
- C12. Pitched roofs to carports shall not permitted unless compliance with the streetscape objectives can be demonstrated and the carport structure does not dominate the dwelling façade.
- C13. Carports shall be a maximum of 3.5m in width.
- C14. Carports shall be designed as open pergola type structures. This may include a flat roof and shall not be screened on the sides or front.
- C15. Carport structures shall be setback a minimum of 2m from a primary street front boundary.
- C16. Carport structures shall not exceed 3.5m in height including all elements.

4.2.2 Density of dwellings

Objectives

- O1. Density is to be optimised while allowing for:
 - adequate open space;
 - appropriate curtilage for landscape of exceptional and high value;
 - a street and block system which suits the building typologies and enables the reading of the landscape setting; and
 - minimum intrusion on the topography.

4.2.3 Site coverage

Objectives

- O1. Site coverage enables the proposed building type, adequate open space and the required car parking.
- O2. Site coverage varies to suit the dwelling type i.e. terrace houses require greater site coverage than detached houses.
- O3. Development achieves:
 - a clear physical (bulk) relationship between each building type and its allotment size with regard to creating neighbourhoods of some homogeneity; and
 - adequate separation between dwellings particularly at the rear of the site.

Controls

- C1. The maximum site coverage for residential development as a percentage of the total site area for each dwelling type shall be compliant with the requirements set out in Table 3 below.

Table 3 Minimum site coverage

		Detached	Semi-detached / zero lot line houses	Terrace houses & town houses
Maximum coverage	site	55%	60%	70%

4.2.4 Setbacks

Setbacks are required to protect the privacy of adjoining residents, to provide for sunlight to adjoining dwellings and to provide a visual rhythm and coherence to the streetscape.

Objectives

- O1. Ensure that the dwellings address the public domain and set up a spatial rhythm.
- O2. Ensure there is adequate solar access and privacy
- O3. The setbacks to the street need to provide:
 - a clear reading of the topography;
 - a clear edge to the street and/or open space system;
 - a semi-private zone;
 - houses which are more dominant than garages;
 - reinforcement of the street hierarchy;
 - reinforcement of the street block where appropriate; and
 - an open streetscape with adequate areas for landscaping, fencing, and screen planting.
- O4. The setbacks to the side boundary and the rear are to ensure that there is:
 - adequate solar access to neighbours;
 - privacy for residents and neighbours, and minimise overshadowing; and
 - an even spatial rhythm along the street so that individual building types do not dominate.

Controls

- C1. Table 4 below sets out the minimum setback requirements for all dwelling types on the site.

Table 4 Minimum setback requirements for all dwelling types

All Dwelling Types	
Primary front setback	4m to building façade of habitable rooms from the front boundary line. This setback may be reduced to 3m for dwellings fronting public open space or a corner, providing solar access and other environmental provisions are met.
Side and rear set back	A 1.2m side setback is required for 1 and 2 storey portions of dwellings.
	Garages, including those with studio accommodation above, in lanes can be located on the rear boundary provided a minimum of 7.5m is provided between the façade and opposite boundary fence or building façade. (Refer below for additional requirements).
Eaves/facias	825mm for 1 or 2 storey buildings.

- C2. Garages facing a street shall be set back a minimum of 5.5m from the front boundary.
- C3. Two storey, open, non-habitable structures including carports, pergolas, verandahs and entry features shall sit within the 2m articulation zone as measured from the primary front setback.
- C4. Adjoining building facades shall be aligned. Building facades may vary in alignment only if a cohesive streetscape is achieved. Any variation to the alignment shall be derived from the building type and the topography, i.e. where a lot slopes away from an area of parkland or to achieve a more successful result by locating a building or group closer to the street edge.

4.2.5 Orientation

Objectives

- O1. Ensure that the orientation and organisation of lots will enable dwellings to achieve the environmental performance guidelines as set out in section 2 of this Part.
- O2. The building zone for the dwelling is predominantly at the front of the lot.
- O3. The higher density areas with smaller lot frontages are predominantly east-west or north-south where the north is at the rear.
- O4. Ensure the subdivision of allotments maximises the potential for energy efficient housing development whilst maintaining the design integrity of the overall development.
- O5. All allotments are to provide for sufficient area to allow the siting of dwellings and to allow for adequate areas of private open space, vehicle access and parking as set out elsewhere in this Part.

Controls

- C1. Lots shall be oriented to facilitate the siting of dwellings to meet the Ecologically Sustainable Development (ESD) criteria set out in this Part.
- C2. The above requirements may be varied in cases where an applicant submits an integrated subdivision and development application demonstrating that the performance criteria have not been compromised.

4.2.6 Private open space and landscaping

Objectives

- O1. Private open space areas are to:
 - relate to the living spaces, windows, access/egress points and function of the dwelling; and
 - be amenable and suitable for the intended use
- O2. All setback areas are to be landscaped to Council's satisfaction.
- O3. Ensure private open space is of a size and location suitable for the intended use.
- O4. Private open spaces and living areas are protected from overlooking from public and neighbouring areas.
- O5. Private open space areas are clearly defined and screened for private use.
- O6. Landscape treatment of private open space areas contribute to the master planned themes for streetscape and public open space (where private open space is visible from these public areas).
- O7. Landscape treatments complement solar access requirements for buildings.
- O8. Planting:
 - is appropriate for its setting and environment;
 - is provided in the public and private domain;
 - complements the existing landscaping and topography, lighting and street furniture;
 - is simple and robust; and
 - provides privacy, screening and shading where required.
- O9. All new landscaping is to be designed to be low maintenance and low water usage.

Controls

- C1. New plantings shall contain endemic species that are of low maintenance and low water usage.
- C2. Cultural plantings shall be used where existing plantings are to be enhanced.

- C3. The minimum area of soft landscaping for residential development as a percentage of the total site area for each dwelling type shall be as set out in Table 5 below.
- C4. Private open space shall be of a minimum size as set out in Table 5 below and be able to contain a square measuring a minimum of 4m x 4m which is free from obstructions such as garden beds and steps.
- C5. Private open space areas associated with residences shall accommodate outdoor recreation needs and function as an extension of interior living areas.
- C7. Planting shall be used to minimise overlooking between dwellings, and between dwellings and public or common areas; having regard to crime prevention principles.
- C8. Planting shall be of appropriate mature heights and volumes to the space allotted to them.
- C8. The area between the front property boundary and the front building line shall not be considered as private open space unless solar access is principally to the front garden space and this area is suitably fenced and screened.

Table 5 Minimum private open space per dwelling type

	Detached	Semi-detached / zero lot line houses	Terrace houses & town houses
Minimum area of private open space	70m ²	60m ²	35m ²
Minimum landscaped area of site	45%	40%	30%

4.2.7 Architectural Expression

Objectives

- O1. Ensure that dwellings relate well to one another and contribute to the quality of each precinct and the overall quality of the development.
- O2. The architectural expression of dwellings is to ensure that:
- attached housing has clearly defined party walls which enable buildings to adjust to the topography without large benching;
 - roof forms in attached housing are to reflect the stepped changes at ground level;
 - a high standard of architectural design of both individual dwellings and groups of dwellings;
 - special urban design features are reinforced such as the alignment of roads which curve towards a spatial gateway or landscape focus;

- building entries are clear and legible;
- windows, facades and rooms are well proportioned;
- materials and detailing are appropriately used;
- roof forms are used which relate to the definition of space and do not create big buildings such as hip roofs on runs up terrace houses are not appropriate;
- attention to both the building base and roof is required;
- roof forms in attached housing reflect the stepped changes at ground level;
- windows to main rooms are directed to the front and rear
- the head height of windows relate to the height of the ceiling; and
- there is variety but continuity between dwellings.

Controls

C1. Design of dwellings shall consider the following:

- Articulation of building facade using:
 - material and detailing;
 - legible building entrances;
 - balcony and other elements; and
 - well proportioned openings, window, type and size.
- corner buildings shall be articulated to reinforce the corner condition by addressing both street frontages;
- building elements such as balconies, verandahs, pergolas, sun shading, porches and other elements shall be used to articulate the façade;
- windows to living areas shall be directed either to the street or rear private open space (and vehicular access ways) to provide surveillance to the street and other open space areas;
- modulation of the facade shall be integral to the design of the building, its setting and not arbitrary;
- level changes along a street block shall be made incremental with minimal cut and fill; and

C2. Windows and doors, particularly those that face the street, shall be provided in a balanced manner and respond to the orientation and internal uses.

4.2.8 Adaptable housing

Objectives

- O1. Ensure a sufficient proportion of dwellings include accessible layouts and features to accommodate changing environments of residents.
- O2. Development to allow for dwelling adaptation that meet the changing needs of people's lifestyle.

Controls

- C1. A minimum of 10% of the total number of dwellings shall be constructed so as to be adaptable for use by aged or disabled occupants in accordance with the relevant provisions of the Building Code of Australia and Australian Standards.
- C2. Refer to the requirements for adaptable housing in Part B of this DCP.

4.2.9 Building materials

Objectives

- O1. Ensure that materials are durable and have a long life.
- O2. Ensure that materials have low embodied energy.
- O3. Ensure that materials contribute to the design of the buildings in terms of aesthetics and comfort.
- O4. Materials are to:
 - create a high quality finish which is robust over time;
 - be appropriate to the scale and detailing of the building;
 - relate well to one another; and
 - provide thermally responsive dwellings.

Controls

Walls

- C1. Exterior walls shall be predominantly masonry and/or timber. Lightweight materials especially timber can be used to add interest and texture to the building and to break up larger expanses of wall.
- C2. Bolder brighter shades for areas of detail shall be appropriate provided that these are in keeping with the overall colour scheme of the house and do not detract from the general harmony of the street.

Roofs

- C1. Single colour tile roofs are preferred. Pre-finished metal sheeting may be used on concealed roofs or "lean to" construction.
- C2. Colours shall reinforce the character of the precinct.

Windows

- C1. Windows may be constructed of timber or pre-finished aluminium and shall be in a dark colour.

4.2.10 Solar amenity

Objectives

- O1. Ensure that housing design is energy efficient, assists in developing ecologically sustainable residential communities and leads to a reduction in the household use of fossil fuels.
- O2. The design of buildings minimises household energy needs, utilises passive solar design principles and ensures adequate solar access.
- O3. Shading to western walls is to be provided where not overshadowed by adjoining walls or vegetation.
- O4. Roof insulation is incorporated into all residential development.
- O5. All dwellings have high levels of light penetration.
- O6. Cross ventilation is provided.
- O7. Buildings are to be designed with windows that are located, sized and/or shaded (including the use of eaves) to facilitate thermal performance and minimise the use of artificial light during daylight hours.
- O8. The design of residential dwellings is to demonstrate passive design principles including:
- window placement;
 - building orientation;
 - shading;
 - insulation;
 - ventilation; and
 - sensitive landscaping.

Controls

- C1. The use of materials shall minimise energy use over their whole lifecycle.
- C2. All residential buildings, where not affected by external noise sources, shall be able to be operated in a naturally ventilated mode and achieve comfortable internal conditions.
- C3. Vegetation shall be used to cool the ambient temperature within the development. Selective use of trees shall include consideration of deciduous trees to provide shading in summer and allow passive heat in winter.

- C4. Buildings shall be designed to allow passive heating in winter. Selective shading shall be applied so that the high angles of sunlight in summer do not penetrate the buildings.
- C5. Distances between buildings shall be designed to allow natural light to dwelling living spaces.

4.2.11 Privacy and overshadowing

Objectives

- O1. Ensure the design of buildings and position of windows respects the privacy of adjoining residents.
- O2. Buildings are to be sited and designed to ensure provision of daylight to habitable rooms in adjacent dwellings and neighbouring open space including the private open space associated with dwellings.
- O3. Buildings are to be designed to ensure appropriate levels of privacy.
- O4. Developments are to include site planning, building design and landscaping that minimises the overshadowing of adjoining properties.

Controls

- C1. Windows to living areas shall face predominantly to the street and to the rear.
- C2. Windows to living areas that face directly on to windows, balconies or private open space of adjoining properties shall be appropriately screened and/or have reasonable separation. A distance of 9m between openings of separate dwellings is required unless other mitigating measures are adopted.
- C3. First floor balconies shall not be permitted where directly overlooking living areas of adjacent dwellings unless suitable screening is provided.
- C4. At least 50% of the ground level private open space shall receive not less than 3 hours of sunlight between 9:00am and 3:00pm on June 21 for a minimum of 80% of all dwellings.
- C5. At least one internal living area shall have access to a minimum of 3 hours of direct sunlight between the hours of 9:00am and 3:00pm on June 21. This shall be achieved for a minimum of 80% of all dwellings.

4.2.12 Fencing

Objectives

- O1. Fencing is to:
 - clearly demark the public, semi-public and private domains;
 - complement the dwellings and the streetscape; and
 - provide privacy where appropriate.
- O2. All new dwellings to have side and rear boundary fences.

- O3. Front fences, where appropriate, contribute to the streetscape and allow gardens to contribute to the public domain
- O4. Front fences, where appropriate, extend alongside boundaries of corner sites back to the building line.
- O5. Ensure that rear and side fencing assists in providing privacy to private open space areas.
- O6. Fence height, location and design should not affect traffic sight distances at intersections.
- O7. Ensure that front fences relate in proportion to the height of the building and are appropriate to the style of residence

Controls

- C1. Side boundary fencing constructed behind the building alignment setback shall be a maximum height of 1.8m and be constructed from materials which complement the design of the dwelling.
- C2. The front and side dividing fences where located within the front yard area shall not exceed a height of 1.2m as measured above existing ground level and shall be a minimum of 50% transparent.
- C3. Front and side dividing fences where located within the front yard area shall not be constructed of solid pre-coated metal type materials such as Colorbond or similar.
- C4. Front fencing that is to provide privacy screening for external living areas shall be considered up to a maximum height of 1.8m if complementary to the dwelling design.
- C5. Fencing to secondary road frontages and rear vehicular access shall be a maximum of 1.8m in height at the road boundary from the rear boundary up to the line of the front of the dwelling and must be of materials and design complementary to both the streetscape and dwelling.
- C6. Front fences shall be compatible with and sympathetic to the dwelling design.
- C7. Fencing styles shall complement both the architectural design of the dwelling and the streetscape. Front fences should not exceed 1.2m in height unless required for provision of privacy to private open space and unless appropriately screened by landscaping and with variations in materials and alignment.

4.2.13 Waste controls

Waste requirements should be consistent with the relevant controls identified in Part G of the Cumberland DCP

4.2.14 Parking and loading controls

Parking requirements should be consistent with the relevant controls identified in Part G of the Cumberland DCP