PROPOSED TWO STOREY DWELLING WITH BASEMENT & POOL AND SECONDARY DWELLING AT 45 HILLCREST AVENUE, GREENACRE

- These drawings shall be read in conjunction with all architectural and other consultants drawings and specifications and with such other written instructions and sketches as may be issued during the course of the Contract. Any discrepancies shall be referred to the Superintendent before proceeding with any related works. Construction from these drawings, and their associated consultant's drawings is not to commence until approved by the Local Authorities.

- During construction the structure shall be maintained in a stable condition and no part shall be overstressed Temporary bracing shall be provided by the builder/subcontractor to keep the works and excavations stable at all times.

- G7 Any substitution of materials shall be approved by the Engineer and included in any tender.
- All services, or conduits for servicing shall be installed prior to commencement of pavement construction
- The structural components detailed on these drawings have been designed in accordance with the relevant Standards Australia codes and Local Government Ordinances for the following loadings. Refer to the Architectural drawings for proposed floor usage. Refer to drawings for live loads and superimposed dead loads.

DRAINAGE NOTES

- All pits within the property are to be fitted with "weldlok" or approved equivalent grates: Light duty for landscaped areas Heavy duty where subjected to vehicular traffic


- D7 All pits in roadways are to be fitted with heavy duty grates with locking bolts and continuous hinge
- D8 Provide step irons to stormwater pits greater than 1200 in depth
- D10 Where a high early discharge (hed) pit is provided all pipes are to be connected to the hed pit, uno. D11 Down pipes shall be a minimum of dn100 sw grade upvc or 100 x100 colorbond/zincalume steel, unc
- D13 Eaves gutters shall be a minimum of 125 wide x 100 deep (or of equivalent area) colorbond or zincalume
- D14 Subsoil drainage shall be provided to all retaining walls & embankments, with the lines feeding into the


EROSION AND SEDIMENT CONTROL NOTES

- The contractor shall implement all soil erosion and sediment control measures as necessary and to the satisfaction of the relevant local authority prior to the commencement of and during construction. No disturbance to the site shall be permitted other than in the immediate area of the works and no material shall be removed from the site without the relevant local authority approval. All erosion and sediment control devices to be installed and maintained in accordance with standards outlined in risw department of housing's "managing urban stormwater soils and constructions".
- Place straw bales length wise in a row as parallel as possible to the site contours, uno. Bale ends to be tightly butted. Bales are to be placed so that straws are parallel to the row. Bales are to be placed 1.5m to 2m downslope from the toe of the disturbed batter, uno.

- All drainage pipe inlets to be capped until: pits constructed and protected with silt barrier
- E6 Provide and maintain silt traps around all surface inlet pits until catchment is revegetated or paved.

- The contractor shall implement dust control by regularly wetting down (but not saturating) disturbed area.
- Topsoil shall be stripped and stockpiled outside hazard areas such as drainage lines. This topsoil shall be respread later on areas to be revegetated and stabilised only, (i.e. all footpaths, batters, site regarding areas basins and cathdrains). Topsoil shall not be respected on any other areas unless specifically instructed by the superintendent. If they are to remain for longer than one month stockpiles shall be protected from erosic by covering them with a mulch and hydroseeding and, if necessary, by locating banks or drains downstream of a stockpile to retard silt laden runoff.

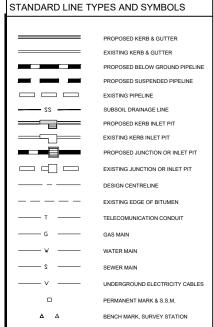

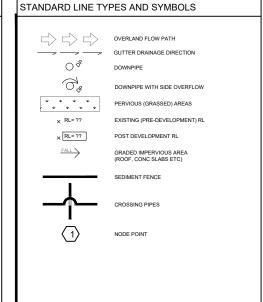

LEGEN	ID		
AHD AG AG ARI BBG L CC DCP DP DRP EBG EDP EEG FRV GD GSIP HP IL IO O/F O/SD PSD PSD PSD PSD PSD PSD PSD RR	Australian height datum Ag-pipe (Sub soil drainage) Average recurrence interval Box Gutter Box Gutter Cover level Clean out inspection opening Discharge control pit Down pipe Discharge control pit Down pipe Existing box gutter Existing down pipe Existing down pipe Existing eaves gutter Existing down pipe Existing eaves gutter Fiber reinforced concrete Fibor vasale Grade discharge High point of gutter Inspection opening Overflow On-site detention On-site detention On-site detention Permissible site discharge Pipe 1 Rectangular hollow section Rubber ring john Rail water re-use tank Railn water head Railn water re-use tank Railn water head Railn water bead Railn water outet Speaded john Spreader	SS SU TW TW TW U/S VG UNO	Stainless steel Box gutter sump Top of vail Top water level Underside of slab Vally gutter Unless noted otherwise

RECOMMENDED MAINTENA	NCE SCHED	ULE	
DISCHARGE CONTROL PIT (DCP)	FREQUENCY	RESPONSIBILITY	PROCEDURE
Inspect flap valve and remove any blockage.	Six monthly	Owner	Remove grate. Ensure flap valve moves freely and remove any blockages or debris.
Inspect screen and clean.	Six monthly	Owner	Revove grate and screen if required and clean it.
Inspect & remove any blockage of orifice.	Six monthly	Owner	Remove grate & screen to inspect orifice. see plan for location of dcp.
Inspect dcp sump & remove any sediment-sludge.	Six monthly	Owner	Remove grate and screen. Remove sediment/sludge build-up and check orifice and flap valve clear.
Inspect grate for damage or blockage.	Six monthly	Owner	Check both sides of grate for corrosion, (especially corners and welds) damage or blockage.
Inspect return pipe from storage and return any blockage.	Six monthly	Owner	Remove grate and screen. ventilate underground storage if present. open flap valve and remove any blockages in return line. Check for sludge/debris on upstream side of return line.
Inspect outlet pipe and remove any blockage.	Six monthly	Maintenance Contractor	Remove grate and screen. ventilate underground storage if present. Check orifice and remove any blockages in outlet pipe. Flush outlet pipe to confirm it drains freely. Check for sludge/debris on upstream side of return line.
Check fixing of step irons is secure.	Six monthly	Maintenance Contractor	Remove grate and ensure fixings secure prior to placing weight on step iron.
Inspect overflow weir & remove any blockage.	Six monthly	Maintenance Contractor	Remove grate and open cover to ventilate underground storage if present, ensure weir clear of blockages.
Empty basket at overflow weir (if present).	Six monthly	Maintenance Contractor	Remove grate and ventilate underground storage chamber if present. Empty basket, check fixings secure and not corroded.
Check attachment of orifice plate to wall of pit (gaps less than 5 mm).	Annually	Maintenance Contractor	Remove grate and screen. ensure plate mounted securely, tighten fixings if required. seal gaps as required.
Check attachment of screen to wall of pit.	Annually	Maintenance Contractor	Remove grate and screen. ensure screen fixings secure. repair as required.
Check screen for corrosion.	Annually	Maintenance Contractor	Remove grate and examine screen for rust or corrosion, especially at corners or welds.
Check attachment of flap valve to wall of .	Annually	Maintenance Contractor	Remove grate. Ensure fixings of valve are secure.
Check flap valve seals against wall of pit.	Annually	Maintenance Contractor	Remove grate. fill pit with water and check that flap seals against side of pit with minimal leakage.
Check any hinges of flap valve move freely.	Annually	Maintenance Contractor	Remove grate. Test valve hinge by moving flap to full extent.
Inspect dcp walls (internal and external, if appropriate) for cracks or spalling.	Annually	Maintenance Contractor	Remove grate to inspect internal walls. Repair as required. Clear vegetation from external walls if necessary and repair as required.
Check step irons for corrosion.	Annually	Maintenance Contractor	Remove grate. Examine step irons and repair any corrosion or damage.
Check orifice diameter correct and retains sharp edge.	Five yearly	Maintenance Contractor	Compare diameter to design (see work-as- executed) and ensure edge is not pitted or damaged.
STORAGE			
Inspect & remove any blockage of orifice.	Six monthly	Owner	Remove grate and screen. remove sediment/sludge build-up.
Check orifice diameter correct and retains sharp edge.	Six monthly	Owner	Remove blockages from grate and check if pit blocked.
Inspect screen and clean.	Six monthly	Owner	Remove debris and floatable material likely to be carried to grates.
Check attachment of orifice plate to wall of pit (gaps less than 5 mm).	Annually	Maintenance	Remove grate to inspect internal walls, repair as required, clear vegetation from external walls if necessary and repair as required.
Check attachment of screen to wall of pit.	Five yearly	Maintenance Contractor	Compare actual storage available with work-as executed plans. If volume loss is greater than 5%, arrange for reconstruction to replace the volume lost. Council to be notified of the proposal.
Check attachment of screen to wall of pit.	Five yearly	Maintenance Contractor	Check along drainage lines and at pits for subsidence likely to indicate leakages.

ISSUED FOR S4.55



				_
ı				
	В	25.03.2025	ISSUED FOR \$4.55	N
	А	24.09.2024	ISSUED FOR DA	N
	REV	DATE	DESCRIPTION	В
		A	A 24.09.2024	A 24.09.2024 ISSUED FOR DA


CODVDIGHT All rights reserved.
These drawings, plans and specifications and the copyright are the property of Nemco Design and must not be used, reproduced or copied wholly or in part without the written permission of **NEMCO**DESIGN


A: SUITE 4, LEVEL 1, 402-410 CHAPEL RD, BANKSTOWN, NSW 2200 P: 9709 5556 M: 0422 606 228

STORMWATER - GENERAL NOTES

PROPOSED TWO STOREY DWELLING WITH A3 23611 45 HILLCREST AVE. GREENACRE DESIGNED BY: LOT 1. DP 21703 20.05.2024 AS SHOWN

NOTE: DO NOT SCALE OFF DRAWINGS. REFER TO ARCHITECTURAL PLANS. VERIFY DIMENSIONS ON SITE

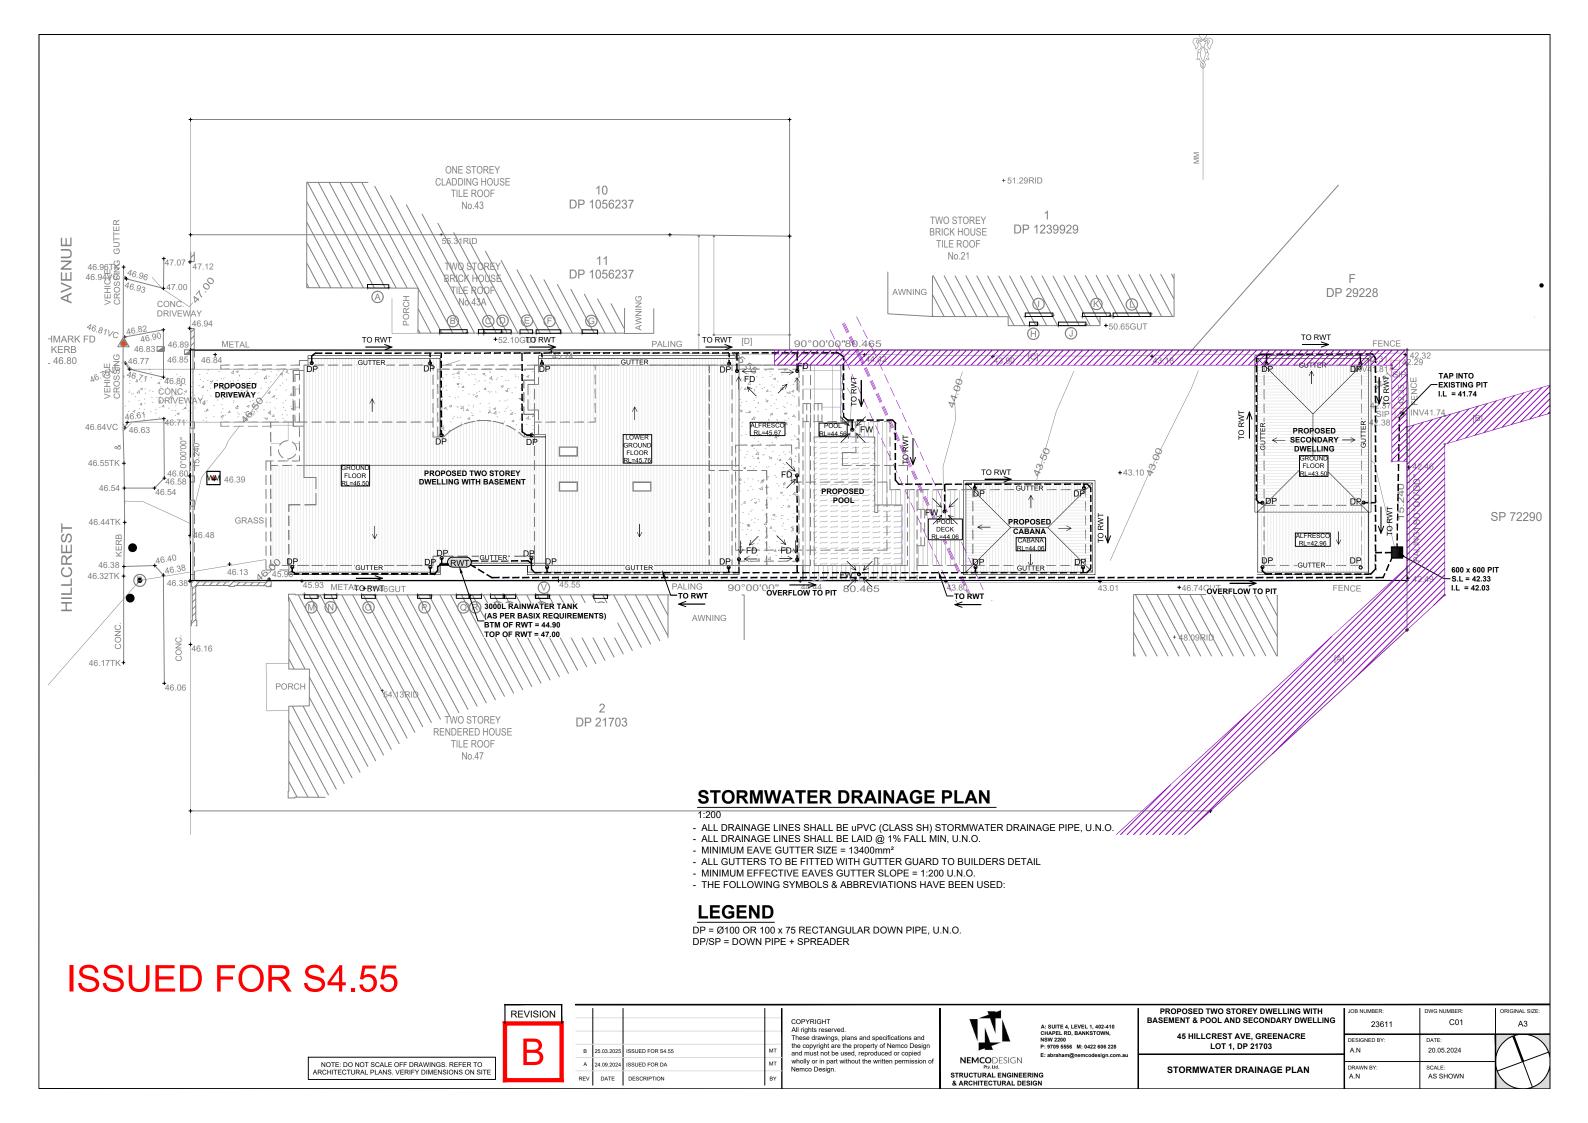

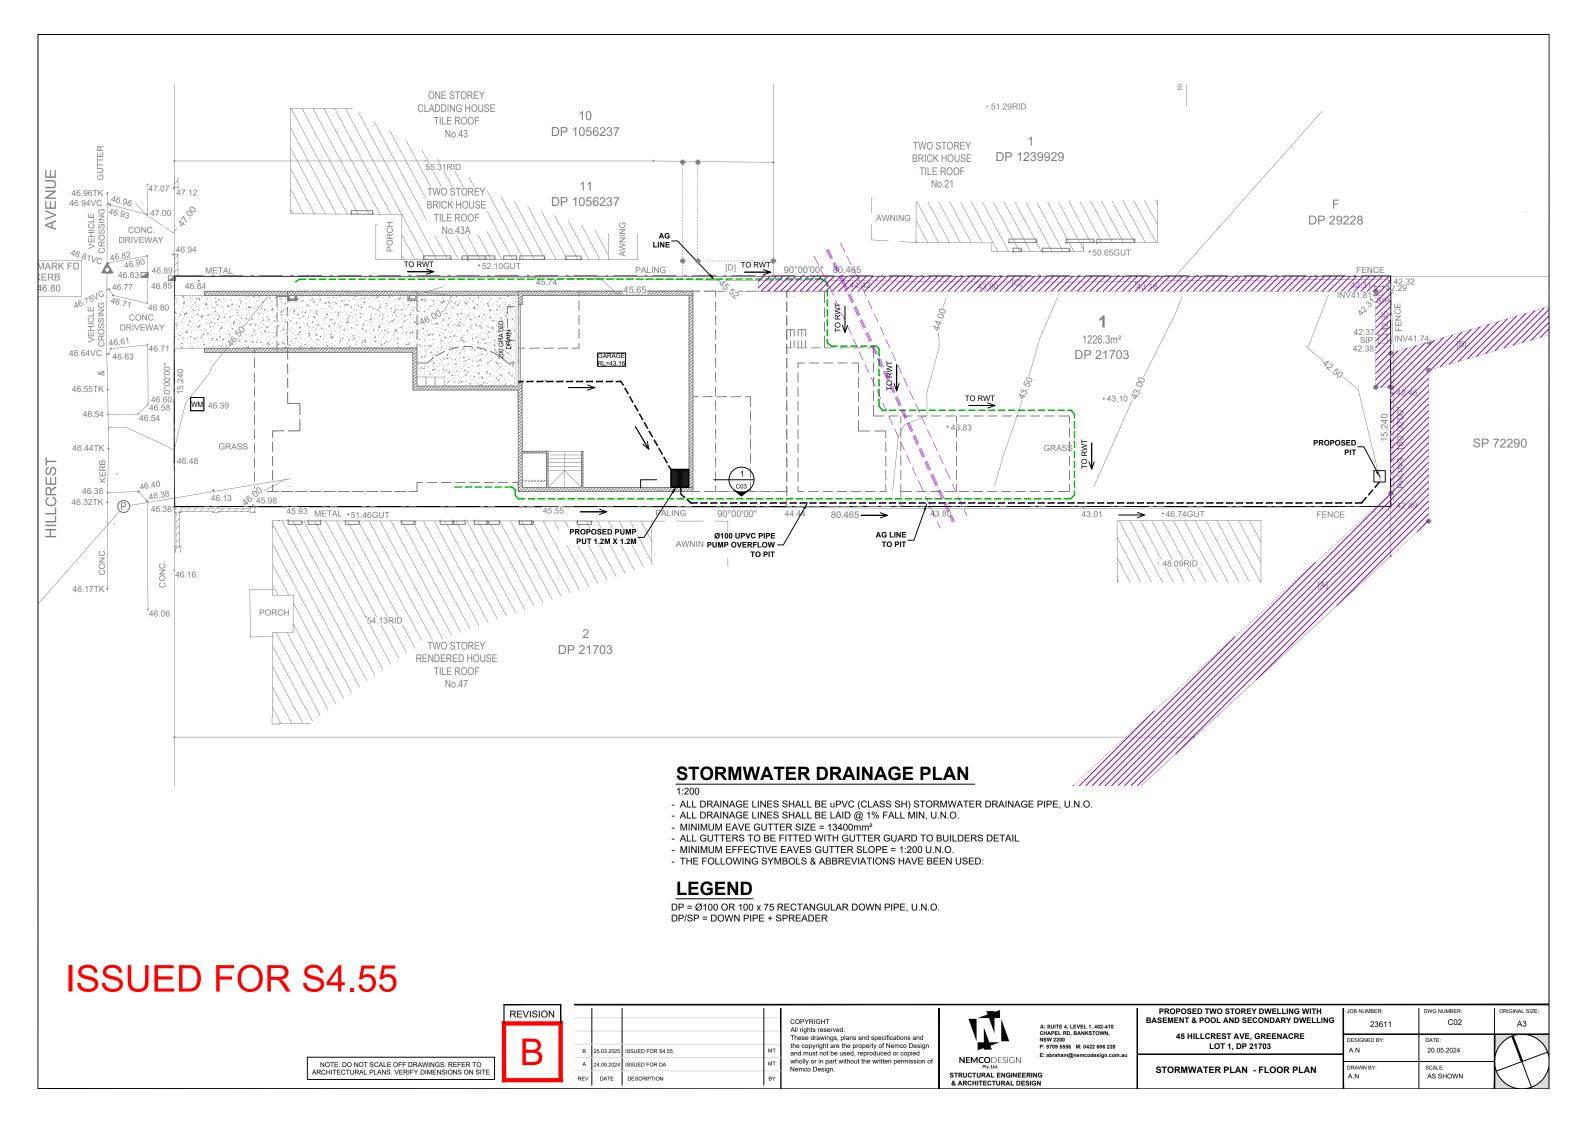


PUMP NOTES:

INSTALL 2 PUMPS RATED AT 3.0 L/s EACH AT 5m HEAD. PUMPS TO BE WIRED TO START ALTERNATELY. CONNECT TO ELECTRICAL DISTRIBUTION BOARD. FIT PUMPS WITH FOOT VALVE. PROVIDE FLOAT SWITCHES AND ELECTRICAL CIRCUITS AS FOLLOWS:

PUMP 1 START = RL 42.31 PUMP 2 START = RL 42.51 PUMP STOP = RL 41.81 (OR BELOW)IN THE EVENT PUMPS DO NOT START UPON REACHING

START LEVEL, PROVIDE AUDIBLE ALARM. PROVIDE PUMPS WITH MANUAL OVERRIDE.

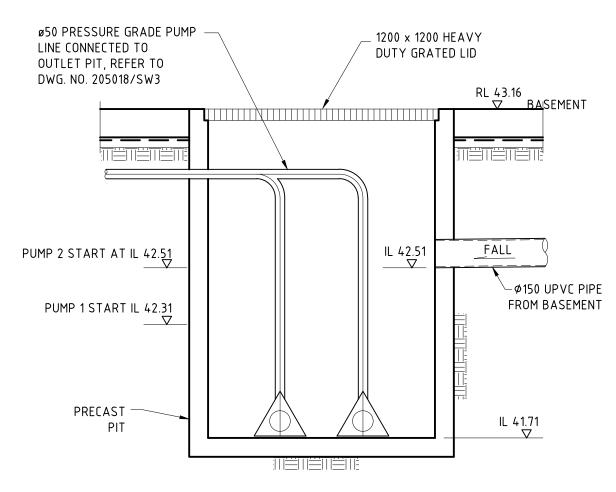

BASEMENT PUMPOUT PIT DETAIL

SCALE 1:20

ISSUED FOR S4.55

	REVISION
NOTE: DO NOT SCALE OFF DRAWINGS. REFER TO ARCHITECTURAL PLANS. VERIFY DIMENSIONS ON SITE	В


SION					
.					
3	•	В	25.03.2025	ISSUED FOR \$4.55	МТ
		Α	24.09.2024	ISSUED FOR DA	МТ
		REV	DATE	DESCRIPTION	BY
				•	


COPYRIGHT
All rights reserved.
These drawings, plans and specifications and
the copyright are the property of Nemco Design
and must not be used, reproduced or copied wholly or in part without the written permission of


171	A: SUITE 4, LE CHAPEL RD, E NSW 2200 P: 9709 5556
NEMCODESIGN Ptv. Ltd.	E: abraham@r
STRUCTURAL ENGINEER & ARCHITECTURAL DESI	

PROPOSED TWO BASEMENT & POOL EVEL 1, 402-410 BANKSTOWN, 45 HILLCRES M: 0422 606 228

PROPOSED TWO STOREY DWELLING WITH BASEMENT & POOL AND SECONDARY DWELLING	JOB NUMBER: 23611	DWG NUMBER: C03	ORIGINAL SIZ
45 HILLCREST AVE, GREENACRE LOT 1, DP 21703	DESIGNED BY: A.N	DATE: 20.05.2024	\bigwedge
SECTION THROGH PUMP PIT & DETAILS	DRAWN BY: A.N	SCALE: AS SHOWN	

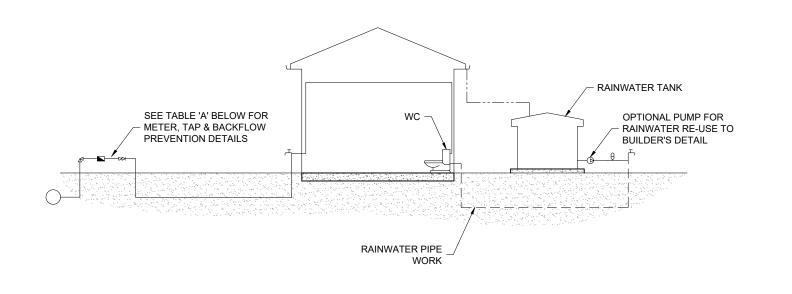

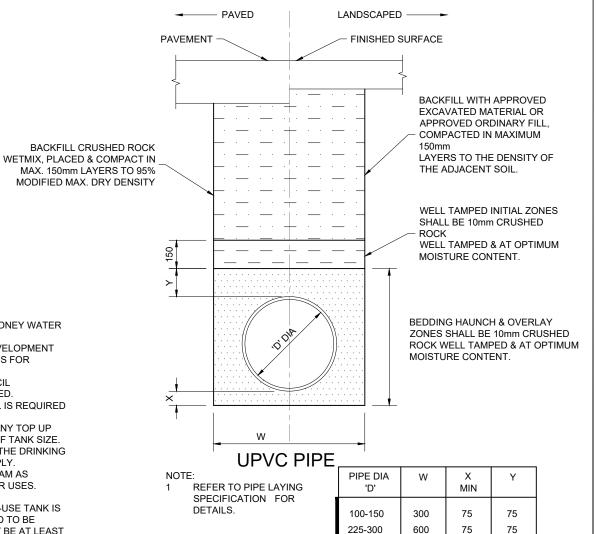

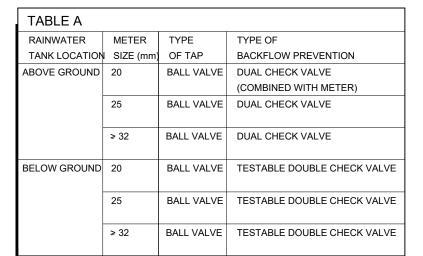


LEGEND


- PRESSURE VESSEL
- METER
- BALL VALVE RIGHT ANGLE TYPE
- DUAL CHECK VALVE
- PUMP
- **GARDEN TAP**
- DRINKING WATER SUPPLY PIPES
- RAINWATER SUPPLY PIPES
- ——— DOWN PIPES

- DIAGRAM NOTES:
- DRAWING TO BE READ IN CONJUNCTION WITH SYDNEY WATER PLUMBING REQUIREMENTS
- 2 FOR TANKS 10,000 LITRES OR LESS, COUNCIL DEVELOPMENT CONSENT IS NOT REQUIRED, IF THEIR CONDITIONS FOR INSTALLATION ARE FOLLOWED.
- 3 FOR TANKS GREATER THAN 10,000 LITRES COUNCIL DEVELOPMENT CONSENT IS GENERALLY REQUIRED.
- 4 FOR TANKS MORE THAN 10,000 LITRES APPROVAL IS REQUIRED FOR BUILDING OVER SEWERS.
- SYDNEY WATER'S APPROVAL IS REQUIRED FOR ANY TOP UP FROM DRINKING WATER SUPPLY, REGARDLESS OF TANK SIZE. NO DIRECT CONNECTION IS ALLOWED BETWEEN THE DRINKING WATER SUPPLY AND THE RAINWATER TANK SUPPLY.
- RAINWATER PIPEWORK IS SHOWN ON THE DIAGRAM AS SUPPLYING INTERNAL AND EXTERNAL RAINWATER USES. CUSTOMERS MAY WANT ONE OR THE OTHER.
- ANY DESIGNED ACCESS LID INTO RAINWATER RE-USE TANK IS TO HAVE A LOCKABLE LID. IF THE LID IS DESIGNED TO BE ACCESSED BY A MAINTENANCE PERSON, IT MUST BE AT LEAST 600 mm x 900 mm IN SIZE.

DUAL DRINKING WATER & RAINWATER SUPPLY DIAGRAM

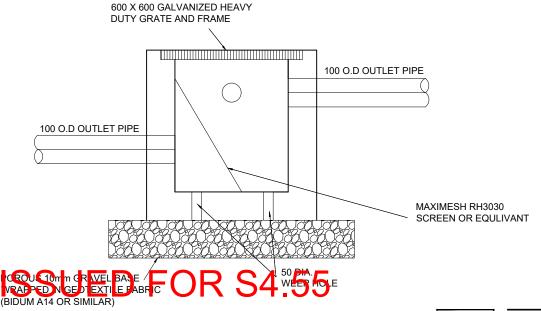

TYPICAL PIPE LAYING DETAIL

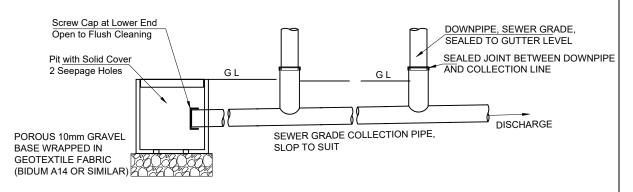

TYPICAL CHARGED SYSTEM **CLEANING EYE PIT DETAIL**

TYPICAL SILT ARRESTOR DETAIL

NOTE: DO NOT SCALE OFF DRAWINGS, REFER TO ARCHITECTURAL PLANS. VERIFY DIMENSIONS ON SITE



REVISION				_
В	_			_
	В	25.03.2025	ISSUED FOR \$4.55	M
	A	24.09.2024	ISSUED FOR DA	M
	REV	DATE	DESCRIPTION	В
				_

All rights reserved.
These drawings, plans and specifications and the copyright are the property of Nemco Design and must not be used, reproduced or copied wholly or in part without the written permission


NEMCODESIGN

A: SUITE 4, LEVEL 1, 402-410 CHAPEL RD, BANKSTOWN, NSW 2200 P: 9709 5556 M: 0422 606 228


STRUCTURAL ENGINEERING & ARCHITECTURAL DESIGN

PROPOSED TWO STOREY DWELLING WITH BASEMENT & POOL AND SECONDARY DWELLING 45 HILLCREST AVE, GREENACRE LOT 1. DP 21703 STORMWATER DETAILS

C04 23611 A3 DESIGNED BY 20.05.2024 AS SHOW!

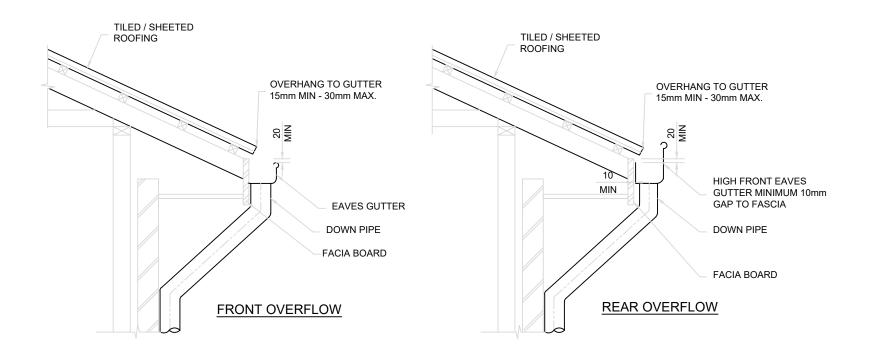

TYPICAL EAVES GUTTER DETAIL

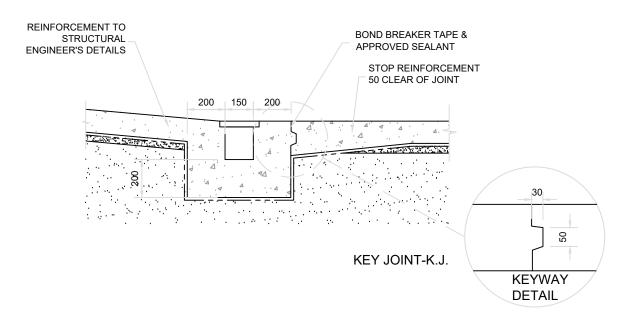

TYPICAL GRATED DRAIN DETAIL

ISSUED FOR S4.55



B 25.03.2025 ISSUED FOR S4.55 24.09.2024 ISSUED FOR DA DATE DESCRIPTION

COPYRIGHT
All rights reserved.
These drawings, plans and specifications and the copyright are the property of Nemco Design and must not be used, reproduced or copied wholly or in part without the written permission of Nemco Design.

NEMCODESIGN STRUCTURAL ENGINEERING & ARCHITECTURAL DESIGN

A: SUITE 4, LEVEL 1, 402-410 CHAPEL RD, BANKSTOWN, NSW 2200 P: 9709 5556 M: 0422 606 228

u ·	PROPOSED TWO STOREY DWELLING WITH BASEMENT & POOL AND SECONDARY DWELLING					
	45 HILLCREST AVE, GREENACRE LOT 1, DP 21703					
	STORMWATER DETAILS	 				

JOB NUMBER: DWG NUMBER: ORIGINAL SIZE: C05 23611 А3 DESIGNED BY: A.N 20.05.2024 DRAWN BY: A.N