

SELECTED FRONT SEMI-ADVANCED TREE

SELECTED REAR SEMI-ADVANCED TREE

GATE TO MATCH FENCING

LETTERBOX.  
REFER TO NOTE 2.

BIN STORE

BRICK EDGING

SELECTED AUSTRALIAN NATIVE, DROUGHT TOLERANT PLANTS

1.8m PROPOSED COLORBOND FENCING TO MATCH EXISTING

EXISTING FENCING

TURF  
(SIR WALTER BUFFALO)





PERMEABLE PEBBLE AND SUBSTRATA

MULCH

CODE	BOTANICAL NAME	COMMON NAME	No.	POT SIZE	MATURE HEIGHT
<b>TREES</b>					
TL	<i>Tristaniopsis laurina</i>	Water Gum	1	75L	8m
ER	<i>Elaeocarpus reticulatus</i>	Blueberry Ash	1	75lt	10m
<b>SHURBS</b>					
WJG	<i>Westringia fruticosa</i> 'Jervis	Coastal rosemary	4	250mm	1.0m
AS	<i>Acmena smithii</i> 'Sublime'	Lilly Pilly	9	250mm	0.6-1.0m
<b>GROUND COVERS &amp; GRASSES</b>					
DC	<i>Dianella caerulea</i>	Dianella	14	150mm	0.7m
BMB	<i>Brachyscome multifida</i> 'Bread	Rock Daisy	15	140mm	0.3m
<b>TURF</b>					
	<i>Stenotaphrum secundatum</i>	Sir Walter Buffalo Turf	-	-	-

- 1) LAWN TO BE FERTILISED TWICE A YEAR IN THE WARM MONTHS, MOWING WEEKLY IN SUMMER MONTHS AND FORTNIGHTLY OR MONTHLY AS REQUIRED IN THE WINTER MONTHS.
- 2) PLANTS TO BE FERTILISED A MINIMUM OF TWICE A YEAR AT THE SAME TIME OF PRUNING, TO DO THIS USE A COMPLETE FERTILISER. KEEP MULCH CLEAR OF TREE TRUNK AREA. AFTER PLANT/SHRUBS AND TREES ARE PLANTED CONTINUE TO WATER WELL ONCE A WEEK.
- 3) PRUNE HEDGE PLANTS A MINIMUM OF 2 - 3 TIMES A YEAR, IN THE WARMER MONTHS. WAIT FOR AT LEAST 10MM OF NEW GROWTH BEFORE PRUNING AGAIN TO PROMOTE HEALTHY NEW GROWTH.

- 1) SIDE & REAR BOUNDARY FENCING SHOULD BE COLORBOND STEEL FENCE. GATES TO MATCH FENCE MATERIALS.
- 2) LETTERBOX PROVIDED TO AUSTRALIA POST REQUIREMENTS CLEARLY DISPLAYING HOUSE NUMBER.
- 3) ALL LANDSCAPED AREAS TO HAVE A MINIMUM 1:100 FALL TOWARDS STORM WATER DRAINS. OR AWAY FROM THE BUILDING FOR POSSIBLE OVERLAND WATER DRAINAGE.
- 4) A TREE PROTECTION ZONE (TPZ) SHALL BE ESTABLISHED FOR THE DURATION OF ANY WORKS NEAR ANY EXISTING TREES, AS PER THE METHOD OUTLINED IN THE CURRENT AS4970-2009. PERMISSION FROM THE COUNCIL ARBORIST IS REQUIRED FOR ACTIVITIES THAT DO NOT COMPLY WITH THE CURRENT AUSTRALIAN STANDARDS.
- 5) DRIVEWAY LAYOUT TO BE CONSTRUCTED FROM ARCHITECTURAL CONSTRUCTION DRAWINGS.
- 6) RETAINING WALLS ALONG SIDE BOUNDARIES BETWEEN LOTS TO BE FINALISED ON SITE AFTER BENCHING.
- 7) ALL RETAINING WALLS VISIBLE FROM THE STREET TO BE MASONRY WITH COLOURS MATCHING THOSE ON THE FRONT FAÇADE OF THE DWELLING.
- 8) ALL IMPORTED SOIL TO GARDEN AREAS TO BE OF PREMIUM GARDEN MIX STANDARD AT 300MM DEPTH .
- 9) TURF TO BE LAID ON A 150MM MINIMUM BASE OF 80% SAND 20% SOIL MIX. REFER TO DETAIL.
- 10) ALL GARDEN AREAS TO BE COVERED WITH A MINIMUM OF 75MM OF 14MM PINE BARK MULCH.
- 11) GARDEN EDGING IS TO BE INSTALLED BETWEEN ALL ADJOINING SOFT LANDSCAPE FINISHES. REFER TO DETAIL.
- 12) ALL TREES AND SHRUBS ARE TO BE SELECTED AND PLANTED IN ACCORDANCE WITH THE PLANTING SCHEDULE SUBSTITUTES REQUIRED DUE TO AVAILABILITY OR QUALITY MUST BE CONSISTENT WITH THE DESIGN INTENT.

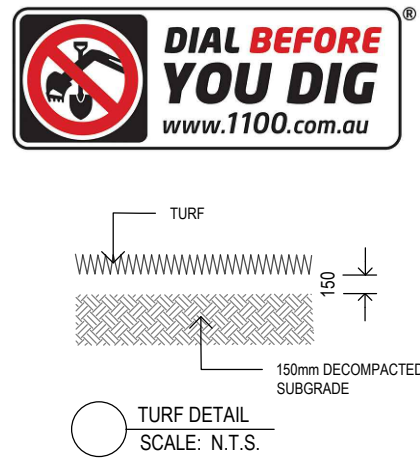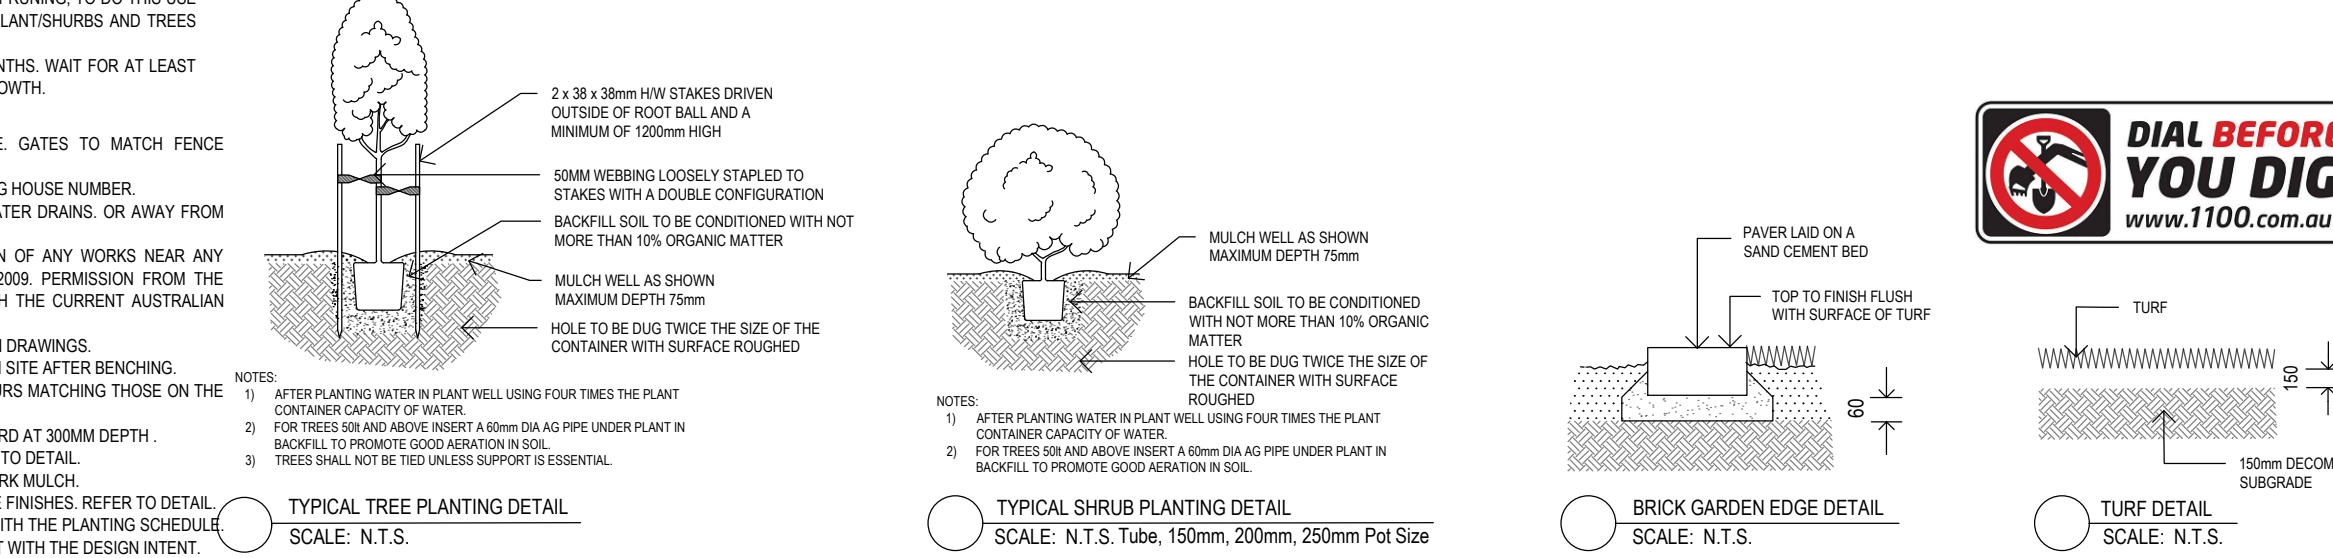

REV	ISSUE / DESCRIPTION	DATE	CHECKED
A	Initial design for DA	06.09.24	KR
B	Re-design	29.04.25	KR



**MYARD PTY LTD**

ABN 83 602 735 777  
info@myard.com.au  
www.myard.com.au  
P 02 8801 1825  
Unit 2, 63 Glendenning Road,  
Glendenning NSW 2761

This drawing is the copyright property of Myard. No part shall be copied or otherwise used without the authors prior written consent.

Drawing was created using colour and may appear incorrect if reproduced in grayscale or black and white.


**GENERAL NOTES:**

Prior to being used for construction, the Principal Contractor must ensure that they are in possession of a Construction Certificate and all other required Council approvals. All works are to comply with B.C.A. Statutory Authorities and relevant Australian Standards.

Contractors must verify all dimensions on site before commencing fabrication or preparation of workshop drawings, and verify all errors and omissions with the Architect. Use figured dimensions only. Do not scale from drawings.

Position of all services on site to be confirmed prior to commencement of construction.

**PLAN DRAWINGS PREPARED FOR DEVELOPMENT APPLICATION ONLY. PLAN IS NOT TO BE USED FOR CONSTRUCTION PURPOSES**

SCALE: 1:200@A3	DRAWING NO. LP-25980	REVISION <b>B</b>	DRAWING TITLE: DA LANDSCAPE PLAN
CLIENT NO: 607229	COUNCIL: CANTERBURY BANKSTOWN	NORTH 	CLIENT: MCDONALD JONES HOMES
DRAWN: AVS	PAGE NO: 1/1		ADDRESS: LOT 1, DP 960514, NO.68 DENNIS STREET, LAKEMBA NSW 2195