



CONTINUES ON DRAWING DA-L/3

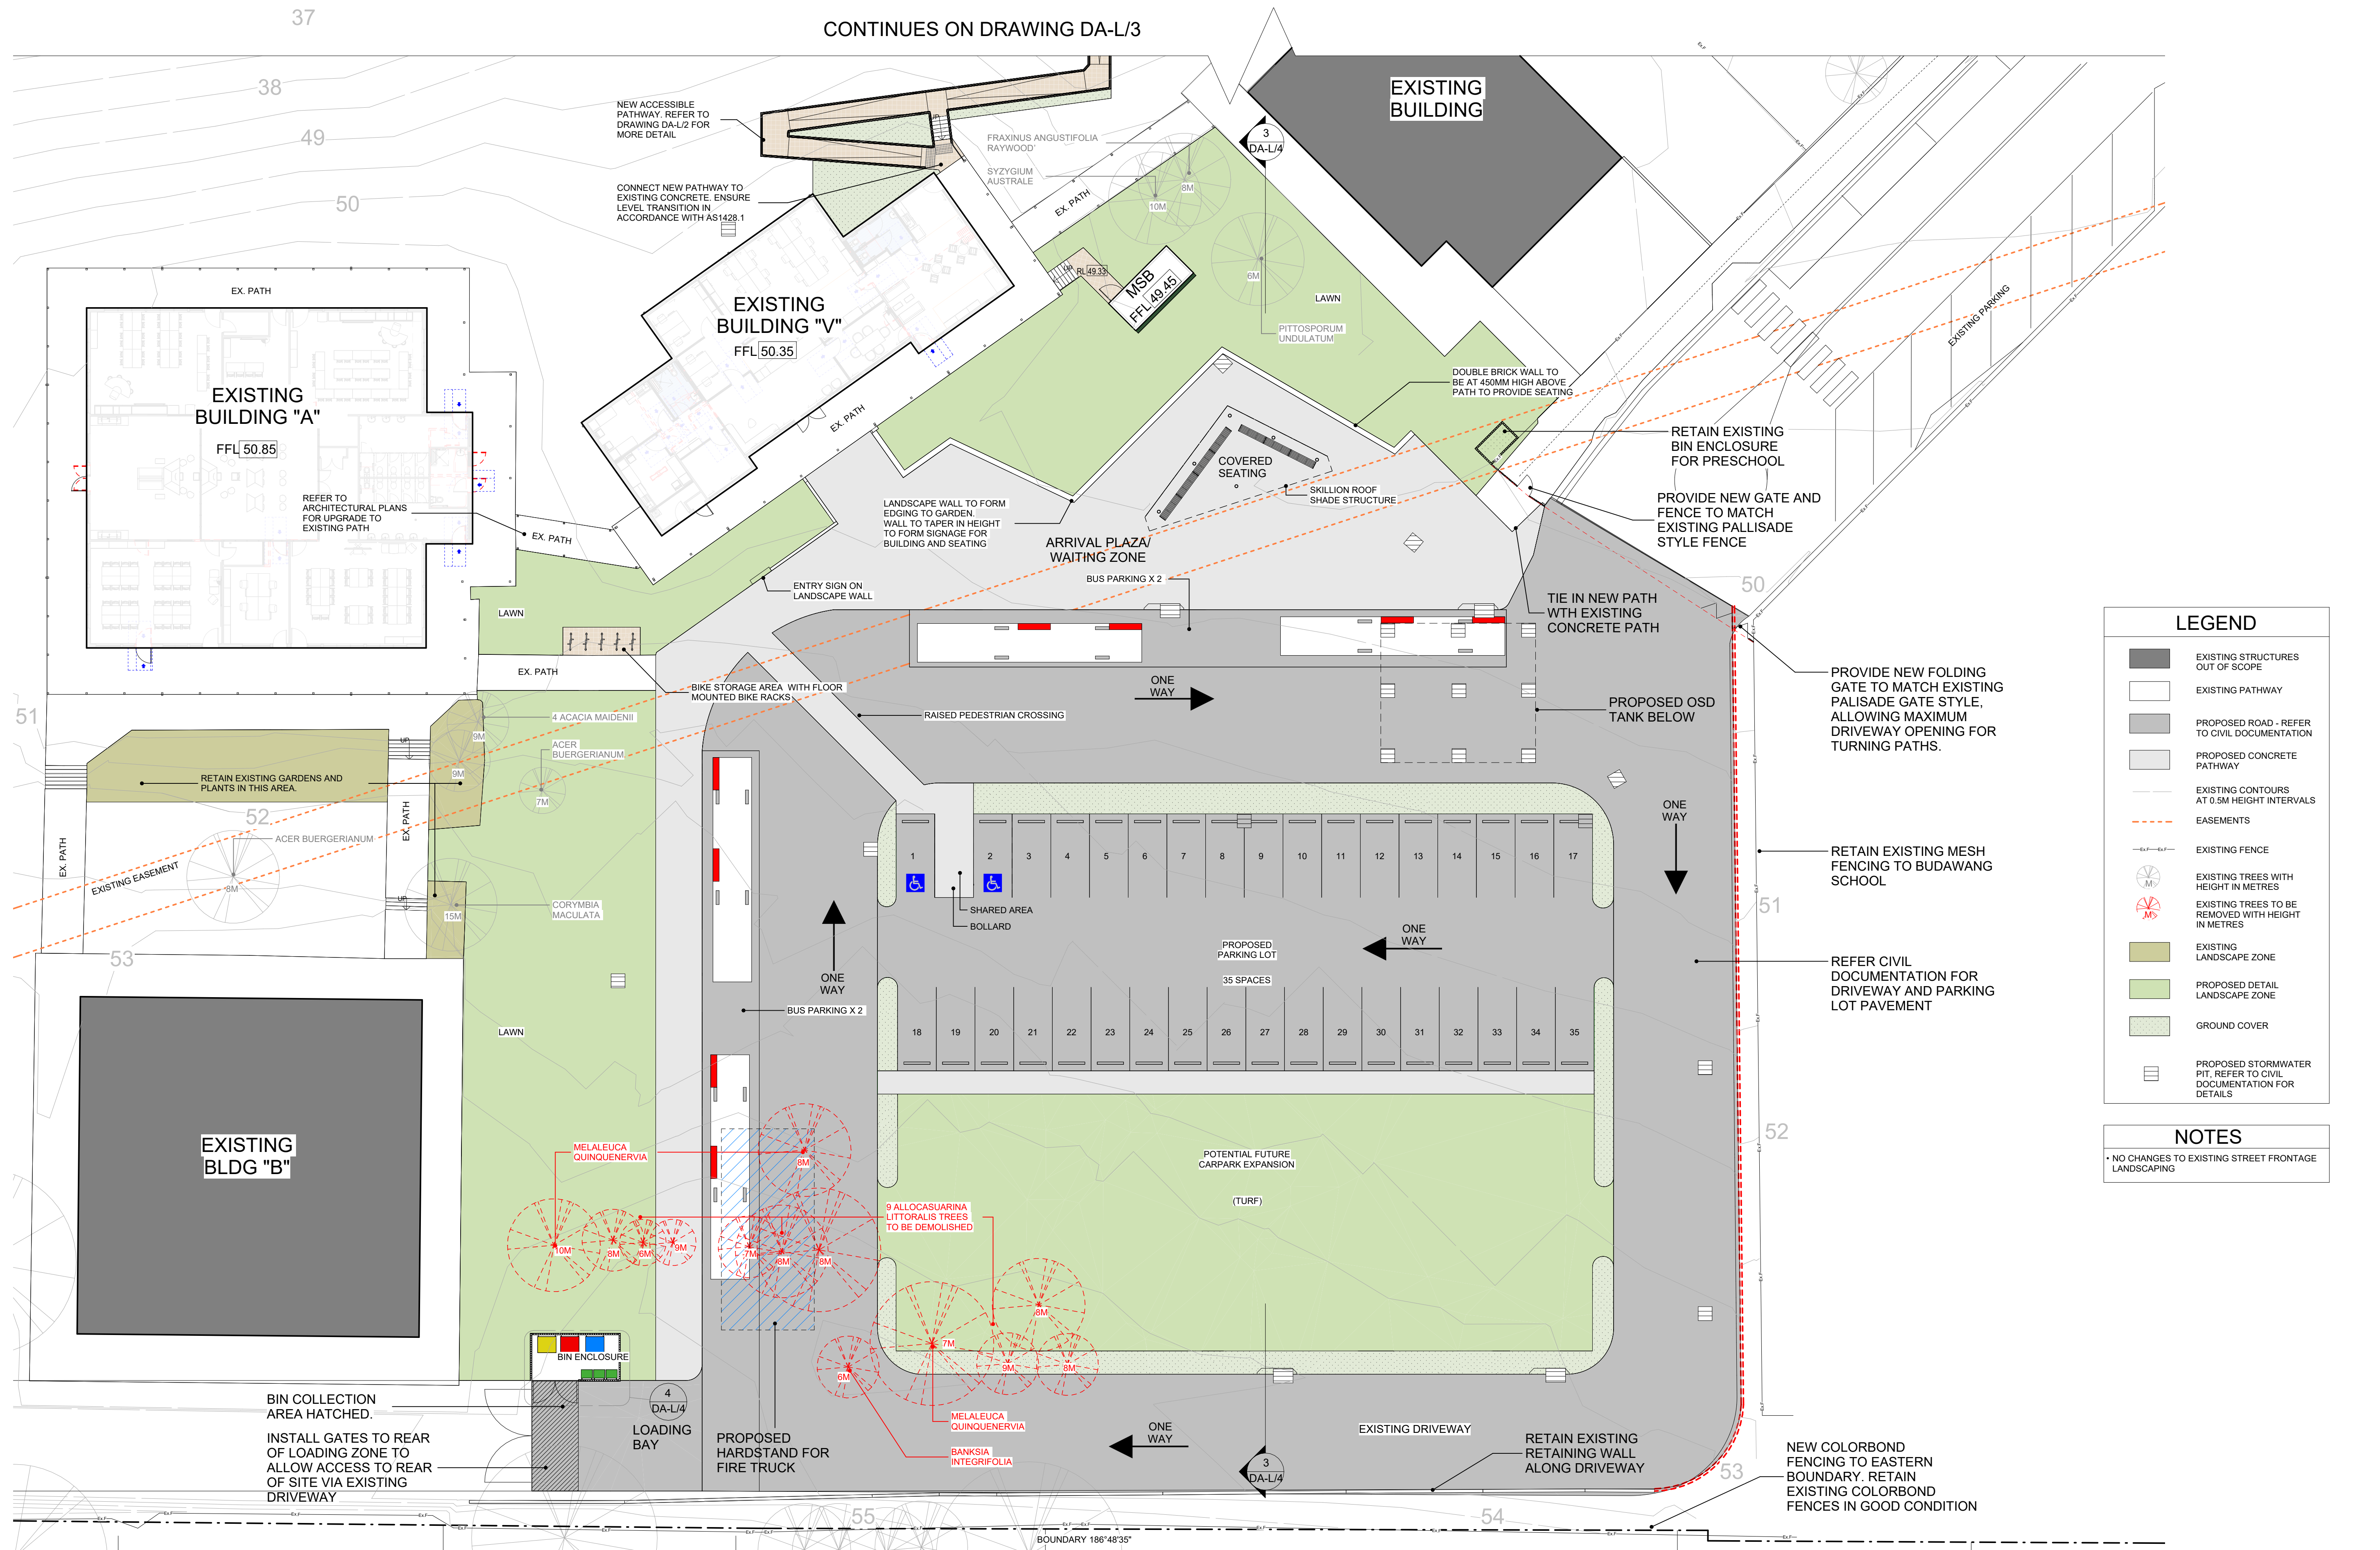

Proposed Refurbishment of the Former Shoalhaven Anglican School

For NSW Government Infrastructure Planning

At 17 CROOBYAR ROAD, MILTON NSW 2539

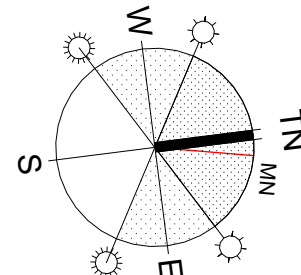


Education
School Infrastructure



REV	DESCRIPTION	DATE	DRAWN	CHECKED	DRAWING TITLE
1	DA ISSUE	11/12/2025	HL	HL	LANDSCAPE CONCEPT PLAN (PART SITE 1)
2	ADDITIONAL INFORMATION	19/03/2026	ZP	ZP	
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					

PROJECT # 25-0026	SCALE: 1:200 @A1	DATE: 19/03/2026
DRAWING NO. DA-L/1	REVISION A	7/04/2026 3:05:03 PM

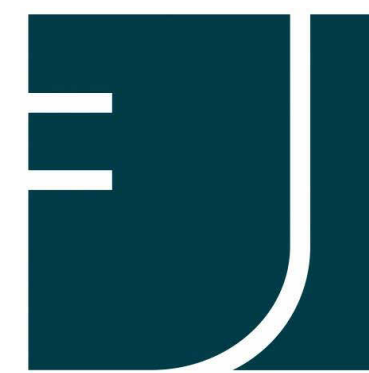

REV	DESCRIPTION	DATE	DRAWN	CHECKED	DRAWING TITLE
C	DA ISSUE	11/12/2025	RBL		PLANTING PLAN & SCHEDULE
A	ADDITIONAL INFORMATION	19/03/2026	ZP		
					PROJECT #: 25-0026 SCALE: 1 : 200 @A1 DATE: 19/03/2026
					DRAWING NO. DA-L/2
					REVISION A
					7/04/2026 3:05:10 PM

USE WRITTEN DIMENSIONS ONLY - DO NOT SCALE OFF DRAWINGS



- EXCAVATE TO LEVELS SHOWN
- LEVEL AND COMPACT SUB-BASE. LAY AND COMPACT 50MM OF FINE CRUSHED ROCK
- FORM CONCRETE FOOTING, WALKWAY AND KERBS WITH REINFORCING TO ENGINEERS SPECIFICATION
- GRADE IMPROVED TOPSOIL TO LEVELS SHOWN
- LAY IMPROVED TOPSOIL TO 200MM DEPTH AND CULTIVATE INTO EXISTING SITE SOIL
- LAY MULCH TO 75MM DEPTH OVER TOPSOIL

CONCRETE WALKWAY: 20MPA, BROOM FINISH PERPENDICULAR TO DIRECTION OF TRAVEL, COLORI STRAW COLOUR


CONCRETE KERBS: 20MPA, SMOOTH OFF-FORM FINISH, COLORI STRAW COLOUR

IMPROVED TOPSOIL: EQUIVALENT TO ANL "NATIVE LOW MIX"

MULCH: EQUIVALENT TO ANL "PINEBARK MINI NUGGETS"


- EXCAVATE THE PIT FOR THE TREE APPROXIMATELY 150MM WIDER AND DEEPER THAN THE ROOTBALL.
- BREAK UP THE PIT SIDES AND BASE TO LOOSEN SUBSOIL
- HAMMER IN STAKES TO A MINIMUM 300MM BELOW PIT BASE
- ADD 100MM OF MULCH TO RETAIN THE PIT TO THE SAME SOIL LEVEL AS POT SOIL AFTER PLANTING
- INCLUDE 2 X 10CM SOLG RELEASE FERTILISER PELLETS AS SPECIFIED
- SECURE THE TREE TRUNK TO STAKE USING 50MM HESSIAN TIE STAPLED TO STAKE
- SPREAD 75MM DEPTH OF APPROVED MULCH AROUND BASE COVERING ENTIRE PLANTING AREA AND DISH AROUND TREE
- WATER TREE BEFORE PLANTING IN THE POT AND THEN THOROUGHLY AFTER PLANTING UNTIL ESTABLISHED.

- EXCAVATE THE PIT FOR PLANT APPROXIMATELY 100MM WIDER ON ALL SIDES AND THE BASE, THAN THE ROOTBALL.
- ROUGH UP THE PIT SIDES AND BOTTOM TO LOOSEN SUBSOIL.
- PLANT IN GOOD QUALITY TOPSOIL TO RETAIN THE SAME SOIL LEVEL AS POT SOIL LEVEL AFTER FIRMSER
- INCLUDE 10CM SLOW RELEASE FERTILISER PELLETS AS SPECIFIED
- SECURE PLANT TRUNK TO STAKE USING 50MM HESSIAN TIE STAPLED TO STAKE IF REQUIRED
- SPREAD 75MM HARDWOOD FLAKE MULCH AROUND BASE, DISHING TOWARD TRUNK, COVERING THE ENTIRE PLANTING AREA
- WATER PLANT BEFORE REMOVING FROM THE POT AND THEN THOROUGHLY AFTER PLANTING UNTIL ESTABLISHED



NSW
GOVERNMENT

Education
School Infrastructure

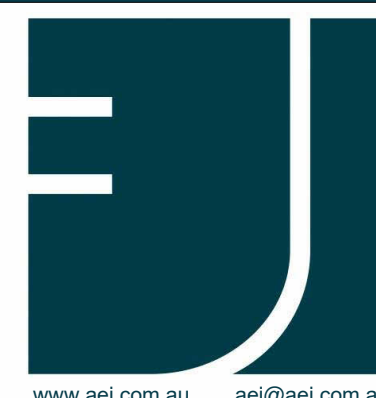[illegible]

COPYRIGHT OF EDMISTON JONES PTY LTD (ACN 003 163 451) ©2025. Nominated Architect Mark Jones Reg. No. 4474
Autodesk Docs/25-0026 DoE RFT - Shoalhaven Anglican School, Milton/25-0026 DoE RFT - Shoalhaven Anglican School, Milton CD ver.25.rvt

USE WRITTEN DIMENSIONS ONLY - DO NOT SCALE OFF DRAWINGS