# CONTOUR

LANDSCAPE ARCHITECTURE

# **LANDSCAPE DOCUMENTATION FOR SECTION 4.55**

# **PROJECT**

**Diggers At The Entrance - Yungala** 

# **ADDRESS**

Cnr The Entrance Road, Archibold Road and Gallipoli Road, Long Jetty, NSW, 2261

# **CLIENT**

HCL1 Pty Ltd c/o MAM Partnership Pty Ltd

# **ARCHITECT**

**ADG** architects

# PROJECT MANAGER



# **DRAWING INDEX**

C0	COVER PAGE	5
C1	LANDSCAPE MASTER PLAN	5
C2	GL LANDSCAPE PLAN	5
C3	L1 LANDSCAPE PLAN	5
C4	L2 & L5 LANDSCAPE PLAN	5
C5	PLANTING ZONE 1 & 2 PLAN	5
C6	PLANTING ZONE 3 - 6 PLAN	5
C7	CANOPY REPLENISHMENT PLAN	9
C8	FENCING DETAILS	5
C9	LANDSCAPE DETAILS	5
C10	OUTLINE SPECIFICATIONS	5







Site Location



CONTOUR LANDSCAPE ARCHITECTURE

PO Box 698 MONA VALE NSW 1660 Tel: 0434 500 705 - AIDLM


Seniors Living


Cnr The Entrance Road, Archibold Road and Gallipoli Road, Long Jetty, NSW, 2261


ANOTHER NOVE	
CLIENT:	NOTES
HCL1 Pty Ltd c/o MAM	comply with building code of australia and all relevant australian standards all works shall be in accordence with development application and
Partnership P	ing site data
ARCHITECT:	aling eet for determination retained, copied, used or
ADG architects	n permission of


	DATE	REV.	<u>ISSUE</u>
	02/07/21	D	FOR COMMENT
	07/09/21	Е	DA
	21/11/22	F	MOD
	25/11/22	G	MOD
	19/04/24	Н	S4.55
r		Н	S4.55


DATE:	19/04/24	DRAWING
		LANDSCAPE
		<b>MASTER PLAN</b>
SCALE:	1:200 @ A1	DRAWING NO:
		C1
DRAWN:	ВТ	REV:



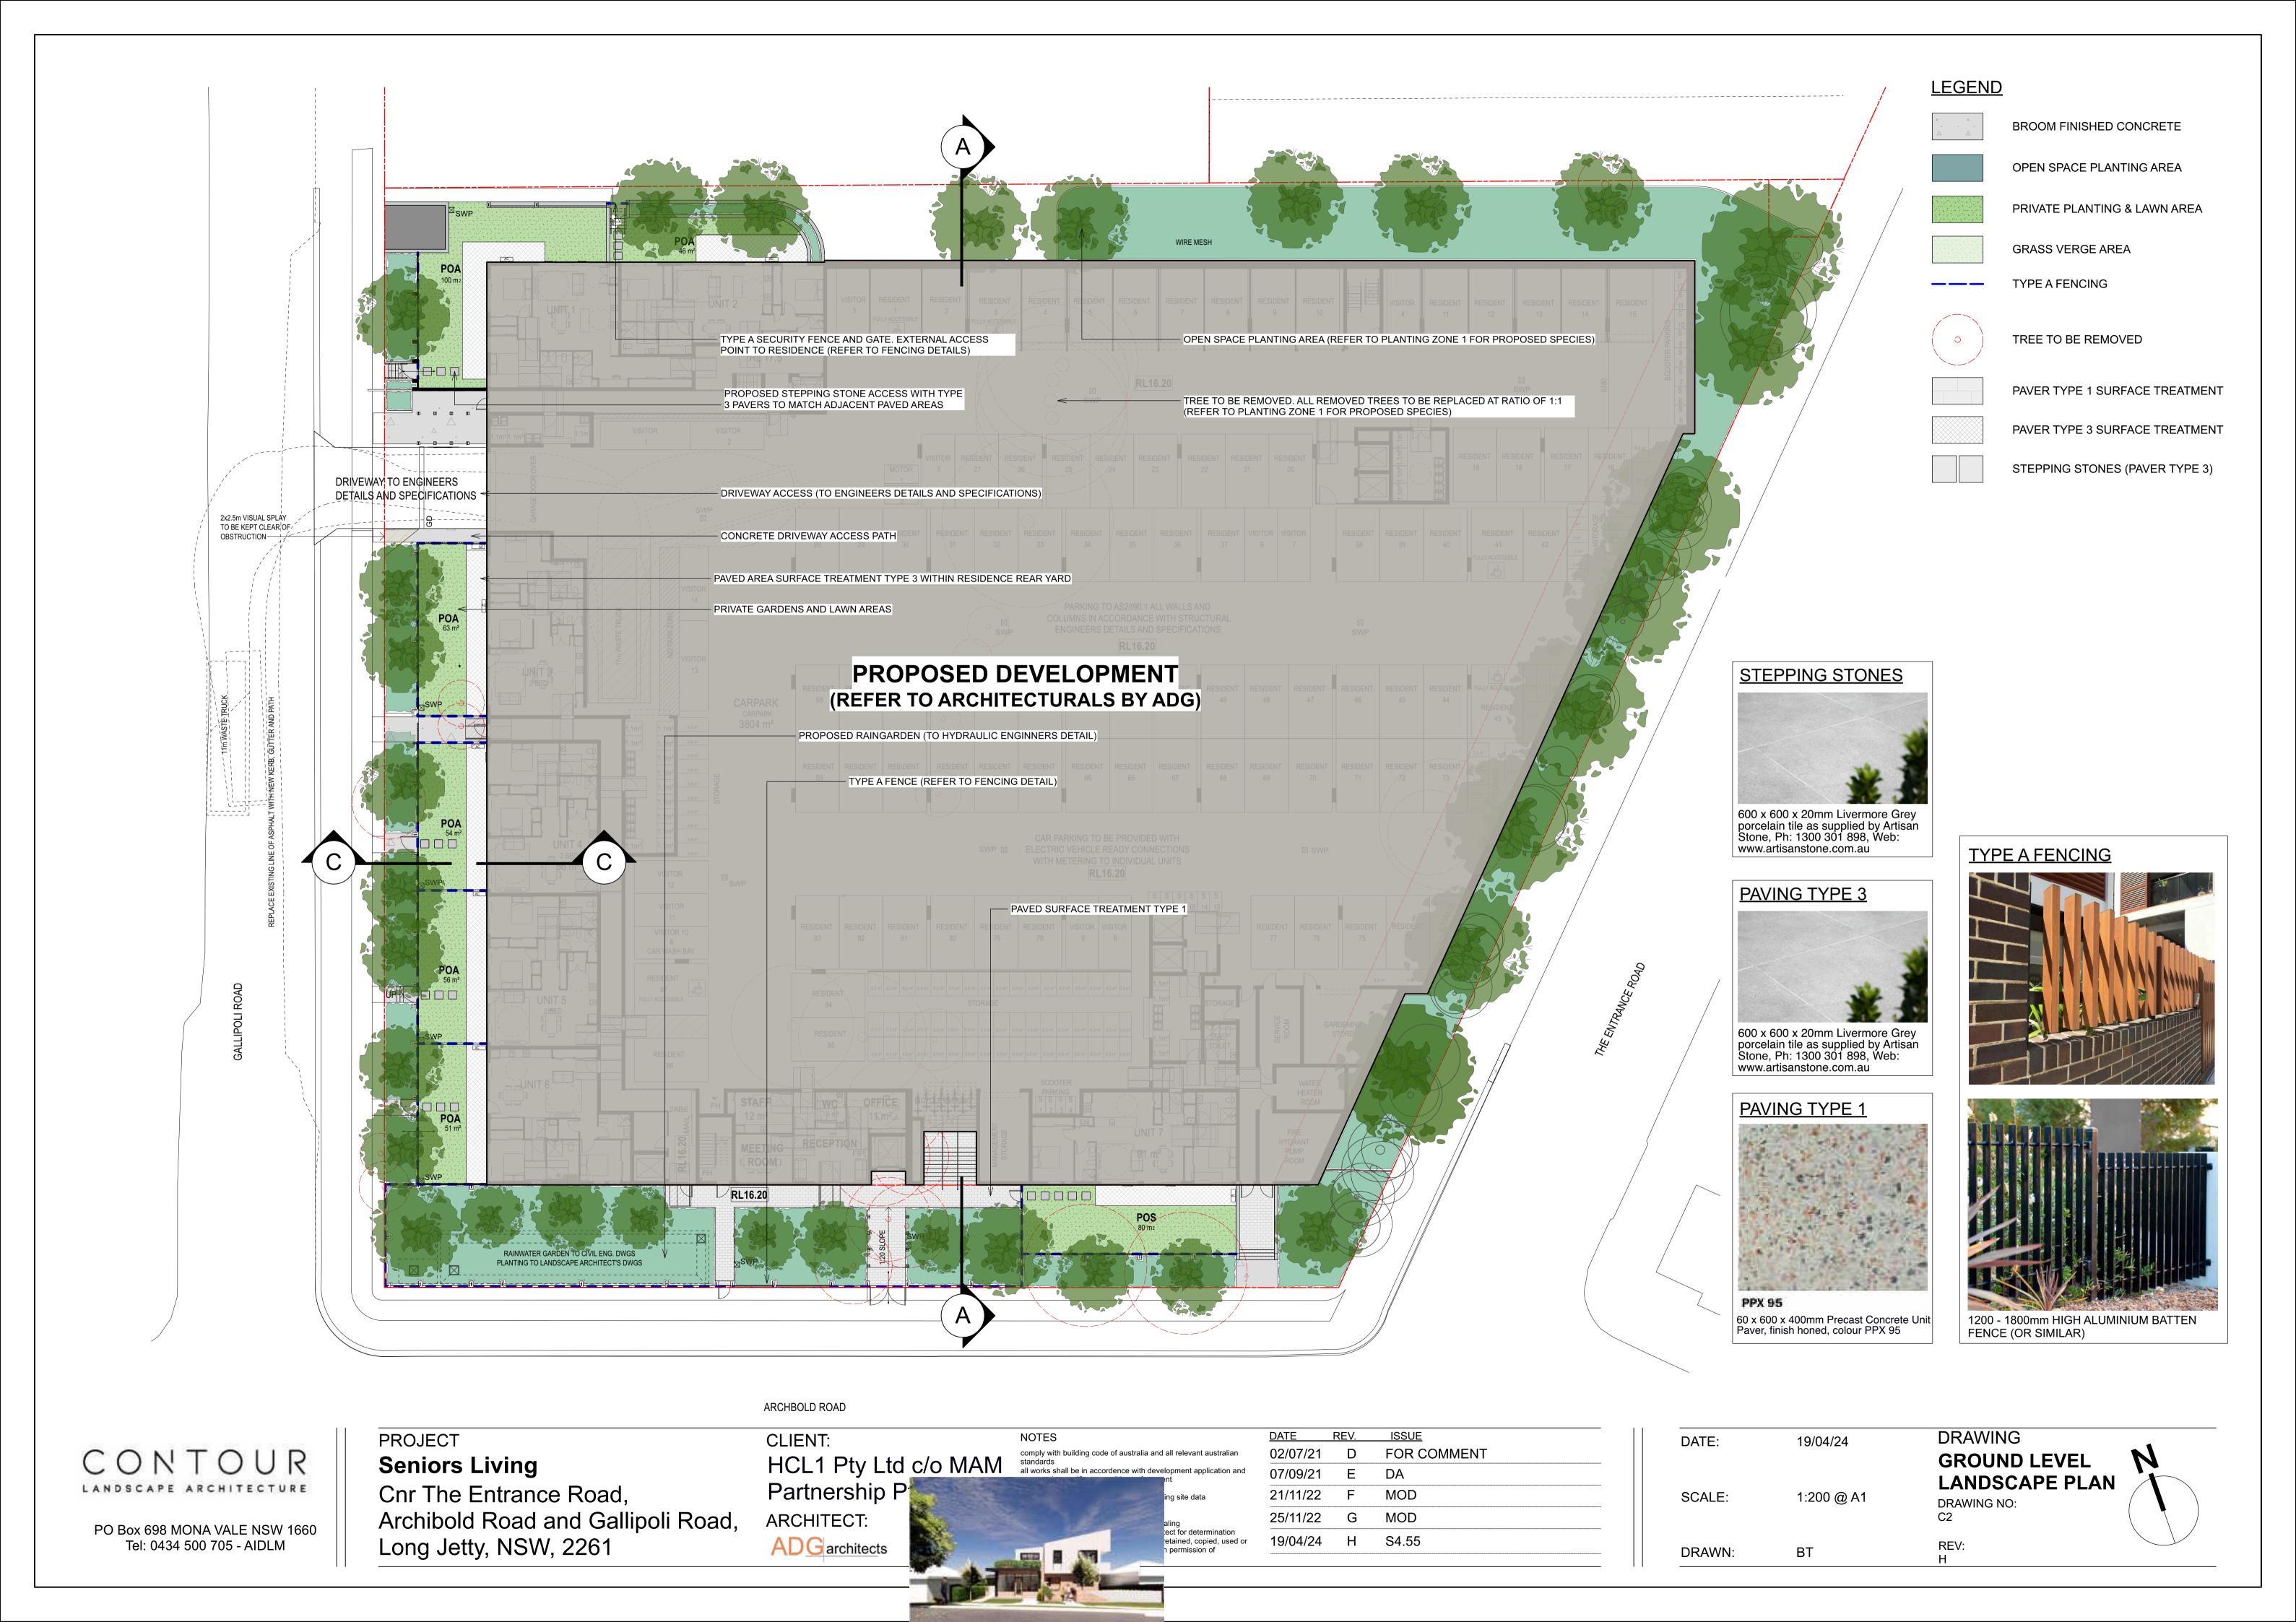

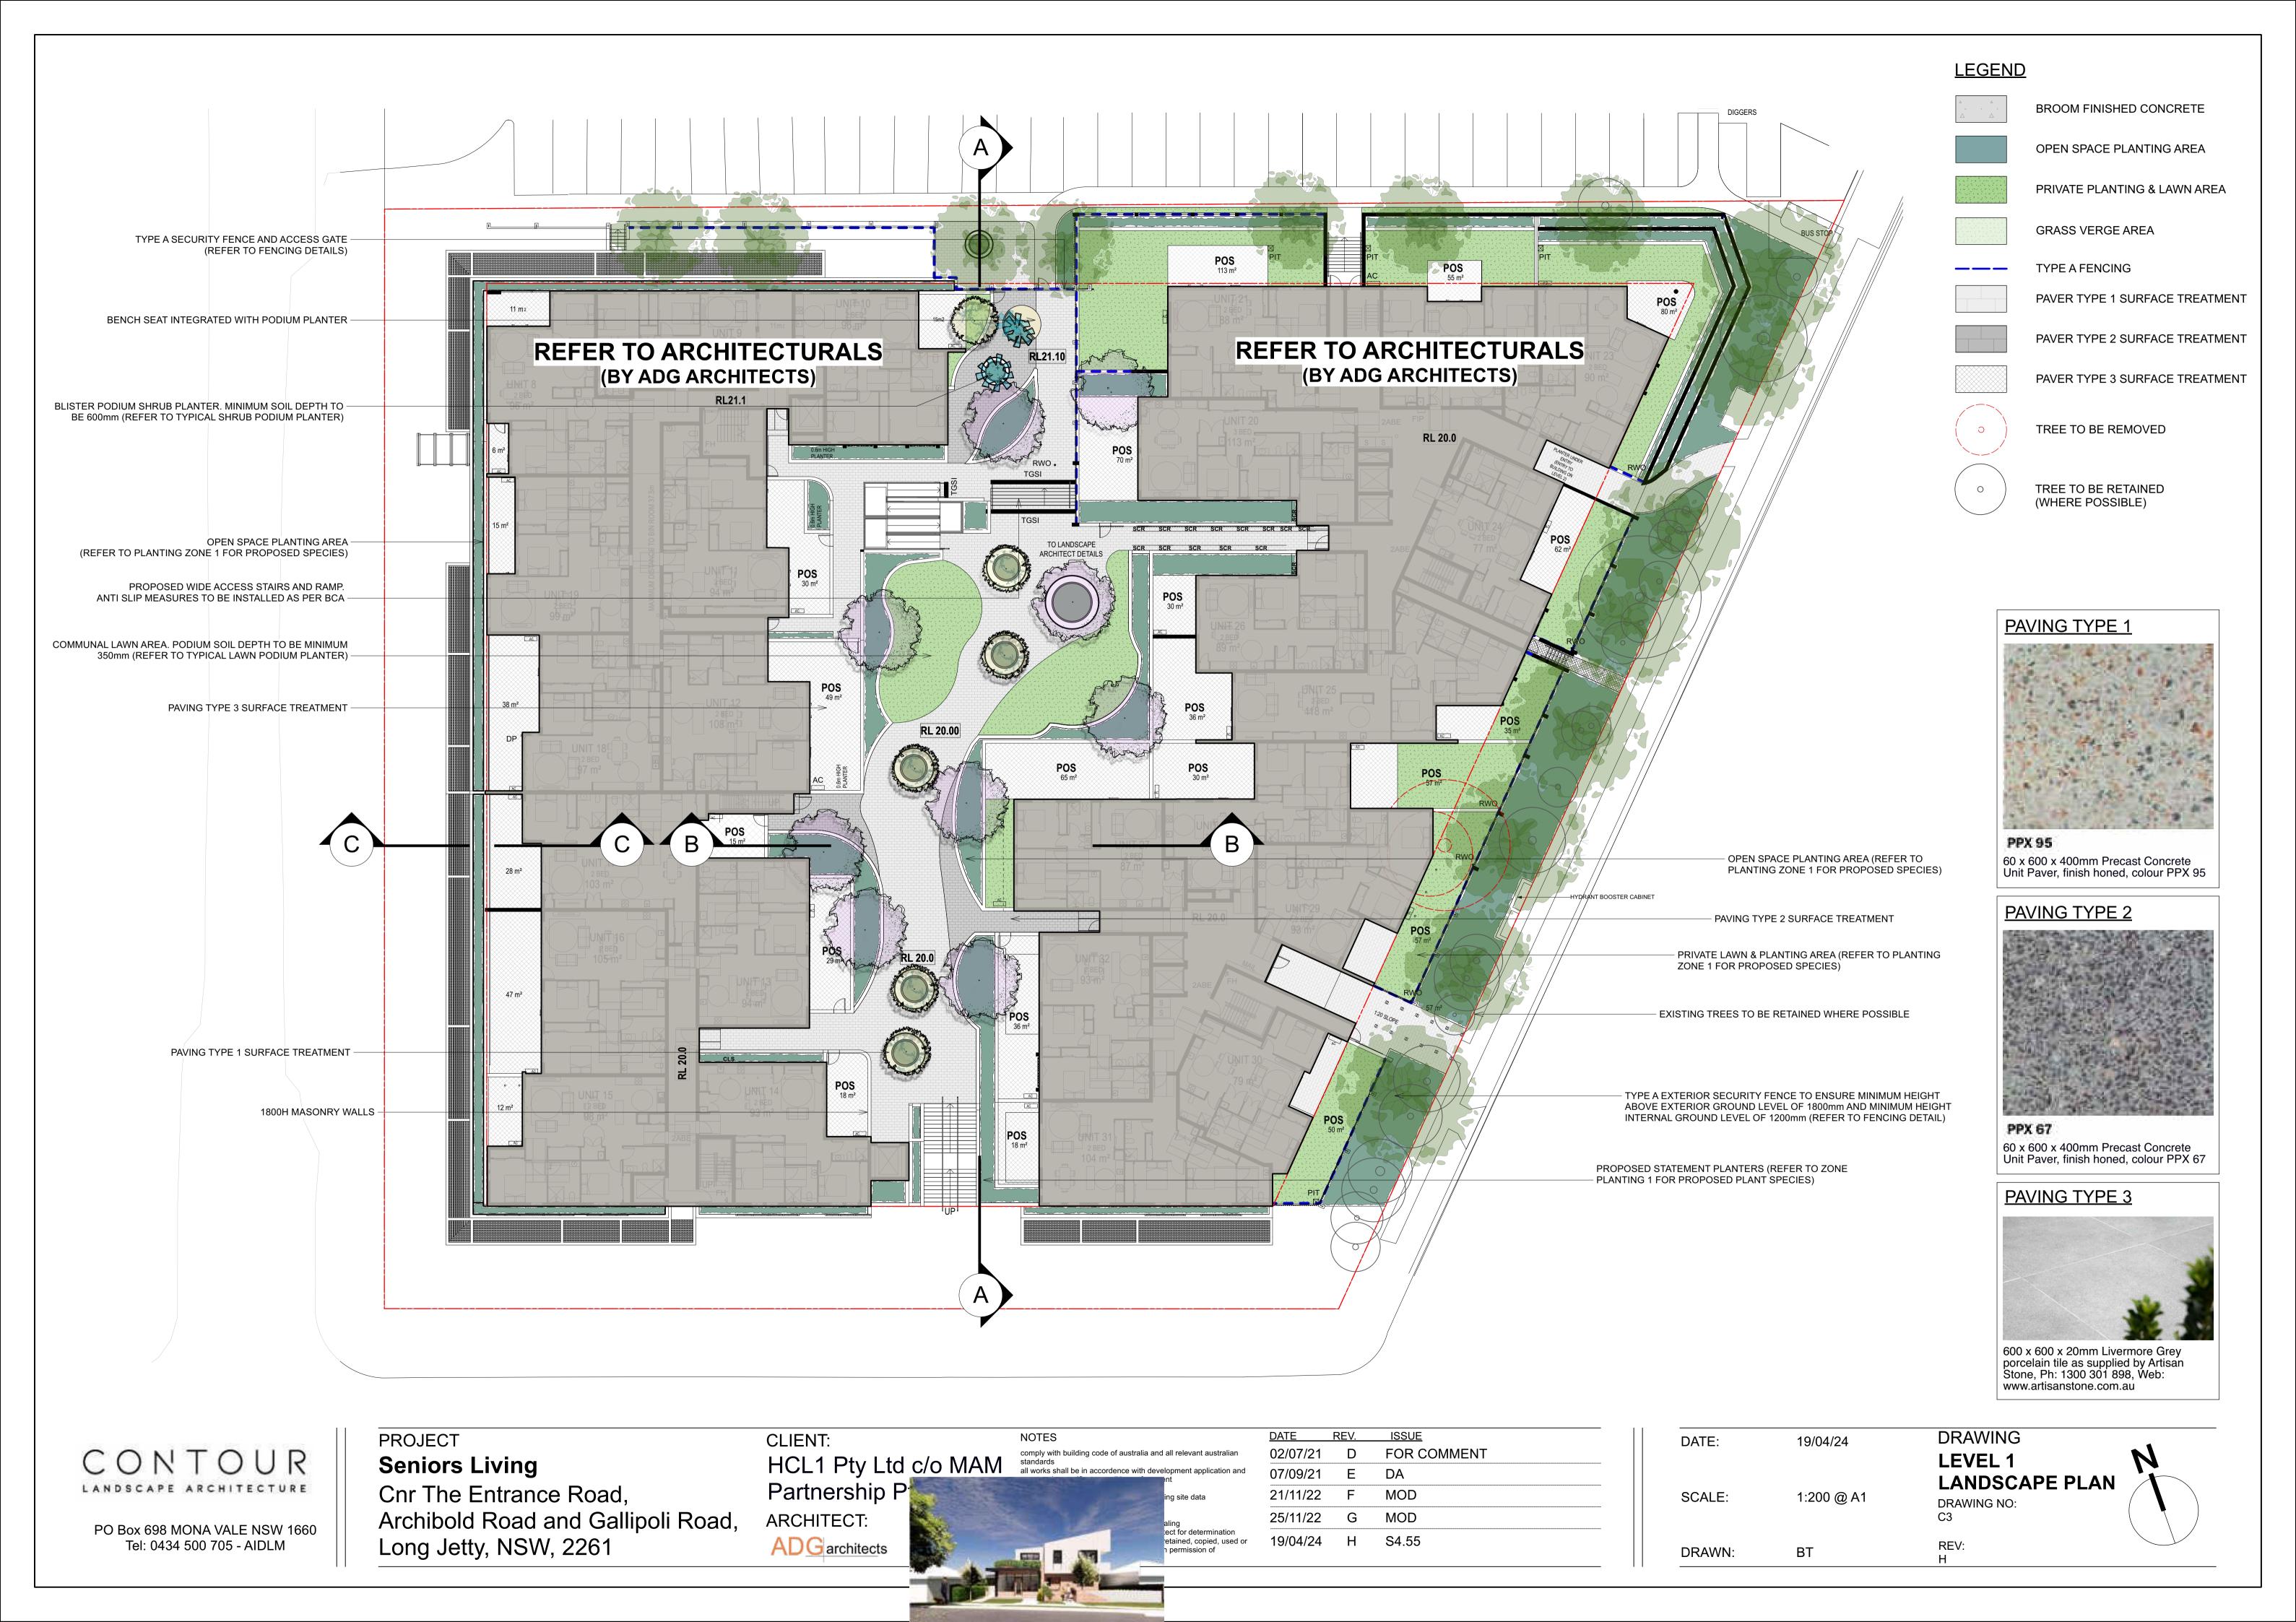

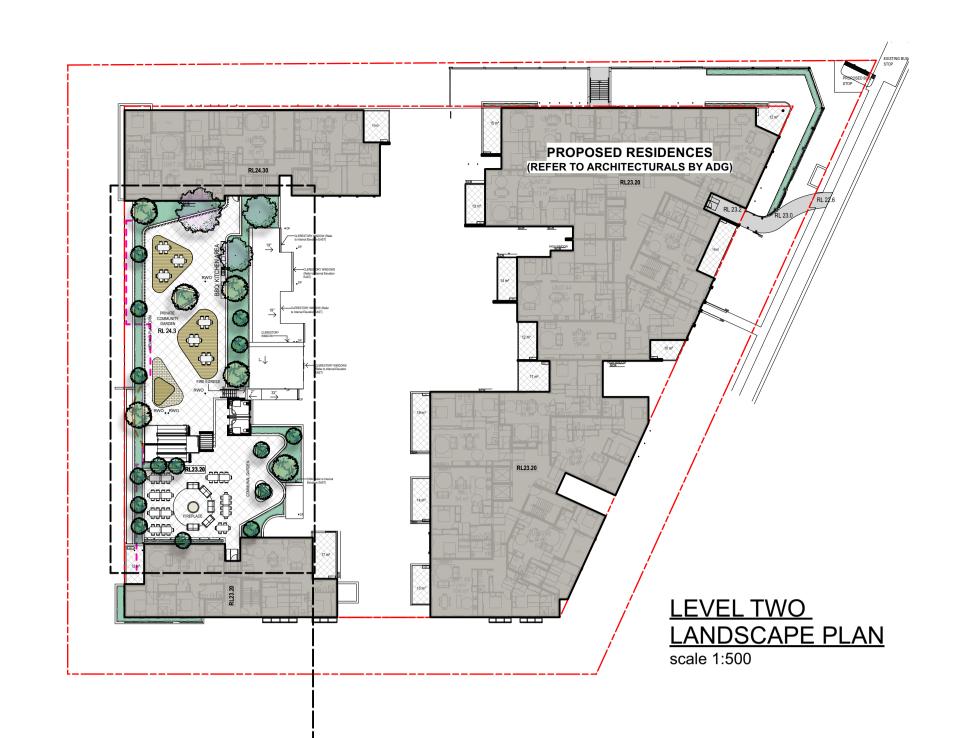

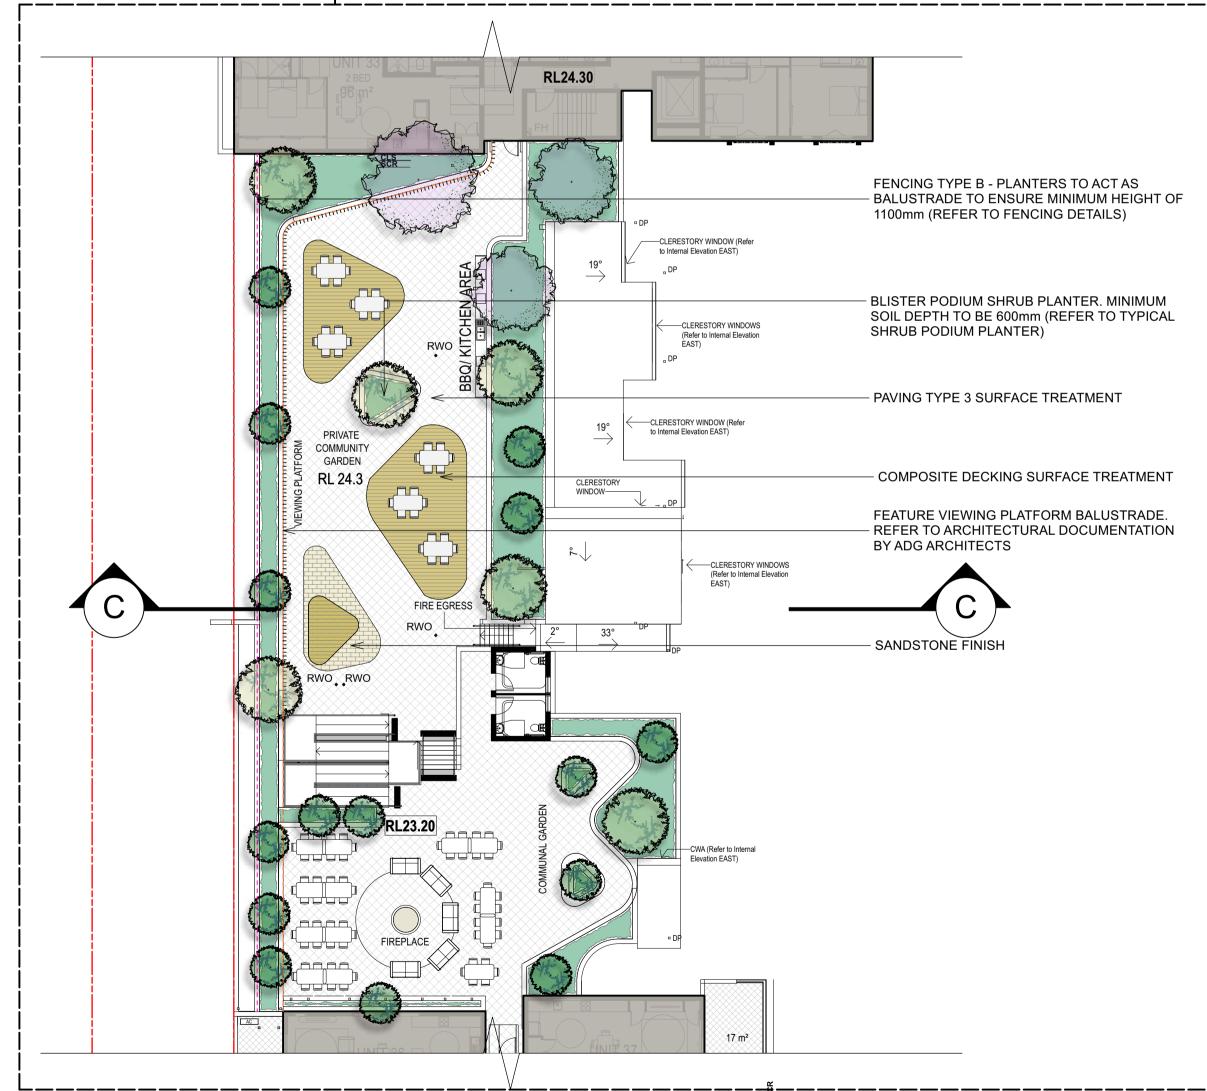

DETAILED LEVEL TWO LANDSCAPE PLAN scale 1:200

CONTOUR LANDSCAPE ARCHITECTURE

PO Box 698 MONA VALE NSW 1660 Tel: 0434 500 705 - AIDLM

PROJECT


**Seniors Living** 

Cnr The Entrance Road, Archibold Road and Gallipoli Road, Long Jetty, NSW, 2261

CLIENT: Partnership P ARCHITECT: ADG architects



AREA WITH 8.5 HEIGHT LIMIT AND MAX FSR OF 0.5

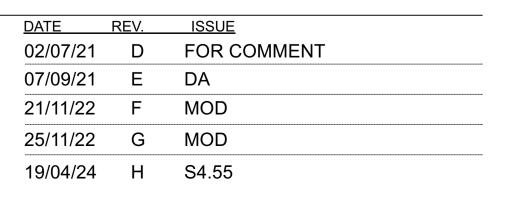

**RL32.80** 

COMMON AREA TO LANDSCAPE ARCHITECT DETAILS

> SCALE: DRAWN:

**LEGEND** 

PAVER TYPE 3 SURFACE TREATMENT

OPEN SPACE PLANTING AREA

SANDSTONE FINISH

FEATURE BALUSTRADE

TYPE B FENCING

PROPOSED RESIDENCES

(REFER TO ARCHITECTURALS BY ADG)

LEVEL FIVE

scale 1:500

**RL32.80** 

LANDSCAPE PLAN


**PAVING TYPE 3** COMPOSITE DECKING SURFACE TREATMENT 600 x 600 x 20mm Livermore Grey porcelain tile as supplied by Artisan Stone, Ph: 1300 301 898, Web:



www.artisanstone.com.au



1200 - 1800mm HIGH ALUMINIUM BATTEN FENCE (OR SIMILAR)

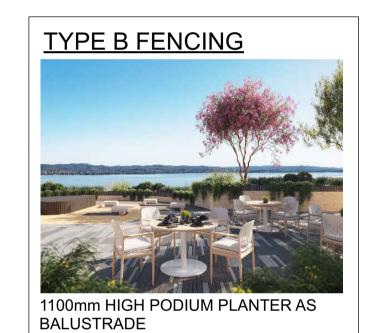



REFER TO ARCHITECTURAL DOCUMENTATION BY ADG ARCHITECTS

# DETAILED LEVEL FIVE LANDSCAPE PLAN scale 1:100

DATE: 19/04/24

PAVING TYPE 3 SURFACE TREATMENT

OPEN SPACE PLANTING AREA (REFER TO PLANTING ZONE 3 FOR PROPOSED SPECIES)

FENCING TYPE B. PLANTERS TO ACT AS BALUSTRADE TO ENSURE MINIMUM HEIGHT OF 1100mm (REFER TO FENCING DETAILS)


- BLISTER PODIUM TREE PLANTER. MINIMUM SOIL DEPTH OF 1200mm (REFER TO TREE PODIUM TYPICAL DETAIL)

AS SHOWN @ A1

DRAWING **LEVEL 2 & 5** LANDSCAPE PLAN **DRAWING NO:** 



PLANTING ZONE 1
GROUND FLOOR

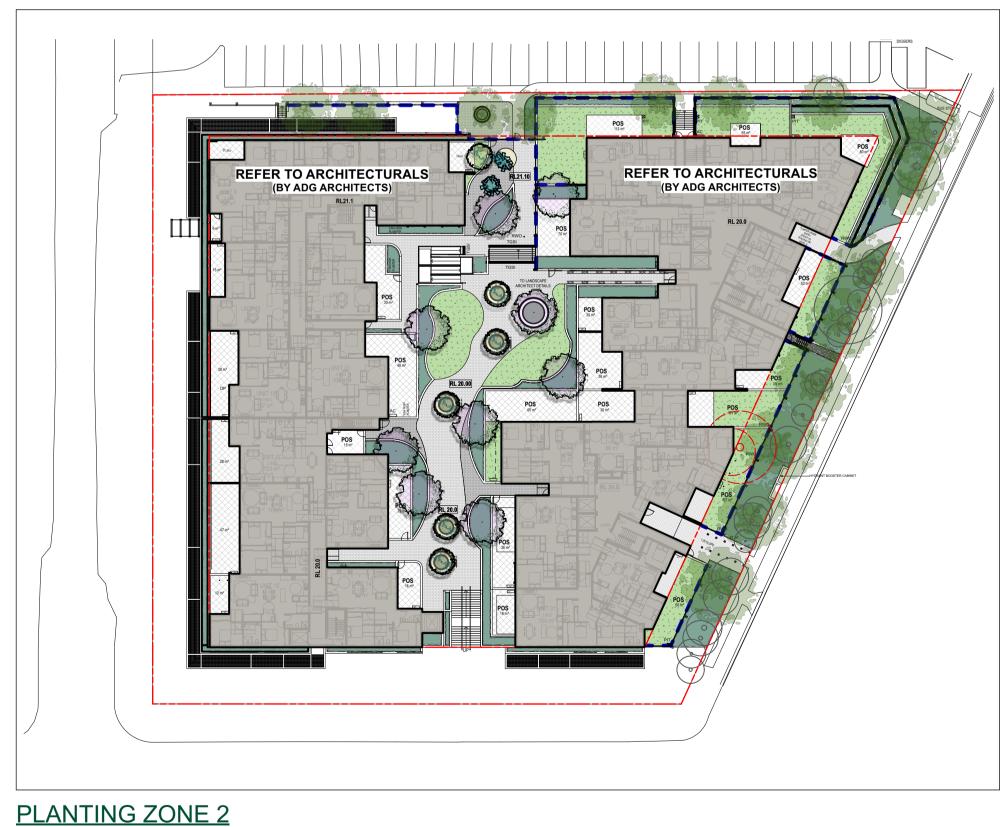

FIRST FLOOR



PO Box 698 MONA VALE NSW 1660 Tel: 0434 500 705 - AIDLM

# PROJECT Seniors Living Cnr The Entrance Road, Archibold Road and Gallipoli Road,

Long Jetty, NSW, 2261



DATE REV. ISSUE

02/07/21 D FOR COMMENT

07/09/21 E DA

21/11/22 F MOD

25/11/22 G MOD

19/04/24 H S4.55



# PLANTING PRINCIPALS:

As this area is the most visible from the surrounding streetscape, the proposed planting shall make a grand statement of locally indigenous plantings that respect the natural landscape and the existing site.

Ample deep soil areas allow for larger tree plantings forward of the development to help provide visual and acoustic privacy to and from the street. These significant plantings will also help to visually ground the proposed development and reduce the scale and bulk.






# PLANTING PRINCIPALS:

As this area is the central core of the proposed development, the proposed planting shall make a grand statement of locally indigenous plantings coupled with familiar plantings for aged care residents to create a comforting and familiar plant palette whilst respecting the local landscape.

Deep soil areas allow for larger tree plantings at the entrances to the development which help provide visual and acoustic privacy to and from the street. On podium garden beds will help to visually screen residences reducing the scale and bulk of the development whilst improving the privacy for the residents.

DATE:	19/04/24	DRAWING
		ZONE 1 & 2
SCALE:	1,500 @ 41	PLANTING PALETTE
SCALE:	1:500 @ A1	DRAWING NO: C5
DRAWN:	ВТ	REV:

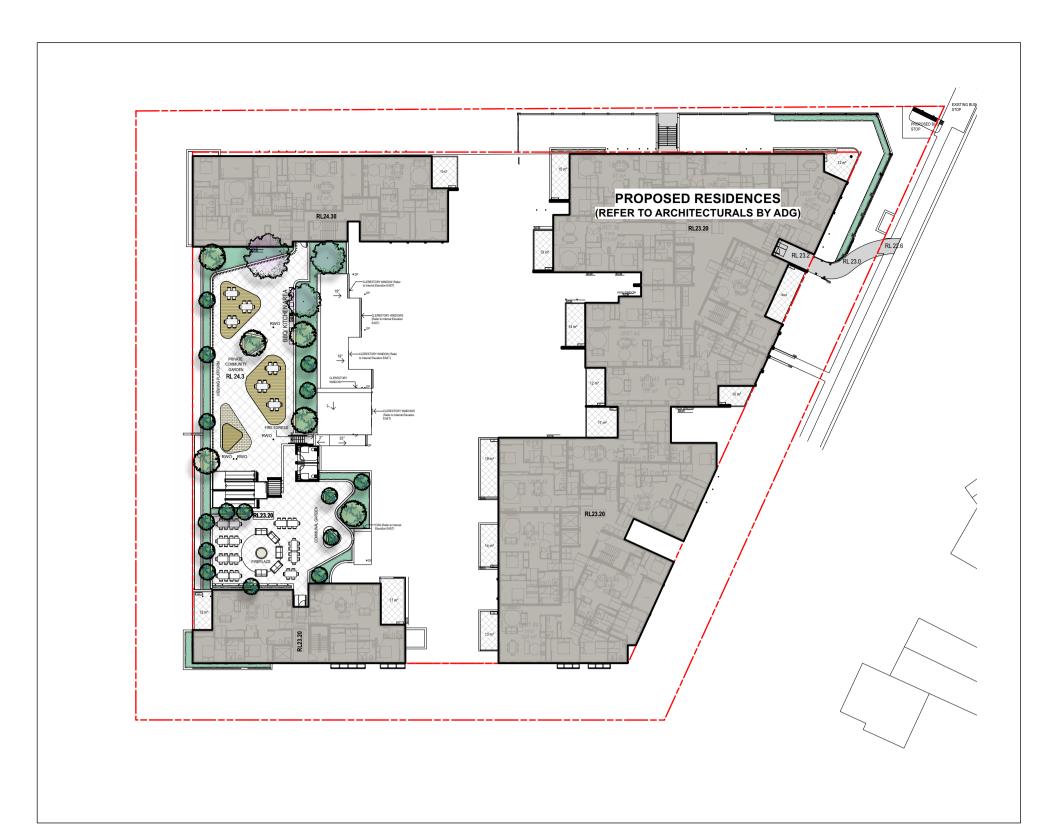


PLANTING ZONE 3
SECOND FLOOR





# PLANTING PRINCIPALS:

Due to the environmental implications of balcony and roof planting combined with difficult maintenance access, tougher and hardier species have been sought. These will ensure long term viability of challenging planting areas whilst framing enticing views out to the district. Locally indegneous plantings will still be maintained and preferred as will familiar species to the aged residents.

Dense plantings on the podium garden beds will help to improve the aural and visual privacy of residences nearby the upper level communal areas. Balcony planters will also help to soften the bulk of the proposed development and provide a contrast from the built form and materials.

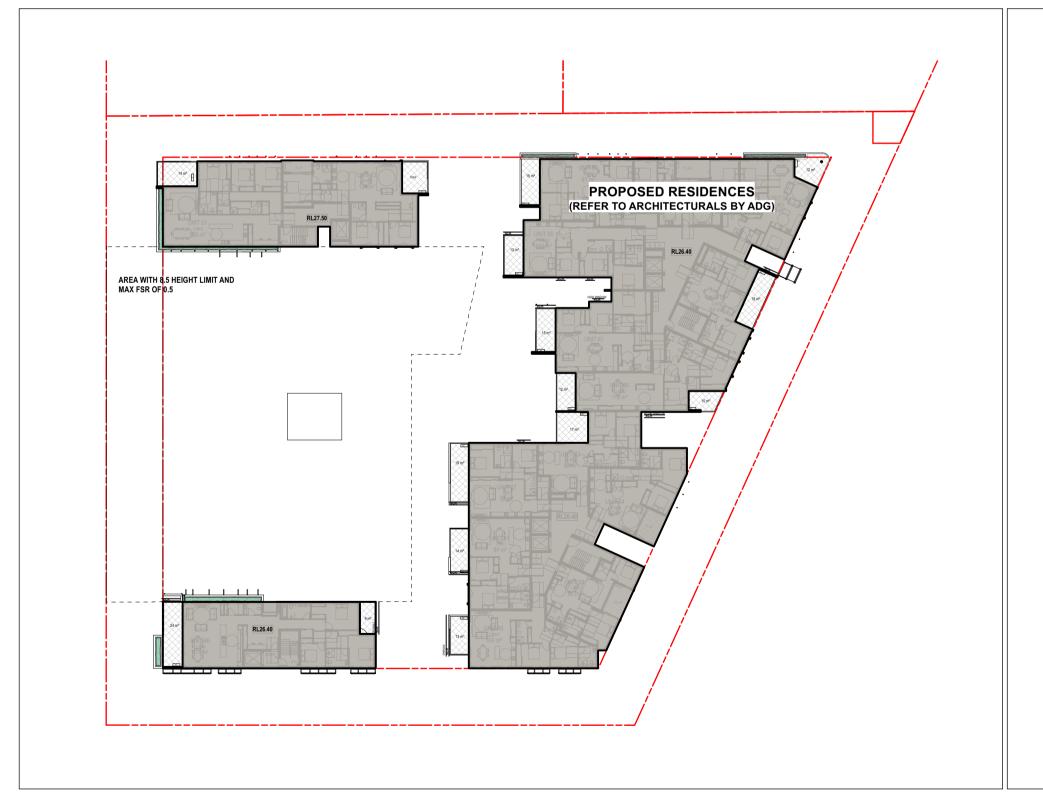

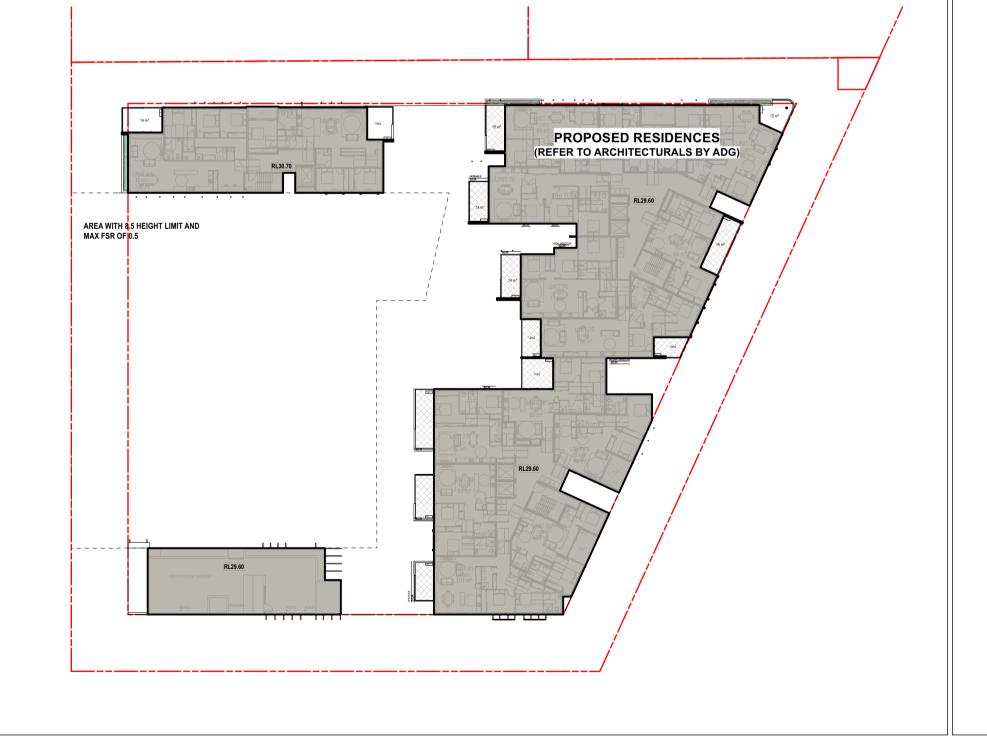

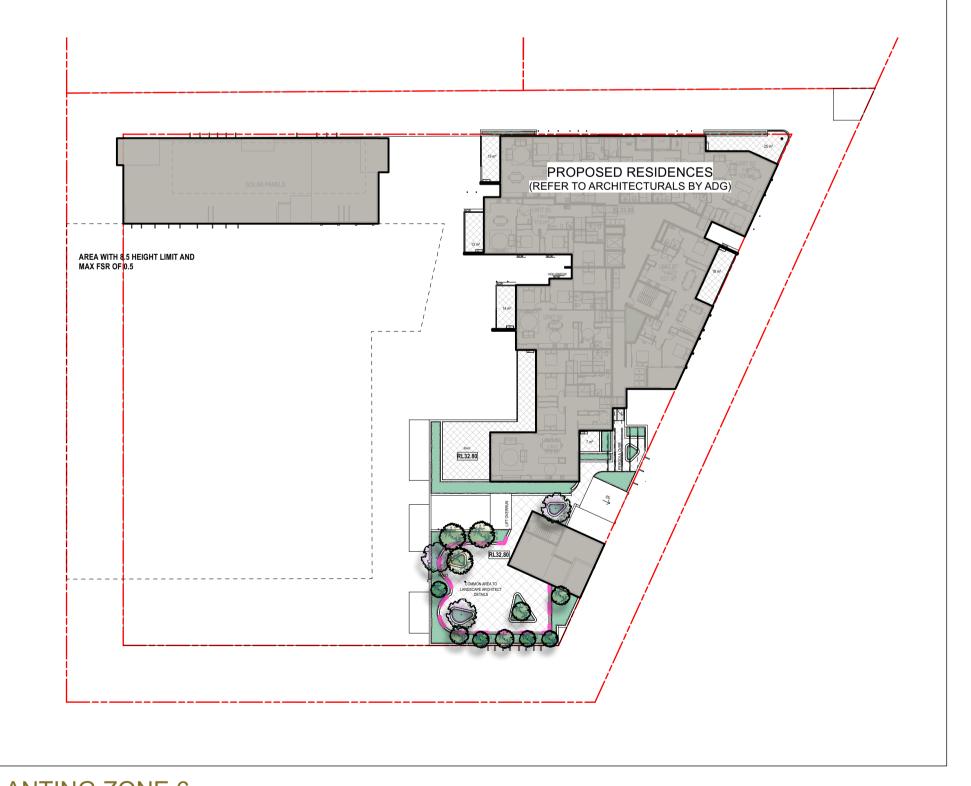

PLANTING ZONE 4
THIRD FLOOR

PLANTING ZONE 5
FOURTH FLOOR

PLANTING ZONE 6
FIFTH FLOOR

# CONTOUR

PO Box 698 MONA VALE NSW 1660 Tel: 0434 500 705 - AIDLM PROJECT

Seniors Living
Cnr The Entrance Road,
Archibold Road and Gallipoli Road,
Long Jetty, NSW, 2261

CLIENT:
HCL1 Pty Ltd c/o MAM
Partnership P
ARCHITECT:
ADG architects

NOTES

comply with building code of australia and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with development application and all relevant australian standards all works shall be in accordence with a standard all relevant all relevant

	<u>DATE</u>	REV.	ISSUE
	02/07/21	D	FOR COMMENT
ł	07/09/21	Ε	DA
	21/11/22	F	MOD
	25/11/22	G	MOD
r	19/04/24	Н	S4.55

DATE:	19/04/24	DRAWING
		<b>ZONE 3, 4, 5 &amp; 6</b>
00415	4.500.0.44	PLANTING PALETTE
SCALE:	1:500 @ A1	DRAWING NO: C6
DRAWN:	ВТ	REV:



CONTOUR LANDSCAPE ARCHITECTURE

PO Box 698 MONA VALE NSW 1660 Tel: 0434 500 705 - AIDLM

**Seniors Living** Cnr The Entrance Road, Archibold Road and Gallipoli Road, Long Jetty, NSW, 2261


Partnership P ARCHITECT: ADG architects

HCL1 Pty Ltd c/o MAM

comply with building code of australia and all relevant australian standards all works shall be in accordence with development application and


	DATE	REV.	ISSUE	
	02/07/21	D	FOR COMMENT	
	07/09/21	Ε	DA	
	21/11/22	F	MOD	
	25/11/22	G	MOD	
r	19/04/24	Н	S4.55	

DATE:	19/04/24	DRAWING
		CANOPY
		REPLENISHMENT PLAN ,
SCALE:	1:200 @ A1	DRAWING NO:
		C7
DRAWN:	ВТ	REV:

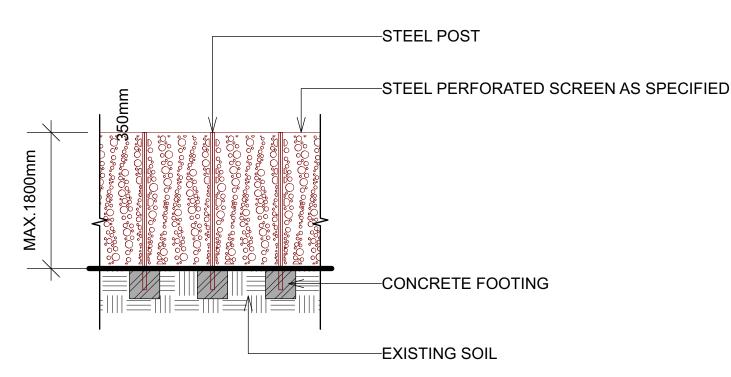


# **FENCE TYPE A TYPICAL DETAIL**

scale 1:50

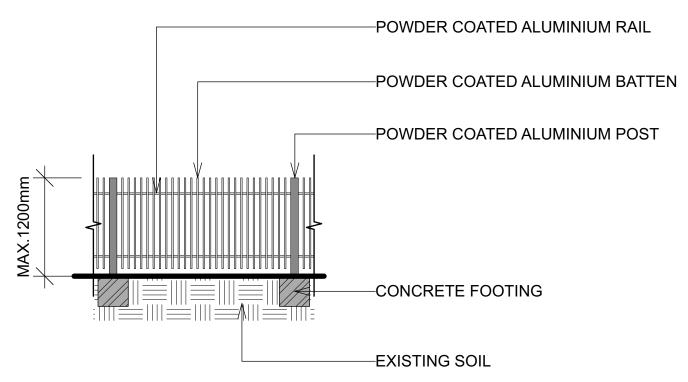

# **FENCE TYPE B TYPICAL DETAIL**

scale 1:50

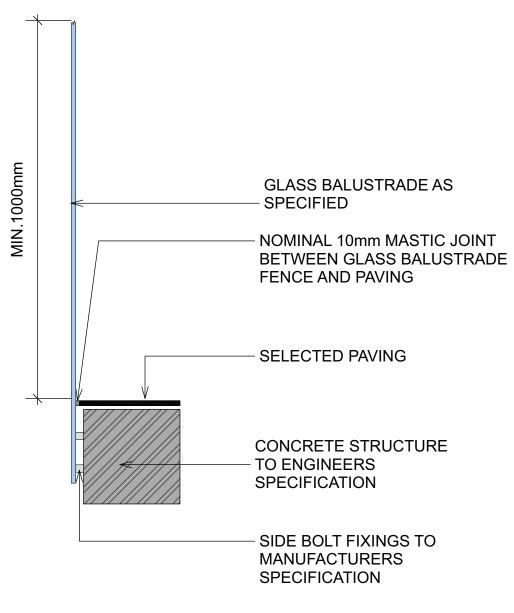


# FENCE TYPE C TYPICAL DETAIL scale 1:10


CONTOUR

PO Box 698 MONA VALE NSW 1660 Tel: 0434 500 705 - AIDLM

PROJECT CLIENT: STEBLECOSTty Ltd c/o MAM comply with building or standards all works shall be in ac A DRAFT **Seniors Living** Cnr The Entrance Road, Partnership P 19/04/24 H S4.55 Archibold Road and Gallipoli Road, ARCHITECT:
Long Jetty, NSW, 2261 ect or determination etailed, copied, used o

DATE:	19/04/24	DRAWING	
		LANDSCAPE	
		DETAILS	
SCALE:	AS SHOWN @ A3	DRAWING NO: C8	
DRAWN:	ВТ	REV: H	

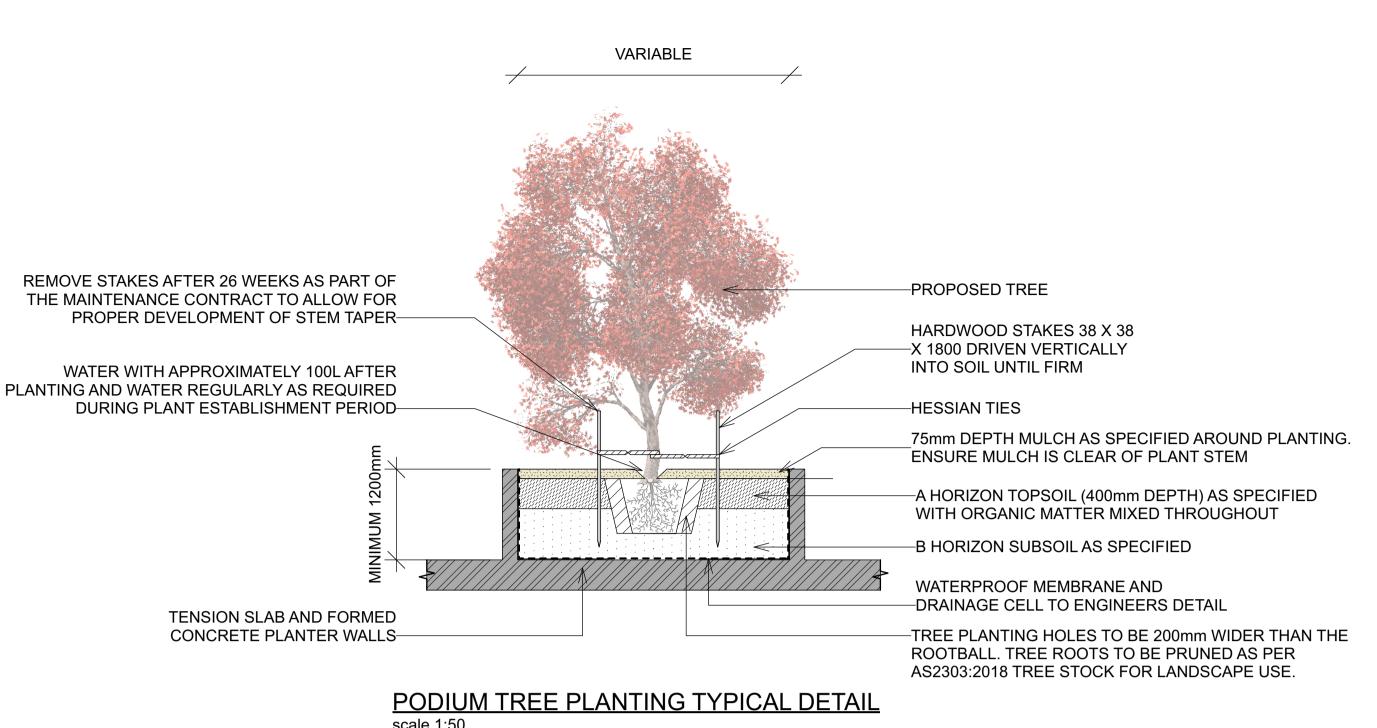

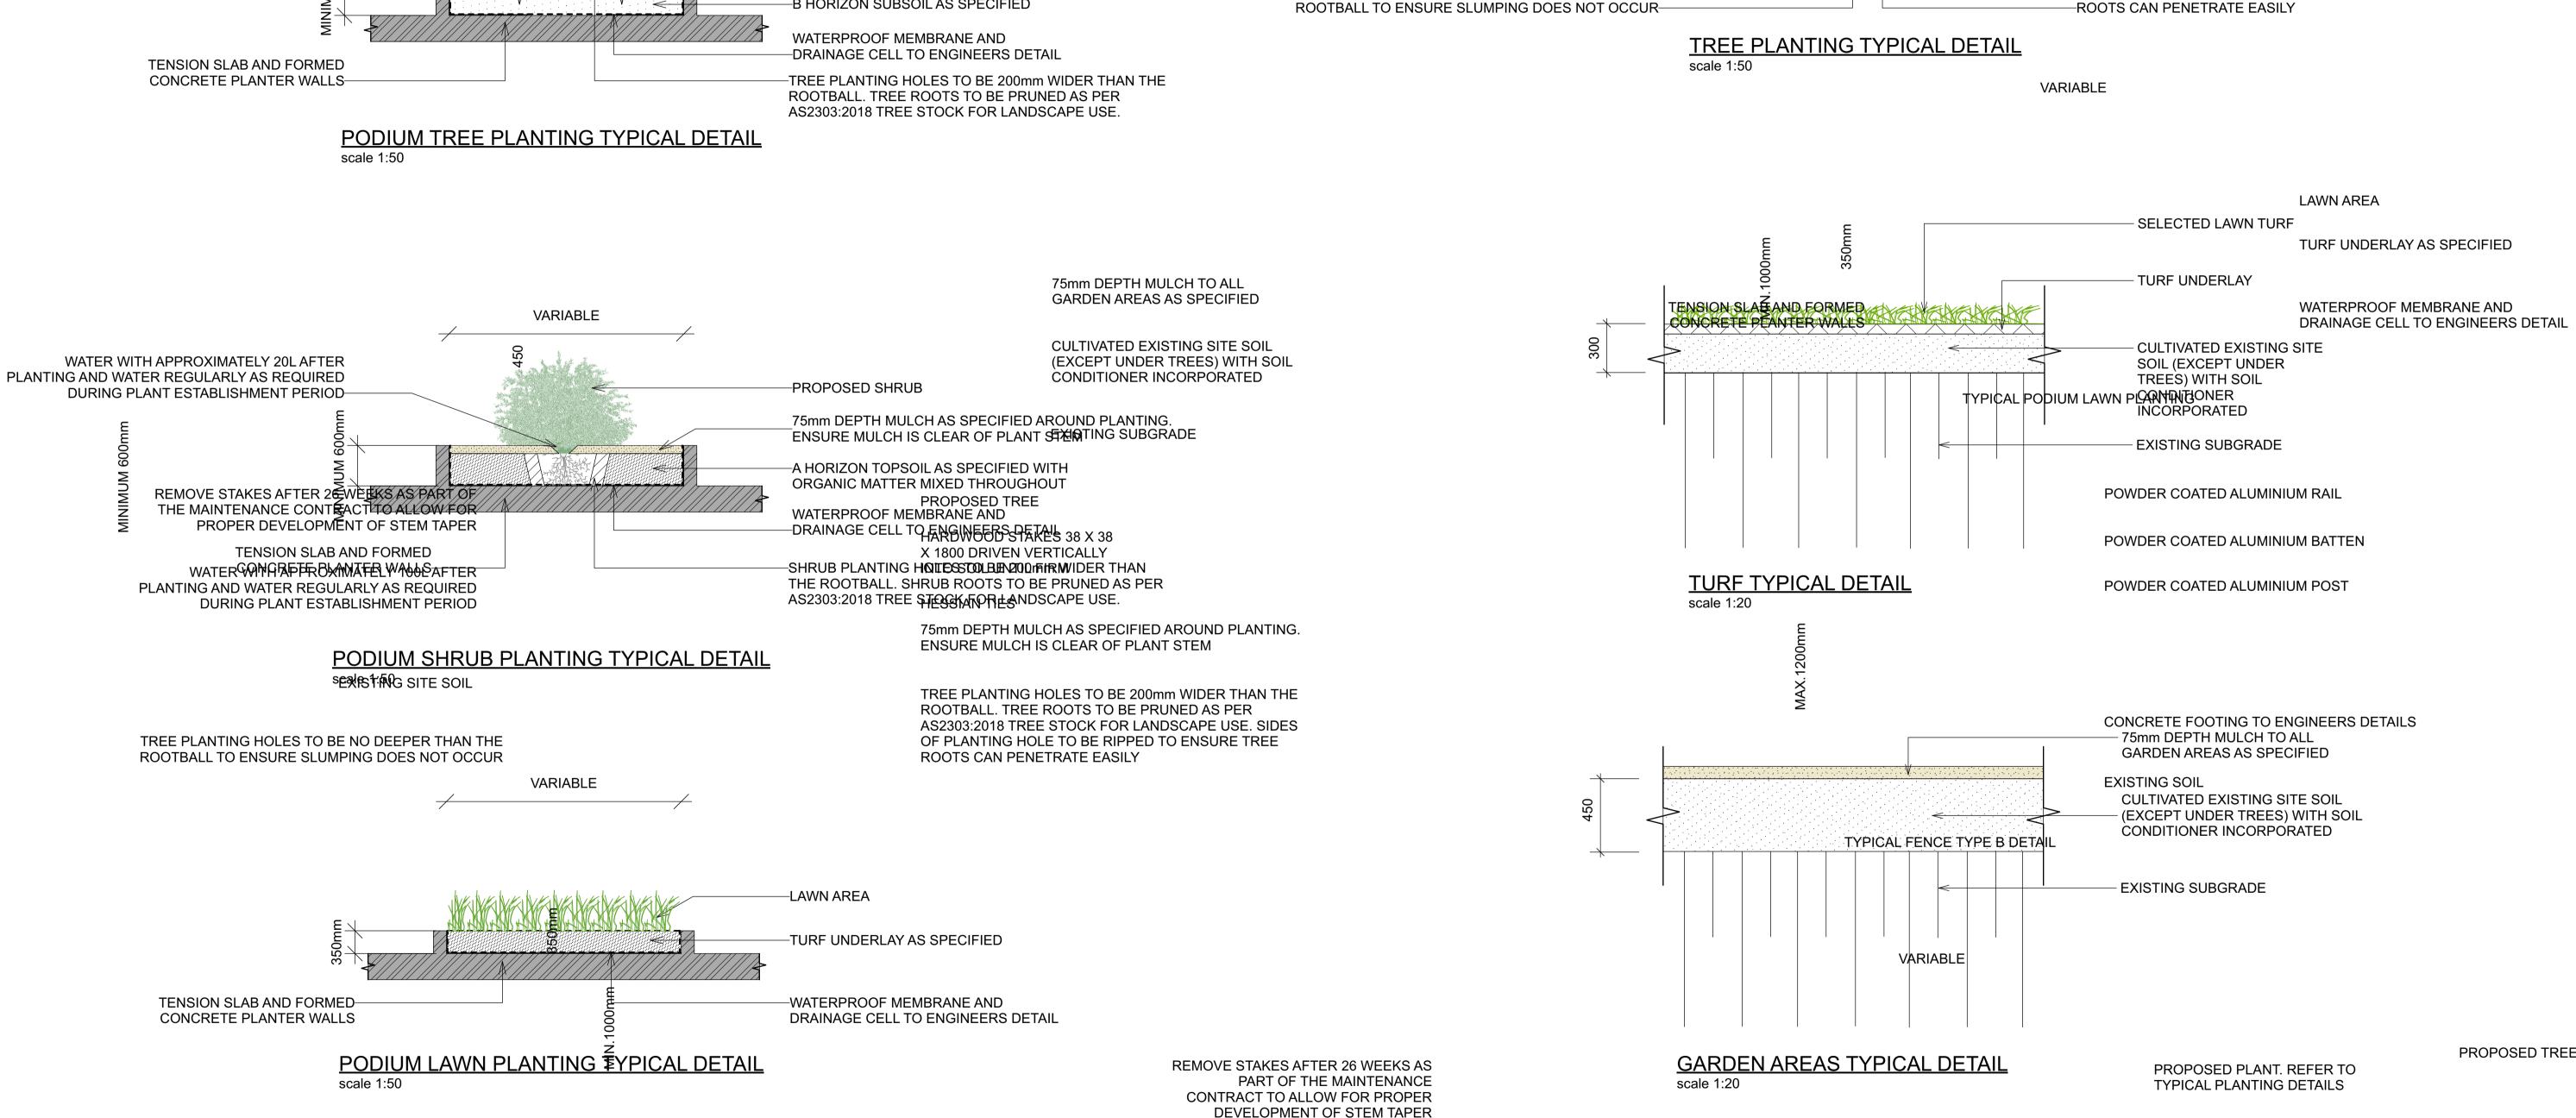

TYPICAL PODIUM TREE PLANTING

REMOVE STAKES AFTER 26 WEEKS AS PART OF

PLANTING AND WATER REGULARLY AS REQUIRED

TREE PLANTING HOLES TO BE NO DEEPER THAN THE

THE MAINTENANCE CONTRACT TO ALLOW FOR

PROPER DEVELOPMENT OF STEM TAPER

WATER WITH APPROXIMATELY 100L AFTER€

DURING PLANT ESTABLISHMENT PERIOD-

EXISTING SITE SOIL-

CONTOUR LANDSCAPE ARCHITECTURE

PO Box 698 MONA VALE NSW 1660 OUND PLANTING. Tel: 0434 500 705 - AIDLM

WIDER THAN THE

ED AS PER

**POWDER COATED ALUMINIUM RAIL** POWDER COATED ALUMINIUM CALLENT: **PROJECT** 

**Seniors Living** POWDER COATED ALUMINIU

Cnr The Entrance Road, Archibold Road and Gallipoliteoad, Long Jetty, N\$W, 2261 **ADG** architects

HACO DETR CHATYED A LOW ON ON BATTER Partnership P UM ARCHITECT:

REV. ISSUE DRAFT comply with building code of australia and all relevant australian 07/05/21 all works shall be in accordence with development application and 07/09/21 DA WATER WITH ARPROXIMATELY 100/04/24 H S4.55 AFTER PLANTING AND WATER REGULARLY AS REQUIRED DURING **TENSION SLAB AND FORMED CONCRETE PLANTER WALLS** PLANT ESTABLISHING PERIOD

75mm DEPTH MULCH AS SPECIFIED AROUND PLANTING. ENSURE MULCH IS CLEAR OF PLANT STEM — A HORIZON TOPSOIL (400mm DEHARDWOOD STAKES 38 X 38 X 1800 DF WITH ORBANN INNETER MIXED DATE: 19/04/24 BHORZANDSCAPECIF WATER DE TANE AND SCALE: AS SHOWN @ ADRAINARE VELL TO ENGINEERS PLANTH G HOLES TO BE 200mm ROOTBALL. TREE ROOTS TO BE AS230 18 EV 18 TREE STOCK FOR L BT DRAWN:

-PROPOSED TREE

-HESSIAN TIES

HARDWOOD STAKES 38 X 38

75mm DEPTH MULCH AS SPECIFIED AROUND PLANTING.

ROOTBALL. TREE ROOTS TO BE PRUNED AS PER

TREE PLANTING HOLES TO BE 200mm WIDER THAN THE

AS2303:2018 TREE STOCK FOR LANDSCAPE USE. SIDES

OF PLANTING HOLE TO BE RIPPED TO ENSURE TREE

ENSURE MULCH IS CLEAR OF PLANT STEM

-X 1800 DRIVEN VERTICALLY

INTO SOIL UNTIL FIRM

75mm DEPTH MULCH AS SPECIFIED AROUND PLANTING. ENSURE MULCH I

## **OUTLINE LANDSCAPE SPECIFICATION**

ALL LANDSCAPE WORKS SHALL BE EXECUTED BY A COMPETENT LANDSCAPE CONTRACTOR EXPERIENCED IN HORTICULTURAL PRACTICE AND LANDSCAPE CONSTRUCTION. THE CONTRACTOR SHALL HOLD A CURRENT NSW STRUCTURAL LANDSCAPE LICENSE OR BE A MEMBER OF THE NSW LANDSCAPE CONTRACTORS ASSOCIATION. IRRIGATION WORKS SHALL BE EXECUTED BY A CONTRACTOR SUITABLY QUALIFIED AND LICENSED BY THE NSW DEPARTMENT OF FAIR TRADING FOR URBAN IRRIGATION.

THESE GENERAL LANDSCAPE SPECIFICATIONS SHALL BE READ IN CONJUNCTION WITH DETAILED DOCUMENTATION PREPARED BY CONTOUR LANDSCAPE ARCHITECTURE, STRUCTURAL ENGINEERING PLANS, STORMWATER ENGINEER PLANS, ARCHITECTURAL DOCUMENTATION AND ALL D.A. CONSENT CONDITIONS.

LANDSCAPE HARDWORKS DEMOLITION, BULK EARTHWORKS, RETAINING WALLS, STONE FACING, PLANTER BOXES, PAVING, DRAINAGE, WATERPROOFING, FENCING AND ALL SITE CONSTRUCTION INDICATED SHALL BE EXECUTED IN ACCORDANCE WITH LANDSCAPE ARCHITECTURAL, ARCHITECTURAL + ENGINEERING SPECIFICATIONS LANDSCAPE WORKS SHALL GENERALLY BE UNDERTAKEN IN ACCORDANCE WITH DA APPROVED PLANS AND CONSTRUCTION CERTIFICATE PLANS AND DETAILS AND SHALL BE COMPLIANT WITH:

AS4970-2009 Protection of trees on development sites

AS 4970-2009/Amdt 1-2010 Protection of trees on development sites

AS4373-2007 Pruning of amenity trees

AS4419-2003 Soils for landscaping and garden use

AS4454-2012 Composts, soil conditioners and mulches

AS3743-2003 Potting mixes

AS/NZ3500:2015 Plumbing and drainage Set

BEFORE LANDSCAPE WORK IS COMMENCED THE LANDSCAPE CONTRACTOR IS TO ESTABLISH THE POSITION OF ALL SERVICES LINES AND ENSURE TREE PLANTING IS CARRIED OUT AT LEAST 3 METRES AWAY FROM THESE SERVICES. SERVICES LIDS, VENTS AND HYDRANTS SHALL BE LEFT EXPOSED AND NOTE COVERED BY ANY LANDSCAPE FINISHES (TURNING, PAVING, GARDEN BEDS ETC.) FINISH ADJOINING SURFACES FLUSH WITH PIT LIDS.

**MANAGEMENT OF TREE PROTECTION (AS REQUIRED)** 

A QUALIFIED AND APPROVED ARBORIST IS TO BE CONTRACTED TO UNDERTAKE OR MANAGE THE INSTALLATION OF PROTECTIVE FENCING, AND TO UNDERTAKE SUCH MEASURES AS THEY DEEM APPROPRIATE TO PRESERVE THE SUBJECT TREES TO BE RETAINED. THE ARBORIST IS TO BE RETAINED FOR THE ENTIRE CONTRACT PERIOD TO UNDERTAKE ONGOING MANAGEMENT AND REVIEW OF THE TREES.

CARE SHALL BE TAKEN DURING THE ENTIRE PERIOD OF WORKS TO ENSURE NO DAMAGE TO ROOTS OR CANOPIES OF TREES TO BE RETAINED. NO STORING OF BUILDING MATERIALS, WASHING OF EQUIPMENT, DISPOSAL OF CHEMICALS, ETC. SHALL BE PERMITTED BENEATH CANOPY OF TREES TO BE RETAINED.. NO EXCAVATION OR TRENCHING SHOULD OCCUR BENEATH CANOPIES EXCEPT FOR COUNCIL-APPROVED WORKS. ALL EXCAVATION BENEATH TREE CANOPIES SHALL BE UNDERTAKEN TO COUNCIL / PROJECT ARBORIST INSTRUCTIONS. PROJECT ARBORIST SHALL BE ADVISED AND ATTEND SITE IF TREE ROOTS GREATER THAN 50MM DIAMETER ARE ENCOUNTERED.

BUILDER SHALL REMOVE ALL EXISTING CONCRETE PATHWAYS, FENCES, FOOTINGS, WALLS, ETC. NOT NOTED TO BE RETAINED AND COMPLETE ALL NECESSARY EXCAVATION WORK PRIOR TO COMMENCEMENT ON SITE BY LANDSCAPE CONTRACTOR. BUILDER SHALL ALSO INSTALL NEW RETAINING WALLS, KERBS, LAYBACK KERB, CROSSOVER, PATHWAYS, ETC. AND MAKE GOOD ALL EXISTING KERBS, GUTTERS, ETC. AS NECESSARY AND TO APPROVAL OF COUNCIL. BUILDER SHALL ENSURE THAT A MINIMUM 600MM OF TOPSOIL IN GARDEN AREA AND A MINIMUM 150MM OF TOPSOIL IN LAWN AREAS EXISTS. SHOULD REQUIRED DEPTHS NOT EXIST BUILDER SHALL CONTACT LANDSCAPE ARCHITECT AND ASK FOR INSTRUCTIONS PRIOR TO COMPLETION OF **EXCAVATION WORKS.** 

ALL LEVELS AND SURFACE DRAINAGE SHALL BE DETERMINED BY OTHERS AND APPROVED ON SITE BY LANDSCAPE CONTRACTOR.

# **SOIL PREPARATION + PLANTING SOILS**

CULTIVATE TO A DEPTH OF 450MM ALL PROPOSED GARDEN AREAS AND 300mm FOR ALL LAWN AREA. DO NOT CULTIVATE BENEATH EXISTING TREES TO BE RETAINED. IN AREAS WHERE FILL IS REQUIRED GAIN REQUIRED SHAPES AND LEVELS USING A PREMIUM GRADE SOIL MIX. IN AREAS WHERE EXCAVATION IS REQUIRED (IF IN CLAY) OVER EXCAVATE AS REQUIRED TO ALLOW FOR INSTALLATION OF 600MM DEPTH OF PREMIUM GRADE TOPSOIL MIX TO GARDEN AREAS AND 300M DEPTH OF PREMIUM GRADE TOPSOIL MIX TO LAWN AREAS.

BEFORE LAYING TOPSOIL, THE FOLLOWING SUBGRADE TREATMENT MUST BE APPLIED TO ALL FINISHED SUBGRADE AREAS:

- 1. FAIR + TRIM TO RELATIVE LEVEL TO ACCOMMODATE REQUIRE OVERALL SOIL DEPTH
- 2.REMOVE ROCK >100mm DIAMETER
- 3. REMOVE RUBBISH SUCH AS CONSTRUCTION GENERATED WASTER, PLASTICS, METALS, GLASS
- 4. APPLY GYPSUM AND LIME AT MANUFACTURER'S RECOMMENDED RATES
- 5. LOOSEN SUBGRADE TO 200mm DEPTH LEAVING SURFACE 'KEYED' TO ACCEPT TOPSOIL

CONTRACTOR SHALL UNDERTAKE PH TESTS AND ADJUST WHERE NECESSARY TO ACHIEVE A PH WITHIN THE 5.5 - 7.5 RANGE, MIX IN GYPSUM AT MANUFACTURER'S RECOMMENDED RATES IF CLAY SOIL ENCOUNTERED.

UNDERTAKE ALL REQUIRED ACTION TO ENSURE THAT NO ROOTBALLS OF PROPOSED PLANTS SIT IN CLAY WHEREVER POSSIBLE EXISTING LEVELS SHALL NOT BE ALTERED THROUGH GARDEN AND LAWN AREAS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE END RESULT OF THE PROJECT IS THAT ALL LAWN AND GARDEN AREAS DRAIN SUFFICIENTLY (BOTH SURFACE AND SUBSTRATE), ARE AT REQUIRED FINISH LEVELS AND HAVE SUFFICIENT SOIL DEPTHS TO ENABLE LAWN AND PLANTS TO THRIVE AND GROW. SHOULD ALTERNATIVE WORKS TO THOSE SPECIFIED REQUIRED TO ACHIEVE THAT RESULT, CONTRACTOR SHALL INFORM BUILDER AT TIME OF TENDER AND REQUEST INSTRUCTIONS.

# **WIRE (FOR CLIMBERS)**

WIRE FOR THE USE AS TRELLIS FOR CLIMBING PLANTS SHALL BE VERTICAL 316-GRADE STAINLESS STEEL (7X7 WIRE ROPE) FIXED TO CONCRETE VIA STAINLESS STEEL EYELETS, INCLUDING TENSION TURN BUCKLES.

### **PLANTING**

ALL PLANTS SHALL BE WELL GROWN AND DISEASE FREE. PLANTING SHALL BE IN ACCORDANCE WITH PLANTING SCHEDULE. TREES SHALL BE GROWN TO NATSPEC. GENERAL PLANT MATERIAL (EXOTICS AND ENDEMIC) SUPPLY PLANTS IN ACCORDANCE WITH PLANTING SCHEDULE. NO SUBSTITUTIONS ARE PERMITTED WITHOUT THE CONSENT OF THE SUPERVISING LANDSCAPE ARCHITECT. PLANT MATERIAL SHALL BE GROWN TO NATSPEC AND SHALL BE VIGOROUS, WELL ESTABLISHED, FREE OF DISEASE AND PESTS, HARDENED OFF, TRUE TO FORM, AND GROWN IN THEIR FINAL CONTAINERS FOR NOT LESS THAN 12 WEEKS. TREES SHALL HAVE A SINGLE LEADING SHOOT AND POTS FREE FROM WEEDS.

IMMEDIATELY REJECT DRIED OUT, DAMAGED OR UNHEALTHY PLANT MATERIAL BEFORE PLANTING.

PLANT HOLES SHALL BE DUG APPROXIMATELY TWICE THE WIDTH AND TO 100MM DEEPER THAN PLANT ROOTBALLS THAT THEY ARE TO RECEIVE. BASE AND SIDES OF HOLE SHALL BE FURTHER LOOSENED. FERTILISER, FOLLOWED BY 100MM DEPTH OF TOPSOIL MIX SHALL THEN BE PLACED INTO BASE OF HOLE AND LIGHTLY CONSOLIDATED. BASE OF HOLE SHALL THEN BE WATERED. REMOVE PLANT CONTAINER AND INSTALL PLANT INTO HOLE. ROOTBALL SHALL BE BACKFILLED WITH SURROUNDING TOPSOIL AND TOPSOIL FIRMED INTO PLACE. AN APPROVED SHALLOW DISH SHALL BE FORCED TO CONTAIN WATER AROUND BASE OF STEM. BASE OF STEM OF PLANT SHALL FINISH FLUSH WITH FINISHED SOIL LEVEL. ONCE INSTALLED PLANT SHALL BE THOROUGHLY WATERED AND MAINTAINED FOR THE DURATION OF THE CONTRACT.

THE LANDSCAPE CONTRACTOR SHALL REPLACE OR ADJUST PLANT STAKES, AND TREE GUARDS AS NECESSARY OR AS DIRECTED BY THE LANDSCAPE ARCHITECT.

STAKES SHALL BE STRAIGHT HARDWOOD, FREE FROM KNOTS AND TWISTS, POINTED AT ONE END AND SIZED ACCORDING TO THE SIZE OF PLANTS TO BE STAKED:

- 5-15 LITRE SIZE PLANT 1X 1200 X 25 X 25MM
- 35-75 LITRE SIZE PLANT 2X 1500 X 38 X 38MM
- 100+ LITRE SIZE PLANT 3X 1800 X 50 X 50MM

TIES SHALL BE 50MM WIDE HESSIAN WEBBING OR APPROVED EQUIVALENT NAILED OR STAPLED TO STAKE. DRIVE STAKES A MINIMUM ONE THIRD OF THEIR LENGTH, AVOIDING DAMAGE TO THE ROOT SYSTEM, ON THE WINDWARD SIDE OF THE

AT PLANTING SPREAD SLOW RELEASE FERTILIZER AROUND DRIP LINE OF ALL PLANTS AT MANUFACTURER'S RECOMMENDED RATES

**GENERAL APPLICATION:** 

EQUAL TO OSMOCOTE PLUS TRACE ELEMENTS - ALL PURPOSE NPK 19.4: 1.6: 6

NATIVE PLANTS: EQUAL TO OSMOCOTE PLUS TRACE ELEMENTS - NATIVE GARDENS NPK 17.9: 0.8: 7.3

## **COMPOST**

SHALL BE WELL-ROTTED BEGETATIVE MATTER OR ANIMAL MANURE, OR OTHER APPROVED MATERIAL, FREE FROM HARMFUL CHEMICALS, GRASS AND WEEK GROWTH AND WITH NEUTRAL PH. PROVIDE A CERTIFICATE OF PROOF OF PH UPON REQUEST.

ENSURE ALL MULCH IS FREE OF WEED SEED AND VEGETATIVE MATERIAL. PROVIDE SAMPLE OF MULCH FOR CLIENT APPROVAL PRIOR TO DELIVERY.

PLACE MULCH TO REQUIRED DEPTH, (REFER TO DRAWINGS) CLEAR OF PLANT STEMS, AND RAKE TO AN EVEN SURFACE FINISHING 25MM BELOW ADJOINING LEVELS. ENSURE MULCH IS WATERED IN AND TAMPED DOWN DURING INSTALLATION.

EDGING SHALL BE INSTALLED AT THE JUNCTION OF LAWN AND GARDEN AREAS AS INDICATED ON DRAWINGS (REFER TO DETAIL). EDGE SHALL BE FINISHED LEVEL WITH LAWN OR ADJOINING GRAVEL. EDGE

TURF SHALL BE 'SIR WALTER' BUFFALO. TURF ROLLS SHALL BE A MINIMUM OF 25mm THICK SUPPLIED FROM A SPECIALIST GROWER OF CULTIVATED TURF. IT SHALL BE OF EVEN THICKNESS, FREE FROM WEEDS. TURF SHALL BE DELIVERED WITHIN 24HRS OF CUTTING AND LAID WITHIN 24 HRS OF DELIVERY. CONTRACTOR SHALL LAY CLOSE BUTTED IN STRETCHER PATTERN WITH STAGGERED JOINTS TO FINISH FLUSH WITH ADJOINING SURFACES AFTER TAMPING. LIGHTLY TAMPING. TO AN EVEN SURFACE IMMEDIATELY AFTER LAYING. DO NOT USE ROLLER. ENSURE TURF ROLLS ARE NOT ALLOWED TO DRY OUT AND WATER IMMEDIATELY AFTER LAYING AS NECESSARY TO ENSURE TOPSOIL IS KEPT MOIST TO 100mm DEPTH. PROTECT NEWLY LAID TURF FROM PEDESTRIAN AND VEHICULAR TRAFFIC UNTIL ESTABLISHED. FERTILISE WITHIN 2 WEEKS OF LAYING WITH AN APPROVED LAWN FERTILISER APPLIED TO MANUFACTURER'S RECOMMENDATIONS. APPLY ADDITIONAL FERTILISER AS REQUIRED TO MAINTAIN HEALTHY GROWTH. ONCE ESTABLISHED, MOW TO MAINTAIN GRASS HEIGHT BETWEEN 30-50mm.

AT SAME TIME MAKE GOOD ALL EXISTING LAWN AREAS USING SAME LAWN TYPE. LAWNS IN SHADE SHALL BE OVERSOWN WITH AN APPROVED SEED MIX. ALLOW TO RETRIM AND RETURF COUNCIL NATURE STRIP AS REQUIRED.

ARTIFICIAL TURF SHALL BE CLASSIC GT AS AVALIABLE FROM https://aptasiapacific.com.au/ (REFER TO DRAWINGS FOR DETAILS)

SUBGRADE PREPARATION

1. TRIM AND GRADE EXISTING SUBSOIL 2.REMOVE ROCK >100mm DIAMETER

3. INSTALL 75mm COMPACTED ROAD BASE

4. INSTALL 20mm GRADED RIVER SAND

ENSURE ALL ARTIFICIAL TURF FINISHES FLUSH WITH ADJACENT SURFACES AND GARGEN EDGING. ENSURE ALL ARTIFICIAL TURF IS GRADED FOR SURFACE WATER TO FALL TOWARDS GARDEN AREAS AND OR DESIGNATED PITS.

(REFER TO DRAWINGS)

AREAS TO BE PAVED SHALL BE EXCAVATED OR FILLED TO ALLOW FOR INSTALLATION OF BEDDING MATERIALS. LEVELS AND FALLS SHALL BE AS PER PLAN. SURFACE DRAINAGE ON PAVING SHALL BE TOWARDS GRATED DRAINS INSTALLED BY BUILDER WITH ALL DRAINS CONNECTED TO STORMWATER SYSTEM.

## **IRRIGATION**

GRUNDFOS 4-54 CONNECTED TO RAINWATER TANK - FINAL SIZING TO ONSITE CONFIRMATION

EMITTER: 'NETAFIM TECHLINE AS' 13MM DRIP TUBE SPACING: 1.6LPH @ 0.4M SPACING

**ROWS: 0.4M APART** 

APPLICATION RATE: 10.0MM/HOUR

**TOTAL WATER USE: 52LPM** 

ALL DRIP TUBE SHALL BE LAID ACROSS ANY SLOPES. A MINIMUM OF 19MM LDPE PIPE SHALL BE USED AS COLLECTOR AND HEADER MANIFOLDS. DRIP TUBE SHALL BE PINNED DOWN EVERY 2.0M OR AS REQUIRED. FLUSH VALVES MUST BE INSTALLED AT THE ENDS OF EACH ZONE AND AT LOW POINTS. VACUUM BREAKERS MUST BE INSTALLED AT HIGH POINTS OF EACH ZONE

# IRRIGATION CONTROLLER

THE IRRIGATION CONTROLLER SHALL BE AN OUTDOOR 'HUNTER EXCORE' WATER PROOF CONTROLLER, OR EQUIVALENT. THIS SHALL BE POSITIONED IN A SUITABLE LOCATION.

COMMUNIAL GARDENS AND GROUND FLOOR UNITS 1.2 & 3 SHALL BE ON SEPERATE ZON

# **RAIN SENSOR**

THE RAIN SENSOR SHALL BE A 'HUNTER RAIN CLICK' OR EQUIVALENT. THIS SHALL BE MOUNTED IN A POSITION SUCH THAT IT IS NOT OBSTRUCTED FROM THE ELEMENTS BY BUILDINGS OR PLANTINGS. **SOLENOID VALVES** 

# THE SOLENOID VALVES SHALL BE 'HUNTER PGV' 25MM DIAMETER, OR EQUIVALENT. ALL SOLENOID VALVES SHALL BE HOUSED IN HIGH DENSITY POLYETHYLENE VALVE BOXES, FINISHED FLUSH WITH GRADE LEVEL. SOLENOID VALVES SHALL BE

POSITIONED TO SUITABLE LOCATIONS PRESSURE REDUCTION VALVES (IF REQUIRED)

'BERMAD' 30PSI X 20MM ADJUSTABLE PRESSURE REDUCTION VALVES SHALL BE INSTALLED ON ALL DRIP ZONES AS REQUIRED. THESE SHALL BE INSTALLED DIRECTLY INTO THE SOLENOID VALVE.

**ADG** architects

WHERE IRRIGATION PIPES CROSS UNDER PATHS OR THROUGH WALLS THEY SHALL BE ENCLOSED IN AN OVERSIZE PVC CONDUIT OR POLY PIPE SUBSTITUTED FOR COPPER PIPE.

# - ALL COMPONTENTS MUST COMPLY WITH SYDNEY WATER AND COUNCIL REQUIREMENTS.

NOTES

- ALLOW TO PROVIDE SEPERATE ZONING FOR THE IRRIGATION AREAS BETWEEN COMMUNIAL AND PRIVATE GARDEN AREAS

CONTOUR LANDSCAPE ARCHITECTURE

PO Box 698 MONA VALE NSW 1660 Tel: 0434 500 705 - AIDLM

**PROJECT** 

**Seniors Living** 

Cnr The Entrance Road, Archibold Road and Gallipoli Road, Long Jetty, NSW, 2261

**CLIENT:** HCL1 Pty Ltd c/o MAM Partnership P ARCHITECT:

comply with building code of australia and all relevant australia all works shall be in accordence with development application an

DATE	REV.	ISSUE	
07/05/21	Α	DRAFT	
02/07/21	В	DRAFT	
19/04/24	Н	S4.55	

DATE:	19/04/24	DRAWING
		<b>OUTLINE LANDSCAPE</b>
SCALE:	N/A	SPECIFICATIONS DRAWING NO: C10
DRAWN:	ВТ	REV: H