

Shed


For

Jude Millard

Lot 5, No. 449 Glen William Road, Glen William, NSW 2321 (DP4352)

Drawing Schedule

Sheet No.	Sheet Title	Current Revision
A00.01	Cover Sheet	A
A00.02	Safe Design Report - Work Cover Safety Notes	A
A01.01	Overall Site Plan	A
A01.02	Enlarged Site/ Earthworks Plan/ Sediment Control	A
A01.03	Concept Stormwater Drainage Plan	A
A02.01	Proposed Plan with Bathroom Layout	A

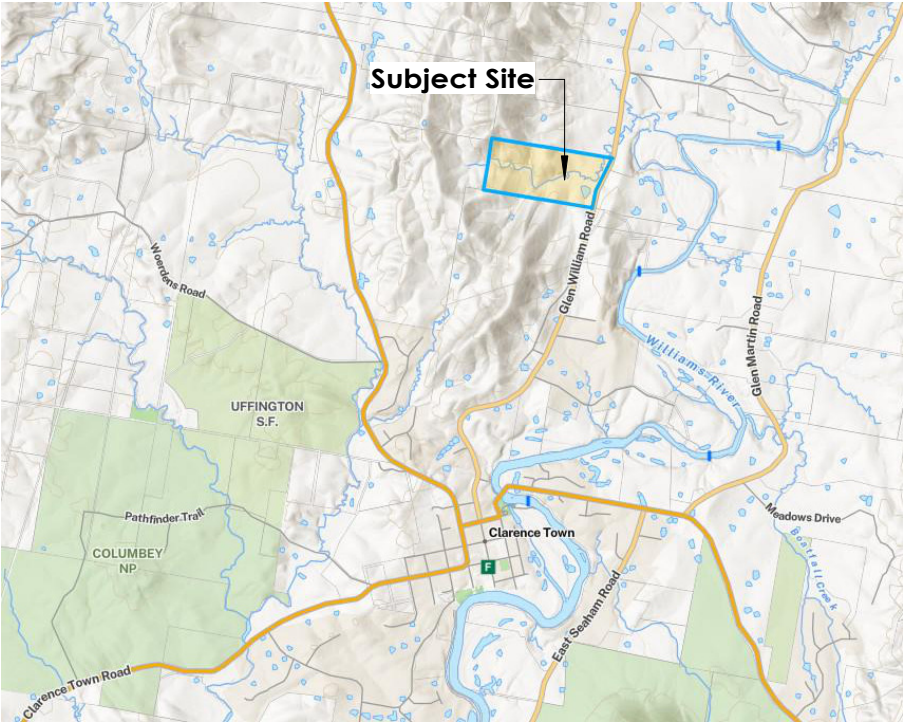

Locality Plan

(Source: Six Maps Website)

NOT FOR CONSTRUCTION

Safety Design Report - Work Cover Safety Notes

THESE NOTES MUST BE READ AND UNDERSTOOD BY ALL INVOLVED WITH THE PROJECT.
THIS INCLUDES (but is not excluded to): OWNER, BUILDER, SUB-CONTRACTORS, CONSULTANTS, RENOVATORS, OPERATORS, MAINTAINERS, DEMOLISHERS.

1.0 FALLS, SLIPS, TRIPS

A. WORKING AT HEIGHTS

DURING CONSTRUCTION

Wherever possible, components for this building should be prefabricated off-site or at ground level to minimise the risk of workers falling more than two metres. However, construction of this building will require workers to be working at heights where a fall in excess of two metres is possible and injury is likely to result from such a fall. The builder shall provide a suitable barrier wherever a person is required to work in a situation where falling more than two metres is a possibility.

DURING OPERATION OR MAINTENANCE

For houses or other low-rise buildings where scaffolding is appropriate: Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, ladders or trestles should be used in accordance with relevant codes of practice, regulations or legislation. For buildings where scaffold, ladders, trestles are not appropriate: Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, fall barriers or Personal Protective Equipment (PPE) shall be used in accordance with relevant codes of practice, regulations or legislation.

ANCHORAGE POINTS

Anchorage points for portable scaffold or fall arrest devices have been included in the design for use by maintenance workers. Any persons engaged to work on the building after completion of construction work should be informed about the anchorage points.

B. SLIPPERY OR UNEVEN SURFACES

FLOOR FINISHES Specified

If finishes have been specified by designer, these have been selected to minimise the risk of floors and paved areas becoming slippery when wet or when walked on with wet shoes/feet. Any changes to the specified finish should be made in consultation with the designer or, if this is not practical, surfaces with an equivalent or better slip resistance should be chosen.

FLOOR FINISHES By Owner

If designer has not been involved in the selection of surface finishes, the owner is responsible for the selection of surface finishes in the pedestrian trafficable areas of this building. Surfaces should be selected in accordance with SA HB 198:2014 and AS/NZ 4586:2013.

STEPS, LOOSE OBJECTS AND UNEVEN SURFACES

Due to design restrictions for this building, steps and/or ramps are included in the building which may be a hazard to workers carrying objects or otherwise occupied. Steps shall be clearly marked with both visual and tactile warning during construction, maintenance, demolition and at all times when the building operates as a workplace. Building owners and occupiers shall monitor the pedestrian access ways and in particular access to areas where maintenance is routinely carried out to ensure that surfaces have not moved or cracked so that they become uneven and present a trip hazard. Spills, loose material, stray objects or any other matter that may cause a slip or trip hazard should be cleaned or removed from access ways. Contractors are required to maintain a tidy work site during construction, maintenance or demolition to reduce the risk of trips and falls in the workplace. Materials for construction or maintenance shall be stored in designated areas away from access ways and work areas.

2.0 FALLING OBJECTS

LOOSE MATERIALS OR SMALL OBJECTS

Construction, maintenance or demolition work on or around this building is likely to involve persons working above ground level or above floor levels. Where this occurs one or more of the following measures shall be taken to avoid objects falling from the area where the work is being carried out onto persons below.

1. Prevent or restrict access to areas below where the work is being carried out.
2. Provide toeboards to scaffolding or work platforms.
3. Provide protective structure below the work area.
4. Ensure that all persons below the work area have Personal Protective Equipment (PPE).

BUILDING COMPONENTS

During construction, renovation or demolition of this building, parts of the structure including fabricated steelwork, heavy panels and many other components will remain standing prior to or after supporting parts are in place. Contractors shall ensure that temporary bracing or other required support is in place at all times when collapse which may injure persons in the area is a possibility. Mechanical lifting of materials and components during construction, maintenance or demolition presents a risk of falling objects. Contractors shall ensure that appropriate lifting devices are used, that loads are properly secured and that access to areas below the load is prevented or restricted.

3.0 TRAFFIC MANAGEMENT

For building on a major road, narrow road or steeply sloping road: Parking of vehicles or loading/unloading of vehicles on this roadway may cause a traffic hazard. During construction, maintenance or demolition of this building designated parking for workers and loading areas should be provided. Trained traffic management personnel should be responsible for the supervision of these areas. For building where onsite loading/unloading is restricted: Construction of this building will require loading and unloading of materials on the roadway. Deliveries should be well planned to avoid congestion of loading areas and trained traffic management personnel should be used to supervise loading/unloading areas. For all buildings: Busy construction and demolition sites present a risk of collision where deliveries and other traffic are moving within the site. A traffic management plan supervised by trained traffic management personnel should be adopted for the worksite.

4.0 SERVICES

GENERAL

Rupture of services during excavation or other activity creates a variety of risks including release of hazardous material. Existing services are located on or around this site. Where known, these are identified on the plans but the exact location and extent of services may vary from that indicated. Services shall be located using an appropriate service (such as Dial Before You Dig), appropriate excavation practice shall be used and, where necessary, specialist contractors should be used.

Locations with underground power: Underground power lines MAY be located in or around this site. All underground power lines must be disconnected or carefully located and adequate warning signs used prior to any construction, maintenance or demolition commencing.

Locations with overhead power lines: Overhead power lines MAY be near or on this site. These pose a risk of electrocution if struck or approached by lifting devices or other plant and persons working above ground level. Where there is a danger of this occurring, power lines should be, where practical, disconnected or relocated. Where this is not practical adequate warning in the form of bright coloured tape or signage should be used or a protective barrier provided.

5.0 MANUAL TASKS

Components within this design with a mass in excess of 25kg should be lifted by two or more workers or by mechanical lifting device. Where this is not practical, suppliers or fabricators should be required to limit the component mass. All material packaging, building and maintenance components should clearly show the total mass of packages and where practical all items should be stored on site in a way which minimises bending before lifting. Advice should be provided on safe lifting methods in all areas where lifting may occur. Construction, maintenance and demolition of this building will require the use of portable tools and equipment. These should be fully maintained in accordance with manufacturer's specifications and not used where faulty or (in the case of electrical equipment) not carrying a current electrical safety tag. All safety guards or devices should be regularly checked and Personal Protective Equipment should be used in accordance with manufacturer's specification.

6.0 HAZARDOUS SUBSTANCES

ASBESTOS

For alterations to a building constructed prior to 1990: If this existing building was constructed prior to 1990 - it therefore may carry asbestos 1986 - it therefore is likely to carry asbestos either in cladding material or in fire retardant insulation material. In either case, the builder shall check and, if necessary, take appropriate action before demolishing, cutting, sanding, drilling or otherwise disturbing the existing structure.

POWDERED MATERIALS - GENERAL

Many materials used in the construction of this building can cause harm if inhaled in powdered form. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation while using powdered material or when sanding, drilling, cutting or otherwise disturbing or creating powdered material.

POWDERED MATERIALS - ENGINEERED STONE

Dated 27th October 2023 Safe Work Australia published the Decision Regulation Impact Statement: Prohibition on the use of engineered stone (Decision RIS). The Decision RIS was developed by Safe Work Australia at the request of WHS ministers and was informed by stakeholder consultation, independent economic analysis, and an expert review of evidence. The Decision RIS recommends a prohibition on the use of all engineered stone, irrespective of crystalline silica content, to protect the health and safety of workers. Engineered stone products are not proposed within these plans or specifications prepared by AMS DESIGN & DRAFTING PTY. LTD.

TIMBER FLOORS

This building may contain timber floors which have an applied finish. Areas where finishes are applied should be kept well ventilated during sanding and application and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

TREATED TIMBER

The design of this building may include provision for the inclusion of treated timber within the structure. Dust or fumes from this material can be harmful. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation of harmful material when sanding, drilling, cutting or using treated timber in any way that may cause harmful material to be released. Do not burn treated timber.

VOLATILE ORGANIC COMPOUNDS

Many types of glue, solvents, spray packs, paints, varnishes and some cleaning materials and disinfectants have dangerous emissions. Areas where these are used should be kept well ventilated while the material is being used and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

SYNTHETIC MINERAL FIBRE

Fibreglass, rockwool, ceramic and other material used for thermal or sound insulation may contain synthetic mineral fibre which may be harmful if inhaled or if it comes in contact with the skin, eyes or other sensitive parts of the body. Personal Protective Equipment including protection against inhalation of harmful material should be used when installing, removing or working near bulk insulation material.

7.0 CONFINED SPACES

EXCAVATION

Construction of this building and some maintenance on the building will require excavation and installation of items within excavations. Where practical, installation should be earned out using methods which do not require workers to enter the excavation. Where this is not practical, adequate support for the excavated area shall be provided to prevent collapse. Warning signs and barriers to prevent accidental or unauthorised access to all excavations shall be provided.

ENCLOSED SPACES

For buildings with enclosed spaces where maintenance or other access may be required:

Enclosed spaces within this building may present a risk to persons entering for construction, maintenance or any other purpose. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter enclosed spaces, air testing equipment and Personal Protective Equipment should be provided.

SMALL SPACES

For buildings with small spaces where maintenance or other access may be required:

Some small spaces within this building will require access by construction or maintenance workers. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter small spaces they should be scheduled so that access is for short periods. Manual lifting and other manual activity should be restricted in small spaces.

8.0 PUBLIC ACCESS

Public access to construction and demolition sites and to areas under maintenance causes risk to workers and public. Warning signs and secure barriers to unauthorised access shall be provided. Where electrical installations, excavations, plant or loose materials are present they shall be secured when not fully supervised.

9.0 OPERATIONAL USE OF BUILDING RESIDENTIAL BUILDINGS

This building has been designed as a residential building. If at a later date, it is used or intended to be used as a workplace, the provisions of the Work Health and Safety Act 2011 or subsequent replacement Act should be applied to the new use.

NON-RESIDENTIAL BUILDINGS

For non-residential buildings where the end-use has not been identified:

This building has been designed to requirements of the classification identified on the drawings. The specific use of the building is not known at the time of the design and a further assessment of the workplace health and safety issues should be undertaken at the time of fit-out for the end-user.

For non-residential buildings where the end-use is known: This building has been designed for the specific use as identified on the drawings. Where a change of use occurs at a later date a further assessment of the workplace health and safety issues should be undertaken.

10.0 OTHER HIGH RISK ACTIVITY

All electrical work should be carried out in accordance with the Code of Practice: Managing Electrical Risks at the Workplace, AS/NZ 3012 and all licensing requirements.

All work using Plant should be carried out in accordance with Code of Practice: Managing Risks of Plant at the Workplace.

All work should be carried out in accordance with Code of Practice: Managing Noise and Preventing Hearing Loss at Work.


Due to the history of serious incidents it is recommended that particular care be exercised when undertaking work involving steel construction and concrete placement. All the above applies.

ALL WORK SHALL BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF THE CURRENT BUILDING CODE OF AUSTRALIA (BCA) / NATIONAL CONSTRUCTION CODE (NCC), AND ALL RELEVANT CURRENT AUSTRALIAN STANDARDS AND LOCAL AUTHORITIES.

NOTHING FOLLOWS

NOT FOR CONSTRUCTION

 AMS DESIGN & DRAFTING	Ph: 0402 613 985 E: info@amsdesigndrafting.com.au AMS Design & Drafting Pty Ltd ABN: 46 652 427 891 www.amsdesigndrafting.com.au www.facebook.com/amsdesigndrafting Glebe Arcade, U1, 479-489 High Street, Maitland, NSW 2320	 Member of BDAAC: 6793-21 Accreditation #: 6895 ACCREDITED BUILDING DESIGNER	These plans are subject to copyright and must not be reproduced without permission				client : Jude Millard		drawn by : AS		job no : AMS-26-027			
							checked by : AS				sheet no : A00.02			
							project : Lot 5, No. 449 Glen William Road, Glen William, NSW 2321 (DP4352)		date : 27.07.26		sheet title : Safe Design Report - Work Cover Safety Notes		scale : on A3	
			A 27.07.26 Issued for DA											
			No. Date Description											

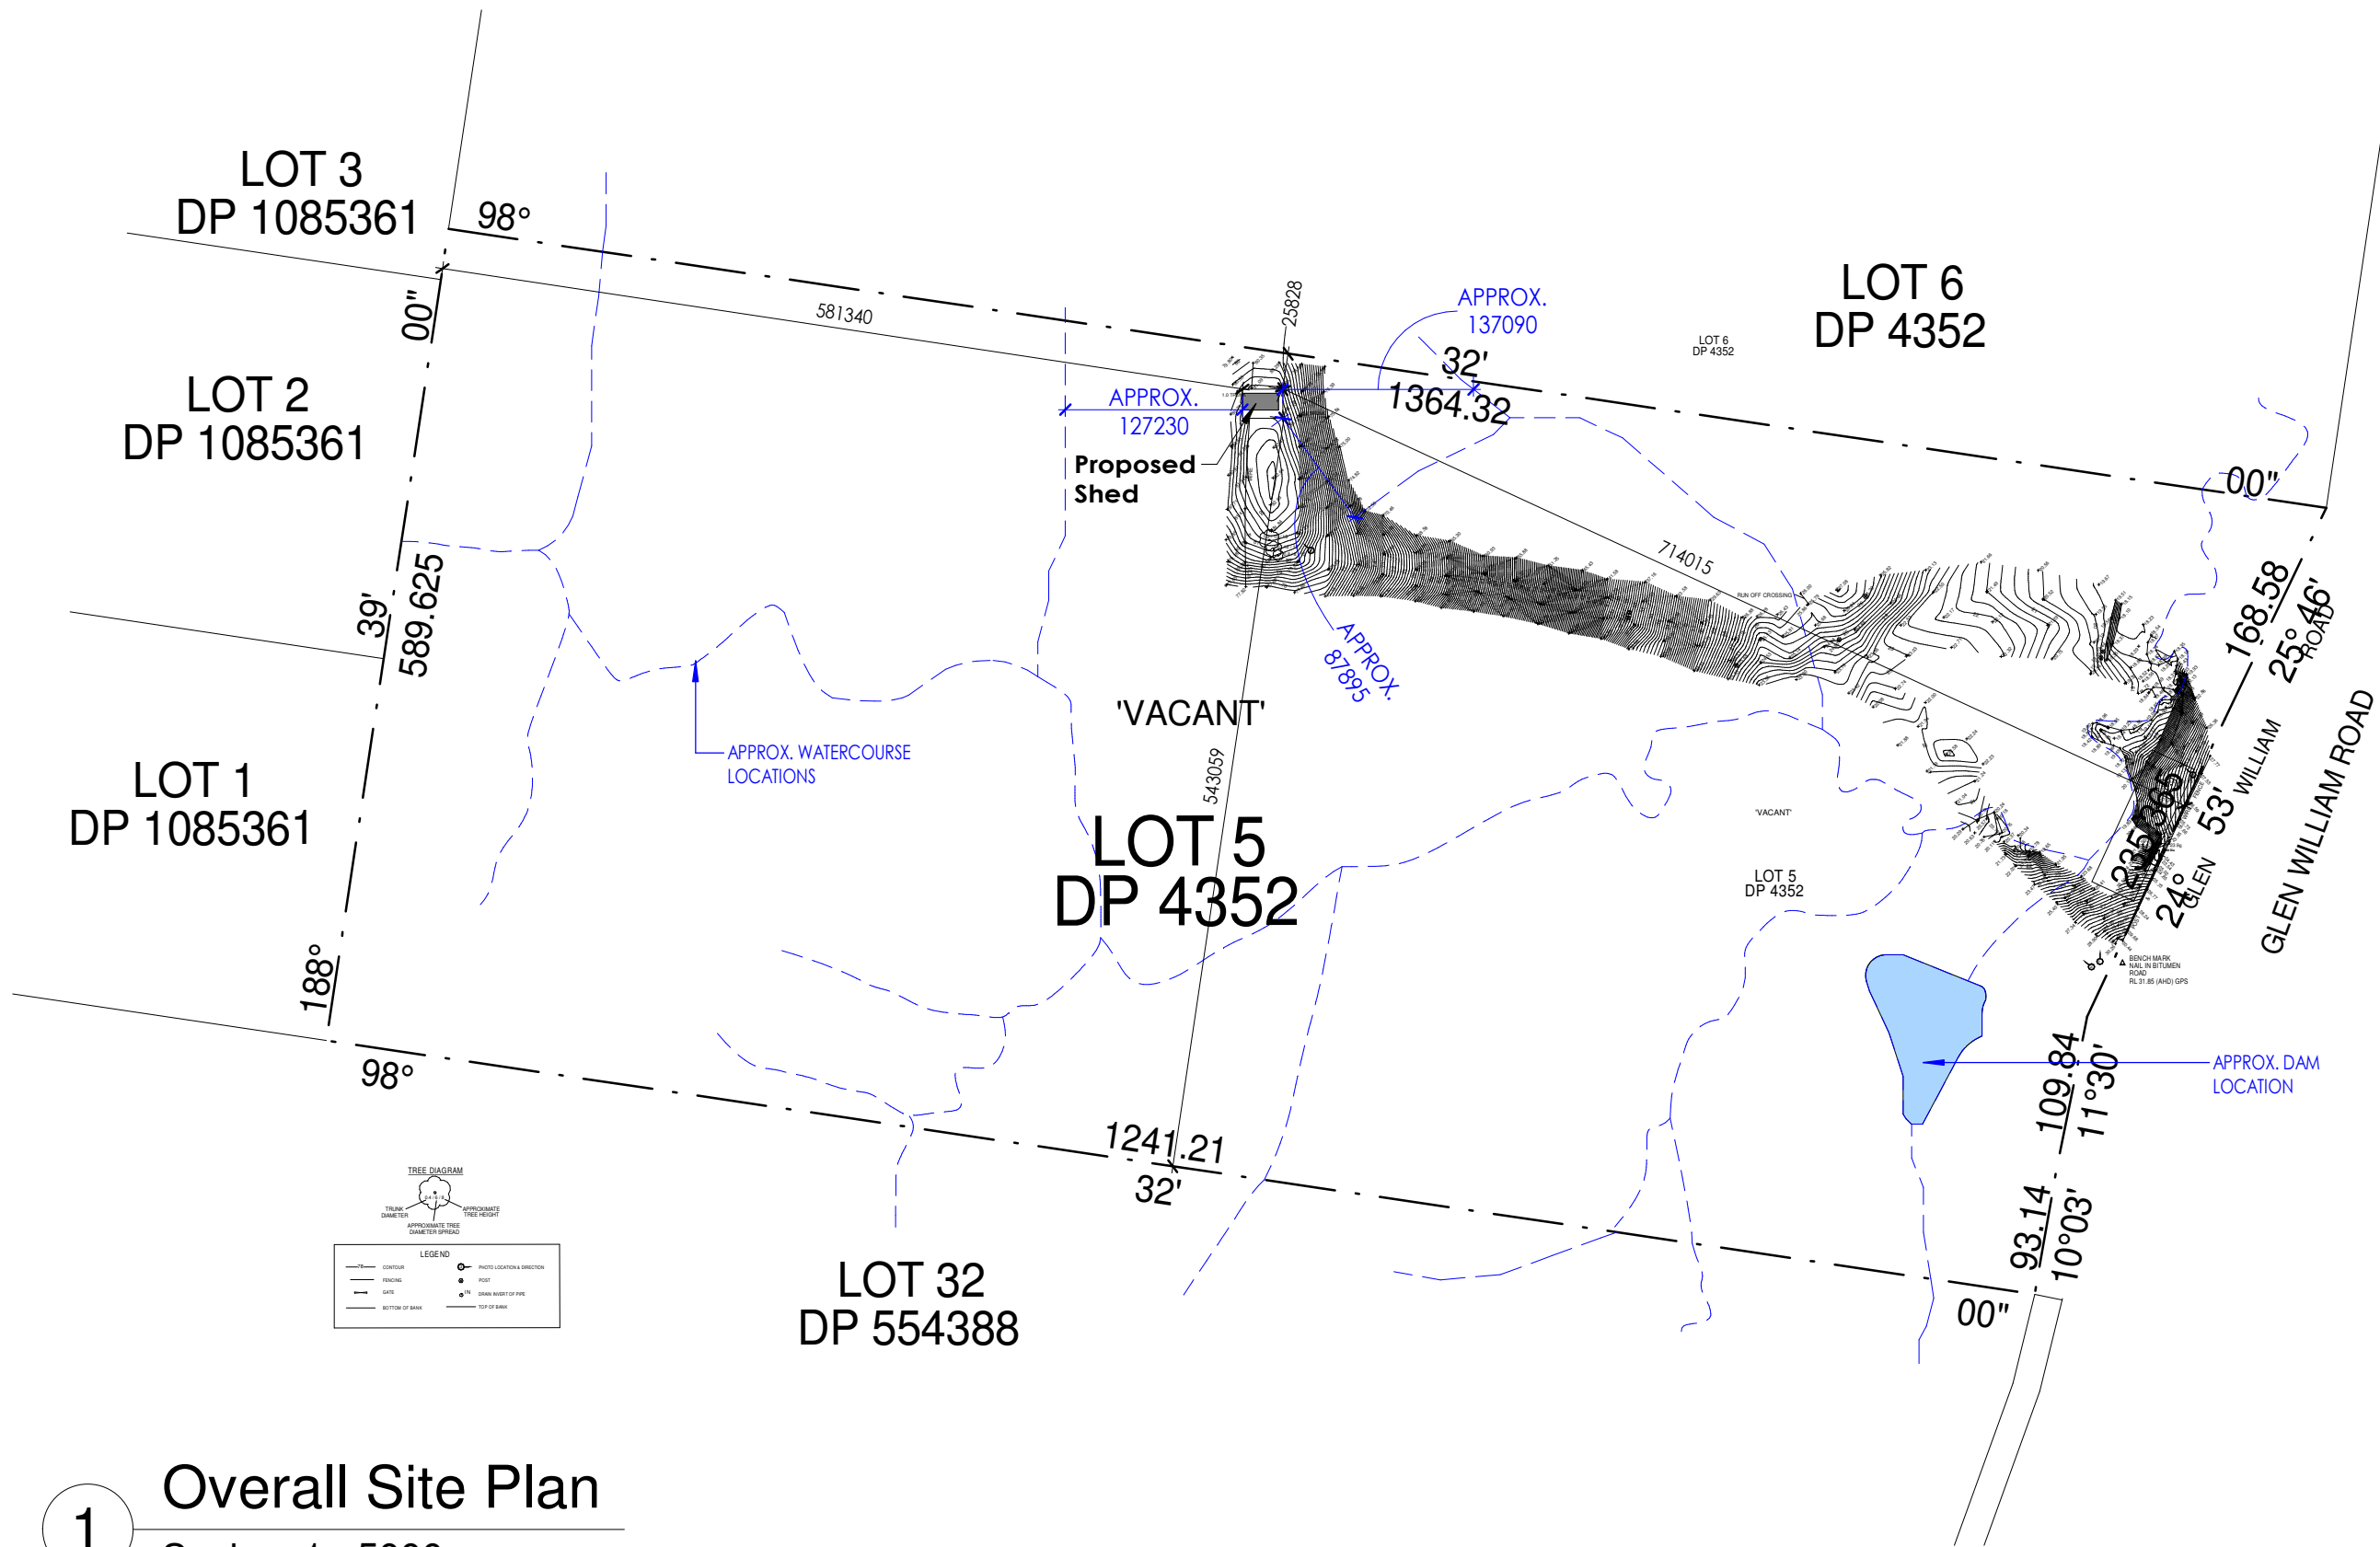

1)

**Ph: 0402 613 985**
E: info@amsdesigndrafting.com.au
AMS Design & Drafting Pty Ltd
ABN: 46 652 427 891
www.amsdesigndrafting.com.au
www.facebook.com/amsdesigndrafting
Glebe Arcade, U1, 479-489 High Street, Maitland, NSW 2320


 **ACCREDITED**
BUILDING DESIGNER

Member of BDAA: 6793-21
Accreditation #: 6895


A	27.07.26	Issued for DA	AMS
No.	Date	Description	Issued By

job no :
AMS-26-027
sheet no :
A01.01
scale : As indicated

NOT FOR CONSTRUCTION

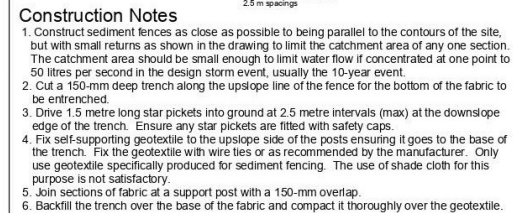

SEDIMENT FENCE	SD 6-8
----------------	--------



Enlarged Site/ Earthworks Plan/ Sediment Control

Scale : 1 : 500




A	27.07.26	Issued for DA	AMS
No.	Date	Description	Issued By

scale : As indicated on A3

NOT FOR CONSTRUCTION

- CONTRACTOR TO CONFIRM INVERT LEVEL OF SPECIFIED OUTLET PRIOR TO WORK WITH ANY DISCREPANCY REPORTED TO THE DESIGNER.
- ALL STORMWATER DRAINAGE TO BE INSTALLED IN ACCORDANCE WITH AS3500.3.
- ALL EXISTING DRAINAGE WITHIN THE SITE IS TO BE FLUSHED (IF REQUIRED) AND CONNECTED TO THE NEW DRAINAGE NETWORK.
- STORMWATER PIPES TO BE LAID WITH 1% (MIN.) GRADE UNLESS NOTED OTHERWISE.
- RETAINING WALL AND OTHER SUBSOIL DRAINAGE LINES ARE TO DRAIN TO CLOSEST DOWNSTREAM STORMWATER PIT
- HARVESTED RAINWATER IS TO BE REUSED FOR TOILET FLUSHING LAUNDRY AND OUTDOOR TAP.
- ACTUAL LAYOUT OF DOWNPIPES & MINOR DRAINAGE TO BE CONFIRMED BY THE PLUMBER. ALL WORKS ARE TO BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE NCC & AS3500
- DRAINAGE DIAGRAMS : STORMWATER IS INDICATIVE ONLY AND MAY VARY DUE TO THE REQUIREMENTS OF AUTHORITIES AND / OR PARTICULAR SITE CONDITIONS
- CONNECT HOUSEWASTES AND SEWERAGE POINTS TO SEPTIC DRAINAGE SYSTEM AS REQUIRED BY COUNCIL REGULATIONS.

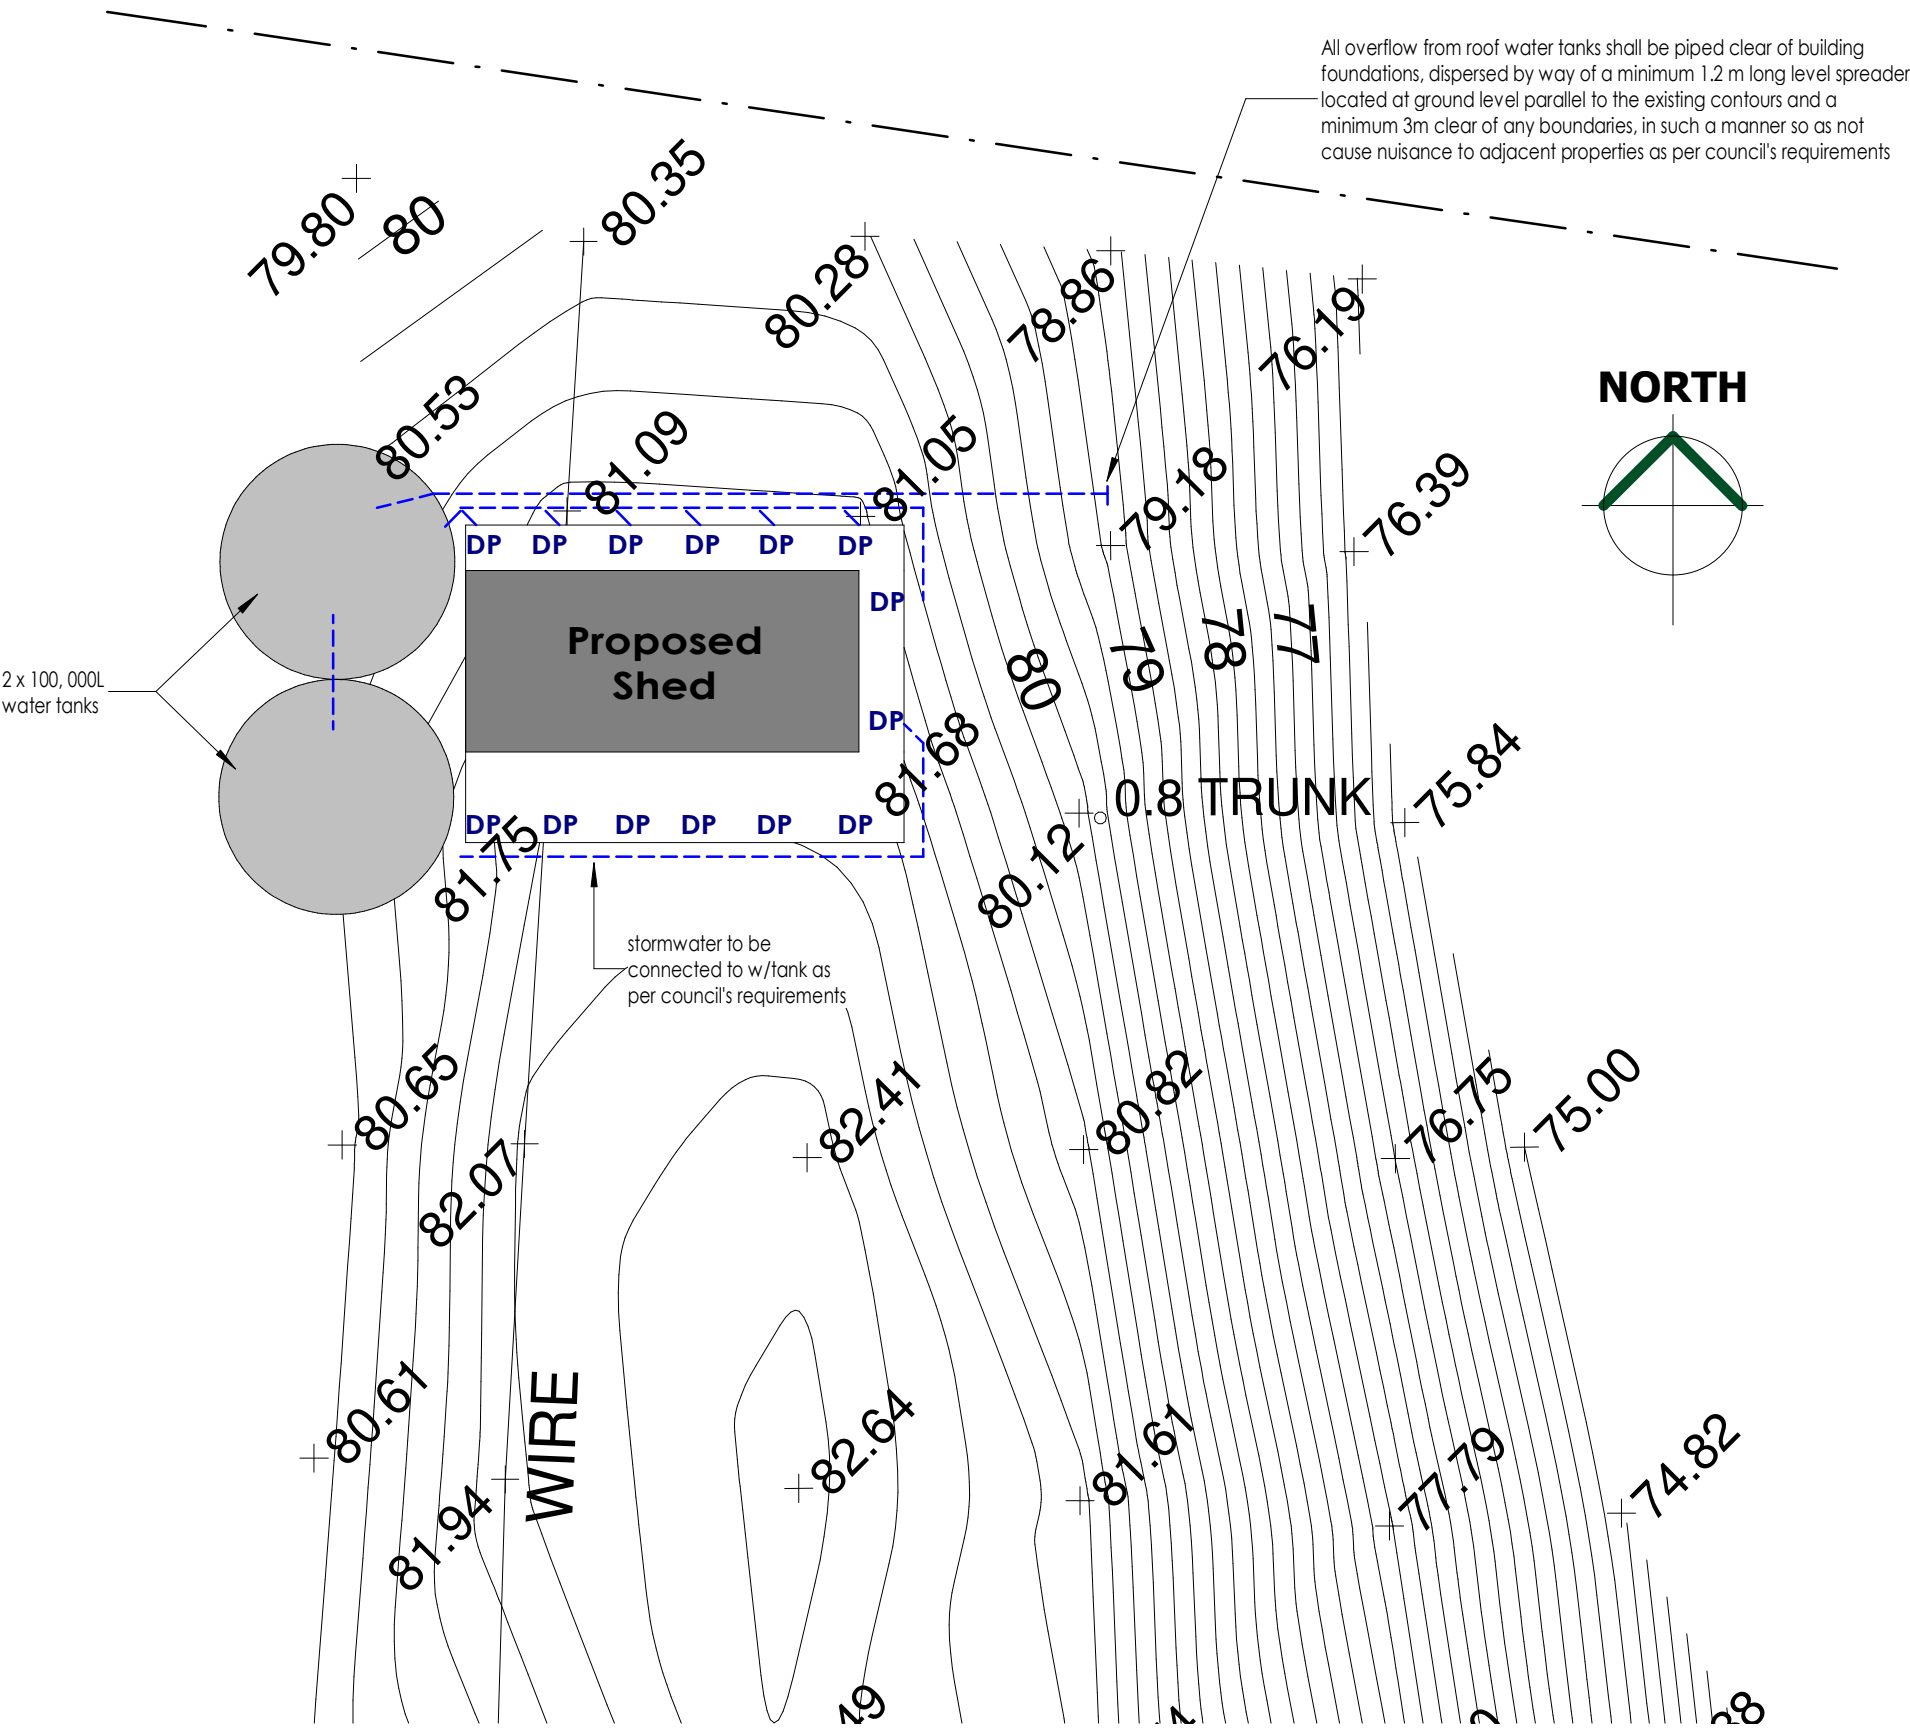

1 Concept Stormwater Drainage Plan

Scale : 1 : 500

NOT FOR CONSTRUCTION



AMS
DESIGN & DRAFTING

Ph: 0402 613 985
E: info@amsdesigndrafting.com.au
AMS Design & Drafting Pty Ltd
ABN: 46 652 427 891
www.amsdesigndrafting.com.au
www.facebook.com/amsdesigndrafting
Glebe Arcade, U1, 479-489 High Street, Maitland, NSW 2320

© These plans are subject to copyright and must not be reproduced without permission



Member of BDAA: 6793-21
Accreditation #: 6895

ACCREDITED
BUILDING DESIGNER

No.	Date	Description	Issued By
A	27.07.26	Issued for DA	AMS


client :
Jude Millard

project :
Lot 5, No. 449 Glen William Road, Glen William, NSW 2321 (DP4352)

drawn by : AS	job no : AMS-26-027
checked by : AS	sheet no : A01.03
date : 27.07.26	scale : As indicated on A3
sheet title : Concept Stormwater Drainage Plan	

D:\MyOD\AMS D&D\Design and Drafting - Documents\2026\AMS-26-027 - Jude Millard - 449 Glen William Road, Glen William\AMS-26-027 - DA_1 - Jude Millard - 449 Glen William Road, Glen William.rvt

26/08/2026 11:10:40 AM

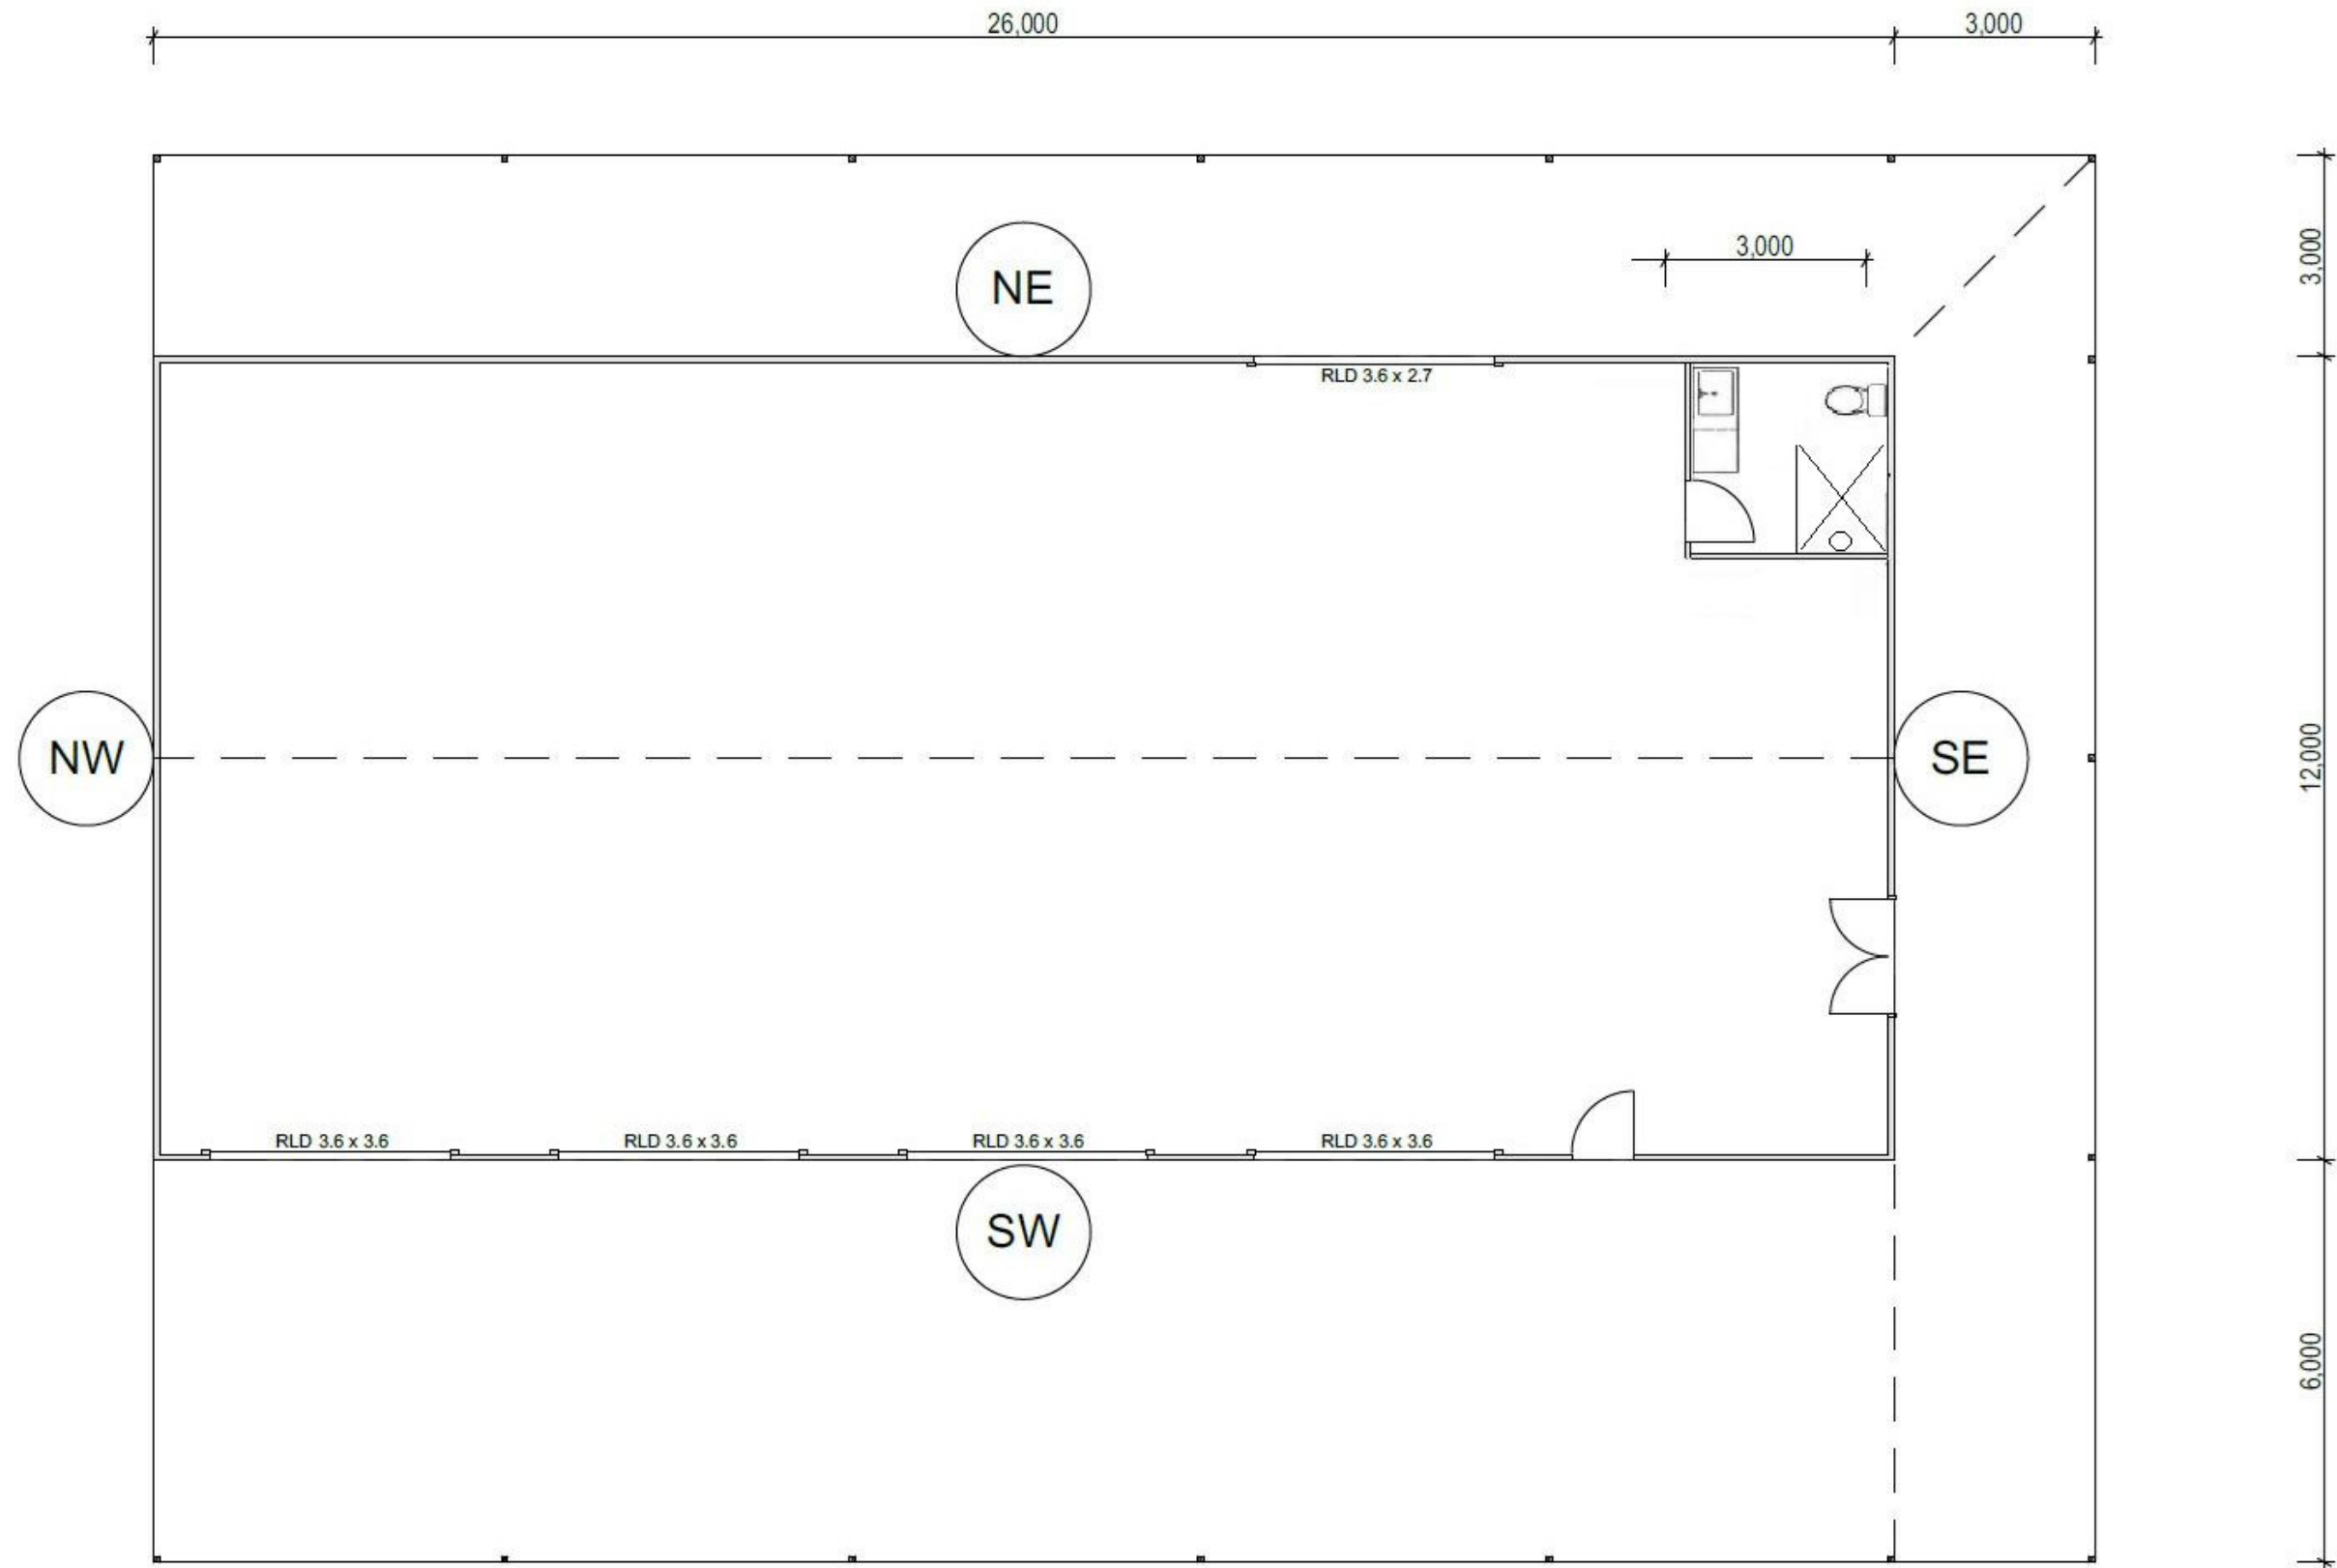

1 Proposed Plan with Bathroom Layout
Scale : NTS.

NOT FOR CONSTRUCTION