

Noise Assessment

Narrabri Solar and Energy Storage System
Narrabri, NSW

Document Information

Noise Assessment

Narrabri Solar and Energy Storage System

Narrabri, NSW

Prepared for: Y.E.S. Group (SA) Pty Ltd

67 Greenhill Road

Wayville SA 5034

Prepared by: Muller Acoustic Consulting Pty Ltd

PO Box 678, Kotara NSW 2289

ABN: 36 602 225 132

P: +61 2 4920 1833

www.mulleracoustic.com

DOCUMENT ID	DATE	PREPARED	SIGNED	REVIEWED	SIGNED
MAC252462-01RP1V1	25 June 2025	Rod Linnett		Oliver Muller	

DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.

CONTENTS

1	INTRODUCTION.....	5
1.1	PURPOSE AND OBJECTIVES.....	5
1.2	SCOPE OF THE ASSESSMENT.....	5
2	PROJECT DESCRIPTION	7
2.1	BACKGROUND	7
2.2	DESCRIPTION OF PROPOSED CONSTRUCTION WORKS.....	7
2.3	DESCRIPTION OF PROPOSED OPERATION	8
2.4	RECEIVER REVIEW	9
3	NOISE POLICY AND GUIDELINES	11
3.1	NOISE POLICY FOR INDUSTRY	11
3.1.1	PROJECT NOISE TRIGGER LEVELS (PNTL).....	12
3.1.2	RATING BACKGROUND LEVEL (RBL)	12
3.1.3	PROJECT INTRUSIVENESS NOISE LEVEL (PINL).....	12
3.1.4	PROJECT AMENITY NOISE LEVEL (PANL).....	13
3.1.5	MAXIMUM NOISE ASSESSMENT TRIGGER LEVELS	15
3.2	INTERIM CONSTRUCTION NOISE GUIDELINE	15
3.2.1	STANDARD HOURS FOR CONSTRUCTION.....	17
3.2.2	CONSTRUCTION NOISE MANAGEMENT LEVELS.....	18
3.3	ROAD NOISE POLICY	19
4	ASSESSMENT CRITERIA	21
4.1	OPERATIONAL NOISE	21
4.1.1	PROJECT INTRUSIVENESS NOISE LEVELS	21
4.1.2	PROJECT AMENITY NOISE LEVELS	21
4.1.3	PROJECT NOISE TRIGGER LEVELS.....	22
4.1.4	MAXIMUM NOISE TRIGGER LEVELS.....	22
4.2	CONSTRUCTION NOISE MANAGEMENT LEVELS	23
4.3	ROAD TRAFFIC NOISE	23
5	MODELLING METHODOLOGY	25

5.1	OPERATIONAL ASSESSMENT METHODOLOGY	26
5.1.1	METEOROLOGICAL ANALYSIS	27
5.2	CONSTRUCTION ASSESSMENT METHODOLOGY	28
5.3	ROAD TRAFFIC NOISE ASSESSMENT METHODOLOGY	29
6	NOISE ASSESSMENT RESULTS	31
6.1	OPERATIONAL NOISE ASSESSMENT	31
6.1.1	MAXIMUM NOISE LEVEL ASSESSMENT	31
6.2	CONSTRUCTION NOISE ASSESSMENT	32
6.3	CONSTRUCTION VIBRATION	33
6.4	ROAD TRAFFIC NOISE ASSESSMENT (CONSTRUCTION)	33
7	DISCUSSION AND CONCLUSION	35
APPENDIX A – GLOSSARY OF TERMS		
APPENDIX B – SOUND POWER DATA		

1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Y.E.S. Group (SA) Pty Ltd to prepare a Noise Assessment (NA) for the proposed Narrabri Battery Energy Storage System (BESS) (the project) located at 742 Stoney Creek Road, Narrabri, NSW.

1.1 Purpose and Objectives

A NA is required as part of the environmental assessment to be submitted to Narrabri Council as part of the Development Application (DA). The purpose of the NA is to quantify potential environmental noise emissions associated with the construction and operation of the project. Where impacts are identified, the assessment includes recommendations for potential noise mitigation and management measures.

1.2 Scope of the Assessment

The NA includes the following key tasks:

- review construction and operating activities to identify key noise generating plant, equipment, machinery or activities proposed to be undertaken as part of the project;
- identify the closest and/or potentially most affected receivers situated within the area of influence to the project;
- determine project-specific construction Noise Management Levels (NMLs), and operational noise criteria;
- undertake 3D noise modelling to predict levels that may occur as a result of the construction and operation of the project at the closest and/or potentially most affected receivers;
- provide a comparison of predicted noise levels against relevant construction noise management levels and operational project noise trigger levels (assessment criteria);
- assess the potential noise impacts associated with construction and operational aspects of the project;
- assess the potential noise impacts associated with road traffic noise during construction; and
- provide feasible and reasonable noise mitigation and management measures, and monitoring options, where construction noise management levels and operational project noise trigger levels may be exceeded.

The assessment has been undertaken in accordance with the following documents:

- NSW Department of Environment and Climate Change (DECCW) – NSW Interim Construction Noise Guideline (ICNG), July 2009;
- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- NSW Department of Environment, Climate Change and Water (DECCW) – NSW Road Noise Policy (RNP), March 2011;
- Australian Standard AS 1055:2018 - Acoustics - Description and measurement of environmental noise - General Procedures; and
- International Standard ISO 9613:1996 - Acoustics - Attenuation of sound during propagation outdoors.

A glossary of terms, definitions and abbreviations used in this report is provided in **Appendix A**.

2 Project Description

2.1 Background

Y.E.S. Group (SA) Pty Ltd propose to construct and operate a 5-Megawatt (MW AC) solar farm and Battery Energy Storage System (BESS) using Photovoltaic (PV) technology at 742 Stoney Creek Road, approximately 10km east of Narrabri, NSW.

2.2 Description of Proposed Construction Works

The project includes installation of groups of north aligned PV modules on mounting structures of 1.3m to 1.5m in height. Approximately 11,100 PV panels will be installed using a single axis tracking system, following the sun from east to west during the day. The PV mounting structure would comprise steel posts driven into the ground using a small pile driver. Additional support structures would be attached to the piles, which would then support the PV panels.

Where cabling of each PV array/module to inverters is required to be underground, earthworks will primarily involve trenching. Other minor earthworks would be completed for the preparation of the site and in most cases a concrete slab would be required to support the ancillary infrastructure, BESS foundations and associated cabling connections. Most of the infrastructure would be pre-fabricated off-site, delivered and assembled on-site. Construction activities associated with the BESS would involve the placement of a shipping container at the appropriate location (by crane or crane truck) and is a negligible noise source/event.

It is anticipated that the solar farm would be constructed in stages, with construction of two to three stages occurring at any one time over a three month period during standard construction hours.

During construction, traffic generated by the project would include employee and delivery vehicles. During the peak construction period, the traffic volume is expected to be up to a maximum of four (4) heavy vehicles (semi-trailers or B-doubles) per hour and up to 40 light vehicles for worker transport per day. All vehicles would access the project site from Stoney Creek Road during construction and operational phases.

2.3 Description of Proposed Operation

PV infrastructure on site will comprise of groups of PV panels installed in rows. The BESS and Inverters will be located centrally and connected by underground cables. The project will be contained solely within the site as shown in **Figure 1**. Layout drawings are presented in Statement of Environmental Effects for the project.

The project would operate 24 hours a day, 7 days a week, with no permanent staff on site. During operation, the PV panels would generate electricity which would be fed into the power grid via the adjacent existing powerline with excess solar energy from the PV system being stored in the BESS for night time usage.

Key noise emissions from the operation of the project are associated with the inverter and transformer(s). The BESS typically consists of a lithium-ion battery rack in a shipping container fitted with relevant switches and controllers. As this equipment generates heat, a Heating Ventilation and Air Conditioning (HVAC) system is required to provide cooling and is the primary noise source associated with the BESS. The HVAC system consists of an air conditioner, heat exchanger and ventilation fans. It is noted that emissions from these sources are anticipated to be acoustically insignificant compared to ambient background noise levels at assessed receivers. It is noted that emissions from these sources are anticipated to be acoustically insignificant compared to ambient background noise levels at assessed receivers.

When required, maintenance activities will occur during standard working hours (except for emergencies) and are expected to include:

- panel cleaning;
- repairs or replacement of infrastructure, as required; and
- land management including mowing to control vegetation as required.

Typical noise sources associated with maintenance activities would include light vehicle movements on site and maintenance of equipment.

2.4 Receiver Review

Using aerial photography, geospatial information and other project design information, MAC has identified the following potentially sensitive receivers that may be affected by noise from operation or construction activities and project related road traffic. **Table 1** presents a summary of receiver identification, type, address and coordinates. These are reproduced visually in **Figure 1**.

Table 1 Receiver Locations				
Receiver	Description	Receiver Type	Coordinates (GDA94/MGA55)	
			Easting	Northing
SR01	740 Stoney Creek Road	Rural Residential	774783	6641881
SR02	678 Stoney Creek Road	Rural Residential	774395	6642035
SR03	920 Stoney Creek Road	Rural Residential	777012	6642106
SR04	22 McCutcheon Lane	Rural Residential	777082	6642606
SR05	851 Stoney Creek Road	Rural Residential	776194	6643177
SR06	126 McCutcheon Lane	Rural Residential	777640	6643125
SR07	669 Stoney Creek Road	Rural Residential	774425	6643103
SR08	625 Stoney Creek Road	Rural Residential	773988	6643219
SR09	585 Stoney Creek Road	Rural Residential	773655	6643015
SR10	977 Stoney Creek Road	Rural Residential	777699	6642534

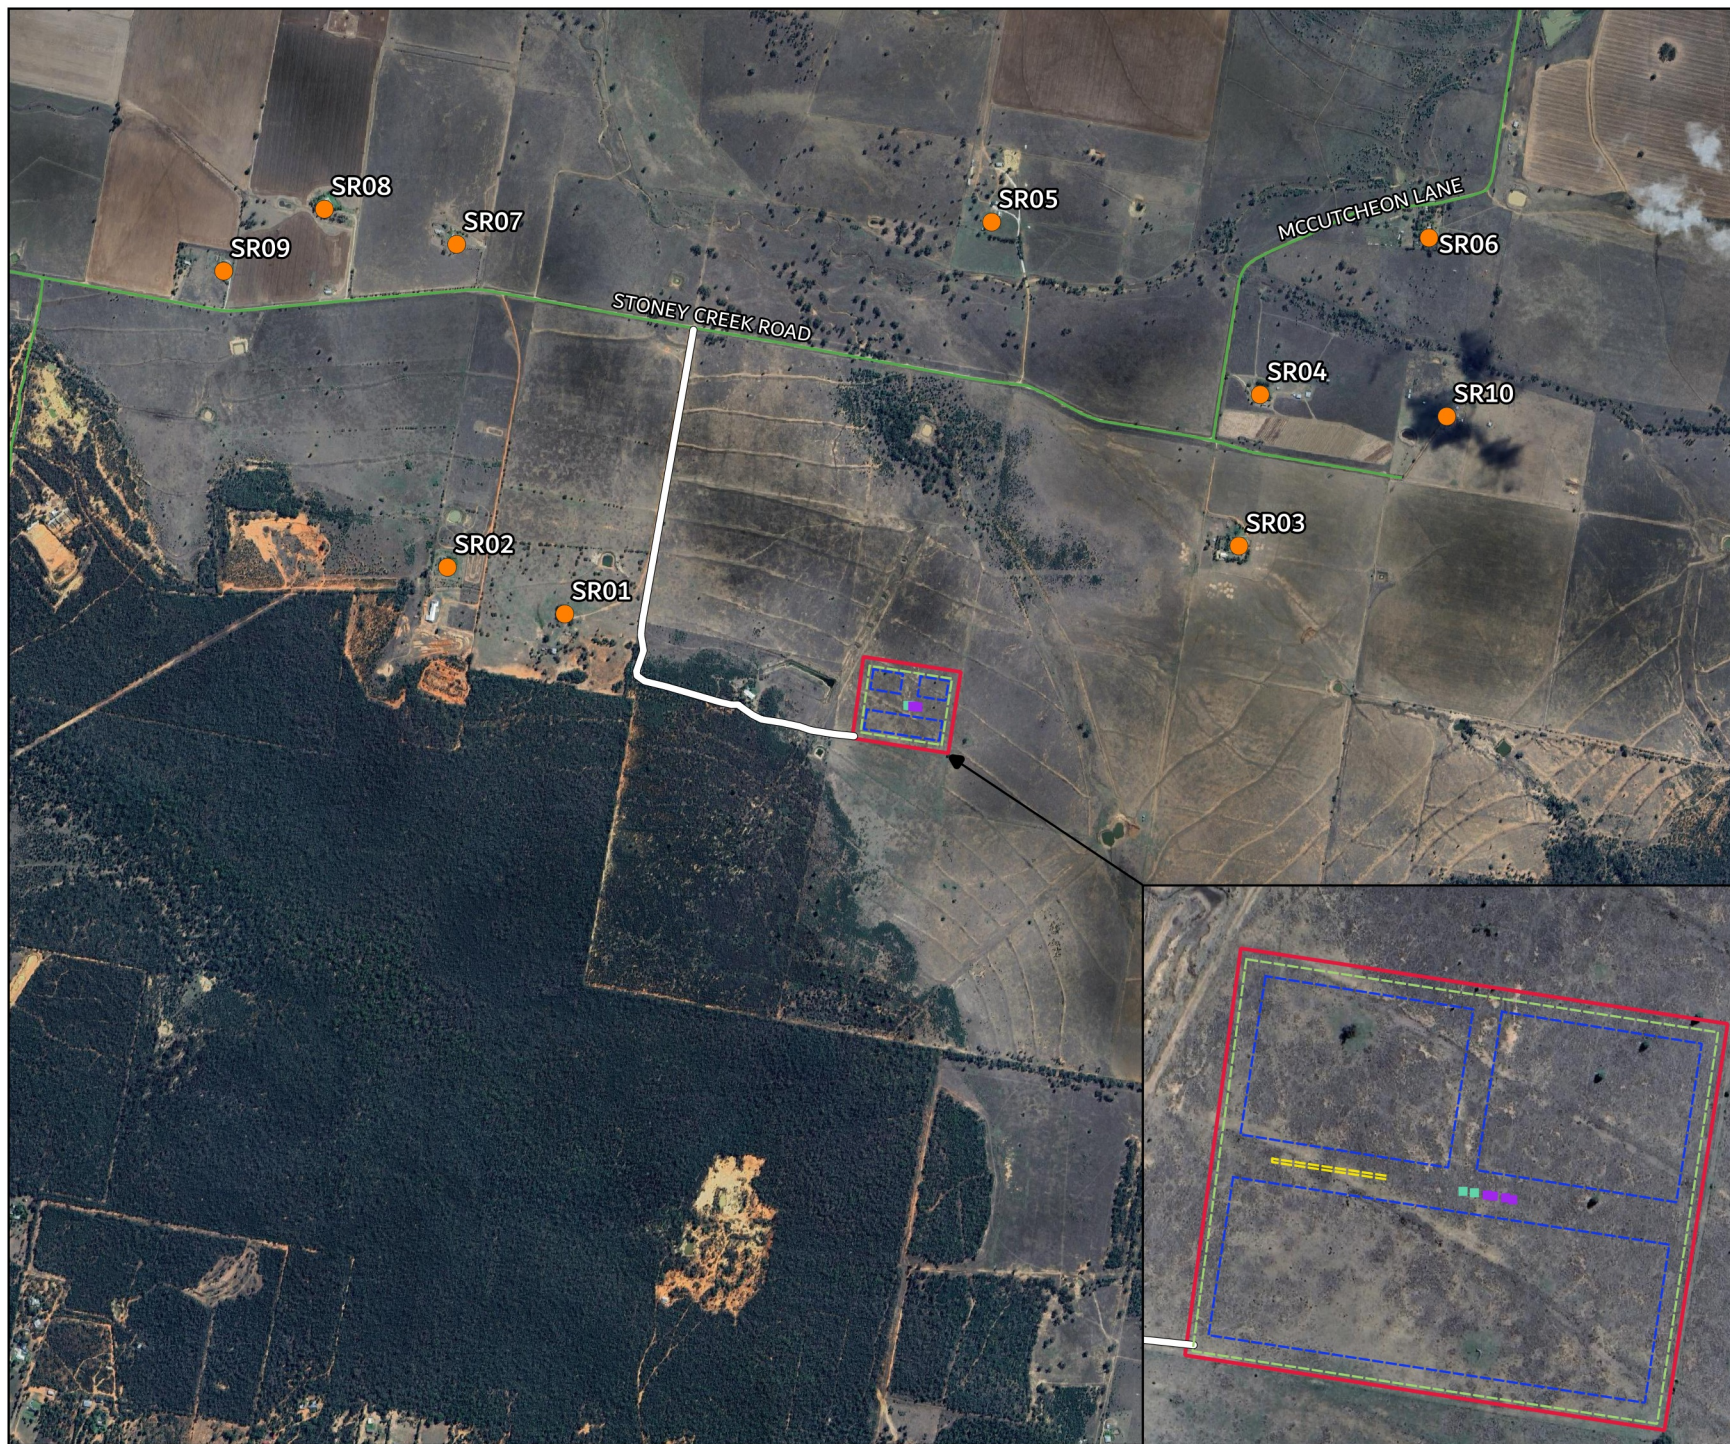


FIGURE 1
Project Layout
MAC252462-01
Narrabri Battery Energy
Storage System

KEY

-  Project Area
-  Receiver
-  Construction Access Road
-  Construction Laydown Area
-  Panel Array
-  Battery Module
-  Inverter



3 Noise Policy and Guidelines

3.1 Noise Policy for Industry

The EPA released the Noise Policy for Industry (NPI) in October 2017 which provides a process for establishing noise criteria for consents and licenses enabling the EPA to regulate noise emissions from scheduled premises under the Protection of the Environment Operations Act 1997.

The objectives of the NPI are to:

- provide noise criteria that is used to assess the change in both short term and long-term noise levels;
- provide a clear and consistent framework for assessing environmental noise impacts from industrial premises and industrial development proposals;
- promote the use of best-practice noise mitigation measures that are feasible and reasonable where potential impacts have been identified; and
- support a process to guide the determination of achievable noise limits for planning approvals and/or licences, considering the matters that must be considered under the relevant legislation (such as the economic and social benefits and impacts of industrial development).

The policy sets out a process for industrial noise management involving the following key steps:

1. Determine the Project Noise Trigger Levels (PNTLs) (ie criteria) for a development. These are the levels (criteria), above which noise management measures are required to be considered. They are derived by considering two factors: shorter-term intrusiveness due to changes in the noise environment; and maintaining the noise amenity of an area.
2. Predict or measure the noise levels produced by the development with regard to the presence of annoying noise characteristics and meteorological effects such as temperature inversions and wind.
3. Compare the predicted or measured noise level with the PNTL, assessing impacts and the need for noise mitigation and management measures.

4. Consider residual noise impacts - that is, where noise levels exceed the PNTLs after the application of feasible and reasonable noise mitigation measures. This may involve balancing economic, social and environmental costs and benefits from the proposed development against the noise impacts, including consultation with the affected community where impacts are expected to be significant.
5. Set statutory compliance levels that reflect the best achievable and agreed noise limits for the development.
6. Monitor and report environmental noise levels from the development.

3.1.1 Project Noise Trigger Levels (PNTL)

The policy sets out the procedure to determine the PNTLs relevant to an industrial development. The PNTL is the lower (ie, the more stringent) of the **Project Intrusiveness Noise Level (PINL)** and **Project Amenity Noise Level (PANL)** determined in accordance with Section 2.3 and Section 2.4 of the NPI.

3.1.2 Rating Background Level (RBL)

The Rating Background Level (RBL) is a determined parameter from noise monitoring and is used for assessment purposes. As per the NPI, the RBL is an overall single figure background level representing each assessment period (day, evening and night) over the noise monitoring period.

For low noise environments, such as rural environments, minimum assumed RBLs apply within the NPI and can be adopted in lieu of completing background noise measurements. This is considered the most conservative method for establishing noise criteria for a project. The minimum assumed RBLs are as follows:

- Minimum Day RBL = 35dBA;
- Minimum Evening RBL = 30dBA; and
- Minimum Night RBL = 30dBA.

3.1.3 Project Intrusiveness Noise Level (PINL)

The PINL ($L_{Aeq}(15min)$) is the RBL + 5dB and seeks to limit the degree of change a new noise source introduces to an existing environment. Hence, when assessing intrusiveness, background noise levels need to be measured. The PINLs for the Project have been determined based on the minimum RBL+5dBA

3.1.4 Project Amenity Noise Level (PANL)

The PANL is relevant to a specific land use or locality. To limit continuing increases in intrusiveness levels, the ambient noise level within an area from all combined industrial sources should remain below the recommended amenity noise levels specified in Table 2.2 (of the NPI). The NPI defines two categories of amenity noise levels:

- **Amenity Noise Levels (ANL)** – are determined considering all current and future industrial noise within a receiver area; and
- **Project Amenity Noise Level (PANL)** – is the recommended level for a receiver area, specifically focusing the project being assessed.

Additionally, Section 2.4 of the NPI states: “to ensure that industrial noise levels (existing plus new) remain within the recommended amenity noise levels for an area, a project amenity noise level applies for each new source of industrial noise as follows”:

PANL for new industrial developments = recommended **ANL** minus 5dBA.

The following exceptions apply when deriving the PANL:

- areas with high traffic noise levels;
- proposed developments in major industrial clusters;
- existing industrial noise and cumulative industrial noise effects; and
- greenfield sites.

Where relevant this assessment has considered influences of traffic with respect to amenity noise levels (ie areas where existing traffic noise levels are 10dB greater than the recommended amenity noise level).

The recommended amenity noise levels as per Table 2.2 of the NPI are reproduced in **Table 2**.

Table 2 Amenity Noise Levels

Receiver Type	Noise Amenity Area	Time of day	Recommended amenity noise level dB LAeq(period)
Residential	Rural	Day	50
		Evening	45
		Night	40
	Suburban	Day	55
		Evening	45
		Night	40
	Urban	Day	60
		Evening	50
		Night	45
Hotels, motels, caretakers' quarters, holiday accommodation, permanent resident caravan parks.	See column 4	See column 4	5dB above the recommended amenity noise level for a residence for the relevant noise amenity area and time of day
School Classroom	All	Noisiest 1-hour period when in use	35 (internal) 45 (external)
Hospital ward			
- internal	All	Noisiest 1-hour	35
- external	All	Noisiest 1-hour	50
Place of worship			
- internal	All	When in use	40
Passive Recreation	All	When in use	50
Active Recreation	All	When in use	55
Commercial premises	All	When in use	65
Industrial	All	When in use	70

Notes: The recommended amenity noise levels refer only to noise from industrial noise sources. However, they refer to noise from all such sources at the receiver location, and not only noise due to a specific project under consideration. The levels represent outdoor levels except where otherwise stated.

Types of receivers are defined as rural residential; suburban residential; urban residential; industrial interface; commercial; industrial – see Table 2.3 and Section 2.7 of the NPI.

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

3.1.5 Maximum Noise Assessment Trigger Levels

The potential for sleep disturbance from maximum noise level events from a project during the night-time period needs to be considered. The NPI considers sleep disturbance to be both awakenings and disturbance to sleep stages.

Where night-time noise levels from a development/premises at a residential location exceed the following criteria, a detailed maximum noise level event assessment should be undertaken:

- LAeq(15min) 40dB or the prevailing RBL plus 5dBA, whichever is the greater, and/or
- LAmax 52dB or the prevailing RBL plus 15dBA, whichever is the greater.

A detailed assessment should cover the maximum noise level, the extent to which the maximum noise level exceeds the rating background noise level, and the number of times this happens during the night-time period. Other factors that may be important in assessing the impacts on sleep disturbance include:

- how often the events would occur;
- the distribution of likely events across the night-time period and the existing ambient maximum events in the absence of the development;
- whether there are times of day when there is a clear change in the noise environment (such as during early morning shoulder periods); and
- current understanding of effects of maximum noise level events at night.


3.2 Interim Construction Noise Guideline

The ICNG sets out procedures to identify and address the impacts of construction noise on residences and other sensitive land uses. This section provides a summary of noise objectives that are applicable to the assessment. The ICNG provides two methodologies for the assessment of construction noise emissions:

- Quantitative, which is suited to major construction projects with typical durations of more than three weeks; and
- Qualitative, which is suited to short term infrastructure maintenance (< three weeks).

The qualitative assessment methodology is a more simplified approach that relies on noise management strategies. This study has adopted a quantitative assessment approach which is summarised in **Figure 2**. The quantitative approach includes identification of potentially affected receivers, derivation of the construction noise management levels, quantification of potential noise impact at receivers via predictive modelling and, provides management and mitigation recommendations.

Figure 2 Quantitative Assessment Processes for Assessing and Managing Construction Noise

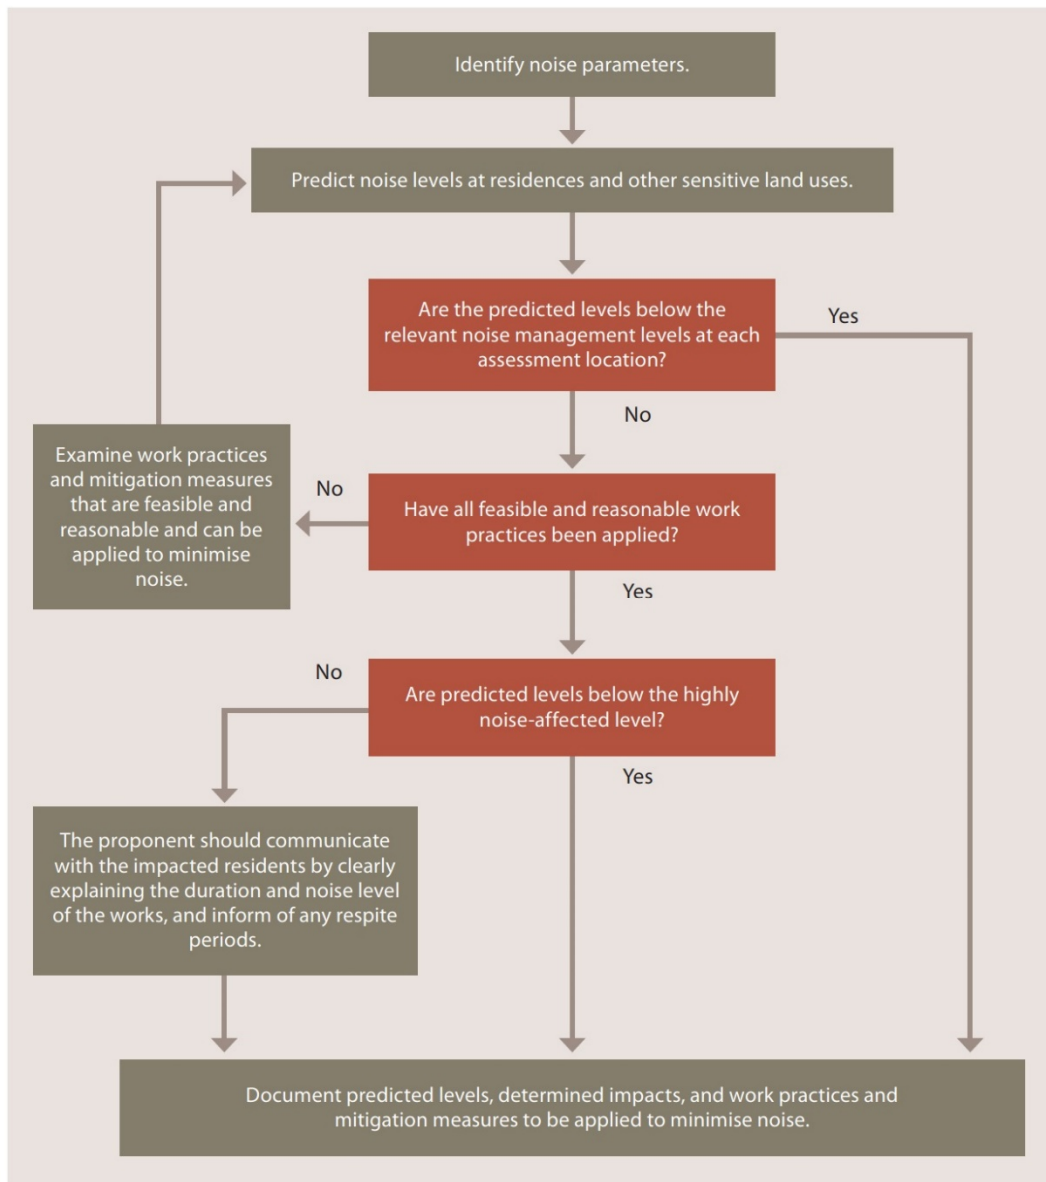

Source: Department of Environment and Climate Change, 2009.

3.2.1 Standard Hours for Construction

Table 3 summaries the ICNG recommended standard hours for construction works.

Table 3 Recommended Standard Hours for Construction	
Daytime	Construction Hours
Monday to Friday	7am to 6pm
Saturdays	8am to 1pm
Sundays or Public Holidays	No construction

These recommended hours do not apply in the event of direction from police, or other relevant authorities, for safety reasons or where required in an emergency to avoid the loss of lives, property and/or to prevent environmental harm.

Construction activities are anticipated to be undertaken during standard construction hours.

3.2.2 Construction Noise Management Levels

Section 4 of the ICNG (DECC, 2009) details the quantitative assessment method involving predicting noise levels and comparing them with the Noise Management Level (NML) and are important indicators of the potential level of construction noise impact. **Table 4** reproduces the ICNG Noise Management Level (NML) for residential receivers. The NML is determined by adding 10dB (standard hours) or 5dB (OOH) to the Rating Background Level (RBL) for each specific assessment period.

Table 4 Noise Management Levels

Time of Day	Management Level LAeq(15min) ¹	How to Apply
Recommended standard hours: Monday to Friday 7am to 6pm Saturday 8am to 1pm No work on Sundays or public holidays.	Noise affected RBL + 10dB	The noise affected level represents the point above which there may be some community reaction to noise. Where the predicted or measured LAeq(15min) is greater than the noise affected level, the proponent should apply all feasible and reasonable work practices to meet the noise affected level. The proponent should also inform all potentially impacted residents of the nature of work to be carried out, the expected noise levels and duration, as well as contact details.
	Highly noise affected 75dBA	The highly noise affected level represents the point above which there may be strong community reaction to noise. Where noise is above this level, the relevant authority (consent, determining or regulatory) may require respite periods by restricting the hours that the very noisy activities can occur, taking into account times identified by the community when they are less sensitive to noise such as before and after school for work near schools, or mid-morning or mid-afternoon for work near residences; and if the community is prepared to accept a longer period of construction in exchange for restrictions on construction times.
Outside recommended standard hours.	Noise affected RBL + 5dB	A strong justification would typically be required for work outside the recommended standard hours. The proponent should apply all feasible and reasonable work practices to meet the noise affected level. Where all feasible and reasonable practices have been applied and noise is more than 5dBA above the noise affected level, the proponent should negotiate with the community. For guidance on negotiating agreements see section 7.2.2.

Note 1: The Rating Background Level (RBL) is an overall single figure background level representing each assessment period over the whole monitoring period. The RBL is used to determine the construction noise management levels for noise assessment purposes and is the median of the ABL's.

3.3 Road Noise Policy

The road traffic noise criteria are provided in the Department of Environment, Climate Change and Water NSW (DECCW), Road Noise Policy (RNP), 2011. The policy sets out noise criteria applicable to different road classifications for the purpose of quantifying traffic noise impacts. The RNP road traffic noise criteria are presented in **Table 5** for all receiver types.

Table 5 Road Traffic Noise Assessment Criteria			
Road category	Type of project/development	Assessment Criteria – dBA	
		Day (7am to 10pm)	Night (10pm to 7am)
Freeways/arterial/ sub-arterial Roads	Existing residences affected by additional traffic on freeways/arterial/sub- arterial roads generated by land use developments	60dB LAeq(15hr)	55dB LAeq(9hr)
	Existing residences affected by additional traffic on local roads generated by land use developments	55dB LAeq(1hr)	50dB LAeq(1hr)
School Classrooms	Proposed road projects and traffic generating developments	40dB LAeq(1hr) (internal) when in use	N/A
Hospital Wards		35dB LAeq(1hr) (internal)	35dB LAeq(1hr) (internal)
Places of Worship		40dB LAeq(1hr) (internal)	40dB LAeq(1hr) (internal)
Open Space (active use)		60dB LAeq(1hr)	N/A
Open Space (passive use)		55dB LAeq(1hr)	N/A
Isolated residences in commercial or industrial zones		Refer to AS2107 for internal levels	
Mixed Use development		Each component to be considered separately	
Childcare Facilities		Sleeping rooms 35dB LAeq(1hr) (internal) Indoor play areas 40dB LAeq(1hr) (internal) Outdoor play areas 55dB LAeq(1hr) (external)	

Additionally, the RNP states where existing road traffic noise criteria are already exceeded, any additional increase in total traffic noise level should be limited to 2dBA, which is generally accepted as the threshold of perceptibility to a change in noise level.

This page has been intentionally left blank

4 Assessment Criteria

Background noise monitoring has not been conducted for this project and hence, the minimum assumed Rating Background Levels (RBL) of 35dBA for the daytime period and 30dBA for the evening and night time periods have been adopted in accordance with NPI methodology.

4.1 Operational Noise

4.1.1 Project Intrusiveness Noise Levels

The PINLs for the project are presented in **Table 6** and have been determined based on the RBLs +5dBA.

Table 6 Project Intrusiveness Noise Levels			
Receiver	Period ¹	Adopted RBL dB LA90(period)	PINL dB LAeq(15min)
All Residential Receivers	Day	35	40
	Evening	30	35
	Night	30	35

Note 1: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

4.1.2 Project Amenity Noise Levels

The PANL for residential receivers and other receiver types (ie non-residential) potentially affected by the project are presented in **Table 7**.

Table 7 Amenity Noise Levels and Project Amenity Noise Levels					
Receiver Type	Noise Amenity Area	Assessment Period ¹	Recommended ANL dB LAeq(period)	ANL dB LAeq(period) ²	PANL dB LAeq(15min) ³
Residential	Rural	Day	50	50	53
		Evening	45	45	48
		Night	40	40	43

Note 1: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

Note 2: Project Amenity Noise Level equals the Amenity Noise Level as there is no other industry in the area.

Note 3: Includes a +3dB adjustment to the amenity period level to convert to a 15-minute assessment period as per Section 2.2 of the NPI.

4.1.3 Project Noise Trigger Levels

The PNTLs are the lower of either the PINLs or the PANLs. **Table 8** presents the derivation of the PNTLs in accordance with the methodologies outlined in the NPI. For this assessment the night time PNTL of 35dB LAeq(15min) is the limiting criteria for residential receivers.

Table 8 Project Noise Trigger Levels				
Catchment	Assessment Period ¹	PINL dB LAeq(15min)	PANL dB LAeq(15min)	PNTL dB LAeq(15min)
Residential Receivers (Rural)	Day	40	53	40
	Evening	35	48	35
	Night	35	43	35

Note 1: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

4.1.4 Maximum Noise Trigger Levels

The maximum noise trigger levels shown in **Table 9** are based on night time RBLs and trigger levels as per Section 2.5 of the NPI. The trigger levels will be applied to transient noise events that have the potential to cause sleep disturbance.

Table 9 Maximum Noise Trigger Levels (Night)			
Residential Receivers			
LAeq(15min)		LAmax	
40dB LAeq(15min) or RBL + 5dB		52dB LAmax or RBL + 15dB	
Trigger	40	Trigger	52
RBL +5dB	35	RBL +15dB	45
Highest	40	Highest	52

Note: Monday to Saturday; Night 10pm to 7am. On Sundays and Public Holidays Night 10pm to 8am.

Note: NPI identifies that maximum of the two values is to be adopted which is shown in bold font.

4.2 Construction Noise Management Levels

The relevant Noise Management Levels (NMLs) for standard construction hours are presented in **Table 10**.

Table 10 Construction Noise Management Levels			
Receiver Type	Assessment Period ¹	Adopted RBL	NML
		dB LA90	dB LAeq(15min)
Rural Residential	Standard Hours	35	45 (RBL + 10dBA)

Note 1: See Table 2 for Standard Recommended Hours for Construction.

Note 2: External level based on 10dB with windows open for adequate ventilation (ICNG).

4.3 Road Traffic Noise

It is acknowledged that the functional classification of roads connecting to arterial roads such as major highways are 'Collector Roads' in accordance with the Roads and Maritime Noise Criteria Guideline (April 2015). However, the Road Noise Policy does not provide separate noise criteria for Collector Roads but applies the sub-arterial category to all roads that are not classified as local roads and hence, the 'sub arterial road' category has been adopted for collector roads. The relevant road traffic noise criteria are provided in the RNP and are presented in **Table 11** for residential receivers.

Table 11 Road Traffic Noise Assessment Criteria			
Road category	Type of project/development	Assessment Criteria – dBA	
		Day (7am to 10pm)	Night (10pm to 7am)
Freeways/arterial/ sub-arterial Roads	Existing residences affected by additional traffic on freeways/arterial/sub- arterial roads generated by land use developments	60dB LAeq(15hr)	55dB LAeq(9hr)
	Existing residences affected by additional traffic on local roads generated by land use developments	55dB LAeq(1hr)	50dB LAeq(1hr)

This page has been intentionally left blank

5 Modelling Methodology

A computer model using DGMR (iNoise, Version 2024) noise modelling software was used to quantify noise emissions from the project. iNoise is an intuitive and quality assured software for industrial noise calculations in the environment. 3D noise modelling is considered industry best practice for assessing noise emissions from projects.

The model incorporated a three-dimensional digital terrain map giving all relevant topographic information used in the modelling process. Additionally, the model uses relevant noise source data, ground type, attenuation from barrier or buildings and atmospheric information to predict noise levels at the nearest potentially affected receivers. Where relevant, modifying factors in accordance with Fact Sheet C of the NPI have been applied to calculations.

The model calculation method used to predict noise levels was in accordance with ISO 9613-1 'Acoustics - Attenuation of sound during propagation outdoors. Part 1: Calculation of the absorption of sound by the atmosphere' and ISO 9613-2 'Acoustics - Attenuation of sound during propagation outdoors. Part 2: General method of calculation' including corrections for meteorological conditions using CONCAWE¹. The ISO 9613 standard from 1996 is the most used noise prediction method worldwide. Many countries refer to ISO 9613 in their noise legislation. However, the ISO 9613 standard does not contain guidelines for quality assured software implementation, which leads to differences between applications in calculated results. In 2015 this changed with the release of ISO/TR 17534-3. This quality standard gives clear recommendations for interpreting the ISO 9613 method. iNoise fully supports these recommendations. The models and results for the 19 test cases are included in the software.

¹ Report no. 4/18, "the propagation of noise from petroleum and petrochemical complexes to neighbouring communities", Prepared by C.J. Manning, M.Sc., M.I.O.A. Acoustic Technology Limited (Ref.AT 931), CONCAWE, Den Haag May 1981

5.1 Operational Assessment Methodology

For this assessment, operational noise predictions were modelled for a typical worst case operational scenario over a 15-minute assessment period based on the operational assumptions and sound power levels in **Table 12**. Plant noise emission data used in modelling for this assessment were obtained from manufacturer data contained in **Appendix B**. Where relevant, modifying factors in accordance with Section 3.3 and Fact Sheet D of the NPI have been applied to calculations.

Table 12 Operational Equipment Sound Power Levels, Lw dBA re 10⁻¹² W

Noise Source/Item	Source			Adjustments, dB				Total Lw
	Type	Lw/ Item	Quantity	Duration per 15 minutes	Quantity	Mitigation	Penalty	
PV Panel Tracking Motor (tracking)	Area	50	428	-12 ¹	26	--	--	64
PV Panel Tracking Motor (reset)	Area	50	428	-9 ¹	26	--	--	67
Inverter Station (Sungrow SG2475HV)	Point	77	1	Constant	--	--	5 ²	82
BESS Storage Module (Sungrow ST2752UX)	Point	84	4	Constant	6	--	5 ²	95
Light Vehicle (<10km/h)	Point	76	2	Constant	3	--	--	79

Note 1: Tracking motor operates 1 minute per 15 minutes when tracking and continuously for 2 minutes during reset.

Note 2: Modifying factor penalty of +5dB added for low frequency and tonality at 50Hz.

During the day, the panels track the sun from east to west, operating less than one minute every fifteen minutes. At sundown or before sunrise, the trackers reposition from a 60-degree tilt in the west to a 30-degree tilt in the east to the east. The worst-case emissions scenario is when the panels reposition or reset requiring all trackers to operation simultaneously for two minutes.

5.1.1 Meteorological Analysis

Noise emissions can be influenced by prevailing weather conditions. Light stable winds (<3m/s) and temperature inversions have the potential to increase noise at a receiver.

Fact Sheet D of the NPI provides two options when considering meteorological effects:

- adopt the noise enhancing conditions for all assessment periods without an assessment of how often the conditions occur – a conservative approach that considers a source to receiver winds for all receivers and F class temperature inversions with wind speeds up to 2m/s at night; or
- determine the significance of noise enhancing conditions. This requires assessing the significance of temperature inversions (F and G Class stability categories) for the night time period and the significance of light winds up to 3m/s for all assessment periods during stability categories other than E, F or G.

Standard meteorological conditions and noise-enhancing meteorological conditions as defined in Table D1 of the NPI are reproduced in **Table 13**.

Table 13 Standard and Noise-Enhancing Meteorological Conditions	
Meteorological Conditions	Meteorological Parameters
Standard Meteorological Conditions	Day/evening/night: stability categories A–D with wind speed up to 0.5m/s at 10m AGL.
Noise Enhancing Meteorological Conditions	Daytime/evening: stability categories A–D with light winds (up to 3 m/s at 10m AGL). Night-time: stability categories A–D with light winds (up to 3m/s at 10m AGL) and/or stability category F with winds up to 2m/s at 10 m AGL.

A detailed analysis of the significance of noise enhancing conditions has not been undertaken and hence, the (worst case) NPI noise enhancing meteorological conditions have been applied to the noise modelling assessment and are presented in **Table 14**.

Table 14 Modelled Meteorological Parameters				
Assessment Condition ¹	Temperature	Wind Speed ² / Direction	Relative Humidity	Stability Class ²
Day	20°C	3m/s all directions	50%	D
Evening	10°C	3m/s all directions	50%	D
Night	10°C	2m/s all directions	50%	F

Note 1: Day 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening 6pm to 10pm; Night - the remaining periods.

Note 2: Implemented using CONCAWE meteorological corrections.

5.2 Construction Assessment Methodology

Construction activities are proposed to be progressive (trenching, piling and assembly) and will occur at several locations simultaneously. Noise emissions were modelled for the following four scenarios:

- earthworks for internal roads and compound construction including the stripping of topsoil and unsuitable soil and the placement and compaction of road base for internal roads;
- earthworks involving trenching for cabling;
- piling of panel supports; and
- assembly of the panels.

It is envisaged that all four construction scenarios have the potential to occur simultaneously at up to two key locations across the site. Noise emission data and assumptions used in this assessment are summarised in **Table 15**. All significant noise generating construction activities will be limited to standard construction hours. Where low intensity construction activities are required to be undertaken outside standard construction hours, such as cabling, minor assembly, use of hand tools etc, they will be managed such that they are not audible at any residential receivers.

Table 15 Construction Equipment Sound Power Levels, Lw dBA (re 10 ⁻¹² Watts)				
Noise Source/Item	Utilisation %	Quantity	Lw/Item	Total Lw
Earthworks for Internal Roads and Compound Construction				
Backhoe	80	1	104	103
Light vehicle	25	2	76	73
Total – Trenching & Earthworks				102
Earthworks Involving Trenching for Cabling				
Piling Rig (hydraulic)	80	1	112	111
Tele-handler	75	1	106	105
Light vehicle	25	2	73	70
Total – Piling				112
Piling of Panel Supports				
Tele-handler	75	1	106	105
Light vehicle	25	1	73	67
Hand tools/Power tools	30	1	102	97
Welder	30	1	105	100
Total – Assembly				106

Table 15 Construction Equipment Sound Power Levels, Lw dBA (re 10⁻¹² Watts)

Noise Source/Item	Utilisation %	Quantity	Lw/Item	Total Lw
Transport (On Site)				
Heavy vehicle	40	1	104	101
Tele-handler	50	1	106	103
Total – Transport				105

5.3 Road Traffic Noise Assessment Methodology

Due to the low traffic volume generated by the project over a typical day during the construction phase, road traffic noise calculation methods such as Calculation of Road Traffic Noise (CRTN - ISBN 0 11 550847 3) by Department of Transport (UK) 1988 or Traffic Noise Model (TNM) by the United States Department of Transport, Federal Highway Administration are not considered appropriate as they are primarily intended to calculate noise emissions from motorways and highways. Whilst each method has a low volume correction, the project traffic volume is out of the scope of these methods.

Therefore, road traffic noise has been calculated using the Traffic Noise Model (TNM) by the United States Department of Transport, Federal Highway Administration Low Volume Calculation Tool at an offset distance of 15m for receivers along the transport route using the parameters presented in **Table 16**.

Table 16 Road Traffic Noise Modelling Parameters

Noise Source/Item	Lw dBA re 10 ⁻¹² W	Movements/hr	Speed, km/h	Source Height, m ¹
Heavy vehicle (rigid, semi trailer or b-double)	104	8	50	1.5
Light Vehicle	96	20	50	0.75

Note 1: Height above ground level.

This page has been intentionally left blank

6 Noise Assessment Results

6.1 Operational Noise Assessment

Noise levels were predicted to all identified receivers at 1.5m above ground level for all operational sources (inclusive of tracking motor resetting) and are presented in **Table 17**. Noise levels are expected to satisfy the PNTLs at all receivers.

Table 17 Predicted Operational Noise Levels

Receiver	Description/Address	Predicted Noise Level dB LAeq(15min)	PNTL dB LAeq(15min) Day/Eve/Night ¹	Compliance Achieved
SR01	740 Stoney Creek Road	<30	40/35/35	✓
SR02	678 Stoney Creek Road	<30	40/35/35	✓
SR03	920 Stoney Creek Road	<30	40/35/35	✓
SR04	22 McCutcheon Lane	<30	40/35/35	✓
SR05	851 Stoney Creek Road	<30	40/35/35	✓
SR06	126 McCutcheon Lane	<30	40/35/35	✓
SR07	669 Stoney Creek Road	<30	40/35/35	✓
SR08	625 Stoney Creek Road	<30	40/35/35	✓
SR09	585 Stoney Creek Road	<30	40/35/35	✓
SR10	977 Stoney Creek Road	<30	40/35/35	✓

Note 1: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

6.1.1 Maximum Noise Level Assessment

A detailed maximum noise level assessment is not required as predicted noise levels for night time operations do not exceed the maximum noise trigger levels of 40dB LAeq(15min) and there are no operational noise sources that generate significant maximum noise events.

6.2 Construction Noise Assessment

Noise levels were predicted to all identified receivers at 1.5m above ground level based on typical construction activities during standard construction hours. **Table 18** summarises the predicted noise level range and maximum predicted noise level for each of the construction scenarios (trenching, piling and assembly) at identified receivers.

Table 18 Predicted Construction Noise Levels

Receiver	Description/Address	Predicted Noise	Highest Predicted	NML Standard	Compliance Achieved
		Level Range	Noise Level	Hours	
		dB LAeq(15min) ¹	dB LAeq(15min)	dB LAeq(15min)	
SR01	740 Stoney Creek Road	<30	<30	45	✓
SR02	678 Stoney Creek Road	<30 - 24	<30	45	✓
SR03	920 Stoney Creek Road	30 - 42	42	45	✓
SR04	22 McCutcheon Lane	<30 - 38	38	45	✓
SR05	851 Stoney Creek Road	<30 - 41	41	45	✓
SR06	126 McCutcheon Lane	<30 - 37	37	45	✓
SR07	669 Stoney Creek Road	<30 - 37	37	45	✓
SR08	625 Stoney Creek Road	<30 - 31	31	45	✓
SR09	585 Stoney Creek Road	<30 - 38	38	45	✓
SR10	977 Stoney Creek Road	<30 - 35	35	45	✓

Note 1: Noise levels from construction activities vary due to their position across the project site with respect to surrounding receivers.

Noise levels are expected to satisfy the NMLs at all receivers when works are at their nearest proximity during standard construction hours.

6.3 Construction Vibration

Department of Environment and Conservation (DEC) 2006, *Assessing Vibration: A Technical Guideline* (the 'Guideline') provides guidance on determining effects of vibration on buildings occupants. The guideline does not address vibration induced damage to structures, blast induced vibration effects or structure borne noise effects.

The Construction Noise & Vibration Strategy (CNVS, V4.2 Transport for NSW, 2020) sets out safe working distances to achieve the human response criteria for vibration. The key vibration generating source proposed to be used is small pile driver used to drive the piles into the ground on which the PV mounting structures are mounted and vibratory roller for road construction. The CNVS sets a safe working distance of 50m for a hammer piling rig and 100m for a large vibratory roller to achieve the residential human response criteria for continuous vibration. Therefore, as the nearest non project related receivers to the project are greater than 100m from the project boundary, human exposure to vibration is anticipated to be minimal. Furthermore, where the human response criteria are satisfied, the structural or cosmetic criteria for sensitive receivers will be achieved. Therefore, vibration impacts are not considered to be a significant issue and have not been considered further in this assessment.

6.4 Road Traffic Noise Assessment (Construction)

During construction, traffic generated by the project include employee/subcontractor and delivery vehicles. The traffic volume over a typical day for standard construction hours is expected to be up to a maximum of four heavy vehicles (semi-trailers or B-doubles) per hour and up to 40 light vehicles for worker transport per day.

The transport route for all vehicles to the access the project site from Stoney Creek Road back to source of product is yet to be determined. Therefore, it has been assumed that the closest residential receivers along the transport route are 15m from the road to represent a potential worst case assessment scenario.

Predicted noise levels from project related construction traffic has been calculated using the methodology described in **Section 5.3** and the parameters presented in **Table 16**. The results presented in **Table 19** show the calculated noise levels as $L_{Aeq}(1hr)$ for local roads and $L_{Aeq}(15hr)$ for arterial/sub arterial roads to align with RNP categories and assessment periods.

Table 19 Predicted Construction Road Traffic Noise Levels

Road Type/Name	Offset Distance to Receiver	Predicted Noise Level	RTN Criteria	Compliance Achieved
Arterial, Sub Arterial and Collector Roads	15m	45dB LAeq(15hr)	60dB LAeq(15hr)	✓
Local Roads	15m	48dB LAeq(1hr)	55dB LAeq(1hr)	✓

Results demonstrate that project construction traffic noise levels would comply with the relevant RNP criteria.

Existing road traffic flows on the Kamilaroi Highway are not available. The project proposes to add an additional 20 light vehicles per day and 100 heavy vehicles over a three month construction period, which would be considered a negligible increase to existing traffic flows resulting in a negligible increase in road traffic noise.

Therefore, it is concluded that project related road traffic noise levels would satisfy the relevant RNP criteria at any residential receiver along the proposed transport routes and not increase existing noise levels by more than 2dB.

7 Discussion and Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Assessment for a proposed Solar Farm with Battery Energy Storage System at 742 Stoney Creek Road, Narrabri, NSW.

The results of the Noise Assessment demonstrate that construction noise levels will satisfy applicable construction noise management levels at all receivers.

The results of the assessment demonstrate that emissions from the project would satisfy the operational PNTLs at all identified receivers.

Furthermore, sleep disturbance is not anticipated, as there are no operational noise sources that generate significant maximum noise events and noise emissions from the project are predicted to satisfy the EPA maximum noise level criteria.

Modelled noise emissions from construction activities identify that predicted noise levels will satisfy the applicable construction management levels at all receivers.

Road traffic noise emissions associated with the project construction are anticipated to satisfy the relevant RNP criteria at all receivers along the proposed transportation route.

A qualitative assessment of potential vibration impacts during the construction phase has been completed. Due to the nature of the works proposed and distances to potential vibration sensitive receivers, vibration impacts from the project would be negligible.

Based on the Noise Assessment results, the project satisfies the relevant requirements of the Interim Construction Noise Guideline, Noise Policy for Industry and the Road Noise Policy, resulting in negligible noise impacts.

This page has been intentionally left blank

Appendix A – Glossary of Terms

A number of technical terms have been used in this report and are explained in **Table A1**.


Table A1 Glossary of Acoustical Terms	
Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for each assessment period (day, evening and night). It is the tenth percentile of the measured L90 statistical noise levels.
Ambient Noise	The total noise associated with a given environment. Typically, a composite of sounds from all sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human ear to sound.
Background Noise	The underlying level of noise present in the ambient noise, excluding the noise source under investigation, when extraneous noise is removed. This is usually represented by the LA90 descriptor
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the most common being the 'A-weighted' scale. This attempts to closely approximate the frequency response of the human ear.
dB(Z), dB(L)	Decibels Z-weighted or decibels Linear (unweighted).
Extraneous Noise	Sound resulting from activities that are not typical of the area.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second equals 1 hertz.
LA10	A sound level which is exceeded 10% of the time.
LA90	Commonly referred to as the background noise, this is the level exceeded 90% of the time.
LAeq	Represents the average noise energy or equivalent sound pressure level over a given period.
LAmx	The maximum sound pressure level received at the microphone during a measuring interval.
Masking	The phenomenon of one sound interfering with the perception of another sound. For example, the interference of traffic noise with use of a public telephone on a busy street.
RBL	The Rating Background Level (RBL) as defined in the NPI, is an overall single figure representing the background level for each assessment period over the whole monitoring period. The RBL, as defined is the median of ABL values over the whole monitoring period.
Sound power level (Lw or SWL)	This is a measure of the total power radiated by a source in the form of sound and is given by $10 \cdot \log_{10} (W/W_0)$. Where W is the sound power in watts to the reference level of 10^{-12} watts.
Sound pressure level (Lp or SPL)	the level of sound pressure; as measured at a distance by a standard sound level meter. This differs from Lw in that it is the sound level at a receiver position as opposed to the sound 'intensity' of the source.

Table A2 provides a list of common noise sources and their typical sound level.

Table A2 Common Noise Sources and Their Typical Sound Pressure Levels (SPL), dBA

Source	Typical Sound Pressure Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

Figure A1 – Human Perception of Sound

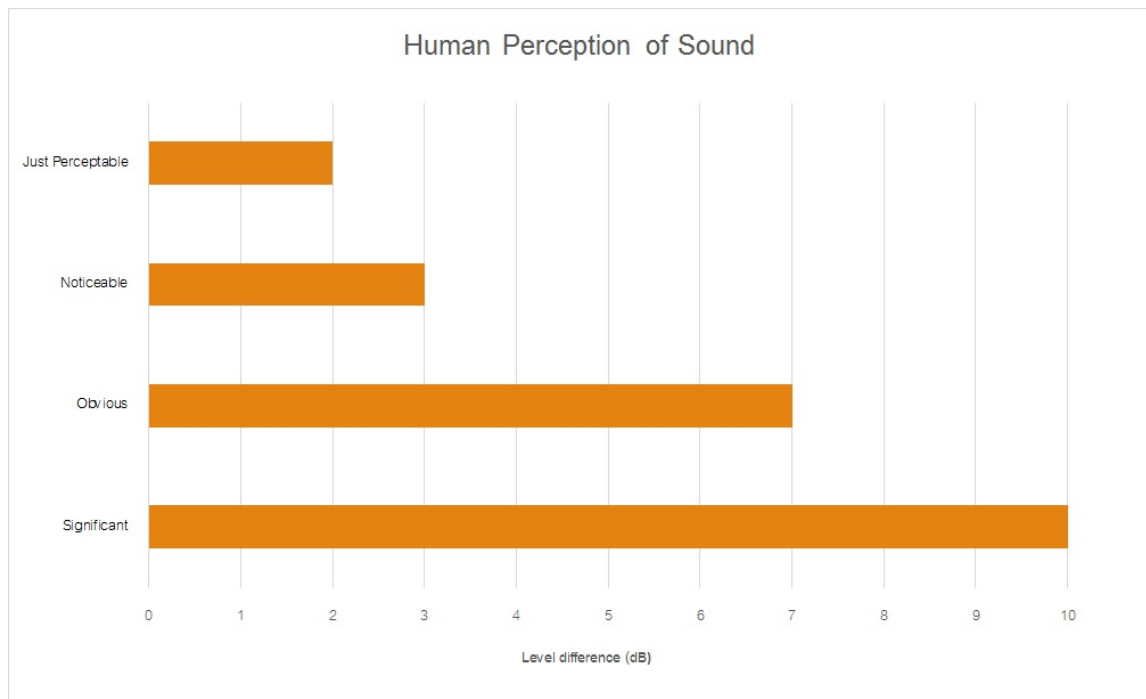


This page has been intentionally left blank

Appendix B – Sound Power Data

SG4950HV-MV

Turnkey Station for 1500 Vdc System MV Transformer Integrated

NEW

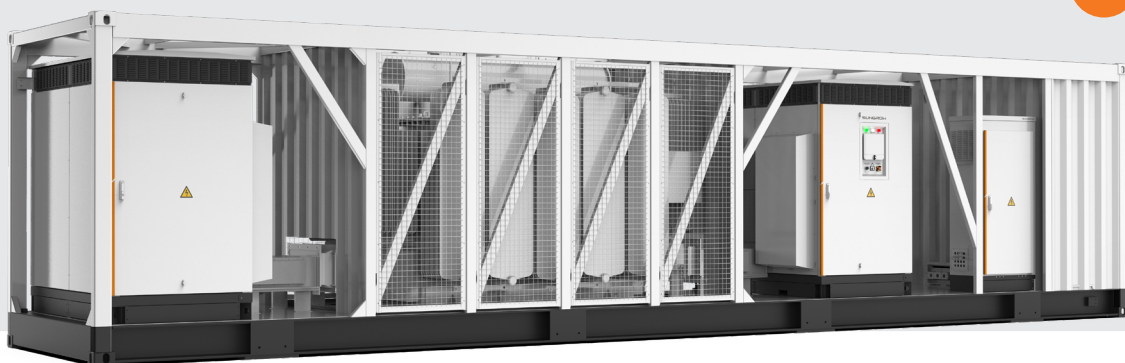

HIGH YIELD

- Advanced three-level technology, max. inverter efficiency 99%
- Effective cooling, full power operation at 50 °C



SMART O&M

- Integrated zone monitoring and MV parameters monitoring function for online analysis and trouble shooting
- Modular design, easy for maintenance
- Convenient external touch screen



SAVED INVESTMENT


- Low transportation and installation cost due to 40-foot container design
- DC 1500V system, low system cost
- Integrated MV transformer, switchgear, and LV auxiliary power supply
- Q at night function optional




GRID SUPPORT

- Compliance with standards: IEC 62271-202, IEC 62271-200, IEC 60076
- Low/High voltage ride through (L/HVRT)
- Active & reactive power control and power ramp rate control

CIRCUIT DIAGRAM

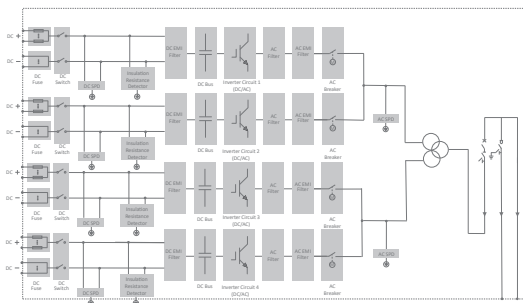

EFFICIENCY CURVE

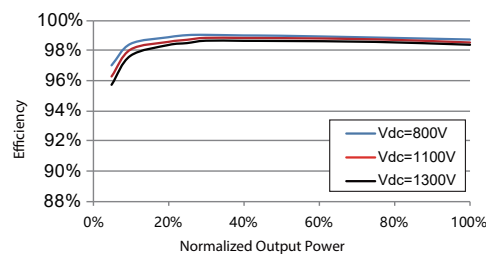

Type designation	SG4950HV-MV
Input (DC)	
Max. PV input voltage	1500 V
Min. PV input voltage / Startup input voltage	800 V / 840 V
MPP voltage range	800 – 1300 V
No. of independent MPP inputs	4
No. of DC inputs	32 / 36 / 44 / 48 / 56 (Max. 48 for floating system)
Max. PV input current	2 * 3508 A
Max. DC short-circuit current	2 * 10000 A
PV array configuration	Negative grounding or floating
Output (AC)	
AC output power	4950 kVA @ 50 °C
Max. inverter output current	2 * 2600 A
Max. AC output current	143 A
AC voltage range	20 kV – 35 kV
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz
Harmonic (THD)	< 3 % (at nominal power)
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging
Feed-in phases / AC connection	3 / 3-PE
Efficiency	
Inverter max. efficiency	99.0%
Inverter European efficiency	98.7%
Transformer	
Transformer rated power	4950 kVA
Transformer max. power	4950 kVA
LV / MV voltage	0.55 kV / 0.55 kV / (20 – 35) kV
Transformer vector	Dy11y11
Transformer cooling type	ONAN (Oil-natural, air-natural)
Oil type	Mineral oil (PCB free) or degradable oil on request
Protection & Function	
DC input protection	Load break switch + fuse
Inverter output protection	Circuit breaker
AC MV output protection	Circuit breaker
Surge protection	DC Type I + II / AC Type II
Grid monitoring / Ground fault monitoring	Yes / Yes
Insulation monitoring	Yes
Overheat protection	Yes
Q at night function	Optional
General Data	
Dimensions (W*H*D)	12192*2896*2438 mm
Weight	27 T
Degree of protection	Inverter: IP65 / Others: IP54
Auxiliary power supply	5 kVA (optional: max. 40 kVA)
Operating ambient temperature range	-35 to 60 °C (> 50 °C derating)
Allowable relative humidity range	0 – 100 %
Cooling method	Temperature controlled forced air cooling
Max. operating altitude	1000 m (standard) / > 1000 m (optional)
Display	Touch screen
Communication	Standard: RS485, Ethernet; Optional: optical fiber
Compliance	CE, IEC 62109, IEC 61727, IEC 62116, IEC 62271-202, IEC 62271-200, IEC 60076
Grid support	Q at night (Optional), L/HVRT, active & reactive power control and power ramp rate control




Sungrow Power Supply Co., Ltd.
 Add: No. 1699 Xiyou Road, Hefei, China
 Tel: +86 551 6532 7834
 Email: info@sungrow.cn
 Website: www.sungrowpower.com



Noise Test Report

TYPE TEST SHEET

This Type Test sheet shall be used to record the results of the type testing of Generating Unit			
Type Tested reference number		SG2475HV	
Generating Unit technology		Grid-connected PV Inverter	
System supplier name		Sungrow Power Supply Co., Ltd.	
Address		No.1699 Xiyou Rd., New & High Technology Industrial Development Zone, Hefei, P.R. China	
Tel	+86 551 65327834	Fax	+86 551 6532 7800
E:mail	info@sungrow.cn	Web site	www.sungrowpower.com
Maximum export capacity, use separate sheet if more than one connection option.	N/A	kW single phase, single, split or three phase system	
	2475	kW three phase	
	N/A	kW two phases in three phase system	
	N/A	kW two phases split phase system	
Compiled by		On behalf of	Sungrow Power Supply Co., Ltd.
		Test Date	2020-05-08
Note that testing can be done by the manufacturer of an individual component, by an external test house, or by the supplier of the complete system, or any combination of them as appropriate. Where parts of the testing are carried out by persons or organisations other than the supplier then the supplier shall keep copies of all test records and results supplied to them to verify that the testing has been carried out by people with sufficient technical competency to carry out the tests.			

Sungrow Power Supply Co., Ltd.

Add: No. 1699 Xiyou Road, Hefei, China

Tel: +86 551 6532 7834

Email: info@sungrow.cn

Website: www.sungrowpower.com

SUNGROW

The aim of this test is to determine the noise level when the PV Grid inverter in rated working condition

Used settings of the measurement device for Noise measurement

Measurement device	Date of measurement
AWA6228	2018-11-30

The condition s during testing are specified below:

PGU operation mode	Rated Working Condition
Voltage range	800-1500V
Grid frequency range	50Hz/ 45-55Hz
Distance	1m
Date	2020-05-08

The system noise level please check the table below.

Orientation	Noise (dB)
Front	77.2
Behind	78.9
Sidepiece	73.4
Average Noise	76.5

Additional comments

N/A

ST2752UX

Liquid Cooling Energy Storage System



LOW COSTS

- Highly integrated ESS for easy transportation and O&M
- All pre-assembled, no battery module handling on site
- 8 hour installation to commission, drop on a pad and make electrical connections



SAFE AND RELIABLE

- Integrated DC/DC converters actively limit fault current
- DC electric circuit safety management includes fast breaking and anti-arc protection
- Multi level battery protection layers formed by discreet standalone systems offer impeccable safety



EFFICIENT AND FLEXIBLE

- Intelligent liquid cooling ensures higher efficiency and longer battery cycle life
- Modular design supports parallel connection and easy system expansion
- IP54 outdoor cabinet and optional C5 anti-corrosion



SMART AND ROBUST

- Fast state monitoring and faults record enables pre-alarm and faults location
- Integrated battery performance monitoring and logging



Type designation	ST2752UX
Battery Data	
Cell type	LFP
Battery capacity (BOL)	2752 kWh
System output voltage range	1036.8 ~ 1401.6 V
General Data	
Dimensions of battery unit (W * H * D)	9340*2600*1730mm
Weight of battery unit	26,400kg
Degree of protection	IP54
Operating temperature range	-30 to 50 °C (> 45 °C derating)
Relative humidity	0 – 95 % (non-condensing)
Max. working altitude	3000 m
Cooling concept of battery chamber	Liquid cooling
Fire safety	Fused sprinkler heads, NFPA 69 explosion prevention and ventilation IDLH gases
Communication interfaces	RS485, Ethernet
Communication protocols	Modbus RTU, Modbus TCP
Compliance	CE, IEC 62477-1, IEC 61000-6-2, IEC 61000-6-4, IEC 62619
2 HOURS APPLICATION-ST2752UX*4-5000UD-MV	
BOL kWh (DC)	11,008 kWh
ST2752UX Quantity	4
PCS Model	SC5000UD-MV
4 HOURS APPLICATION-ST2752UX*8-5000UD-MV	
BOL kWh (DC)	22,016 kWh
ST2752UX Quantity	8
PCS Model	SC5000UD-MV
Grid Connection Data	
Max.THD of current	< 3 % (at nominal power)
DC component	< 0.5 % (at nominal power)
Power factor	> 0.99 (at nominal power)
Adjustable power factor	1.0 leading – 1.0 lagging
Nominal grid frequency	50 / 60 Hz
Grid frequency range	45 – 55 Hz / 55 – 65 Hz
Transformer	
Transformer rated power	5,000 kVA
LV/MV voltage	0.9 kV / 33 kV
Transformer cooling type	ONAN (Oil Natural Air Natural)
Oil type	Mineral oil (PCB free) or degradable oil on request



 Sungrow Power Supply Co., Ltd.	Page	Page 1 of 9
	Security classification	Confidential

ST2752UX_0.5C Noise Test Report

ISO 3744 (2010) - Acoustics - Determination of sound power levels and sound energy levels of noise sources using sound pressure - Engineering methods for an essentially free field over a reflecting plane

 Sungrow Power Supply Co., Ltd.	Page	Page 2 of 9
	Security classification	Confidential

Contents

1	DESCRIPTION.....	3
2	NOISE TEST	4
2.1	BASIC TEST INFORMATION	4
2.2	SOUND SOURCE INFORMATION	4
2.3	TEST ENVIRONMENT.....	4
2.4	TEST STANDARD	5
2.5	TEST EQUIPMENT	5
2.6	OPERATING CONDITIONS FOR THE TEST	5
2.7	TEST DATA.....	5
2.8	TEST RESULTS AND CONCLUSIONS	6

 Sungrow Power Supply Co., Ltd.	Page	Page 3 of 9
	Security classification	Confidential

1 Description

1. **The report is invalid under any of the following circumstances:**
 - 1) All or part of the report is quoted without the approval of Sungrow Acoustical Laboratory;
 - 2) Other circumstances;
2. **Sungrow Acoustical Laboratory is only responsible for the results of test samples.**
3. **For any questions or doubts about the report, please contact Sungrow Acoustical Laboratory for feedback within one week after receiving the report.**

 Sungrow Power Supply Co., Ltd.	Page	Page 4 of 9
	Security classification	Confidential

2 Noise test

2.1 Basic test information

Applying department: PV & Storage BG - Energy Storage Division

Applicants: Wu Jin, Zhou Xudong, Tang Jiancheng

Test date: November 8, 2023

Tester: Zhang Yi

2.2 Sound source information

Sample name: Energy storage battery container-0.5

Sample model: ST2752UX_0.5C

Sample No.: ~

Water cooling unit: Envicool

Fans of electrical compartment: EBM

Sample reception date: November 7, 2023

Sample parameters: W: 9340mm H: 2600mm D: 1730mm

Max operating ambient temperature¹: 45°C

Auxiliary equipment and its acoustic treatment: None

Installation conditions: Place on the ground of the storage yard

¹: The maximum operating ambient temperature refers to the ambient temperature at which the unit operates without power reduction. During this simulation test, the ambient temperature was 45°C.

2.3 Test environment

Description of test environment: On the ground of the storage yard

Simulated operating ambient temperature: 45°C

Ambient humidity: 48%RH

 Sungrow Power Supply Co., Ltd.	Page	Page 5 of 9
	Security classification	Confidential

2.4 Test standard

Test standard: ISO 3744:2010 Acoustics - Determination of sound power levels and sound energy levels of noise sources using sound pressure - Engineering methods for an essentially free field over a reflecting plane

2.5 Test equipment

Instruments and equipment	Manufacturer	Model	No.	Calibration date	Valid until
Simcenter 12-channel Hand-held Acquisition System	Siemens Industry Software (Beijing) Co., Ltd.	SCADAS XS	SC-XS12-ACL	February 23, 2023	February 22, 2024
Acoustic calibrator	B&K	4231	3010773	February 23, 2023	February 22, 2024

2.6 Operating conditions for the test


No.	Operating condition
Operating condition 1	ST2752UX_operation at 100% of its rated power
Operating condition 2	ST2752UX_operation at 80% of its rated power
Operating condition 3	ST2752UX_operation at 72.5% of its rated power
Operating condition 4	ST2752UX_operation at 60% of its rated power and lower power

Note: This test was conducted during the stable operation of the unit.

2.7 Test data


- a) Illustration of the positions of microphones for the sound power level test (test distance: $d = 2\text{m}$, number of measuring points: $N=19$)

ISO 3744:2010(E)

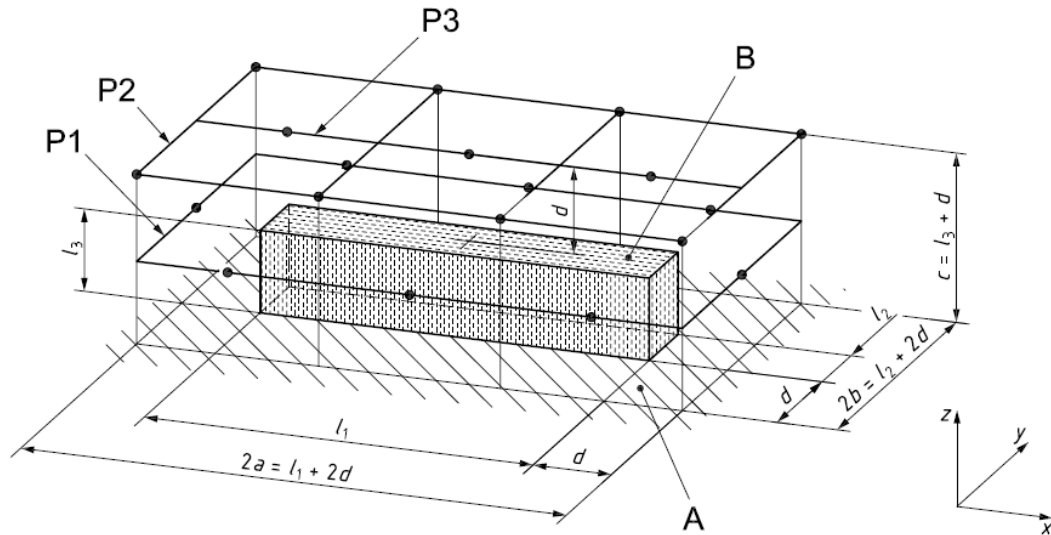

- Microphone positions
- The microphone placement is guided by Figures C.1 and C.9 in ISO 3744 - Annex C

b) On-site test picture

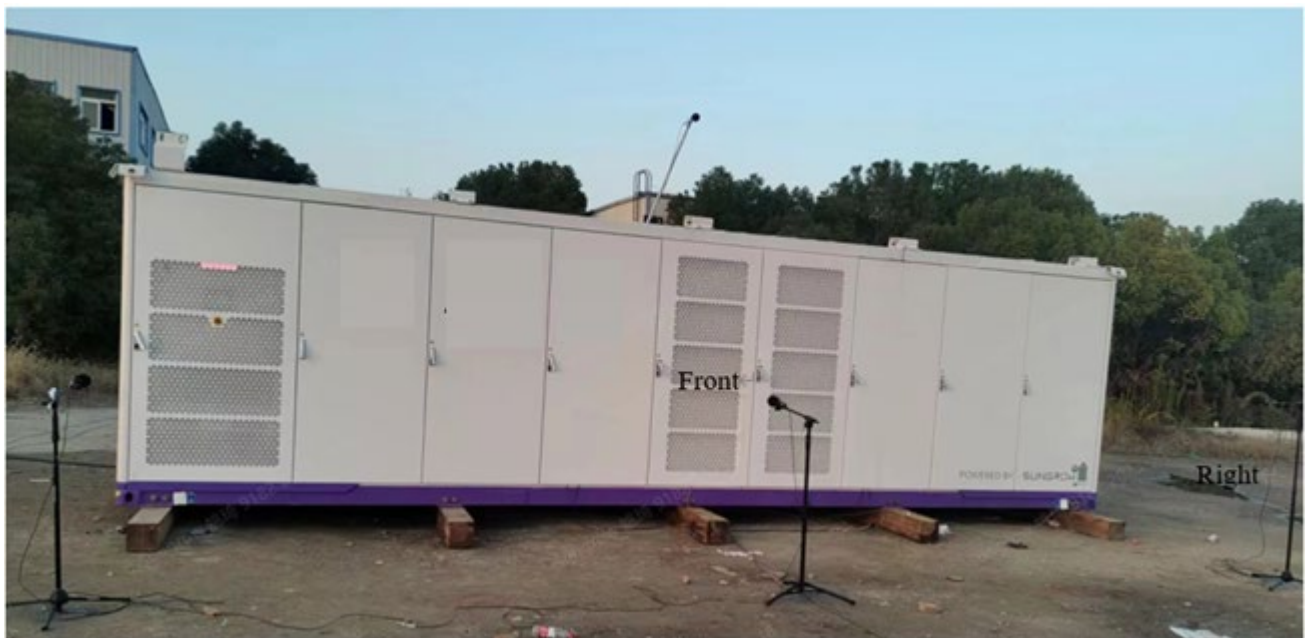

c) Background noise value

Background noise	52dBA
------------------	-------

2.8 Test results and conclusions

2.8.1 The test results of sound power levels under the operating conditions are as follows:

PV & Storage BG/Product Technology Center/Heat Flow Design Department

No.	Operating condition	Sound power level/dBA	Extended measurement uncertainty U/dB
1	ST2752UX_operation at 100% of its rated power	92.4	2.6
2	ST2752UX_operation at 80% of its rated power	86.4	
3	ST2752UX_operation at 72.5% of its rated power	82.4	
4	ST2752UX_operation at 60% of its rated power and lower power	78.8	

2.8.2 The maximum sound pressure levels (dBA) of each surface @1m under various operating conditions are as follows:

Operating condition	Front side	Right side	Back side	Left side	Top side
ST2752UX_operation at 100% of its rated power	79.41	51.75*	64.9	63.1	78.18
ST2752UX_operation at 80% of its rated power	71.21	51.9*	57.7	57.9	72.58
ST2752UX_operation at 72.5% of its rated power	66.31	50.8*	54.4*	52.5 ⁻	65.38
ST2752UX_operation at 60% of its rated power and lower power	63.03	49.1*	52.5*	52.4 ⁻	60.43

Note: “-” indicates that only the accuracy required by ISO 3746 is met due to background noise; “*” indicates that the background noise does not satisfy the test requirements, and calculations are adjusted by subtracting 3dBA from the test values. For detailed calculation methods, refer to section 8.3.3 in ISO 3746. The same below.

Annex: Data on sound power levels in 1/3 octave bands

	ST2752UX_operation at 100% of its rated power	ST2752UX_operation at 80% of its rated power	ST2752UX_operation at 72.5% of its rated power	ST2752UX_operation at 60% of its rated power and lower power
1/3 octave (Hz)	Sound power level L_{WA} , dBA			

 Sungrow Power Supply Co., Ltd.	Page	Page 8 of 9
	Security classification	Confidential

25	42.94	37.52	37.01	37.05
31.5	46.98	44.02	42.11	40.86
40	51.82	48.10	49.49	46.59
50	55.81	54.77	54.43	52.40
63	56.40	60.04	56.44	53.26
80	58.50	55.62	53.75	53.62
100	61.40	59.03	62.18	53.98
125	65.86	70.03	56.28	54.58
160	79.21	62.82	59.01	59.57
200	71.34	65.03	62.09	58.23
250	76.62	69.34	63.51	60.24
315	77.34	69.18	65.49	63.23
400	74.99	70.62	67.65	66.57
500	78.69	73.11	75.21	64.89
630	79.80	78.69	70.27	67.15
800	87.37	76.63	73.08	70.44
1000	82.51	78.89	75.70	72.64
1250	82.86	78.05	73.48	70.93
1600	81.36	74.69	71.26	68.50
2000	78.74	72.92	67.28	64.25
2500	78.18	70.82	64.52	60.65
3150	76.80	68.95	62.00	56.62
4000	75.59	68.33	61.30	57.05
5000	71.46	64.90	58.92	56.30
6300	72.04	74.64	68.07	64.47
8000	64.55	58.25	53.55	49.92
10000	59.69	53.30	48.98	46.00
12500	61.18	57.31	57.40	56.25

 Sungrow Power Supply Co., Ltd.	Page	Page 9 of 9
	Security classification	Confidential

16000	48.64	41.55	37.40	33.59
20000	47.25	44.65	44.56	42.57

This page has been intentionally left blank

Muller Acoustic Consulting Pty Ltd

PO Box 678, Kotara NSW 2289

ABN: 36 602 225 132

Ph: +61 2 4920 1833

www.mulleracoustic.com

