

Ph: 9545 5200 info@zenithlandscapes.com.au

CLIENT: DAVID GABO

21-4455 LO1

DATE: 02.06.2021

MAINTENANCE

- 1. These works shall be in addition to the construction contract.
- 2. The Contractor shall commence and fully implement the short term maintenance after Practical Completion has been confirmed by the
- 3 The Contractor shall carry out maintenance works for a minimum period of 26 weeks
- 4. Maintenance works shall include the following works:
- a. Mow lawns and trim edges each 10 days in summer and each 14 days in winter.
- b. Water all planting and lawn areas in order to ensure adequate soil moisture at all times.
- c. Remove any weed growth from all planting areas.
- d. Spray and control pests and diseases as required. e. Replace plants which fail with plants of similar size and quality as originally planted.

HARDWOOD STAKE VERTICALLY FOR TREE

SPECIES; 50mm WIDTH HESSIA TIE SECURED TO STAKES

x50x2000mm INSTALLED VERTICALLY FOR TREE TIE SECURED TO STAKES

FORM SHALLOW DISH TO

100mm DEPTH MULCH AS PER SPECIFICATION

LARGER THAN POT SIZE

PLANTING MIX AS PER

- RIP BASE TO 150mm

BASE OF PLANT

ON ALL SIDES

HOLE TO BE 150mm

f. Adjust ties to trees as necessary.

PLAN HESSIAN TIES nts

- g. Make good any erosion or soil subsidence which may occur.
- h. Maintain all mulched areas in a clean and tidy condition to the depth as originally specified.
- i. Make good any defects or faults arising from defective workmanship.
- Note: The Contractor is not to be held responsible for the theft or vandalism of any plants during the maintenance period
- 5. Advanced trees shall be individually inspected at least once a month in order to determine their health and vigour. Should the trees exhibit any signs of disease, pest infestation or poor growth then a qualified arborist shall be consulted within 14 days in order to determine the most appropriate course of action. Recommended treatment shall then be commenced within 7 days and shall continue until the problem is
- 6. When the maintenance period is completed the Contractor shall notify the Superintendent. The site shall then be inspected and if to the satisfaction of the Superintendent the responsibility will be handed over to the Client for on-going maintenance.

TREE PROTECTION GUIDELINES


1. WORK NEAR TREES


GENERAL: All existing trees which are to remain undisturbed are indicated on the drawings and shall be adequately protected for the duration of the contract as specified by the client. Any variation from this specification or enquires regarding the protection/health of the trees to be retained must be referred to Council's Landscape Officer or Tree Preservation Officer for approval and/or advice.


REQUIREMENTS: Trees shall not be removed or lopped unless specific instruction is given in writing by the Superintendent. All tree protection works shall be carried out before excavation, grading and site works commence.


- Protect trees specified or shown to be retained from damage by ground works. Take necessary precautions, including the following: 2.1.Method: Fence off the root zones of all existing trees to be retained in accordance with the Tree Protection Detail. Protective fencing is to remain in place until the completion of all building and hard landscape construction. Fencing is to be located as shown on the Existing Tree Plan. A layer of organic mulch 100mm thick shall be placed over the protected area where existing garden beds are not already present.
- Where building works are required within the root zone of existing trees these works must be supervised by a qualified Arborist. 2.2.Harmful materials: Do not store or otherwise place bulk materials and harmful materials under or near trees. Do not place spoil from excavations against tree trunks. Prevent wind-blown materials such as cement from harming trees and plants. Prevent concrete wash or other
- substances from entering the protection zone. 2.3. Damage: Prevent damage to tree bark. Do not attach stays, guys and the like to trees
- 2.4. Work under trees: Do not add or remove topsoil within the drip line of the trees. If it is necessary to excavate within the drip line, use hand methods such that root systems are preserved intact and undamaged. Open up excavations under tree canopies for as short a period as possible.
- 2.5.Roots: Do not cut tree roots exceeding 50mm diameter unless undertaken by a qualified Arborist.


GROUND LEVEL TO FINISH FLUSH MORTAR BED - MINIMUM 50mm DEPTH CONSOLIDATED SUB-GRADE STANDARD BRICK EDGE DETAIL nts







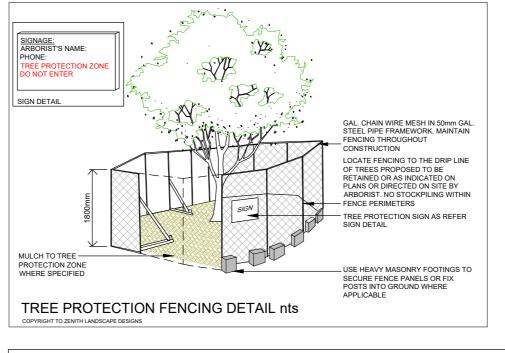

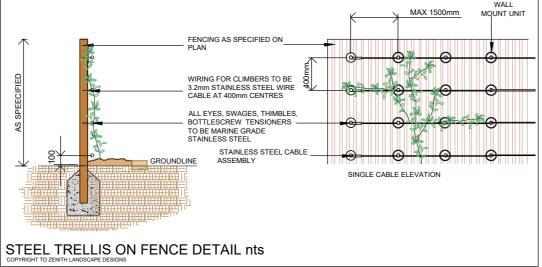

COPYRIGHT TO ZENITH LANDSCAPE DESIGNS









Dwarf Mat Rush





Tuckeroo

TYPICAL PLANTING DETAIL nts

Creeping Boobialla Yellow Guinea Vine

Dwarf Meterosideros Flax Lily

_,	Rev. no.	Description:	Date:	Rev. no.	Description:	Date:	ARBORIST:
	А	ADDITIONAL TREE PLANTING	03.07.2021				SURVEY: MICHAEL J BURG
1	В	S.34 SUBMISSION	25.03.2022				HYDRAULIC: WATERDESIGN
							ARCHITECT: ARCHISPECTRUM



417A MAROLIRRA ROAD

41/A MANOU	
MAROUBRA	

CLIENT: DAVID GABO

LANDSCAPE GUIDELINES

2. SITE PREPARATION

3. MASS PLANTED AREAS

kerbs, roads and existing plant material.

or equivalent at the manufacturers recommended rates.

around the plant to aid the penetration of water.

4.7 Labels shall be removed entirely from the plants.

1.1 The Contractor shall familiarise themselves with the site prior to tender.

1.2 The Contractor will be held responsible for any damage to utility services, pipes, building structures, paving surfaces, fencing, footways,

2.1 Prepared sub-grade is to be free of stones larger than 100mm diameter, cement, rubbish and any other foreign matter that could hinder

3.1 Once clear of weed growth, grass and debris, sub-grade should be cultivated to a minimum depth of 150mm incorporating 'Dynamic Lifter'

4.1 All plant material is to be hardened off, disease and insect free and true to species, type and variety. Plants are to be well grown but not

4.4 Plants should be planted at the same depth as the plants were in the containers and allow for a shallow saucer of soil to be formed

5.1 Ties should be firmly attached to the stakes, in a way to avoid damage to the stem while allowing a small degree of movement.

6.2 At the completion of turfing the whole area shall be thoroughly soaked and kept moist till the completion of landscape works.

8.1 Soil mix for mass planted areas shall be 3 parts site soil to 1 part 'Organic Garden Mix' as supplied by A.N.L. or equivalent.

4.2 All plants are to be removed from their containers prior to planting with as little disturbance to the root system as possible.

4.6 The Contractor shall be responsible for the failure of plants during construction, except for acts of vandalism.

7.1 Mulch for all general mass planted beds shall be 'Droughtmaster' mulch as supplied by A.N.L. or similar.

9.1 Feature pebbles shall be 20mm Nepean River Gravel or similar laid to a minimum 50mm depth

1.3 The site is to be left in a clean and tidy condition at the completion of works to the satisfaction of the Superintendent.

1.4 No work involving an extra shall be undertaken unless approval is first obtained from the Superintendent.

1.6 The Contractor shall continuously maintain all areas of the Contract during progress of the works specified.

1.5 No substitute of material shall be made unless approval is given by the Superintendent.

3.2 Weeds shall be controlled by a combination of chemical and hand removal techniques.

root bound and shall comply with Natspec - "Guide to Purchasing Landscape Trees".

4.3 Planting shall not be carried out in dry soil or extreme weather conditions.

4.5 All plant material should be watered thoroughly immediately after planting.

6.1 Turf areas should be cultivated before turfing by ripping or harrowing.

1. GENERAL

plant growth.

4. PLANTING

6. TURF AREAS

7. MULCH

SOIL MIXES

9. FEATURE PEBBLES

TITLE: LANDSCAPE PLAN						
STATUS:	LEC	scales: 1:100 @A2				
CHECKED	: MFG	SHEET 2 OF 2		REVISION:		
DRAWN: MAG		DRAWING No.		R		
DATE:	02.06.2021	21-4	4455 LO2	D		

DISCLAIMER Every effort is made to ensure the accuracy of these documents, however they should be thoroughly checked before being issued to any other persons or authority or used for construction purposes. Any inaccuracies, omissions or discrepancies should be referred back to Zenith Landscape Designs immediately.

These drawings maybe printed in whole. The drawings and parts thereof remain the intellectual property of Zenith Landscape Designs and may not be used in part or whole for any other purpose without the prior permission of Zenith Landscape

NOTES

1. Vehicular pavement, fencing and built structure details shall be to Architect's specification

- 2. All surface and sub-surface drainage requirements shall be to Engineers details.
- 3. Numeric dimensions should be taken in preference to scaling.
- 4. All dimensions should be checked on-site prior to commencing construction.
- 5. Contractors shall verify the location of all site features prior to commencing works.
- 6. Soil testing has not been undertaken as part of the preparation of this design;
- Contractors shall determine the need for soil testing prior to any planting works.
- 7. A search of underground services has not been undertaken as part of the preparation of this design; it is recommended that Contractors contact DIAL BEFORE
- YOU DIG ON 1100 prior to commencing any works. 8. This plan is to be read in conjunction with the architectural and engineering plans
- 9. It is recommended that an approved root barrier be installed to manufacturers recommendations to all tree planting in the vicinity of structures, walls and hard