



Waste Assessment

Narrabri 3A Solar Farm

September 2020

Document Set ID: 1852193
Version: 1, Version Date: 12/04/2021

ENGINEERING | STRATEGY | ANALYTICS | CONSTRUCTION

DOCUMENT CONTROL

| Report Title | | Waste Assessment – Narrabri 3A Solar Farm | | | |
|--------------|------------|---|-----------|-------------|----------|
| Rev | Date | Status | Author/s | Reviewed By | Approved |
| 1 | 11/09/2020 | Final | I Berwick | C Wilson | Approved |

A person or organisation choosing to use documents prepared by ITP Renewables accepts the following:

- (a) Conclusions and figures presented in draft documents are subject to change. ITP Renewables accepts no responsibility for use outside of the original report.
- (b) The document is only to be used for purposes explicitly agreed to by ITP Renewables.
- (c) All responsibility and risks associated with the use of this report lie with the person or organisation who chooses to use it.

Unless otherwise specified, all intellectual property in this report remains the exclusive property of ITP Renewables, and may be used only to evaluate and implement the findings and recommendations in this report. Intellectual property includes but is not limited to designs, drawings, layouts, charts, data, formulas, technical information, recommendations, and other written content.

ITP Renewables

Office: Level 1, 19-23 Moore St
Turner ACT 2612

Postal: PO Box 6127
O'Connor ACT 2602
Australia

Email: info@itpau.com.au
Phone: +61 (0) 2 6257 3511

itpau.com.au

Waste Assessment of the Narrabri 3A Solar Farm September 2020

ii



ABOUT ITP RENEWABLES

ITP Renewables (ITP) is a global leader in renewable energy engineering, strategy, construction, and energy sector analytics. Our technical and policy expertise spans the breadth of renewable energy, energy storage, energy efficiency and smart integration technologies. Our range of services cover the entire spectrum of the energy sector value chain, from technology assessment and market forecasting right through to project operations, maintenance and quality assurance.

We were established in 2003 and operate out of offices in Canberra (Head Office), Sydney, North Coast NSW, Adelaide and Auckland, New Zealand. We are part of the international ITP Energised Group, one of the world's largest, most experienced and respected specialist engineering consultancies focussing on renewable energy, energy efficiency, and carbon markets. The Group has undertaken over 2,000 contracts in energy projects encompassing over 150 countries since it was formed in 1981.

Our regular clients include governments, energy utilities, financial institutions, international development donor agencies, project developers and investors, the R&D community, and private firms.

ABBREVIATIONS

| | |
|------|--|
| AC | Alternating current |
| EPA | Environmental Protection Agency |
| Ha | hectare |
| ITP | ITP Renewables |
| LCA | Life cycle analysis |
| MW | Megawatt, unit of power (1 million Watts) |
| MWp | Megawatt-peak, unit of power at standard test conditions used to indicate PV system capacity |
| NSW | New South Wales |
| POEO | Protection of the Environment Operations (Act) |
| PV | Photovoltaic |
| WMP | Waste management plan |

TABLES

| | |
|---|----|
| Table 1. Site Information | 6 |
| Table 2 - Waste Materials and Disposal and Management Options | 12 |
| Table 3 - Waste Register Example..... | 17 |

FIGURES

| | |
|--|----|
| Figure 1 - Proposed 32 ha solar farm site and surrounding farm area (note the project will comprise 13.7 ha within this area)..... | 7 |
| Figure 2 - Waste Management Hierarchy..... | 15 |

TABLE OF CONTENTS

| | | |
|----------|--|-----------|
| 1 | INTRODUCTION..... | 6 |
| 2 | PROJECT DESCRIPTION..... | 8 |
| 3 | LEGISLATIVE CONTEXT..... | 9 |
| 3.1 | Protection of the Environment Operations (POEO) Act 1997 | 9 |
| 3.2 | Protection of the Environment Operations (Waste) Regulation 2014 | 9 |
| 3.3 | Waste Avoidance and Resource Recovery Act 2001 | 9 |
| 3.4 | EPA Waste Classification Guidelines..... | 10 |
| 3.5 | Narromine Local Environmental Plan 2011 | 10 |
| 3.6 | State Environmental Planning Policy (Infrastructure) 2007 | 11 |
| 4 | PROJECT WASTE | 12 |
| 5 | WASTE DISPOSAL FACILITIES..... | 14 |
| 6 | WASTE MANAGEMENT AND MINIMISATION..... | 15 |
| 6.1 | Reduce..... | 15 |
| 6.2 | Resource Recovery (Reuse, Recycle, Recover) | 16 |
| 6.3 | Dispose..... | 16 |
| 6.4 | Waste Management Plan | 17 |
| 7 | LIFE CYCLE ANALYSIS | 18 |
| 8 | SUMMARY..... | 19 |
| 9 | REFERENCES..... | 20 |

1 INTRODUCTION

The proposed Narrabri 3A Solar Farm (referred to as the Project) is located at 11498 Newell Highway to the southwest of the town of Narrabri, within the Narrabri Shire Council area, NSW (Figure 1). ITP Development (ITP) is proposing to construct a 6.4 MW DC solar facility within the 62 ha site.

Table 1. Site Information

| Parameter | Description |
|-------------------------|--|
| Solar farm name | Narrabri 3A Solar Farm |
| Site reference | Narrabri 3A |
| Lot/DP(s) | Lot 102 DP579423 |
| Street address | 11498 Newell Highway, Narrabri, NSW 2390 |
| Council | Narrabri Shire Council |
| AC capacity | 5 MW |
| DC capacity | 6.4 MW |
| Site area | Approx. 62 ha |
| Project area | Approx. 11.32 ha |
| Current land use | Grazing, recently destocked |

This report provides a waste assessment to support the Development Application for the project. It provides a:

- Desktop review of resource use, waste generation type and quantity expected and Life Cycle Analysis (LCA) during construction and operation.
- Desktop review of waste generation against the Protection of the Environment Operations (POEO) Act 1997, POEO (Waste) Regulation 2014 and Waste Avoidance and Resource Recovery Act 2001.
- Desktop review of waste disposal options (local approved waste disposal facility), during construction and operation.
- Desktop impact assessment against NSW policies and referenced industry standards for solar photovoltaic systems.
- Desktop management assessment with mitigation measure recommendations for construction and operation.



Figure 1 - Proposed 62 ha solar farm site and surrounding farm area (note the project will comprise 11.32 ha within this area)

2 PROJECT DESCRIPTION

ITP is proposing to construct a solar farm with a DC capacity of 6.4 MWp and AC output of 5 MW on an approximately 11.32 ha site that is currently used for grazing.

There are to be approximately 12,100 solar modules installed in 140 rows (each row being approximately 103 m long and 2 m wide) running east to west. Each row of solar photovoltaic (PV) modules will rotate to track the sun across the sky from east to west each day. There is approximately 6.25 m spacing between each row. The maximum hub height of each module is 2.75 m.

The solar farm will also consist of an inverter station. The inverter station incorporates the high/medium voltage switchgear and transformers and two 3 MW inverters. The inverter station is ground mounted and incorporated on a 12.19 m skid.

The mounting system is constructed on piles that are driven into the ground. During construction there is expected to be 50 personnel on site working from 7 am – 4 pm Monday to Friday. The construction is expected to take approximately 3 months. Once operational the site will be unmanned. Maintenance is expected to be carried out quarterly by a crew of 2 – 3 people.

Solar panels and related infrastructure will be decommissioned and removed upon cessation of operations. This is likely to occur within two years of the end of the project. The site will be returned to the pre- development land use of agriculture.

3 LEGISLATIVE CONTEXT

Waste management is an integral part of the construction, operation and decommissioning phases of a project. There are several acts and guidelines that relate to the assessment of waste and ongoing management during project operation.

3.1 Protection of the Environment Operations (POEO) Act 1997

The POEO Act aims to protect and restore and enhance the quality of the environment in NSW, while still having regard to ecologically sustainable development.

With relevance to waste management, the Act aims to reduce risks to human health and to prevent degradation of the environment by promoting pollution prevention and the reduction in the use of materials and the re-use, recovery or recycling of materials. The Act contains the requirements for the management of waste and also the offences that relate to pollution. Section 148 requires that any pollution incidents or those that threaten material harm to the environment must be notified to the relevant authority (e.g. NSW Environment Protection Authority).

Section 143 of the POEO Act requires waste to be transported to a place that can lawfully accept it. It is an offence under Section 115 to negligently dispose of waste that may cause harm to the environment, unlawfully transport and deposit waste (e.g., if waste is transported to a place that cannot be used as a waste facility for the waste).

The waste classification definitions are also provided in the Act, and more information is provided in the EPA Waste Classification Guidelines (EPA, 2014) (Section 3.4).

Wastes that may be generated as part of construction and demolition activities, including 'building and demolition waste' as defined in the Act and includes unsegregated material that results from the demolition, erection, construction, refurbishment or alteration of buildings. Materials such as bricks, concrete, paper, plastics, glass and metal, and timber are included in this category.

3.2 Protection of the Environment Operations (Waste) Regulation 2014

The POEO Waste Regulation aims to protect human health and the environment and provides the framework for the waste industry in NSW, including the details of the licencing, reforms and the waste levy system.

The POEO Waste Regulation prescribes the wastes (hazardous waste, restricted solid waste etc) which are automatically deemed to be land pollution and the person is guilty of an offence if the waste is illegally dumped.

3.3 Waste Avoidance and Resource Recovery Act 2001

The Waste Avoidance and Resource Recovery Act 2001 aims to encourage the efficient use of resources and to reduce environmental harm. Waste management for the project must be

conducted in accordance with the Act. The projects' waste management program needs to consider the hierarchy outlined in the Act:

- i. Avoidance of unnecessary resource consumption;
- ii. Resource recovery (including reuse, reprocessing, recycling and energy recovery); and
- iii. Disposal.

ITP has an obligation to minimise material harm to the environment as a result of the construction, operation and decommissioning of the project. Details of the project waste management and minimisation can be found in Section 6.

3.4 EPA Waste Classification Guidelines

The EPA Waste Classification Guidelines (EPA, 2014) comprise four parts:

1. Part 1: Classifying waste;
2. Part 2: Immobilisation of waste;
3. Part 3: Waste containing radioactive material; and
4. Part 4: Acid sulfate soils.

Part 1 of the guidelines provide details on each of the classes of waste that are defined in clause 49 of Schedule 1 of the (POEO Act):

- Special waste;
- Liquid waste;
- Hazardous waste;
- Restricted solid waste;
- General solid waste (putrescible); and
- General solid waste (non-putrescible).

Classification of the projects' waste is discussed in more detail in Section 4.

3.5 Narrabri Local Environmental Plan 2012

The Narrabri Local Environmental Plan 2012 aims to make local environmental planning provisions for land in Narrabri in accordance with the relevant standard environmental planning instrument. The Plan does not provide specific management requirements for waste as it relates mostly to urban planning and conflicting land use management. The Plan provides additional provisions for earthworks to ensure that earthworks for which development consent is required will not have a detrimental impact on environmental functions and processes, neighbouring uses, cultural or heritage items or features of the surrounding land.

The Plan provides the prohibited and permitted types of development within the local area. Some types of development are also regulated by specific state environmental planning policies.

3.6 State Environmental Planning Policy (Infrastructure) 2007

Division 4 of the State Environmental Planning Policy (Infrastructure) 2007 relates to 'Electricity generating works or solar energy systems'. The policy relates to the approval process for solar energy systems, and there are no specific details required for waste management. The policy generally states that for infrastructure projects waste materials must be sorted and must be disposed of at a waste or resource management facility.

4 PROJECT WASTE

Waste will mostly be generated during the construction phase of the project, and at the decommissioning phase (after 35 years of operation). The wastes are likely to include construction materials waste (e.g., wood pallets, cardboard), green waste and domestic waste. There will be no putrescible waste as a result of the project. The waste types generated from the project are likely to be classified as general solid waste (non- putrescible) class under the POEO Act.

The operating phase will not generate waste streams unless there is maintenance, repairs or replacement of equipment required.

Table 1 provides the details of the waste generation types and quantities expected during construction, operation and decommissioning. It also provides the options for disposal and management. Section 6 provides further details on the disposal and management options for the waste material. These quantities are estimates based on other solar projects and the actual waste from the project may vary depending on the packaging options from the PV supplier.

Table 2 - Waste Materials and Disposal and Management Options

| Activity | Waste Material | Disposal and Management |
|---------------------|---|---|
| Construction | <ul style="list-style-type: none"> Packaging waste such as cardboard, wood pallets, plastic wrap, scrap metal, general waste including approximately 810 wooden pallets and cardboard packing boxes. | Laydown area to contain a skip bin to allow segregation of solid wastes into the following categories, for appropriate recycling/disposal as indicated: <ul style="list-style-type: none"> Steel and scrap metal (recycled) Timber/cardboard (recycled) General wastes and plastic (landfill). |
| | <ul style="list-style-type: none"> Concrete waste (minimal quantities) | |
| | <ul style="list-style-type: none"> Electric cable waste and cable reels Plastic pipe offcuts/scrap | |
| | <ul style="list-style-type: none"> Empty drums and containers (minimal quantities) | Collected and disposed at offsite waste facilities. |
| | <ul style="list-style-type: none"> Minimal used lubricating oil and filters Unused or spent chemicals | Fluids recycled where possible. Where not possible, disposed of at offsite waste facilities. |
| Operation | Minimal volumes of domestic wastes such as office consumables, paper, plastics, glass. | Taken offsite to appropriate recycling/disposal. |

| | | |
|------------------------|--|--|
| | Waste as a result of maintenance or replacement of equipment. | |
| Decommissioning | <ul style="list-style-type: none"> • PV panels (12,100 panels) and supporting poles and mounts • Glass for panels (250 tonnes) • Silicon for wafers (40 tonnes) • Inverters / transformers / batteries • PV boxes, skids, scrap metal (410 tonnes) • Electrical cables | Taken offsite to appropriate recycling/disposal for PV panels. |
| | <ul style="list-style-type: none"> • Fencing • Storage containers (two 20-foot containers) | Removed from site and reused. |

5 WASTE DISPOSAL FACILITIES

The closest waste management facility to the project site is on Yarrie Lake Road in Narrabri, approximately 10 minutes' drive (6.4 km) from the project site (see Figure 1). It is open 8 am to 5 pm 7 days a week. The Narrabri Community Recycling Centre is also located at the waste management facility. The Recycling Centre offers recycling for paper and cardboard as well as paint, batteries, motor oil and fluorescent lights. Scrap metal can be recycled at French's Scrap Metal, located on Goobar Street in Narrabri.

6 WASTE MANAGEMENT AND MINIMISATION

Waste management and minimisation for the project should be in accordance with the POEO Act.

The waste management hierarchy is an internationally and nationally accepted guide for waste management practices with the objective of achieving optimal waste management outcomes. This hierarchy promotes waste avoidance and reduction and encourages resource recovery and efficiency and specifies the preferred order of practices, ranked from most to least preferred. This hierarchy is shown in Figure 2 and described below:

- AVOID or REDUCE unnecessary resource consumption and waste generation.
- RE-USE waste resources without further manufacturing.
- RECYCLE waste resources to make the same or different products.
- RECOVER waste resources, including the recovery of energy.
- TREAT waste before disposal, including reducing the hazardous nature of waste.
- DISPOSE of waste only if no viable alternative.

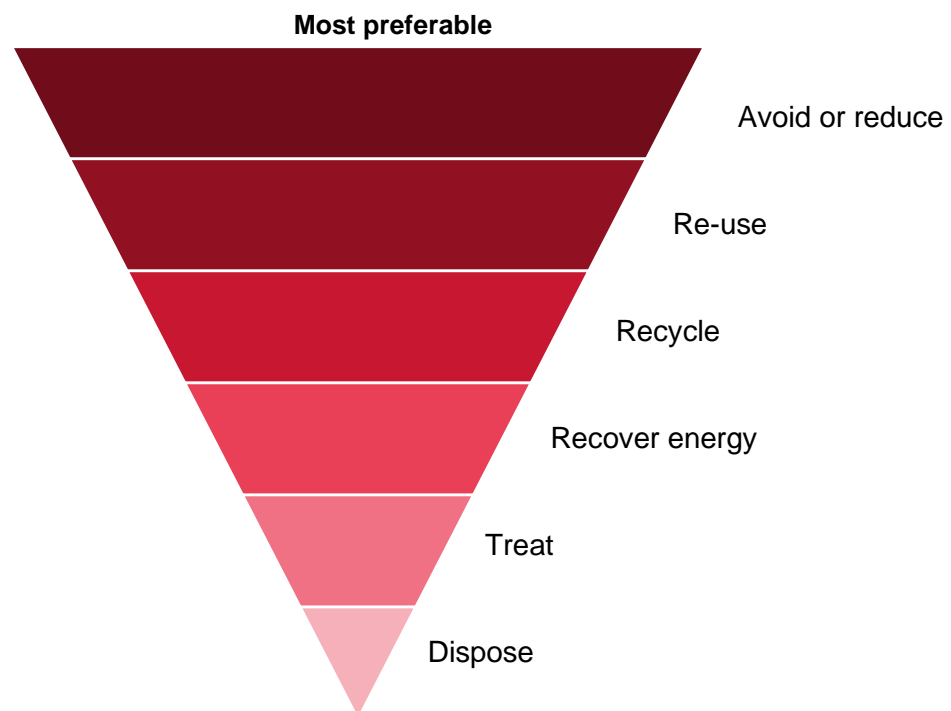


Figure 2 - Waste Management Hierarchy

6.1 Reduce

The project should aim to reduce waste where possible when purchasing goods for construction and during the operation phases. Inductions and staff education should include waste management and recycling procedures, particularly for the construction phase.

6.2 Resource Recovery (Reuse, Recycle, Recover)

If vegetation clearance is required during construction activities, the cleared vegetation should be re-used for mulch and soil erosion control where possible.

At the end of the 35 year life of the solar products the site will be decommissioned. Decommissioning should consider recycling where possible. Recycling of solar PV modules is becoming more common in Australia (Energy Matters, 2012 and Renew Economy, 2016).

There are companies who specialise in providing a drop off location or collection of modules. The decommissioned PV panels are then reclaimed and recycled into other products (Reclaim PV Recycling, 2018). The general steps in the recycling process done by specialist companies are:

- Remove aluminium frames, junction boxes and cables;
- Remove glue, recover glass, aluminium, solar cells and contacts;
- Separate out glass (crushed into small pieces) and other products for re-use in other new products; and
- Remove other materials for use in new models or other products.

6.3 Dispose

If no viable alternative exists for the waste product it will require disposal to a suitable waste facility. The waste should be separated during construction into different bins or skips for different waste streams (separate reusable and recyclable from non-reusable and non-recyclable waste).

The waste should be classified on site according to the EPA Waste Classification Guidelines and then stored and handled on site in accordance with its classification. All waste should be removed as soon as practicable and then sent to an appropriately licenced facility for disposal.

Waste should be classified and logged in a register and then tracked to ensure it reaches its destination offsite. The tracking process should include classification, a description of the waste, volume of the waste, date the waste is transported from site and the destination. An example of a waste tracking register is in Table 3.

If transported by a third party, the details of the company transporting the waste should also be recorded. The EPA have an online waste tracking system for hazardous waste. This should be used if disposal of hazardous waste is required (EPA, 2018).

Table 3 - Waste Register Example

| Date | Description of Waste | Classification | Volume | Tracking | Transport Details | Destination |
|------------|----------------------|---------------------------------------|---------|----------|---------------------------|-------------------------------------|
| 1 Dec 2018 | Cardboard | General solid waste (non-putrescible) | 1 tonne | | Example transport company | Recycled at waste disposal location |
| | | | | | | |
| | | | | | | |

6.4 Waste Management Plan

Prior to operation of the project, a Waste Management Plan (WMP) should be developed. This will build on what is proposed in this report and provide detailed procedures regarding management, minimisation, recycling, record keeping and tracking and disposal of waste.

The WMP should contain:

- Strategies to reduce waste during all project phases;
- Recycling, re-use and recovery strategies and opportunities;
- Classification of all waste streams;
- Tracking register and details;
- Recycling management onsite;
- Responsibilities for recycling, re-use and disposal; and
- Reporting and notification procedures if a waste incident occurs where there is a threat to the material harm of the environment.

7 LIFE CYCLE ANALYSIS

A Life Cycle Analysis (LCA), also called a Life Cycle Assessment, is an approach that considers all aspects of a project's resource use. It is an environmental accounting and management approach that considers all the aspects of resource use and environmental releases associated with a system from cradle to grave. The LCA assessment considers raw materials, material processing, manufacturing, operational/use phase, decommissioning and provides an estimate of energy and emissions based on the total life of the project (Wu et al, 2017).

Construction materials and energy used for solar panels includes purification of silicon, production of PV frames and cabling. The construction of each of these uses energy and creates waste products. Energy consumption and use of resources is greatest in the production of the PV panels and silicon (Alsema et al, 2006). The Department of Industry, Resources and Energy NSW (2016) states that during plant operation, PV modules emit no pollution, produce no greenhouse gases and use no finite fossil-fuel resources.

Müller, et al (2005) reviewed the environmental impacts of recycling processes for crystalline silicon modules. The findings indicated that energy consumption during the recycling process of PV panels can be substantial. However, overall the recycling solar components is worthwhile. This is mostly due to the potential reuse of recovered component in future projects.

For solar projects the LCA considers the total energy input and annual energy output of the project. This is termed the 'Energy Payback Time'. The energy payback time varies depending on the project's design and geographic location. For solar projects the general timeframe for energy payback is achieved in less than four years for projects with a 25-30 year operating period (Bhandari et al, 2015, Department of Industry, Resources and Energy NSW, 2016). Alsema et al (2006) found that PV panels had an energy payback of 1.5 – 2 years in southern Europe and 2.7 – 3.5 years for middle Europe. Due to the greater solar resource in Australia the energy payback for this project is expected to be at the lower end of these ranges.

The Fraunhofer Institute for Solar Energy Systems (2015) considered the ratio of energy produced by a solar PV compared to the energy used to create the module. It was determined that the PV panels would provide more than 10 x the amount of energy used to make the system.

8 SUMMARY

The project will generate the most waste during the construction and decommissioning phases. To comply with the NSW legislation and policies, the waste should be recycled or re-used where possible and only disposed of if no alternative is available.

Cardboard, scrap metal and wood from the construction phase can be recycled. Plastics and general waste will require disposal at the local waste facilities. Decommissioning of the project is likely to occur in 35 years' time. Technology for recycling of PV panels is likely to be more advanced and readily available. Options for recycling of PV panels should be reviewed as the project progresses.

9 REFERENCES

- Alsema E.A, de Wild-Scholten M J and Fthenakis V.M (2006) *Environmental impacts of PV electricity generation – A critical comparison of energy supply options*. Presented at the 21st European Photovoltaic Solar Energy Conference, Dresden, Germany, 4-8 September 2006.
- Bhandari K P, Collier J, Ellingson R, Apul D (2015) *Energy payback time (EPBT) and energy return on energy invested (EROI) of solar photovoltaic systems: A systematic review and meta-analysis*, Volume 47, July 2015, Pages 133-141.
- Department of Industry, Resources and Energy NSW (2016) *Fact Sheet: Solar farms in NSW*.
- Energy Matters (2012) *Solar panel recycling will be a multi-billion dollar industry*. Available online <https://www.energymatters.com.au/renewable-news/em3001/>
- EPA (2014) *Waste Classification Guidelines. Part 1: Classifying waste*. NSW EPA, Sydney.
- EPA (accessed 2018) *Online Waste Tracking*. Available online <https://www.epa.nsw.gov.au/your-environment/waste/tracking-transporting-hazardous-waste/online-waste-tracking>.
- Fraunhofer Institute for Solar Energy Systems (ISE). (2015). *Photovoltaics Report*.
- Narrabri Local Environmental Plan 2012. Accessed 11 September 2020 <https://www.legislation.nsw.gov.au/view/html/inforce/current/epi-2012-0636>
- Müller, A., K. Wambach and E.A. Alsema, (2005) *Life Cycle Analysis of Solar Module Recycling Process, Proceedings of MRS Fall Meeting, Boston, MS, Nov-Dec 2005*
- Reclaim PV Recycling* (accessed 2019) <http://reclaimpv.com/>
- Renew Economy (2016) *Solar panel recycler leads Australia in emerging industry*. Available online <https://reneweconomy.com.au/solar-panel-recycler-leads-australia-in-emerging-industry-99038/>
- Schleisner L. (2000) *Life cycle assessment of a wind farm and related externalities*. Renewable Energy 20 279-288.
- Wu P, Ma X, Ji J, Ma Y (2017) *Review on Life Cycle Assessment of Energy Payback of Solar Photovoltaic Systems and a Case Study*, Energy Procedia Volume 105, May 2017, Pages 68-74.



ITP Renewables

Office: Level 1, 19-23 Moore St
Turner ACT 2612

Postal: PO Box 6127
O'Connor ACT 2602
Australia

Email: info@itpau.com.au
Phone: +61 (0) 2 6257 3511

itpau.com.au