



# **Lot 5 Sealark Road, Callala Bay**

## **Flood Study Report**

---

Project No. 1861  
Date: 15 July 2024

---

Prepared for: The Hare Bay Consortia

---

**Footprint (NSW) Pty Ltd**  
**210 Jamberoo Road**  
**Jamberoo, NSW 2533, Australia**  
**ACN 131 571 929 ABN 44 131 571 929**  
**Mobile 0430 421 661**  
**Email: ashley@footprinteng.com.au**

Document and Distribution Status						
Author(s)			Reviewer(s)		Signatures	
Revision No.	Status	Release Date	Document Distribution			
			PRM Architects	Shoalhaven City Council	Madison Marcus	Patrick Mahedy
1	DRAFT	21/10/2019	PDF			
2	DRAFT	08/11/2019	PDF			
3	FINAL	28/10/2020	PDF			
4	AMENDED	22/11/2021	PDF	PDF		
5	AMENDED	12/01/2024	PDF			
6	AMENDED	15/07/2024			PDF	PDF

Distribution Types: F = Fax, H = Hard Copy, P = PDF, E = Other Electronic Document. Digits indicate number of copies.

#### Commercial in Confidence

All intellectual property rights, including copyright, in designs developed and documents created by Footprint (NSW) Pty Ltd remain the property of that company. Any use made of any such design or document without the prior written approval of Footprint (NSW) Pty Ltd will constitute an infringement of the rights of that company which reserves all legal rights and remedies in respect of any such infringement.

The information, including the intellectual property, contained in this document is confidential and proprietary to Footprint (NSW) Pty Ltd. It may only be used by the person to whom it is provided for the stated purpose for which it is provided, and must not be imparted to any third person without the prior written approval of Footprint (NSW) Pty Ltd. Footprint (NSW) Pty Ltd reserves all legal rights and remedies in relation to any infringement of its rights in respect of its confidential information.

© 2024 Footprint (NSW) Pty Ltd

#### Disclaimer

This report is prepared by Footprint (NSW) Pty Ltd for its clients' purposes only. The contents of this report are provided expressly for the named client for its own use. No responsibility is accepted for the use of or reliance upon this report in whole or in part by any third party.

This report is prepared with information supplied by the client and possibly other stakeholders. While care is taken to ensure the veracity of information sources, no responsibility is accepted for information that is withheld, incorrect or that is inaccurate. This report has been compiled at the level of detail specified in the report and no responsibility is accepted for interpretations made at more detailed levels than so indicated.

# TABLE OF CONTENTS

<b>1.0</b>	<b>INTRODUCTION .....</b>	<b>1</b>
1.1.	Scope of Works .....	1
<b>2.0</b>	<b>SUBJECT SITE .....</b>	<b>2</b>
2.1.	Site Description.....	2
2.2.	Development Proposal.....	3
<b>3.0</b>	<b>HYDROLOGICAL MODELLING.....</b>	<b>4</b>
3.1.	Purpose.....	4
3.2.	Model Adoption .....	4
3.3.	Catchment Areas.....	4
3.3.1.	Manning's Roughness .....	6
3.3.2.	Model Configuration .....	6
3.4.	Modelling Input Parameters .....	9
3.5.	Flow Routing.....	10
3.6.	Rainfall Data .....	10
3.6.1.	Design Rainfall.....	10
3.6.2.	Pre-Burst Rainfall .....	10
3.6.3.	Probable Maximum Precipitation.....	10
3.7.	Results .....	11
<b>4.0</b>	<b>HYDRAULIC MODELLING .....</b>	<b>13</b>
4.1.	Two-Dimensional Domain.....	13
4.2.	Manning's Roughness .....	15
4.3.	Boundary Conditions.....	15
4.3.1.	Direct Rainfall .....	15
4.3.2.	Upstream Boundary Conditions.....	16
4.3.3.	Downstream Boundary Conditions .....	18
4.4.	Hydraulic Model Verification .....	19
4.4.1.	Comparison between models.....	19
4.4.2.	Comparison to critical duration.....	20
4.4.3.	Comparison to Regional Flood Frequency Estimation Model.....	21

4.5.	Design Event Modelling .....	23
4.6.	Impact of Climate Change .....	24
4.6.1.	Sea Level Rise.....	25
4.6.2.	Increased Rainfall Intensity .....	26
4.7.	Pre-Development Results .....	27
4.8.	Pre-Development Results Discussion.....	28
4.9.	Comparison to ARR1987 IDF Data.....	28
4.10.	Post Development Modelling .....	29
4.10.1.	Stage 1 - Channel Modification .....	29
4.10.2.	Stage 2 – Residential Development.....	29
4.11.	Post Development Results .....	30
4.12.	Post Development Results Discussion.....	32
<b>5.0</b>	<b>CONCLUSION .....</b>	<b>33</b>

# APPENDICES

## **APPENDIX A**

Detailed Site Survey

## **APPENDIX B**

ARR Data Hub Output

## **APPENDIX C**

ARR 2019 IDF Data

## **APPENDIX D**

Pre-Burst Rainfall Depths

## **APPENDIX E**

RFFE Method Output

## **APPENDIX F**

Pre-Development Modelling Results

## **APPENDIX G**

Preliminary Civil Design Drawings

## **APPENDIX H**

Post Development Modelling Results

# 1.0 INTRODUCTION

Footprint (NSW) Pt. Ltd. (*Footprint*) has been engaged by 'The Hare Bay Consortia' as owners of Lot 5 Sealark Road, Callala Bay to undertake a flood study to be lodged in support of a planning proposal to re-zone part of the land to enable residential development.

The purpose of the flood study is to address Ministerial Direction 4.3 (flood prone land) issued under Section 9.1 of the EP&A Act and to define flood levels and velocities, flood hazard and hydraulic categories over the land in accordance with the NSW Floodplain Development Manual (2005).

## 1.1. Scope of Works

The scope of works for the project includes:

1. Review available background information including LiDAR data, topographic maps, existing planning proposal, existing site survey.
2. Undertake a detailed inspection of the site, adjacent watercourses and associated catchments.
3. Undertake hydrologic modelling to determine critical storm durations for the 1% AEP and PMF events only.
4. Undertake two-dimensional hydraulic modelling (using HEC-RAS) to determine the depth and extent of flooding over the proposal area for each of the above rainfall events using a flood envelope approach to account for both riverine and coastal dominated flooding in accordance with NSW OEH guidelines.
5. Consider the impacts associated with climate change on flood behaviour including increased rainfall and sea level rise.
6. Undertake a comparison between ARR1987 and ARR2019 IDF data.
7. Undertake post-development hydraulic modelling to determine the impact of flooding on the proposed development or the impact of the proposed development on flood behaviour.
8. Preparation of a detailed flood study report defining any assumptions, outlining the modelling methodology and presenting the findings of the investigations.

## 2.0 SUBJECT SITE


### 2.1. Site Description

The subject site is described as Lot 5 DP 1225356, Sealark Road, Callala Bay and comprises an area of approximately 6.46 hectares.

The subject site adjoins Sealark Road on its' western boundary, the Jervis Bay National Park on its' northern boundary, Wowly Creek (Gully) on its' eastern boundary and existing residential development in Monarch Place to its southern boundary as shown in Figure 1.



Figure 1: Site Locality Plan (source: Six Maps)

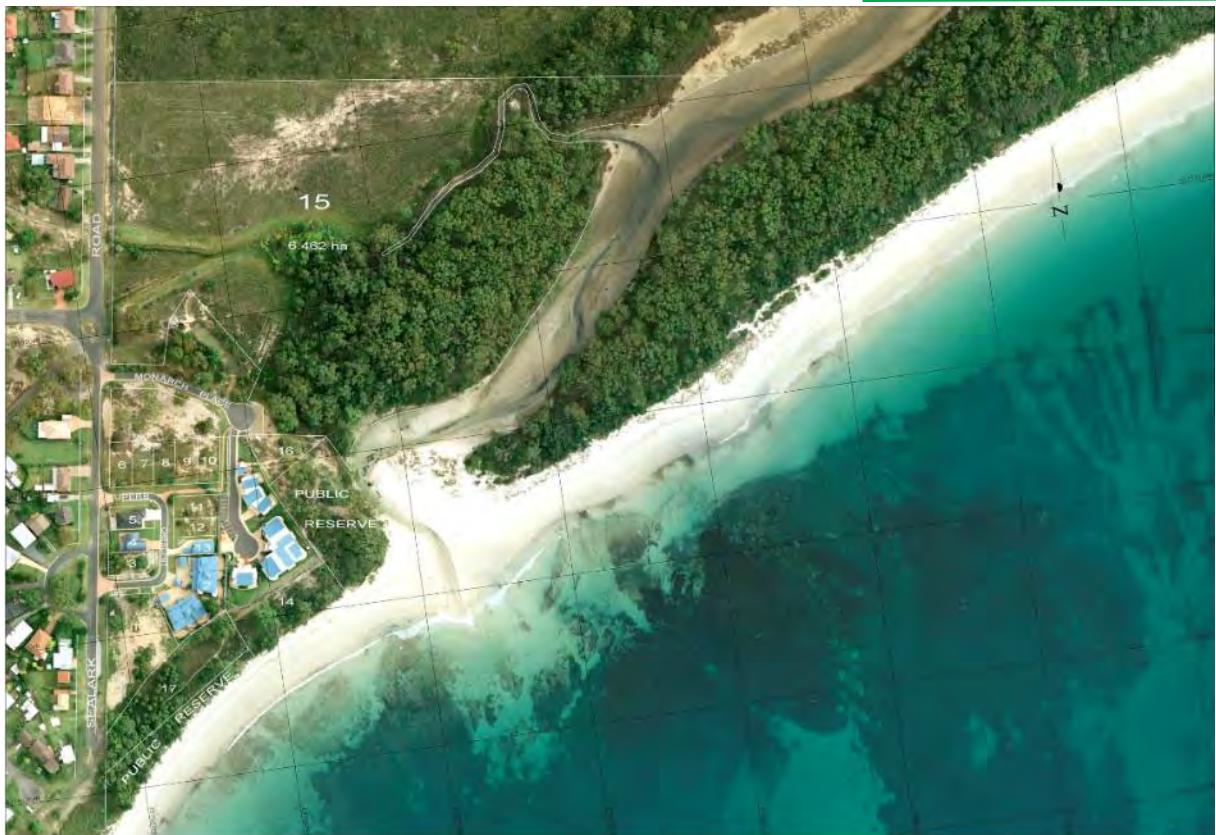

*Figure 2: Site Locality Plan with Aerial*

The site generally slopes in a north-westly to south-easterly direction towards Wowly Creek. Elevations over the site range from approximately RL6.0m AHD at the north-western corner to approximately RL2.0m AHD along the eastern boundary adjacent to Wowly Creek.

The site is traversed by an open drain which discharges from two stormwater outlets under Sealark Road. This open drain discharges to Wowly Creek near the north-eastern corner of the site.

A copy of the detailed site survey is included in Appendix A.

## 2.2. Development Proposal

The current proposal consists of rezoning the north-western portion of the land for residential development due to existing site constraints elsewhere on the site including the presence of an Endangered Ecological Community (EEC) and flooding.

Concept plans for the proposed development are included in Appendix G.

## 3.0 HYDROLOGICAL MODELLING

### 3.1. Purpose

Hydrological modelling for the broader Wowly Creek catchment was conducted to inform the HEC-RAS two-dimensional direct rainfall hydraulic model. The primary purposes of the hydrological model were to:

- i. determine the critical storm duration for the subject site, and
- ii. determine the median storm within the ensemble of modelled storms

such that the hydraulic modelling could be limited to only one storm for each storm event (i.e. 1% AEP, PMF).

Hydrological modelling was also undertaken separately for the existing residential catchment west of the subject site to determine the critical duration and quantum of flows arriving at the subject site via both the pipe network and as overland flows across Sealark Road.

### 3.2. Model Adoption

Hydrological modelling was conducted in DRAINS using a RAFTS storage routing model for the broader Wowly Creek model and ILSAX hydrology for the existing residential catchment.

Storage routing models can model larger catchments using a lumped approach by assuming heterogeneity within the sub-catchment to account for the storage and retardence of flows that occurs within the sub-catchment. Such models account for slope and roughness and use a loss model to produce a hydrograph at the sub-catchment outlet.

The RAFTS hydrological model was chosen because it is widely used and accepted across Australia within the industry and has been shown to be insensitive to initial conditions.

### 3.3. Catchment Areas

The total catchment area contributing to Wowly Creek at the outlet to Jervis Bay is estimated to be approximately 559 hectares and was determined using 1m Digital Elevation Models (DEM's) covering the catchment which were obtained through the Australian Foundation Spatial Data web portal.

The Wowly Creek catchment was dissected into 7 sub-catchments to represent changes in catchment topography and land-use and ranged in size from approximately 23.5 hectares to 168 hectares as shown in Figure 3.

The existing residential catchment to the west of the subject site, represented by catchments 6 and 7 in the Wowly Creek model was further dissected into 45 catchments in the detailed model for this area, typically based on existing drainage structures as shown in Figure 4.

Parameters adopted for modelling of each Wowly Creek sub-catchment are included in Table 1.

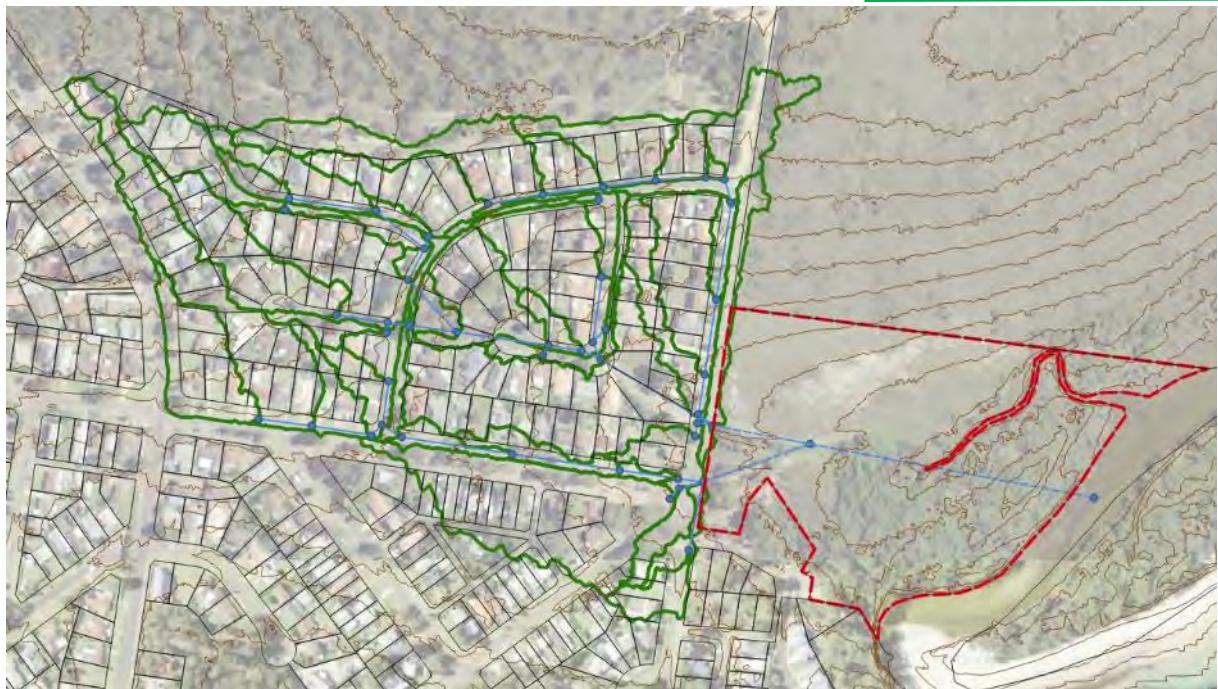


Figure 3: Catchment Plan

Table 1: Summary of Catchment Areas

Catchment	Area (ha)	Impervious Percentage	Ave. Slope Gradient (%)	Manning's 'n' <sup>1</sup>
1	125.5	0	3.1	0.100
2	158.1	0	2.7	0.100
3	167.8	0	2.7	0.100
4	67.8	0	3.0	0.100
5	23.5	5	3.6	0.100
6	9.7	40	2.3	0.025
7	6.6	40	2.0	0.025
TOTAL	559			

<sup>1</sup> Refer to Section 3.3.1



*Figure 4: Catchment Plan – Existing Residential Catchment (Catchments in Green, Pipes as Solid Blue Lines, Drainage Nodes as Blue Dots, Open Channels and Blue Dashed Lines)*

### 3.3.1. Manning's Roughness

The adopted Manning's n value specified in Table 1 are consistent with those noted in Tables 6.2.1 and 6.2.2 of Australian Rainfall and Runoff (ARR) 2019.

Table 6.2.1 of ARR2019 specifies a range of Manning's n values of 0.050 to 0.160 for heavily timbered floodplains, with a normal value of 0.10. The adopted value of 0.100 is considered representative of the typically heavily forested areas with the Jervis Bay National Park which covers most of the catchment.

Table 6.2.2 specifies a range of Manning's n values of 0.020 to 0.040 for estuaries and oceans and the adopted value of 0.025 is within this range and is considered representative of the typically sandy bed throughout the estuary.

Further, it is noted that the Currambene Creek and Moona Moona Creek Flood Study (2006) adopted values of 0.030 and 0.120 for the lower part of Currambene and Moona Moona Creeks and the values adopted for this study are consistent with the values the previous study in the adjacent catchment.

For the existing residential catchment a single Manning's n value of 0.025 was adopted.

### 3.3.2. Model Configuration

The configuration of the DRAINS hydrological model for Wowly Creek is shown in Figure 5, whilst the model for the existing residential catchment id shown in Figure 6.

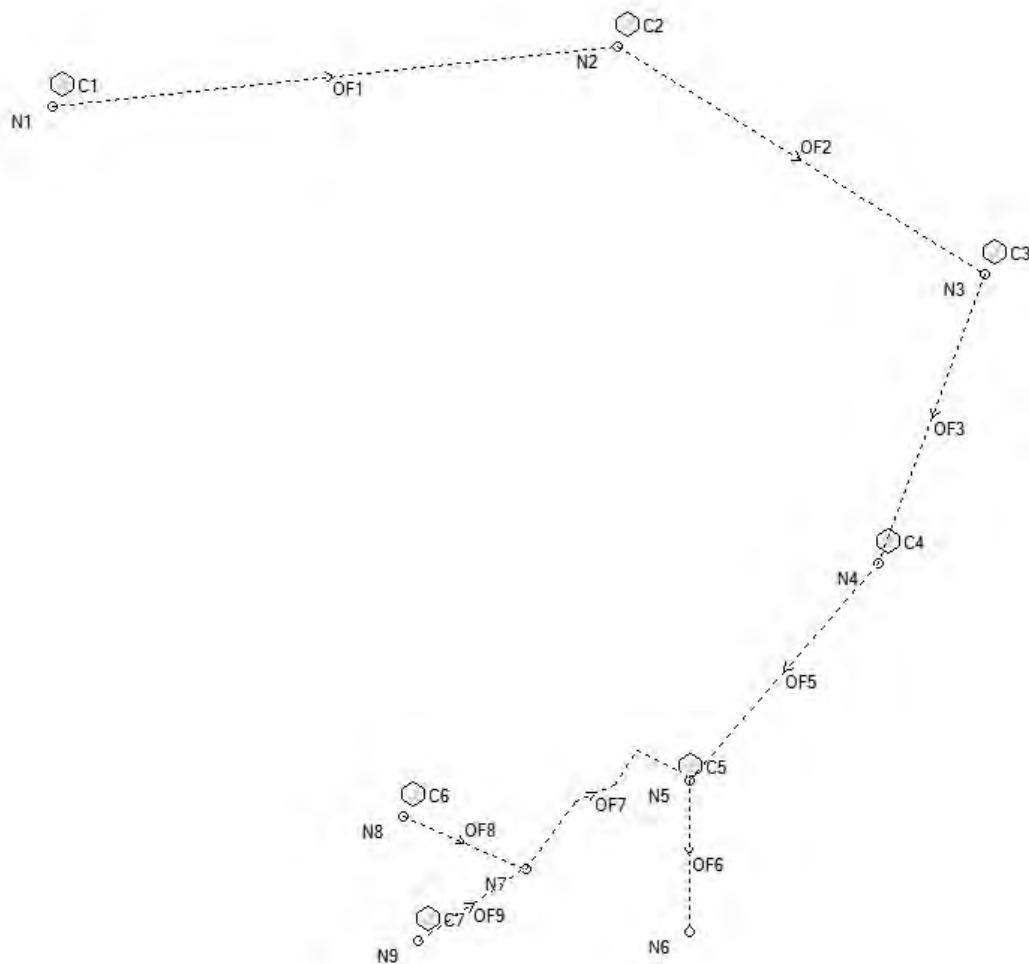


Figure 5: DRAINS Hydrological Model Configuration – Wowly Creek Catchment

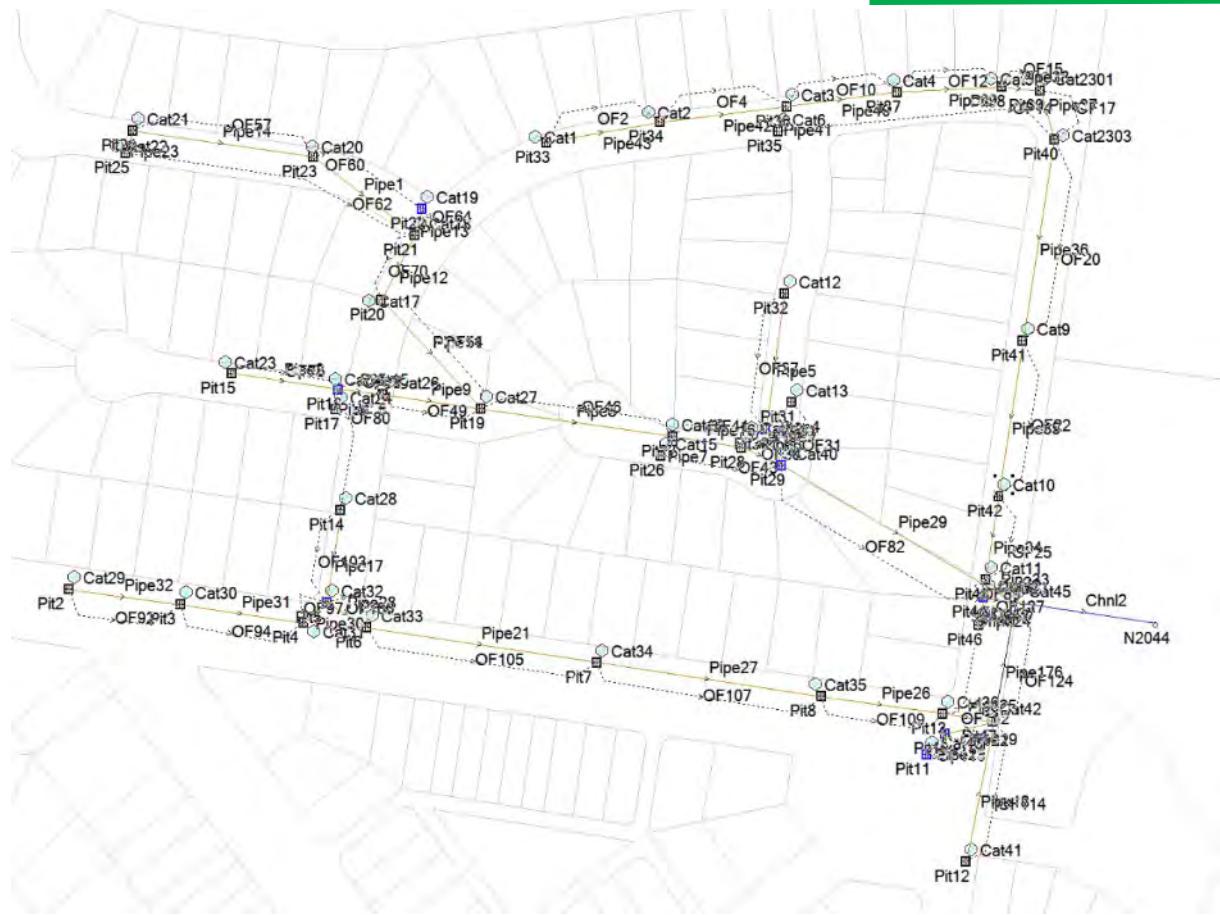


Figure 6: DRAINS Hydrological Model Configuration - Existing Residential Catchment

## 3.4. Modelling Input Parameters

The parameters adopted for hydrological modelling are shown in Table 2.

Table 2: Hydrological Parameters Adopted

Parameter	Value Adopted	Justification/Source
<b>RAFTS Hydrological Model (Wowly Creek Catchment)</b>		
Impervious Area Initial Loss (mm)	1	Typical value for urban areas. Only applicable to existing urban area as catchments within the National Park were modelled as 100% pervious.
Impervious Area Continuing Loss (mm/hr)	0	Typical value for urban areas.
Pervious Area Initial Loss (mm)	26	Recommended value from ARR 2019 data hub (refer Appendix B) for non-urban areas. Also adopted for urban area given extent of urban area in the catchment is very low (<3%).
Pervious Area Continuing Loss (mm/h)	1.6	40% of the from ARR 2019 data hub (refer Appendix B) as recommended for NSW.
BX	1	RAFTS Default
<b>ILSAX Hydrological Model (Existing Residential Catchment)</b>		
Paved (Impervious) Area Depression Storage (mm)	1	Typical value for urban areas
Supplementary Area Depression Storage (mm)	1	
Grassed (Pervious) Area Depression Storage (mm)	5	Typical value for urban areas
Soil Type	3	
<b>General</b>		
Sub-catchment Area (ha)	Varies	As per Figure 3 & Table 1
Impervious Area (%)	Varies	Typical 0% for forested areas. 40% for Lots and 95% for roads
Sub-catchment Slope (%)	Varies	As per Table 1
Manning's n	Varies 0.025 (urban) to 0.100 (forest)	As per Table 1 and Section 3.3.1. 0.025 consistent with urban catchment. 0.10 consistent with heavily forested catchment areas.

## 3.5. Flow Routing

The routing of flows through the Wowly Creek catchment (OF1 to OF6) was undertaken by adopting a parabolic cross-sectional profile (200m wide x 10m deep) and applying this to each overflow route (link). For OF1 a Manning's n value of 0.1 was adopted representing flows through a heavily forested catchment, whilst for OF2 to OF6 a value of 0.025 was adopted representing flows within the sand-based estuary.

Flows were routed along each link using the DRAINS premium hydraulic model which applies the full St Venant equations of unsteady flow to overland flow routes. This allows water levels along these routes to be determined accurately, allowing for varied water surface flow profiles, including subcritical and supercritical flows. It also accounts for storage effects in overland flow routes.

The routing of flows through the residential catchment model was typically undertaken using realistic road cross sections.

## 3.6. Rainfall Data

### 3.6.1. Design Rainfall

IFD design rainfall depth data and temporal pattern was derived in accordance with Australian Rainfall and Runoff (2019) using the Bureau of Meteorology's Rainfall IFD on-line Data System.

The temporal patterns for the Southern Slopes (Vic/NSW) region was used as these cover the subject site (latitude -34.984, longitude 150.723).

It was found that no variation in rainfall intensity occurred over the catchment area and therefore single point rainfall intensities were adopted.

A copy of the rainfall depths for the range of storm durations used can be found in Appendix C.

Storm probabilities in ARR2019 are now classified in two ways: Very Frequent storms, quantified as 'Exceedances per Year' (EY), and both Frequent and Infrequent storms given as Annual Exceedance Probability (AEP). The 'very frequent' storms have only been used for the 1EY, 0.5EY and the 0.2EY as these are equivalent to the former classifications of 1 in 1 year, 1 in 2 year and 1 in 5 year storms respectively (ARR 2019 state that the 50% AEP and the 20% AEP do not correspond statistically to the 1 in 2 year and 1 in 5 year storms, but rather are equivalent to the 1 in 1.44 year and 1 in 4.48 year storms respectively).

### 3.6.2. Pre-Burst Rainfall

NSW transformation pre-burst rainfall depths derived from ARR 2019 data hub (refer Appendix B were adopted in the model.

In the absence of pre-burst rainfall depths for the 4.5 hour (270 minute) and 9 hour (540 minute) storm in the ARR Data these values were determined by linear interpolation.

Pre-burst rainfall depths adopted in the modelling for various events and durations are shown in Table E1 in Appendix D.

### 3.6.3. Probable Maximum Precipitation

The PMF is the response of the catchment to the probable maximum precipitation (PMP) and is the largest flood event that can reasonably be expected to occur at a location.

Estimates of PMP were made using the Generalised Short Duration Method (GSDM) presented in Bureau of Meteorology (2003) and are provided in Table 3. This method is appropriate for estimating extreme rainfall depths for catchments up to 1000km<sup>2</sup> in area and storm durations up to 6 hours and is therefore considered appropriate for the subject catchment.

Table 3: Estimate of PMP

Duration (Hours)	PMP Estimate (mm)
0.25	150
0.50	220
0.75	270
1.0	320
1.5	370
2.0	410
3.0	460
4.5	520*
6.0	570

\* interpolated from 4 and 5 hour depths

Due to the inability of DRAINS (and HEC-RAS) to model spatially variable rainfall no adjustment to the point values above where made.

Notwithstanding, an assessment was undertaken to determine how much of the catchment would fall between the ellipses in Figure 6 of the GSDM and the results are provided in Table 4.

Given the relatively small size of the catchment (5.6km<sup>2</sup>) the assessment indicates that only a very small reduction (in the order of 10%) in rainfall would apply over a little more than half of the catchment that lies between the A and B ellipses.

The hydrological results obtained through modelling point PMP values in lieu of spatially variable PMP values would therefore be slightly higher than actual flows and therefore conservative.

Table 4: Assessment of PMP Spatial Distribution

Ellipse	Approximate Area (km <sup>2</sup> )
A	2.4
A-B	3.2
B-C	0

## 3.7. Results

The DRAINS model was run in ‘premium’ mode for storm durations ranging from 10 minutes to 3 hours for the 1% AEP event and 15 minutes to 6 hours for the PMF event with the downstream boundary set to 0.6m (approximating neap tide level).

A summary of relevant peak flows at the outlet of Wowly Creek for the Wowly Creek model are shown in Table 5 for the critical storm duration and the critical storm either side of the critical duration.

Table 5: Peak Flows at outlet of Wowly Creek (critical values in bold)

Event (AEP)	Critical Duration (hours)	Storm No. in Ensemble	Peak Flow Rate (m³/s)
5% AEP	4.5	Storm 6	29.6
	<b>6.0</b>	<b>Storm 6</b>	<b>30.3</b>
	9.0	Storm 7	29.0
1% AEP	3.0	Storm 7	42.1
	<b>4.5</b>	<b>Storm 8</b>	<b>46.3</b>
	6.0	Storm 7	40.2
PMF	1.5	N/A	238
	<b>2</b>	<b>N/A</b>	<b>254</b>
	3	N/A	238

## 4.0 HYDRAULIC MODELLING

Hydraulic modelling was conducted using an unsteady direct rainfall two-dimensional HEC-RAS model (Version 5.0.7) which covered the entire catchment draining to the proposal area, except for the existing residential area to the west of Sealark Road. For this area inflow hydrographs were applied to the edge of, and within, the two-dimensional domain to represent overland flows and piped flows respectively, in lieu of using direct rainfall to better represent the urban catchment rainfall-runoff characteristics.

### 4.1. Two-Dimensional Domain

A digital elevation model (DEM) of the catchment area was established using the following elevation data:

- i. a series of 1m gridded digital elevation models sourced from [www.elevation.fsd.org.au](http://www.elevation.fsd.org.au)
- ii. a 5m gridded DEM of bathymetry for Jervis Bay, including the Wowly Creek estuary, obtained from the NSW Office of Environment and Heritage
- iii. detailed site survey over the subject site.

Although the bathymetry data extended approximately 1.2km up Wowly Creek from its outlet into Jervis Bay, the data was only used to define bed levels within Jervis Bay below RL0.00m AHD as it was found that the 1m gridded data provided a more accurate three dimensional representation of the estuary than the coarser 5m bathymetry data. Further the 1m data was found to compare favourably to the 5m bathymetry data in terms of elevation to the bed of the estuary as shown in Figure 7, which is perhaps an indication that the estuary had very little water at the time the 1m gridded data was surveyed (April 2011).

The DEM data was locally modified in the location of each of the existing drainage channels to better represent the topography in these locations.

The elevation data from each source was imported into HEC-RAS and used as the basis for development of a 10m x 10m terrain model. The DEM grid was further refined where required by applying breaklines to enforce abrupt changes in geometry, such as along existing banks.

The extent of the two-dimensional domain used in HEC-RAS is shown in Figure 8.

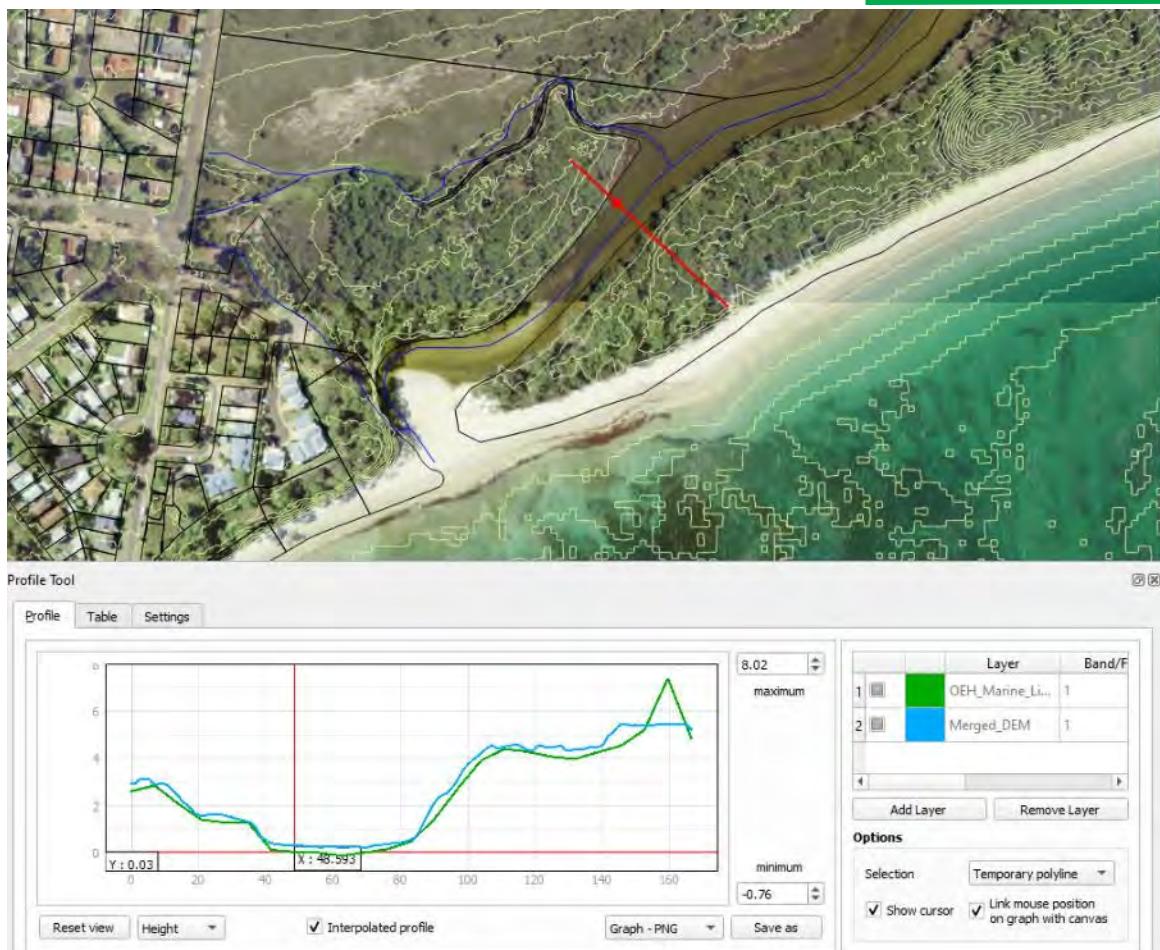


Figure 7: Comparison of 1m DEM (blue) versus 5m Bathymetry DEM (green)

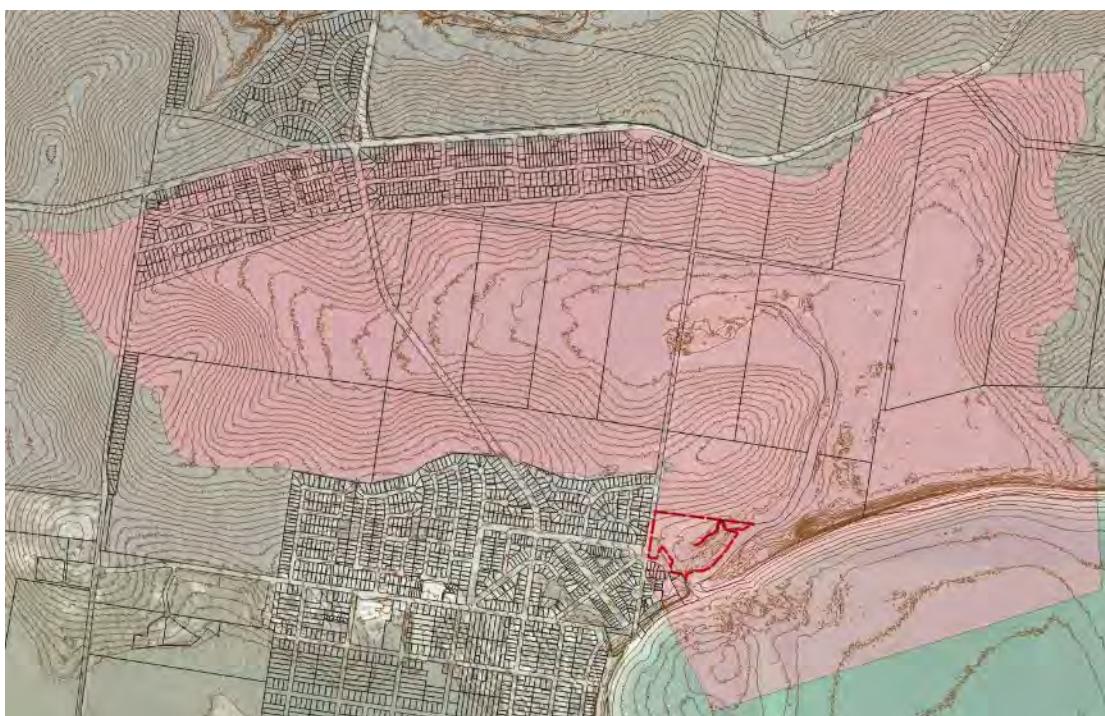


Figure 8: Extent of Two-Dimensional Domain

## 4.2. Manning's Roughness

The two-dimensional domain was assigned a default Manning's n value of 0.1 which is considered representative of the heavily forested areas within the Jervis Bay National Park. The Manning's n value was decreased to 0.025 within the estuary and Jervis Bay to account for the typically sandy bed, and decreased to 0.025 within the grassed area of the subject site and the adjacent existing residential areas.

Manning's n override regions are shown in Figure 9.

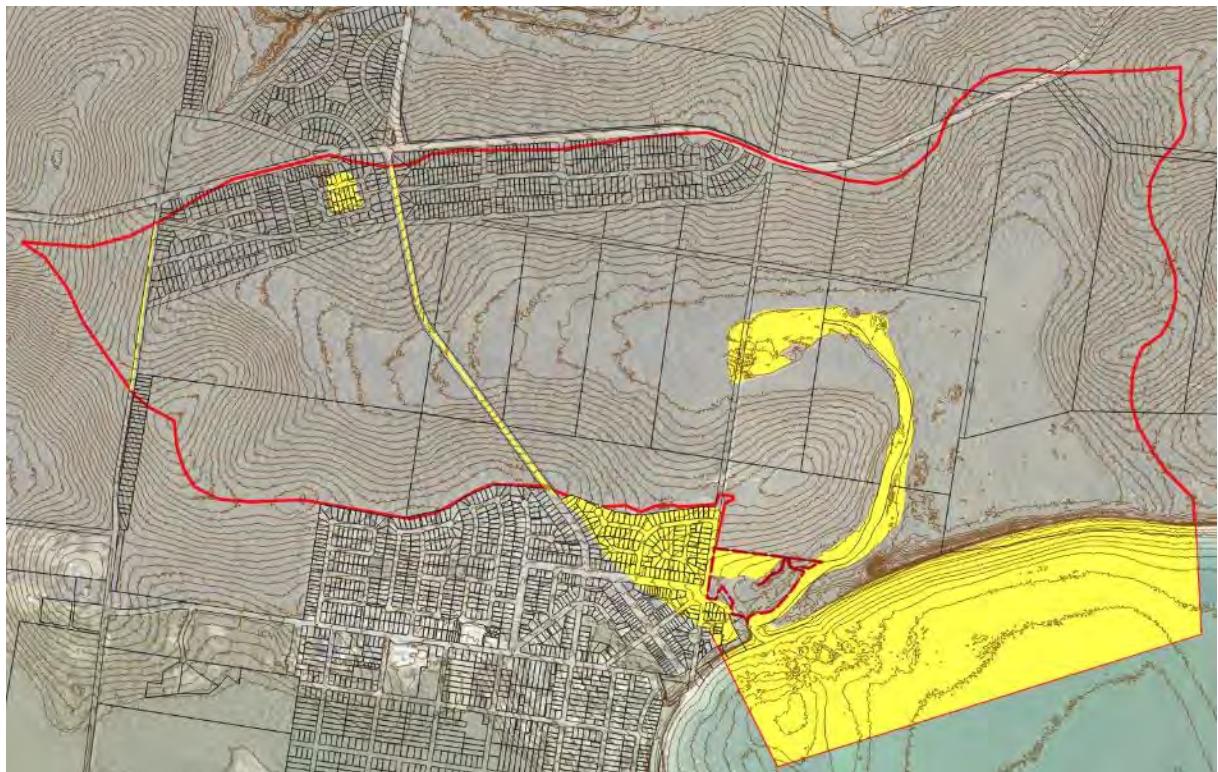


Figure 9: Manning's n Override Regions (Yellow 0.025)

## 4.3. Boundary Conditions

### 4.3.1. Direct Rainfall

The direct rainfall boundary condition applies precipitation directly to the surface of the grid to perform two-dimensional hydraulic calculations.

The current limitation of HEC-RAS means that precipitation can only be used to apply rainfall excess (rainfall minus losses due to interception/infiltration) directly to the two-dimensional grid.

Rainfall excess hyetographs for the median storm in the ensemble for the critical duration storm events shown in Table 5 were generated by subtracting initial losses plus pre-burst rainfall (refer to Table 2) from the design rainfall data starting from the beginning of the data set. An example of this for the 1% AEP, 4.5 hour storm event is shown in Figure 10.

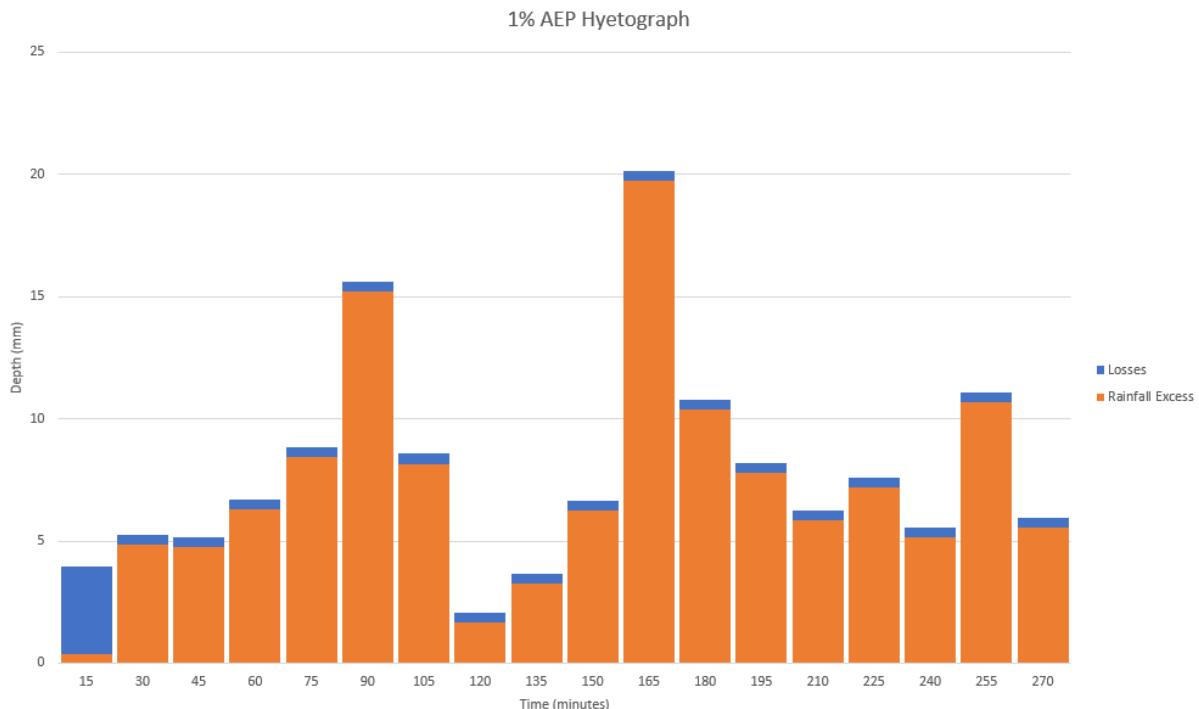


Figure 10: 1% AEP Rainfall Excess Hyetograph


### 4.3.2. Upstream Boundary Conditions

Flow hydrographs were used to define the upstream boundary conditions for flows from the existing residential catchment to the west of the subject with the locations shown in Figure 11 and summarised in Table 7

Table 6: Summary of Upstream Boundary Conditions

Boundary Name	Representative Flow
INT01	Piped flows discharging into northern drainage channel
INT02	Piped flows discharging into southern drainage channel
QT01	Overland flows discharging down Sealark Road from the north (extracted from OF25 in the DRAINS Model)
QT02	Overland flows discharging through public reserve between Sealark Road and Cronin Place (extracted from OF82 in the DRAINS Model)
QT03	Overland flows emanating from Sydney Avenue and discharging into the western side of Sealark Road (extracted from OF112 in the DRAINS Model)
QT04	Overland flows emanating from Sealark Road south of Sydney Avenue and flowing down the eastern side of Sealark Road.

The hydrographs adopted for the modelling were those of the median storm in the ensemble for the critical duration of each catchment, rather than those of the critical duration of the Wowly Creek catchment.

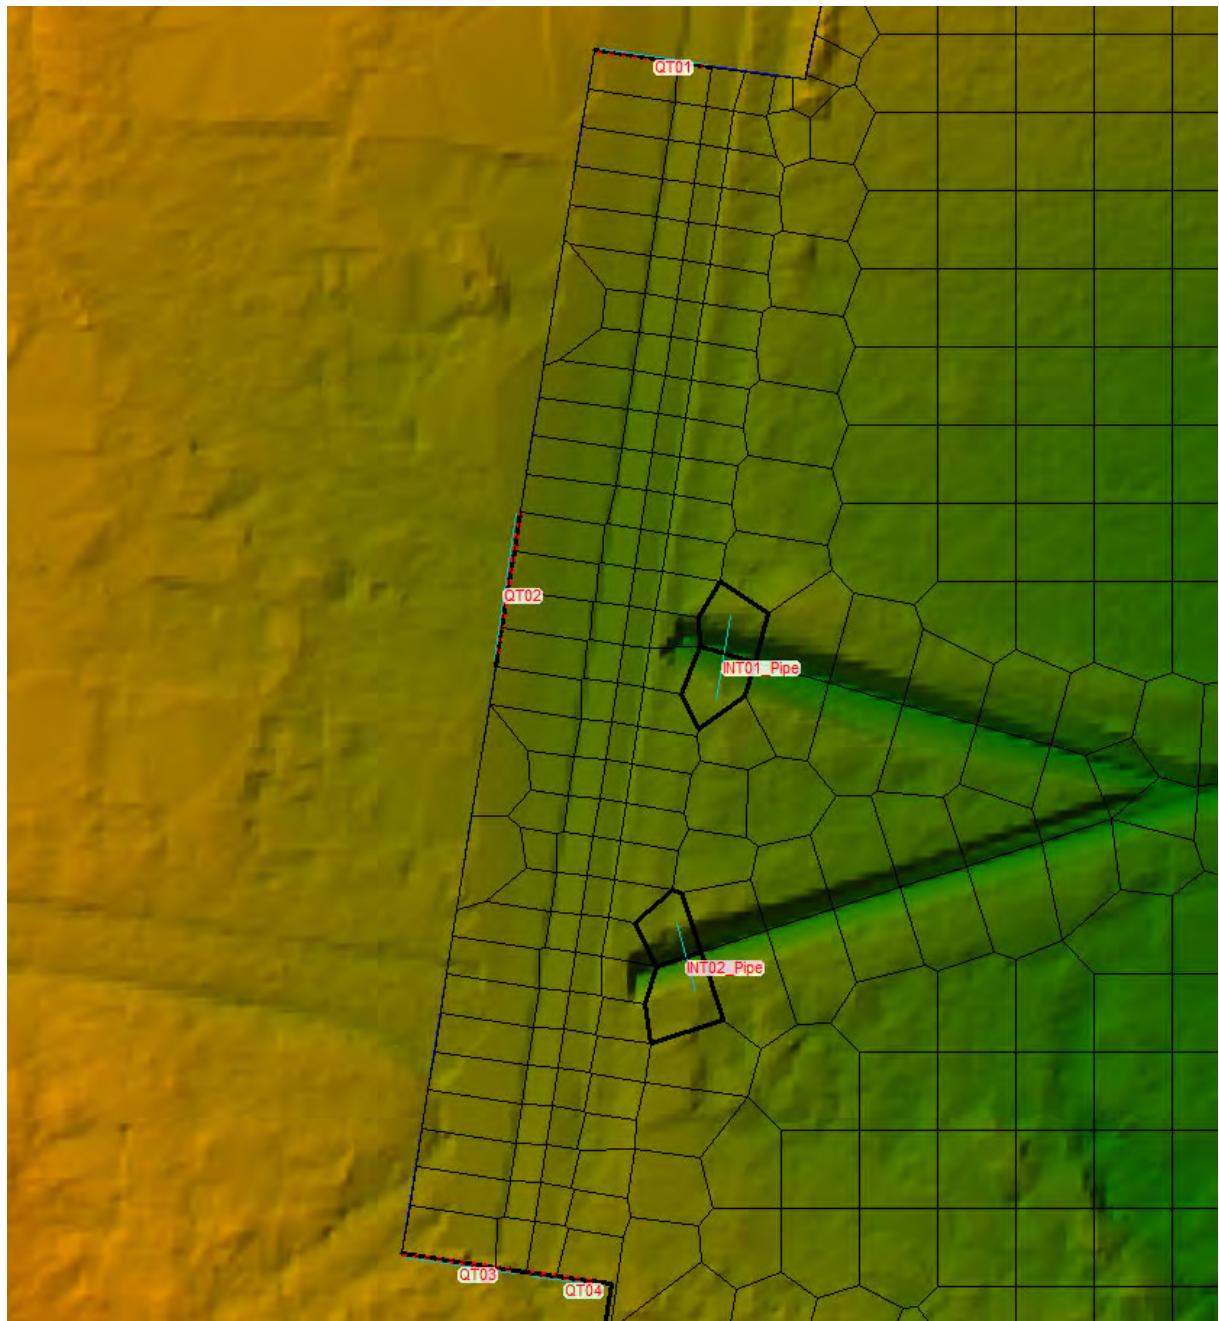

*Figure 11: Location of Upstream Boundary Conditions Representing Runoff from adjacent Residential Catchment*

### 4.3.3. Downstream Boundary Conditions

A stage hydrograph boundary was adopted as the downstream boundary condition for each storm event to represent downstream ocean levels within Jervis Bay. Stage hydrographs were extracted from the event time series shown in the NSW Office of Environment and Heritage, Floodplain Risk Management Guide: Modelling the Interaction of Catchment Flooding and Oceanic Inundation in Coastal Waterways. The timing of each time series was adjusted such that peak ocean levels were coincidental with relevant peak flows from the catchment (refer to Table 5) as shown in Figure 12.

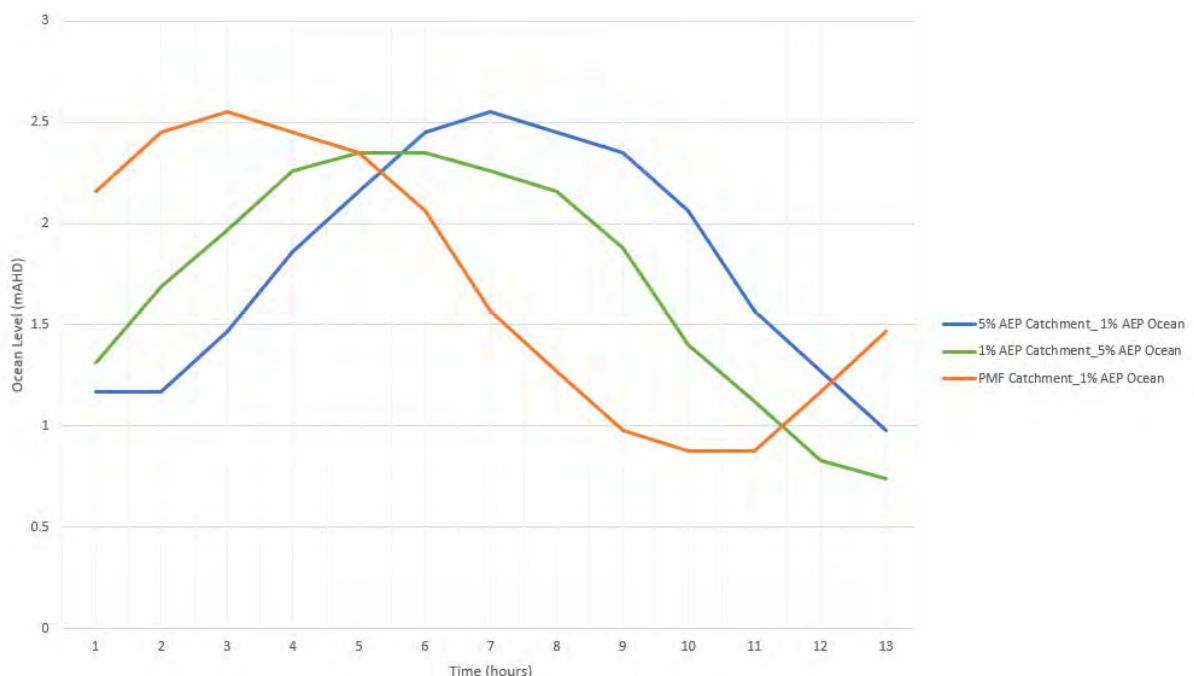


Figure 12: Downstream Ocean Boundary Time Series

A summary of design peak ocean levels used in the model is shown in Table 7.

Table 7: Summary of Design Peak Ocean Levels

Design Ocean Event	NSW OEH Guideline Figure	Peak Ocean Level (m AHD)
1% AEP	Figure A.3	2.55
5% AEP	Figure A.4	2.35

## 4.4. Hydraulic Model Verification

### 4.4.1. Comparison between models

Validation of the HEC-RAS hydraulic model was undertaken by comparing hydrographs and volume accumulation for the 5% AEP and 1% AEP events at the Wowly Creek entrance between those generated in DRAINS(Wowly Creek Model) and those generated in HEC-RAS. For each event the downstream boundary was set at a fixed elevation of 0.6m which approximates a neap tide elevation.

The results of the validation are shown in Table 8 and Figure 13.

Table 8: Results of Hydraulic Model Validation

<b>Event</b>	<b>DRAINS</b>		<b>HEC-RAS</b>	
	<b>Peak Flow (m<sup>3</sup>/s)</b>	<b>Volume (m<sup>3</sup>)</b>	<b>Peak Flow (m<sup>3</sup>/s)</b>	<b>Volume (m<sup>3</sup>)</b>
5% AEP	30.3	481,076	24.7	448,229
1% AEP	46.3	679,520	37.2	620,413

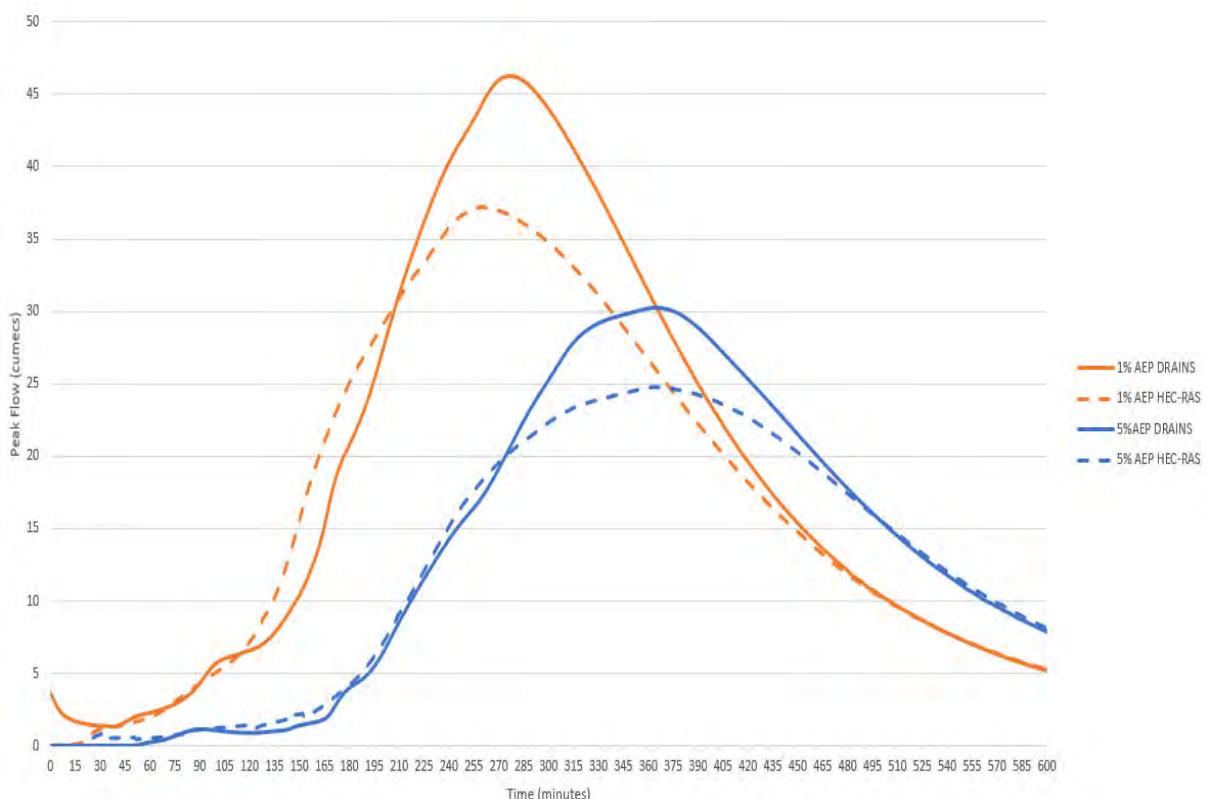


Figure 13: Comparison of DRAINS and HEC-RAS Hydrographs

The results of the validation show:

- i. that peak flows generated in DRAINS are in the order of 19% higher than those generated in HEC-RAS. This is expected as the DRAINS model used simplistic link routing (refer to Section 3.5) and did not represent the significant wetland storage area to the east of Wowly Creek which would contribute towards the reduction in peak flows observed in the HEC-RAS model.
- ii. volume accumulation in DRAINS is in the order of 8% lower than volume accumulation in HEC-RAS over the same storm duration. Once again, the reduction in volumes can be explained by the simplistic routing applied in DRAINS and the presence of the wetland storage area in HEC-RAS.
- iii. the overall shape of the hydrographs the timing of peak flows between the two models are very similar.

#### 4.4.2. Comparison to critical duration

Due to the differences between peak runoff rates observed between the DRAINS (Wowly Creek) and HEC-RAS models the median storm event from the ensemble for the duration either side of the critical duration (as shown in Table 5) was modelled in HEC-RAS in order to ensure that the correct critical duration had been adopted for modelling purposes.

The results of this comparison are shown in Figure 13 for the 5% AEP, Figure 14 for the 1% AEP and Figure 15 for the PMF event.

The results show that the critical storm duration storm adopted generates the maximum peak flow across all events, except for the 5% AEP event for which all storms produce peak flows of very similar magnitude (i.e. all within 0.6m<sup>3</sup>/s).

This analysis validates that the critical durations for each of the events adopted in Table 5 produce the highest peak flows and are therefore acceptable for adoption in design event modelling.

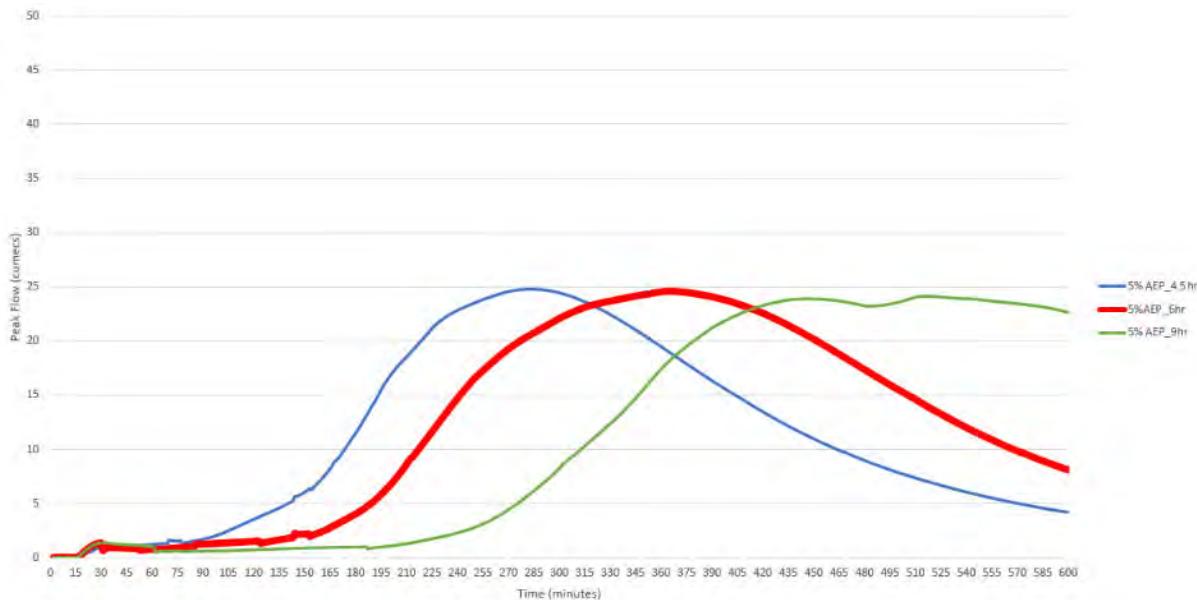


Figure 14: Comparison of Hydrographs for 5% AEP storms (critical storm in red)

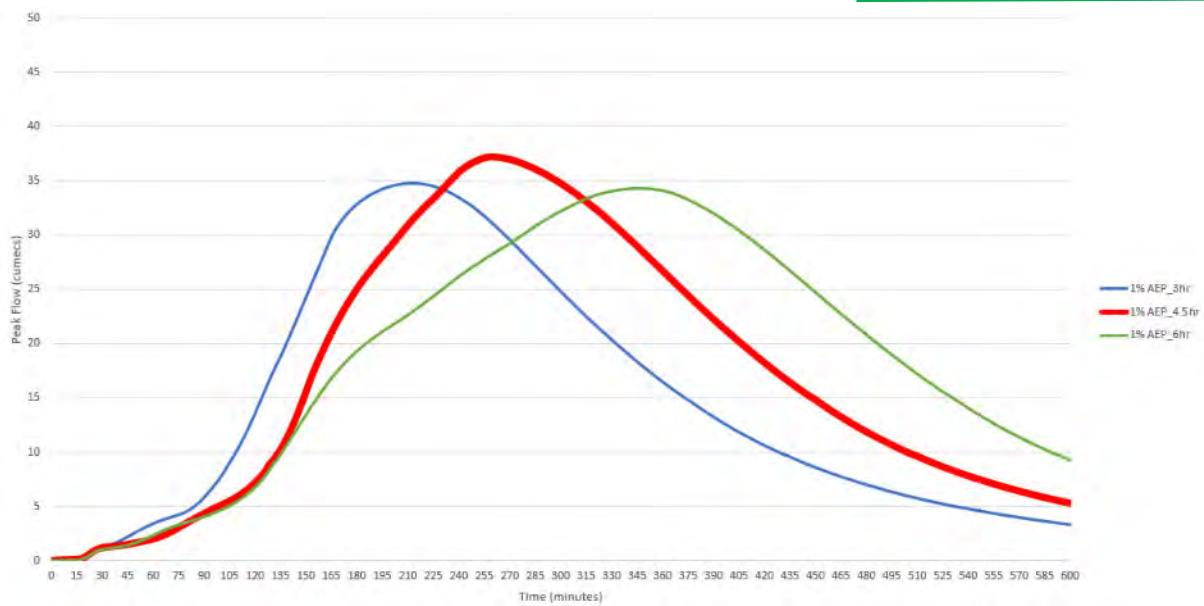


Figure 15: Comparison of Hydrographs for 1% AEP storms (critical storm in red)

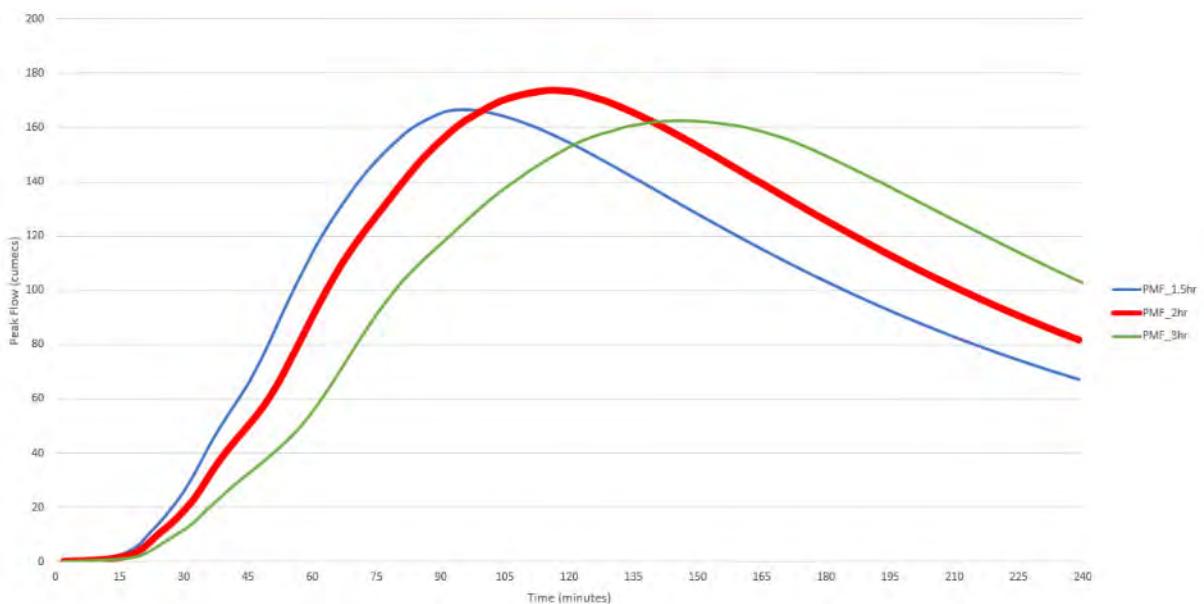


Figure 16: Comparison of Hydrographs for PMF storms (critical storm in red)

#### 4.4.3. Comparison to Regional Flood Frequency Estimation Model

A comparison of peak flows for the 1% and 5% AEP events from both DRAINS and HEC-RAS were compared to the peak flows obtained through the Regional Flood Frequency Estimation (RFFE) Model and the results are shown in Table 9 and Figure 17.

Table 9: Comparison to RFFE Model

AEP	Peak Flow Rate (cumecs)				
	DRAINS	HEC-RAS	Regional Flood Frequency Estimation Model		
			Discharge	Lower (5%)	Upper (95%)
1%	46.3	37.2	122	44.5	33.9
2%	-	-	93.5	34.9	255
5%	30.3	24.7	63.1	24.1	168
10%	-	-	44.7	17.2	118

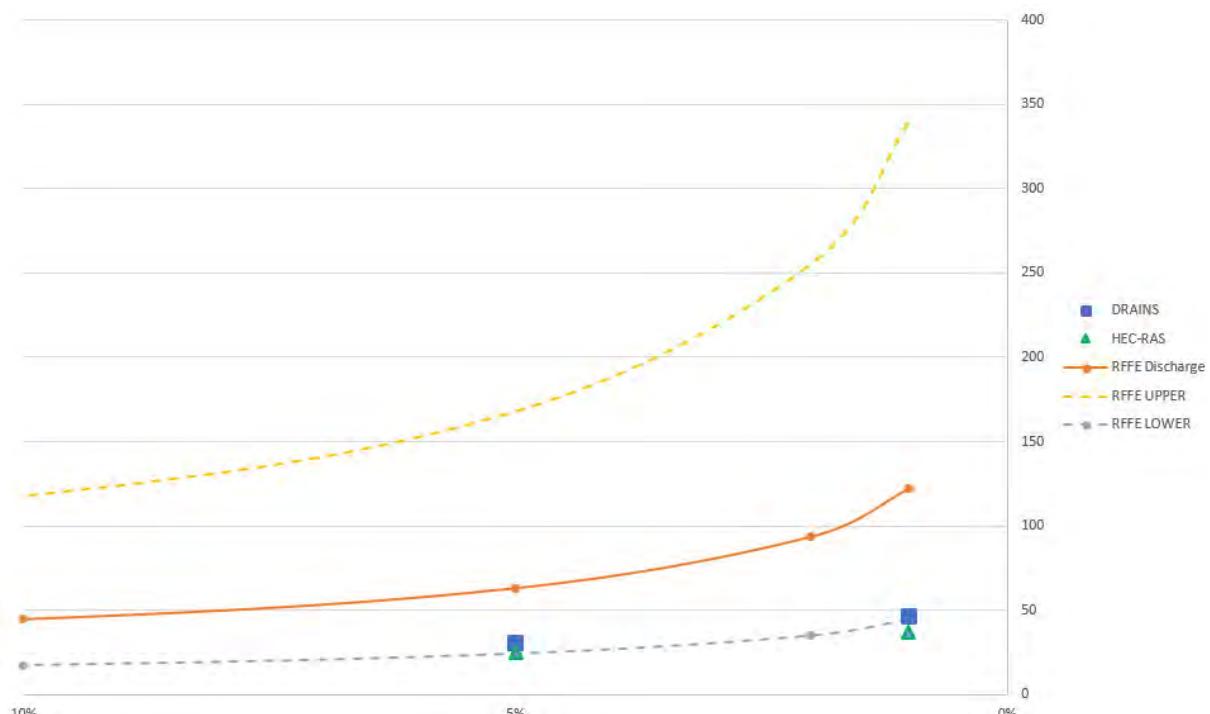


Figure 17: Comparison to RFFE Model

The comparison shows that the modelled flows lie close to the lower confidence limit (5%). This is not unexpected as most of the subject catchment comprises National Park and is located adjacent to the coast, whereas most of the catchments used in the derivation of results are located further away from the coast and/or in less densely vegetated areas.

The RFFE method results are included in Appendix E and show that the subject catchment is typically an order of magnitude less than most of the catchments used in the derivation of the results (i.e. the majority are in excess of 100km<sup>2</sup>). The subject site catchment also has a shape factor of 0.42 whilst the majority of the comparison catchments have shape factors between 0.5 and 1. In this regard the RFFE results include a statement that the catchment has unusual shape and the results have a lower accuracy and may therefore not be directly applicable in practice.

## 4.5. Design Event Modelling

Design floods events are hypothetical floods used for planning and floodplain management purposes. They are based on having a probability of occurrence specified as either:

- Annual Exceedance Probability (AEP) expressed as a percentage; or
- Average Recurrence Interval (ARI) expressed in years.

This report uses the AEP terminology. Table 10 provides the approximate equivalent for ARI and AEP events.

Table 10: Design Flood Terminology

<b>ARI</b>	<b>AEP</b>
100 years	1%
20 years	5%
10 years	10%
5 years	20%

Design flood conditions are derived from the application of design rainfall parameters (refer to Section 4.3.1) and design downstream ocean boundary levels (refer to Section 4.3.3)

Flooding in tidal waterways may occur due to a combination of ocean and catchment flooding derived from the same storm cell and therefore the risk of flooding from both sources may vary significantly depending on the location, distance from the ocean and the level of the ocean.

The NSW Governments Flood Risk Management Guide: Modelling the Interaction of Catchment Flooding and Oceanic Inundation in Coastal Waterways (DECCW, 2015) recommends that flood planning areas in tidal waterways consider the interaction of catchment and coastal flooding from the selection of peak flood levels from an envelope of scenarios such as:

- 1% AEP ocean flooding with 5% AEP catchment flooding with coincident peaks
- 5% AEP ocean flooding with 1% AEP catchment flooding with coincident peaks

On the above basis design event modelling was undertaken for the suite of events shown in Table 11.

Table 11: Design Model Runs

<b>Design AEP for Peak Flood Levels</b>	<b>Catchment Flood Scenario</b>	<b>Ocean Water Boundary Scenario</b>
<b>Design Model Runs</b>		
1% AEP Envelope	5% AEP	1%AEP
	1% AEP	5% AEP
PMF Catchment	PMF	1% AEP

## 4.6. Impact of Climate Change

The impact of climate change on flooding was assessed for both an increase in sea level and an increase in rainfall intensity in accordance with the sensitivity model runs shown in Table 12, with an explanation of the factors adopted provided in Section 4.6.1 and Section 4.6.2 respectively.

Table 12: Summary of Climate Change Design Model Runs

Design AEP for Peak Flood Levels	Catchment Flood Scenario	Ocean Water Boundary Scenario
<b>Climate Change Scenarios</b>		
1% CC Ocean Envelope	5% AEP	1% AEP + CC
	1% AEP	5% AEP + CC
1% CC Catchment Envelope – RCP4.5	5% AEP + RCP4.5	1% AEP
	1% AEP + RCP4.5	5% AEP
1% CC Catchment Envelope – RCP8.5	5% AEP + RCP8.5	1% AEP
	1% AEP + RCP8.5	5% AEP
PMF CC	PMF	1% AEP + CC
1% Combined Catchment (RCP8.5) & 1% Ocean Envelope	1% AEP + RCP8.5	5% AEP + CC
	5% AEP + RCP8.5	1% AEP + CC

#### 4.6.1. Sea Level Rise

Shoalhaven City Council adopted the following sea level rise projections in February 2015.

Table 13: Summary of SCC Sea Level Rise Projections

Planning Horizon	Projected Sea Level Rise (mm)
2030	100mm
2050	230mm
2100	360mm

As the proposed development consists of the subdivision of land which has a design life in excess of 100 years the 2100 planning horizon was adopted with a sea level rise projection of 360mm.

For modelling purposes, the downstream boundary levels described in Section 4.3.3 were increased by 360mm, to reflect the rise in sea level.

## 4.6.2. Increased Rainfall Intensity

ARR2019 currently provides advice on changes in projected rainfall intensity (or equivalent depth) due to climate change. Note, that due to little available information, no adjustment due to climate change is considered for projected changes in rainfall frequency, duration and temporal patterns, antecedent wetness and baseflow (Flood Plain Risk Management Guide, NSW Office of Environment and Heritage, 2019).

ARR2019 recommends the use of the Representative Concentration Pathway (RCP) 4.5 and RCP8.5 values in assessing climate change effect on flooding. Interim climate change factors can be found on the ARR Data Hub, as provided in Appendix B, and are represented as a percentage increase in design rainfall depths that should be applied for a given future year (up to 2090). These values correspond to the percentage increase that considers a 5% increase in rainfall intensity for every 1°C of projected warming in the subject region.

As the proposed development consists of the subdivision of land which has a design life exceeding 100 years the 2090 planning horizon was adopted.

Table 14: Summary of Adopted Increases in Rainfall Intensity

Planning Horizon	Increase in Rainfall Intensity RCP4.5	Increase in Rainfall Intensity RCP8.5
2090	7.6%	16.3%

To reflect the increase in rainfall intensity the HEC-RAS model was adjusted as follows:

- i. Direct Rainfall Boundary: Rainfall depths for each critical storm event were increased by the percentages in Table 14 and the resultant rainfall excess applied as the direct rainfall boundary.
- ii. Upstream Boundary Condition: The increase in rainfall intensities were applied to the DRAINS hydrological model and the resultant hydrographs from the existing residential catchment DRAINS model were applied to the HEC-RAS model.

## 4.7. Pre-Development Results

The HEC-RAS model was run in unsteady mode with variable timestep controlled by Courant condition for a duration of 10 hours for both the 1% AEP and PMF events. The results are provided in Appendix F and include the mapping shown in Table 15. For those figures demonstrating the change in flood level the comparison flood surface relates to the flood surface in the absence of any climate change impacts (i.e. those shown on Figures 1.1 and 2.1).

The results include the mapping of flood hazard vulnerability in accordance with Book 6, Chapter 7 of Australian Rainfall and Runoff (2019).

Table 15: Schedule of Pre-Development Results Mapping

<b>Figure</b>	<b>Description</b>
Figure 1.1	Envelope of Maximum Flood Levels and Depths – 1% AEP
Figure 1.2	Envelope of Maximum Flood Velocities – 1% AEP
Figure 1.3	Envelope of Maximum Flood Hazard – 1% AEP
Figure 1.4	Source of Maximum Flood Envelope Level – 1% AEP
Figure 1.5	Extent of Pre Development Flood Planning Area
Figure 2.1	Maximum Flood Levels and Depths – PMF
Figure 2.2	Maximum Flood Velocities – PMF
Figure 2.3	Maximum Flood Hazard – PMF
Figure 3.1	Envelope of Maximum Flood Levels and Depths – 1% AEP + Sea Level Rise (0.36m)
Figure 3.2	Change in Maximum Flood Level – 1% AEP + Sea Level Rise (0.36m)
Figure 4.1	Maximum Flood Levels and Depths – PMF + Sea Level Rise (0.36m)
Figure 4.2	Change in Maximum Flood Level – PMF + Sea Level Rise (0.36m)
Figure 5.1	Envelope of Maximum Flood Levels and Depths – 1% AEP+ RCP4.5 Climate Change
Figure 5.2	Change in Maximum Flood Level – 1% AEP + RCP4.5 Climate Change
Figure 6.1	Envelope of Maximum Flood Levels and Depths – 1% AEP+ RCP8.5 Climate Change
Figure 6.2	Change in Maximum Flood Level – 1% AEP + RCP8.5 Climate Change
Figure 7.1	Envelope of Maximum Flood Levels and Depths – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 7.2	Envelope of Maximum Flood Velocities – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)

Figure	Description
Figure 7.3	Envelope of Maximum Flood Hazard – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 7.4	Change in Maximum Flood Level – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)

## 4.8. Pre-Development Results Discussion

The results show that:

- i. flooding in the lower reaches of Wowly Creek is dominated by ocean derived flooding rather than catchment derived flooding. This is particularly evident in Figure 1.4 which shows that ocean derived flood (green) dominates over an area extending approximately 2.3km upstream for the inlet.
- ii. flooding within the upper reaches of the subject site is dominated by catchment derived runoff (blue) from the adjacent residential development, whilst the lower portions are dominated by ocean derived flooding (green).
- iii. Outside of the drainage channels, flood hazard within the subject site is H1 for the 1% AEP and H1 to H3 for the PMF event. Flood hazard within existing drainage channels are classified as up to H5 in both events.
- iv. a projected increase in sea level of 360mm results in similar increases in flood levels over a large portion of the estuary for the 1% AEP event and increases of between 200 and 300mm in the PMF event. Within the subject site these increases are limited to the lower, eastern half of the site and do not extend to the land adjacent to Sealark Road due to the change in elevation at this location.
- v. The increase in rainfall intensity has very little impact on flood levels (less than 25mm within the estuary due to the significant storage volume within the estuary. The subject site experiences increase of up to 10mm in the RCP4.5 scenario and up to 25mm in the RCP8.5 scenario.
- vi. Sealark Road experiences flooding at depths of up to approximately 350mm in the 1% AEP event, however flood hazard remain relatively low at H2 due to the relatively low velocities occurring at these depths.

## 4.9. Comparison to ARR1987 IFD Data

A comparison of 1987 and 2019 IFD data for the 5% AEP, 6 hour storm and 1% AEP, 4.5 hours storm (see Table 16) shows the 1987 IFD data to be 19% and 26% higher than the 2019 data.

Table 16: Comparison of 1987 and 2019 IFD Data

Event	Rainfall Intensity (mm/hr)		% Difference
	2019	1987	
5% AEP, 6hr	20.3	24.2	+19%
1% AEP, 4.5hr	31.6	39.9	+26%

The hydraulic modelling conducted for the assessment of the impact of an increase in rainfall intensity showed that, due to the large storage area of the estuary in comparison to the catchment, that the flood level within the estuary is insensitive to increases in rainfall, with an increase in rainfall of 16% resulting in an increase in flood level of less than 10mm.

Given this insensitivity the increase in flood levels associated with ARR1987 IDF data was not modelled and is likely to be in the order to 10-15mm.

## 4.10. Post Development Modelling

### 4.10.1. Stage 1 - Channel Modification

The Stage 1 works involve redirecting (by a pipe) the existing outlet to the southern drainage channel through the subject site to the northern drainage channel and realigning and enlarging that channel to fit with the proposed future development.

### 4.10.2. Stage 2 – Residential Development

The Stage 2 works comprise the construction of the development including earthworks, roadworks and drainage works as shown in the preliminary civil design drawings in Appendix G (Drawing 1861-C01 to C10 and incorporate the following elements:

The preliminary civil design plans incorporate the following elements:

- Perimeter road linking Sealark Road to Monarch Place raised to typically be above the 1% AEP flood level.
- Internal road linking Sealark Road to the proposed perimeter road.
- Widening and realigning of the existing northern drainage channel to achieve a nominal base dimension of 5m with 1 in 4 side slopes.
- Culvert crossing over the proposed drainage channel comprising a single 4200 x 1200mm reinforced concrete box culvert
- Filling of proposed lots to typically be above the 1% AEP flood level plus 500mm freeboard (i.e. above the flood planning level)

The impact of flooding on the proposed development and the impact of the proposed development on flooding was assessed for both scenarios by incorporating the associated topographical changes including road and lot filling platforms and adjusting the Manning's n value over the proposed development area for the Stage 2 scenario (refer to Figure 18). For both Stage 1 and Stage 2 scenarios the residential DRAINS model was modified to reflect the change in piped versus overland flows and the fact that all flows would be directed to the northern drainage channel. The upstream boundary conditions in the HEC-RAS were updated to reflect the change in flow behaviour with all hydrographs updated and boundary INT02 deleted to reflect the removal of the southern piped outlet.

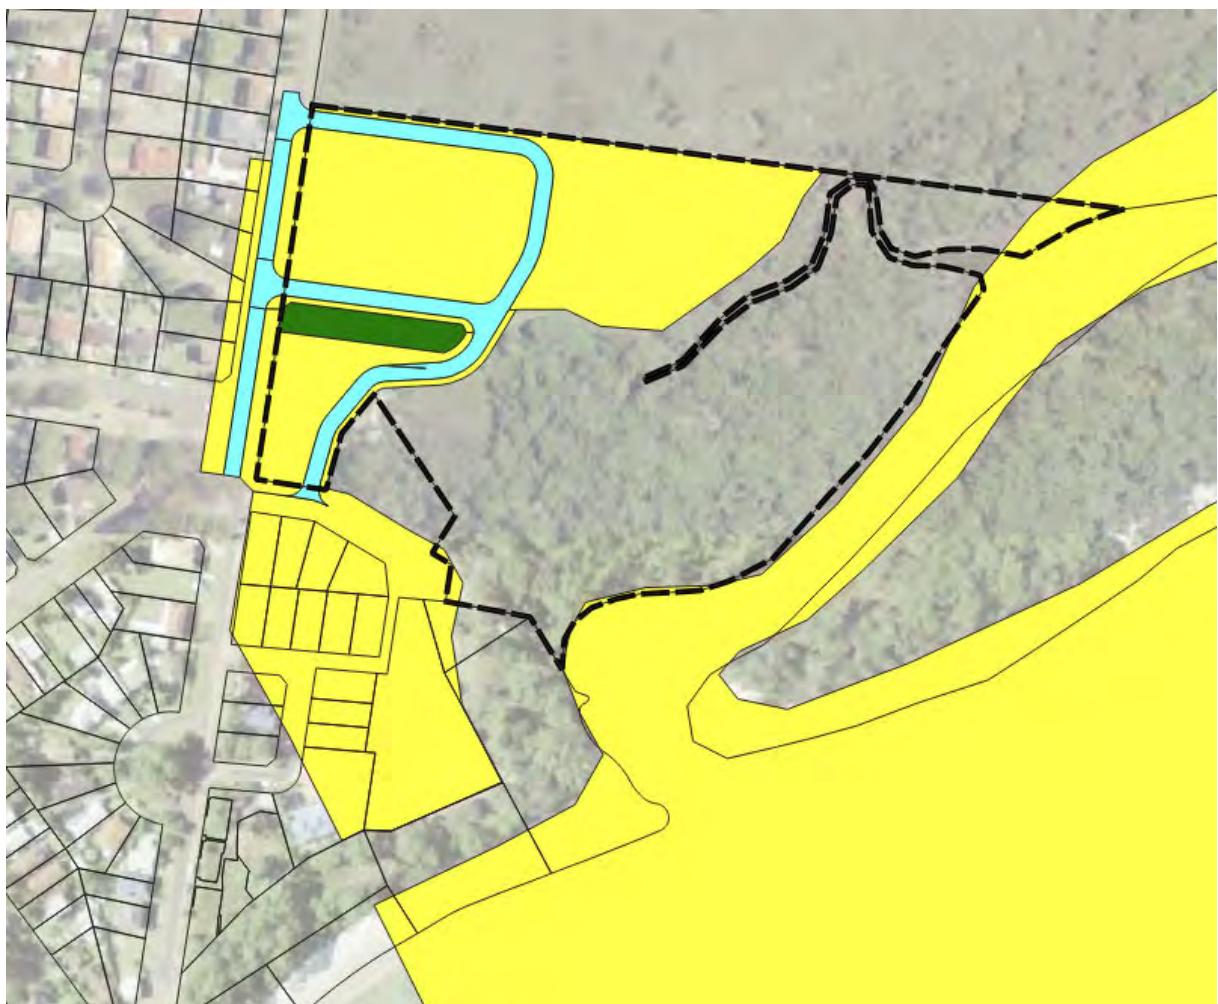


Figure 18: Post Development Manning's  $n$  Override Regions (Light Blue 0.015, Yellow 0.025, Orange 0.04, Green 0.06)

## 4.11. Post Development Results

The Stage 1 and Stage 2 HEC-RAS model was run for the 1% AEP + RCP8.5 rainfall increase +360mm sea level rise events under the same model run variables and design event model runs as the pre-development model, whilst the Stage 2 model was also run for the PMF + 360mm sea level rise event. The results are provided in Appendix H and include the mapping shown in Table 17. For those figures demonstrating the change in flood level the comparison flood surface relates to the pre-development flood surface for the corresponding design event model run (i.e. for the 1% AEP the RCP8.5 rainfall increase and 360mm sea level rise as shown in Figure 7.1 and for the PMF inclusive of 360mm sea level rise as shown in Figure 4.1).

The Stage 2 results include the mapping of flood hazard vulnerability in accordance with Book 6, Chapter 7 of Australian Rainfall and Runoff (2019).

Table 17: Schedule of Post Development Results Mapping

<b>Figure</b>	<b>Description</b>
Figure 8.1	Post Development (Stage 2) Envelope of Maximum Flood Levels and Depths – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 8.2	Post Development (Stage 2) Envelope of Maximum Flood Velocities – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 8.3	Post Development (Stage 2) Envelope of Maximum Flood Hazard – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 8.4	Post Development (Stage 2) Change in Maximum Flood Level – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 8.5	Post Development (Stage 2) Flood Planning Area – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 9.1	Stage 1 Envelope of Maximum Flood Levels and Depths – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 9.2	Stage 1 Change in Maximum Flood Level – 1% AEP+ RCP8.5 Rainfall Increase + Sea Level Rise (0.36m)
Figure 10.1	Post Development (Stage 2) Maximum Flood Levels and Depths – PMF + Sea Level Rise (0.36m)
Figure 10.2	Post Development (Stage 2) Maximum Flood Velocities – PMF + Sea Level Rise (0.36m)
Figure 10.3	Post Development (Stage 2) Maximum Flood Hazard – PMF + Sea Level Rise (0.36m)
Figure 10.4	Post Development (Stage 2) Change in Maximum Flood Level – PMF + Sea Level Rise (0.36m)

## 4.12. Post Development Results Discussion

The Stage 1 results show that:

- i. The redirecting of flows to the northern drainage channel, widening and realigning that channel and filling the southern drainage channel results in reductions in flood levels of between 20 and 40mm in Sealark Road.
- ii. Due to the increase in flows in the northern channel flood levels at the eastern end of the channel are shown to increase slightly (up to 80mm) and these increases are wholly contained within the subject site.
- iii. The increase in flooding shown within the southern (filled) drainage channel is as a direct result of raising the surface level in that location in the presence of very minor residual flooding occurring in that location.

The Stage 2 results shown that:

- i. The areas proposed for residential development (Lots A, B and C) are flood free in the 1% AEP event (including rainfall increases and sea level rise projections). It should be noted that flooding shown on the proposed roads is because of rainfall on grid (direct rainfall) modelling in the absence of a stormwater drainage network which would otherwise be implemented to manage these local flows.
- ii. Reduction in 1% AEP flood levels of between 20 and 140mm in Sealark Road thereby providing a benefit to local residents. The increase in reduction above that observed for Stage 1 is because of creating a larger and more well graded overland flow path for surface flows at the sag point in Sealark Road, which enables ponded water in Sealark Road to drain into the channel more efficiently.
- iii. Minor localised increases in flood levels of up to 250mm at the outlet of the proposed road culvert in the 1% AEP event and these increases are wholly contained within the subject site.
- iv. the proposed development is not anticipated to result in any adverse flooding impacts in the 1% AEP design event.
- v. Some significant increases in flood levels within roads in the 1% AEP event and within roads and lots in the PMF event, however these are typically attributed to an increase in ground surface level in the presence of minor flooding, rather than an increase in flood depth.
- vi. the proposed area of residential rezoning (Lots A, B and C) is outside the 1% AEP flood planning area when incorporating RCP8.5 rainfall increases and 0.36m sea level rise (i.e. worst case climate change impacts) as shown in Figure 8.5.

## 5.0 CONCLUSION

The modelling demonstrates that flooding within the Wowly Creek estuary is dominated by oceanic flooding rather than catchment derived flooding.

Within the upper reaches of the subject site in the location of the proposed residential rezoning flooding occurs predominately from the runoff derived from the existing residential catchments to the west of Sealark Avenue. Currently these flows exceed the capacity of the existing channel and cause flooding of variable depth within the overbanks.


Except for overbank flooding from the above drainage channels the area proposed for residential rezoning is relatively free from flooding and is therefore considered suitable for residential development.

Post development modelling shows that modifying these drainage channels combined with filling of parts of the land would minimize the area of land inundated by flooding and that suitable flood free land above the flood planning level can be made available for residential development.

Further, the post development modelling showed that 1% AEP flood levels Sealark Road would be reduced by up to 140mm thereby improving serviceability for residents.

# APPENDIX A

## Detailed Site Survey

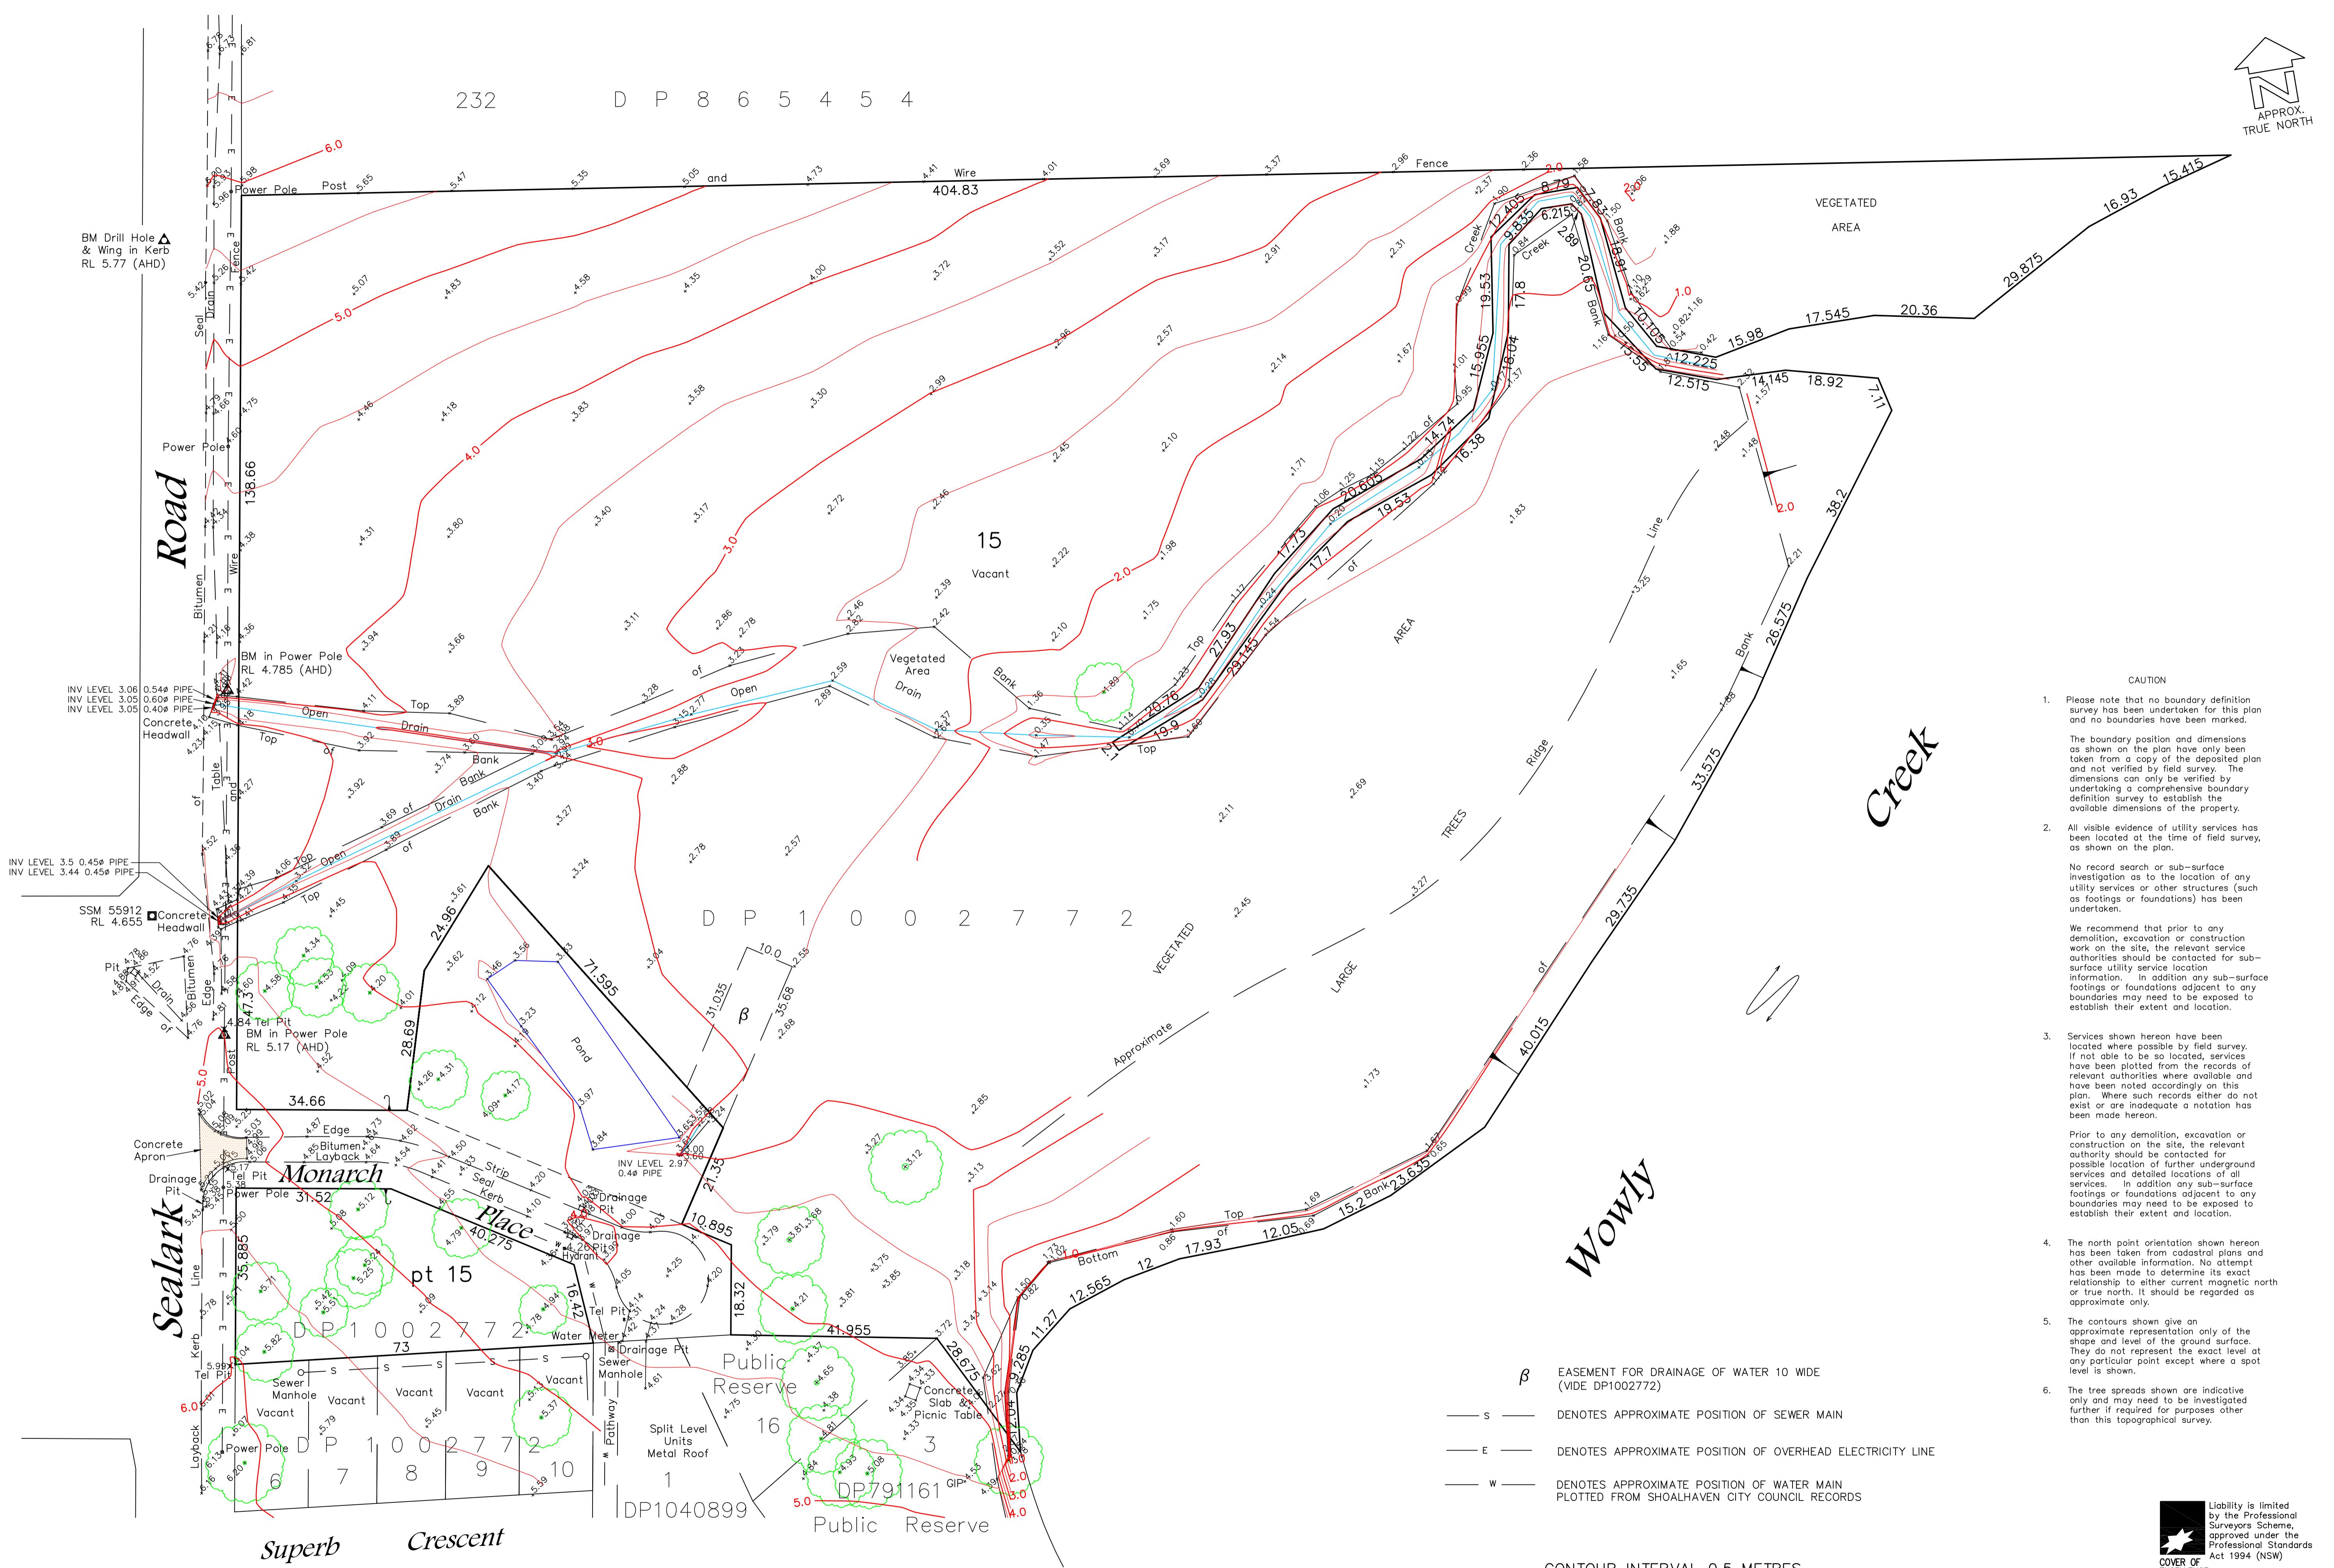

APPROX.  
NORTH

RATIO:

DATUM:  
AUSTRALIAN HEIGHT DATUM  
ORIGIN: SSM 55912  
RL 4.655 AHD

	SURVEY
M	DESIGN
	DRAWN
	CHECK'D

GH	AMENDMENTS	BY	DATE
AVS			
24340 DETAIL			



PLAN SHOWING CONTOURS AND DETAIL  
OVER PART OF LOT 15 DP1002772  
AT SEALARK ROAD AND MONARCH PLACE  
CALLALA BAY FOR HARE BAY DEVELOPMENT  
CONSORTIUM C/O MERLOT CONSTRUCTIONS PTY LTD

REF. No.		24340	
SHEET	1	OF	1 SHEETS
		AMENDMENT	

## **APPENDIX B**

### **ARR Data Hub Output**

**ATTENTION:** This site was updated recently, changing some of the functionality. Please see the changelog ([./changelog](#)) for further information


# Australian Rainfall & Runoff Data Hub - Results

## Input Data

Longitude	150.723
Latitude	-34.984

### Selected Regions (clear)

River Region	show
ARF Parameters	show
Storm Losses	show
Temporal Patterns	show
Areal Temporal Patterns	show
BOM IFDs	show
Median Preburst Depths and Ratios	show
10% Preburst Depths	show
25% Preburst Depths	show
75% Preburst Depths	show
90% Preburst Depths	show
Interim Climate Change Factors	show
Probability Neutral Burst Initial Loss ( <a href="#">./nsw_specific</a> )	show

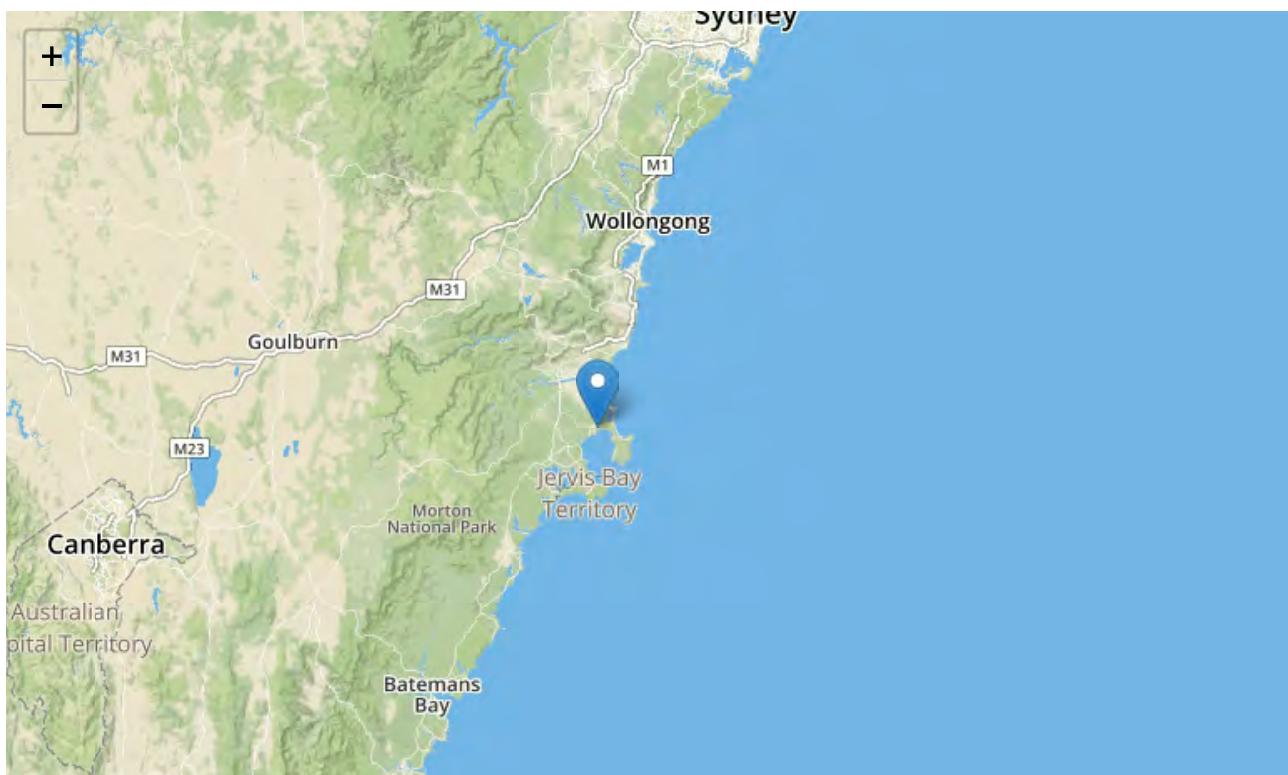

## Data

### River Region

<b>Division</b>	South East Coast (NSW)
<b>River Number</b>	16
<b>River Name</b>	Clyde River-Jervis Bay

### Layer Info

<b>Time Accessed</b>	05 August 2019 01:29PM
<b>Version</b>	2016_v1

### ARF Parameters

$$ARF = \text{Min} \left\{ 1, \left[ 1 - a (Area^b - c \log_{10}(Duration)) Duration^{-d} + e Area^f Duration^g (0.3 + \log_{10}(AEP)) + h 10^{i Area \frac{Duration}{1440}} (0.3 + \log_{10}(AEP)) \right] \right\}$$

Zone	a	b	c	d	e	f	g	h	i
SE Coast	0.06	0.361	0.0	0.317	8.11e-05	0.651	0.0	0.0	0.0

### Short Duration ARF

$$ARF = \text{Min} \left[ 1, 1 - 0.287 (Area^{0.265} - 0.439 \log_{10}(Duration)) . Duration^{-0.36} + 2.26 \times 10^{-3} \times Area^{0.226} . Duration^{0.125} (0.3 + \log_{10}(AEP)) + 0.0141 \times Area^{0.213} \times 10^{-0.021 \frac{(Duration-180)^2}{1440}} (0.3 + \log_{10}(AEP)) \right]$$

### Layer Info

<b>Time Accessed</b>	05 August 2019 01:29PM
<b>Version</b>	2016_v1

### Storm Losses

Note: Burst Loss = Storm Loss - Preburst

Note: These losses are only for rural use and are **NOT FOR DIRECT USE** in urban areas

Note: As this point is in NSW the advice provided on losses and pre-burst on the NSW Specific Tab of the ARR Data Hub (./nsw\_specific) is to be considered. In NSW losses are derived considering a hierarchy of approaches depending on the available loss information. The continuing storm loss information from the ARR Datahub provided below should only be used where relevant under the loss hierarchy (level 5) and where used is to be multiplied by the factor of 0.4.

<b>ID</b>	14817.0
<b>Storm Initial Losses (mm)</b>	26.0
<b>Storm Continuing Losses (mm/h)</b>	4.0

### Layer Info

---

**Time Accessed** 05 August 2019 01:29PM

**Version** 2016\_v1

---

### Temporal Patterns | Download (.zip) (static/temporal\_patterns/TP/SSmainland.zip)

---

**code** SSmainland

**Label** Southern Slopes (Vic/NSW)

---

### Layer Info

---

**Time Accessed** 05 August 2019 01:29PM

**Version** 2016\_v2

---

### Areal Temporal Patterns | Download (.zip) (./static/temporal\_patterns/Areal/Areal\_SSmainland.zip)

---

**code** SSmainland

**arealabel** Southern Slopes (Vic/NSW)

---

### Layer Info

---

**Time Accessed** 05 August 2019 01:29PM

**Version** 2016\_v2

---

### BOM IFDs

Click here ([\) to obtain the IFD depths for catchment centroid from the BoM website](http://www.bom.gov.au/water/designRainfalls/revised-ifd/?year=2016&coordinate_type=dd&latitude=-34.984323464&longitude=150.72253611&sdmin=true&sdhr=true&sdday=true&user_label=)

---

### Layer Info

---

**Time Accessed** 05 August 2019 01:29PM

## Median Preburst Depths and Ratios

Values are of the format depth (ratio) with depth in mm

min (h)\AEP(%)	50	20	10	5	2	1
60 (1.0)	2.1 (0.072)	2.6 (0.066)	3.0 (0.062)	3.3 (0.059)	1.9 (0.028)	0.9 (0.011)
90 (1.5)	7.0 (0.209)	6.7 (0.144)	6.5 (0.117)	6.3 (0.096)	3.6 (0.045)	1.5 (0.016)
120 (2.0)	14.9 (0.390)	12.1 (0.229)	10.2 (0.161)	8.4 (0.114)	4.9 (0.055)	2.3 (0.023)
180 (3.0)	7.8 (0.171)	8.1 (0.128)	8.2 (0.109)	8.3 (0.095)	10.5 (0.100)	12.1 (0.102)
360 (6.0)	12.5 (0.195)	21.2 (0.241)	27.0 (0.257)	32.5 (0.267)	21.9 (0.151)	13.9 (0.085)
720 (12.0)	6.6 (0.074)	13.8 (0.110)	18.5 (0.124)	23.1 (0.134)	28.9 (0.142)	33.3 (0.146)
1080 (18.0)	5.9 (0.055)	9.7 (0.064)	12.2 (0.067)	14.5 (0.069)	23.4 (0.094)	30.0 (0.108)
1440 (24.0)	1.9 (0.015)	6.2 (0.036)	9.0 (0.044)	11.8 (0.049)	17.8 (0.062)	22.3 (0.069)
2160 (36.0)	0.0 (0.000)	2.2 (0.011)	3.6 (0.015)	5.0 (0.017)	7.1 (0.021)	8.7 (0.023)
2880 (48.0)	0.0 (0.000)	0.1 (0.000)	0.1 (0.001)	0.2 (0.001)	2.3 (0.006)	3.9 (0.009)
4320 (72.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)

## Layer Info

Time Accessed	05 August 2019 01:29PM
Version	2018_v1
Note	Preburst interpolation methods for catchment wide preburst has been slightly altered. Point values remain unchanged.

## 10% Preburst Depths

Values are of the format depth (ratio) with depth in mm

<b>min (h)\AEP(%)</b>	<b>50</b>	<b>20</b>	<b>10</b>	<b>5</b>	<b>2</b>	<b>1</b>
60 (1.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
90 (1.5)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
120 (2.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
180 (3.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
360 (6.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
720 (12.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
1080 (18.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
1440 (24.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
2160 (36.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
2880 (48.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
4320 (72.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)

## Layer Info

<b>Time Accessed</b>	05 August 2019 01:29PM
<b>Version</b>	2018_v1
<b>Note</b>	Preburst interpolation methods for catchment wide preburst has been slightly altered. Point values remain unchanged.

**25% Preburst Depths**

Values are of the format depth (ratio) with depth in mm

<b>min (h)\AEP(%)</b>	<b>50</b>	<b>20</b>	<b>10</b>	<b>5</b>	<b>2</b>	<b>1</b>
60 (1.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
90 (1.5)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
120 (2.0)	0.8 (0.022)	0.8 (0.015)	0.8 (0.012)	0.7 (0.010)	0.3 (0.004)	0.0 (0.000)
180 (3.0)	0.1 (0.002)	0.1 (0.001)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
360 (6.0)	0.5 (0.008)	0.3 (0.003)	0.1 (0.001)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
720 (12.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
1080 (18.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	1.1 (0.004)	2.0 (0.007)
1440 (24.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
2160 (36.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
2880 (48.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)
4320 (72.0)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)	0.0 (0.000)

**Layer Info**

<b>Time Accessed</b>	05 August 2019 01:29PM
<b>Version</b>	2018_v1
<b>Note</b>	Preburst interpolation methods for catchment wide preburst has been slightly altered. Point values remain unchanged.

**75% Preburst Depths**

Values are of the format depth (ratio) with depth in mm

<b>min (h)\AEP(%)</b>	<b>50</b>	<b>20</b>	<b>10</b>	<b>5</b>	<b>2</b>	<b>1</b>
60 (1.0)	32.3 (1.138)	32.8 (0.832)	33.2 (0.696)	33.5 (0.596)	32.8 (0.480)	32.3 (0.412)
90 (1.5)	40.9 (1.214)	41.9 (0.900)	42.6 (0.761)	43.2 (0.658)	40.5 (0.509)	38.5 (0.424)
120 (2.0)	45.9 (1.202)	53.2 (1.011)	58.1 (0.921)	62.7 (0.849)	50.5 (0.567)	41.3 (0.407)
180 (3.0)	47.5 (1.033)	48.8 (0.773)	49.6 (0.658)	50.4 (0.574)	70.9 (0.673)	86.2 (0.722)
360 (6.0)	49.3 (0.768)	69.8 (0.791)	83.3 (0.793)	96.4 (0.790)	98.1 (0.678)	99.3 (0.611)
720 (12.0)	30.0 (0.334)	47.6 (0.381)	59.2 (0.398)	70.4 (0.407)	84.0 (0.411)	94.1 (0.413)
1080 (18.0)	24.2 (0.224)	40.8 (0.269)	51.8 (0.285)	62.3 (0.295)	68.3 (0.274)	72.8 (0.261)
1440 (24.0)	17.8 (0.146)	26.7 (0.155)	32.6 (0.157)	38.2 (0.158)	50.4 (0.176)	59.5 (0.186)
2160 (36.0)	7.8 (0.055)	20.7 (0.102)	29.2 (0.119)	37.4 (0.130)	40.8 (0.119)	43.5 (0.113)
2880 (48.0)	5.0 (0.032)	9.5 (0.042)	12.4 (0.046)	15.3 (0.048)	18.1 (0.047)	20.3 (0.047)
4320 (72.0)	0.0 (0.000)	1.2 (0.005)	1.9 (0.006)	2.7 (0.007)	22.0 (0.050)	36.4 (0.073)

**Layer Info**

<b>Time Accessed</b>	05 August 2019 01:29PM
<b>Version</b>	2018_v1
<b>Note</b>	Preburst interpolation methods for catchment wide preburst has been slightly altered. Point values remain unchanged.

## 90% Preburst Depths

Values are of the format depth (ratio) with depth in mm

<b>min (h)</b>	<b>AEP(%)</b>	<b>50</b>	<b>20</b>	<b>10</b>	<b>5</b>	<b>2</b>	<b>1</b>
60 (1.0)		95.4 (3.357)	109.7 (2.779)	119.2 (2.502)	128.4 (2.286)	119.7 (1.752)	113.2 (1.445)
90 (1.5)		99.0 (2.937)	114.7 (2.462)	125.1 (2.234)	135.0 (2.055)	132.1 (1.661)	130.0 (1.429)
120 (2.0)		98.1 (2.568)	132.2 (2.512)	154.7 (2.453)	176.4 (2.389)	160.0 (1.797)	147.7 (1.456)
180 (3.0)		84.4 (1.836)	123.2 (1.952)	148.9 (1.975)	173.6 (1.975)	174.9 (1.661)	175.9 (1.474)
360 (6.0)		79.4 (1.238)	117.3 (1.330)	142.4 (1.356)	166.5 (1.365)	173.7 (1.201)	179.1 (1.102)
720 (12.0)		82.0 (0.912)	103.4 (0.828)	117.6 (0.789)	131.2 (0.759)	159.5 (0.782)	180.7 (0.793)
1080 (18.0)		56.7 (0.525)	85.2 (0.562)	104.1 (0.573)	122.2 (0.579)	147.2 (0.590)	165.9 (0.595)
1440 (24.0)		64.6 (0.529)	74.5 (0.432)	81.0 (0.391)	87.3 (0.361)	107.0 (0.374)	121.8 (0.380)
2160 (36.0)		52.8 (0.372)	63.2 (0.311)	70.0 (0.286)	76.6 (0.267)	92.6 (0.270)	104.6 (0.272)
2880 (48.0)		21.0 (0.135)	35.0 (0.156)	44.2 (0.163)	53.1 (0.166)	69.9 (0.182)	82.4 (0.191)
4320 (72.0)		10.4 (0.060)	19.2 (0.077)	25.0 (0.082)	30.5 (0.084)	78.4 (0.178)	114.2 (0.229)

## Layer Info

<b>Time Accessed</b>	05 August 2019 01:29PM
<b>Version</b>	2018_v1
<b>Note</b>	Preburst interpolation methods for catchment wide preburst has been slightly altered. Point values remain unchanged.

## Interim Climate Change Factors

	RCP 4.5	RCP6	RCP 8.5
2030	<b>0.648 (3.2%)</b>	0.687 (3.4%)	<b>0.811 (4.0%)</b>
2040	<b>0.878 (4.4%)</b>	0.827 (4.1%)	<b>1.084 (5.4%)</b>
2050	<b>1.081 (5.4%)</b>	1.013 (5.1%)	<b>1.446 (7.3%)</b>
2060	<b>1.251 (6.3%)</b>	1.229 (6.2%)	<b>1.862 (9.5%)</b>
2070	<b>1.381 (7.0%)</b>	1.460 (7.4%)	<b>2.298 (11.9%)</b>
2080	<b>1.465 (7.4%)</b>	1.691 (8.6%)	<b>2.719 (14.2%)</b>
2090	<b>1.496 (7.6%)</b>	1.906 (9.7%)	<b>3.090 (16.3%)</b>

## Layer Info

Time Accessed	05 August 2019 01:29PM
Version	2019_v1
Note	ARR recommends the use of RCP4.5 and RCP 8.5 values. These have been updated to the values that can be found on the climate change in Australia website.

## Probability Neutral Burst Initial Loss

min (h)\AEP(%)	50	20	10	5	2	1
<b>60 (1.0)</b>	12.8	8.8	9.0	8.8	9.6	6.5
<b>90 (1.5)</b>	11.8	8.3	9.2	9.0	8.9	5.3
<b>120 (2.0)</b>	10.4	7.8	8.3	8.3	8.7	5.5
<b>180 (3.0)</b>	12.1	9.1	9.5	8.9	8.3	2.9
<b>360 (6.0)</b>	11.9	8.0	8.4	8.1	9.1	2.8
<b>720 (12.0)</b>	15.4	10.7	11.4	9.0	10.2	3.0
<b>1080 (18.0)</b>	17.1	12.4	13.3	11.0	12.0	3.6
<b>1440 (24.0)</b>	19.3	15.1	15.4	13.2	14.1	4.3
<b>2160 (36.0)</b>	22.2	16.8	17.1	15.2	16.8	8.7
<b>2880 (48.0)</b>	24.8	20.4	20.0	20.7	20.0	10.2
<b>4320 (72.0)</b>	27.3	24.1	24.8	24.4	23.1	7.6

## Layer Info

Time Accessed	05 August 2019 01:29PM
Version	2018_v1

**Note**

As this point is in NSW the advice provided on losses and pre-burst on the NSW Specific Tab of the ARR Data Hub (./nsw\_specific) is to be considered. In NSW losses are derived considering a hierarchy of approaches depending on the available loss information. Probability neutral burst initial loss values for NSW are to be used in place of the standard initial loss and pre-burst as per the losses hierarchy.

[Download TXT \(downloads/30fd0218-eb31-4c6a-9753-a0270413312d.txt\)](#)

[Download JSON \(downloads/d079fcc2-1baf-456c-898a-ad1d668a6373.json\)](#)

[Generating PDF... \(downloads/11af4468-b57d-4fcc-ba73-6679d1feb8af.pdf\)](#)

## APPENDIX C

### ARR 2019 IFD Data



## Location

**Label:** Sealark Rd, Callala Bay

**Easting:** 292188

**Northing:** 6126324

**Zone:** 56

**Latitude:** Nearest grid cell: 34.9875 ([S](#))

**Longitude:** Nearest grid cell: 150.7125 ([E](#))

## IFD Design Rainfall Intensity (mm/h)

Issued: 24 September 2019

Rainfall intensity for Durations, Exceedance per Year (EY), and Annual Exceedance Probabilities (AEP).

[FAQ for New ARR probability terminology](#)

<b>Duration</b>	<b>Annual Exceedance Probability (AEP)</b>						
	<b>63.2%</b>	<b>50%#</b>	<b>20%*</b>	<b>10%</b>	<b>5%</b>	<b>2%</b>	<b>1%</b>
<b>1 min</b>	128	145	204	247	293	358	411
<b>2 min</b>	110	124	171	205	241	294	338
<b>3 min</b>	101	114	157	189	223	272	312
<b>4 min</b>	93.4	106	147	177	209	255	293
<b>5 min</b>	87.3	99.0	138	167	197	241	276
<b>10 min</b>	66.7	75.9	107	130	154	188	216
<b>15 min</b>	54.8	62.4	88.0	107	127	155	179
<b>20 min</b>	47.1	53.6	75.5	91.7	109	133	153
<b>25 min</b>	41.6	47.3	66.5	80.8	95.8	117	135
<b>30 min</b>	37.5	42.6	59.8	72.6	86.0	105	121
<b>45 min</b>	29.7	33.6	47.0	56.8	67.1	81.9	94.1
<b>1 hour</b>	25.1	28.4	39.5	47.7	56.2	68.3	78.4
<b>1.5 hour</b>	19.9	22.5	31.0	37.3	43.8	53.0	60.6
<b>2 hour</b>	16.9	19.1	26.3	31.5	36.9	44.5	50.7
<b>3 hour</b>	13.6	15.3	21.0	25.1	29.3	35.1	39.8
<b>4.5 hour</b>	11.0	12.4	17.0	20.3	23.6	28.1	31.6
<b>6 hour</b>	9.44	10.7	14.7	17.5	20.3	24.1	27.1
<b>9 hour</b>	7.65	8.69	12.0	14.3	16.6	19.6	22.0
<b>12 hour</b>	6.57	7.49	10.4	12.4	14.4	17.0	19.0
<b>18 hour</b>	5.24	6.01	8.43	10.1	11.7	13.9	15.5
<b>24 hour</b>	4.42	5.09	7.19	8.64	10.1	11.9	13.3
<b>30 hour</b>	3.85	4.44	6.31	7.60	8.89	10.6	11.8
<b>36 hour</b>	3.42	3.94	5.64	6.81	7.98	9.52	10.7
<b>48 hour</b>	2.80	3.24	4.66	5.66	6.67	8.00	9.01
<b>72 hour</b>	2.07	2.40	3.48	4.26	5.04	6.10	6.92

<b>96 hour</b>	1.65	1.91	2.79	3.42	4.06	4.95	5.64
<b>120 hour</b>	1.37	1.59	2.33	2.86	3.41	4.16	4.75
<b>144 hour</b>	1.18	1.37	2.00	2.46	2.94	3.59	4.11
<b>168 hour</b>	1.04	1.21	1.76	2.17	2.59	3.16	3.61

Note:

# The 50% AEP IFD **does not** correspond to the 2 year Average Recurrence Interval (ARI) IFD.  
Rather it corresponds to the 1.44 ARI.

\* The 20% AEP IFD **does not** correspond to the 5 year Average Recurrence Interval (ARI) IFD.  
Rather it corresponds to the 4.48 ARI.

This page was created at **12:11 on Tuesday 24 September 2019 (AEST)**

© [Copyright](#) Commonwealth of Australia 2019, Bureau of Meteorology (ABN 92 637 533 532) | [Disclaimer](#) | [Privacy](#) | [Accessibility](#)

## **APPENDIX D**

### Pre-Burst Rainfall Depths


Table E1: NSW Transformation Pre-Burst Rainfall Depths (bold values interpolated)

<b>Storm Duration</b>		<b>Pre-Burst Rainfall Depth (mm)</b>						
		<b>AEP (%)</b>						
<b>min</b>	<b>hrs</b>	<b>50</b>	<b>20</b>	<b>10</b>	<b>5</b>	<b>2</b>	<b>1</b>	
60	1	12.8	16.8	16.6	16.8	16	19.1	
90	1.5	13.8	17.3	16.4	16.6	16.7	20.3	
120	2	15.2	17.8	17.3	17.3	16.9	20.1	
180	3	13.5	16.5	16.1	16.7	17.3	22.7	
<b>270</b>	<b>4.5</b>	<b>13.6</b>	<b>17.1</b>	<b>16.7</b>	<b>17.1</b>	<b>16.9</b>	<b>22.8</b>	
360	6	13.7	17.6	17.2	17.5	16.5	22.8	
<b>540</b>	<b>9</b>	<b>12.0</b>	<b>16.3</b>	<b>15.7</b>	<b>17.1</b>	<b>16.0</b>	<b>22.7</b>	
720	12	10.2	14.9	14.2	16.6	15.4	22.6	
1080	18	8.5	13.2	12.3	14.6	13.6	22	
1440	24	6.3	10.5	10.2	12.4	11.5	21.3	
2160	36	3.4	8.8	8.5	10.4	8.8	16.9	
2880	48	0.8	5.2	5.6	4.9	5.6	15.4	
4320	72	0	1.5	0.8	1.2	2.5	18	

## APPENDIX E

### RFFE Method Output

# Results | Regional Flood Frequency Estimation Model

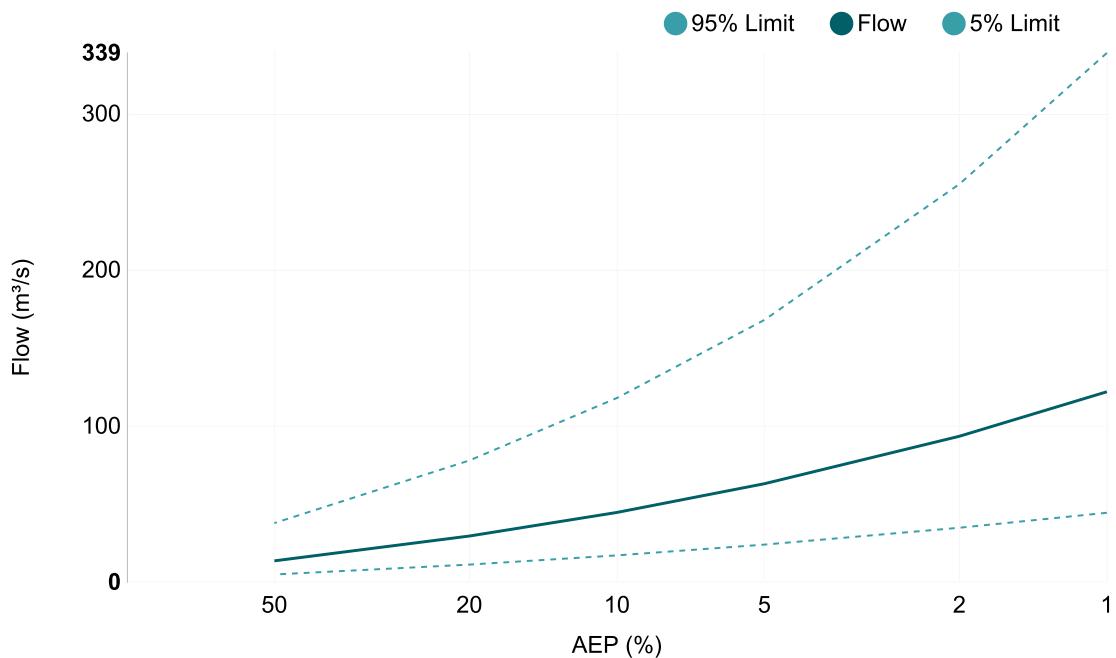

\*The catchment has unusual shape. Results have lower accuracy and may not be directly applicable in practice.

AEP (%)	Discharge (m³/s)	Lower Confidence Limit (5%) (m³/s)	Upper Confidence Limit (95%) (m³/s)
50	13.7	4.97	37.9
20	29.6	11.3	78.0
10	44.7	17.2	118
5	63.1	24.1	168
2	93.5	34.9	255
1	122	44.5	339

## Statistics

Variable	Value	Standard Dev
Mean	2.460	0.646
Standard Dev	0.896	0.162
Skew	0.091	0.027


Note: These statistics come from the nearest gauged catchment. Details.

**Correlation**


1.000		
-0.330	1.000	
0.170	-0.280	1.000

Note: These statistics are common to each region. Details.


## 1% AEP Flow vs Catchment Area

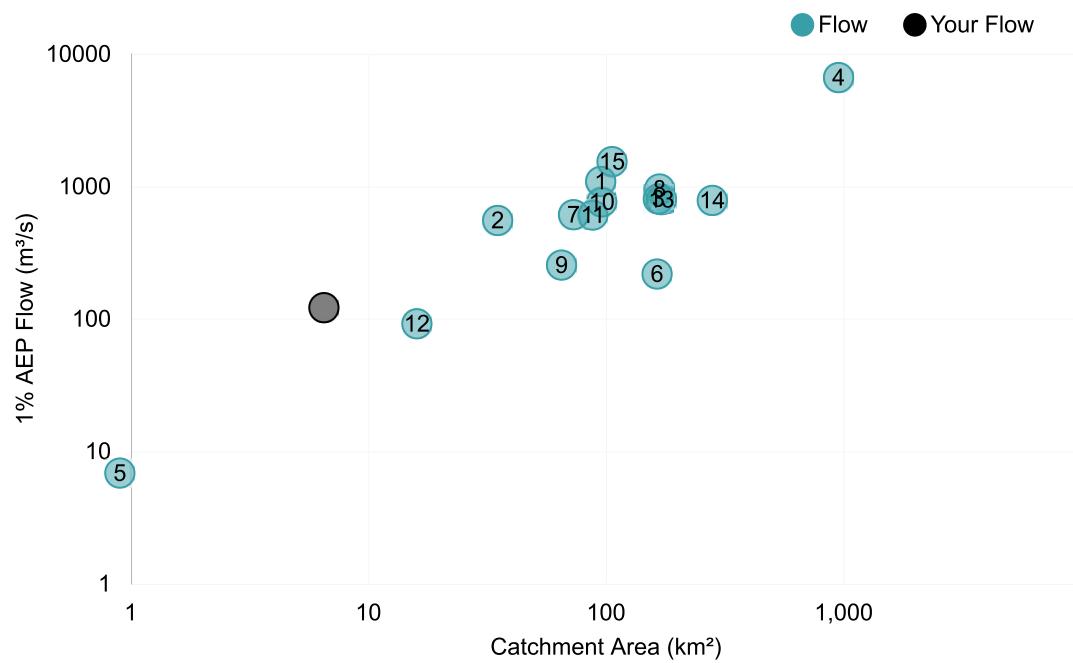


## Shape Factor vs Catchment Area

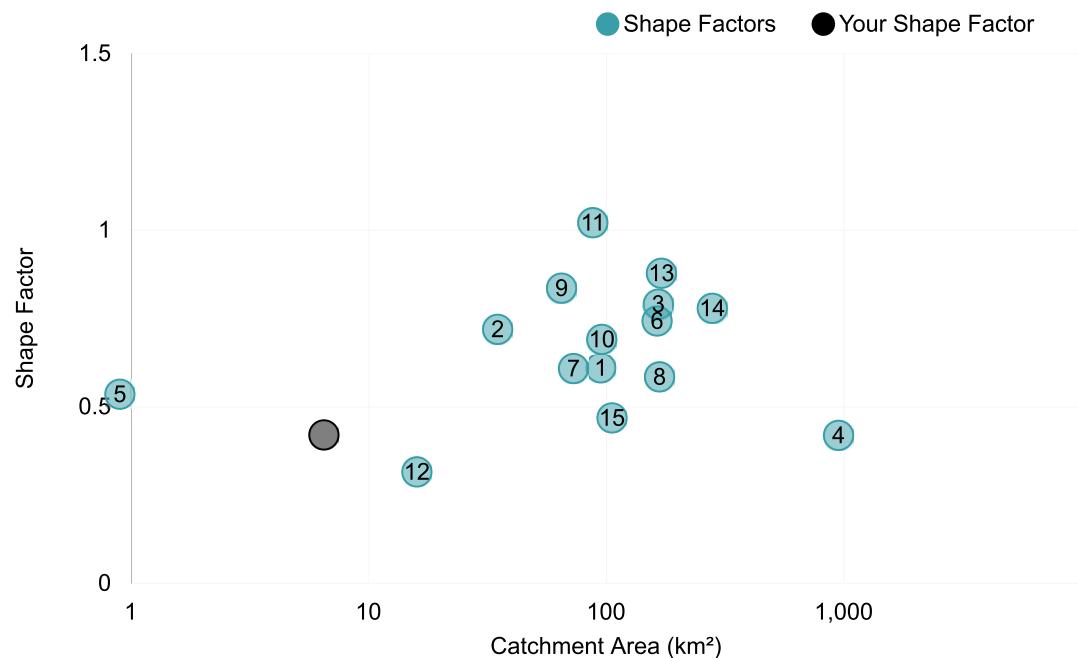

## Intensity vs Catchment Area

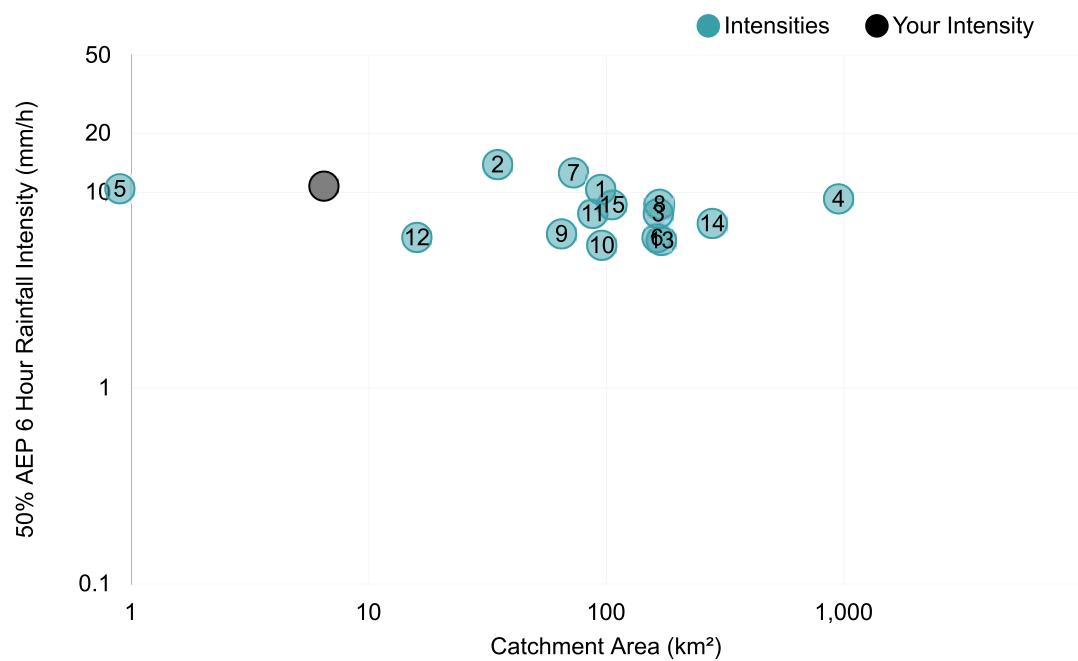

## Bias Correction Factor vs Catchment Area

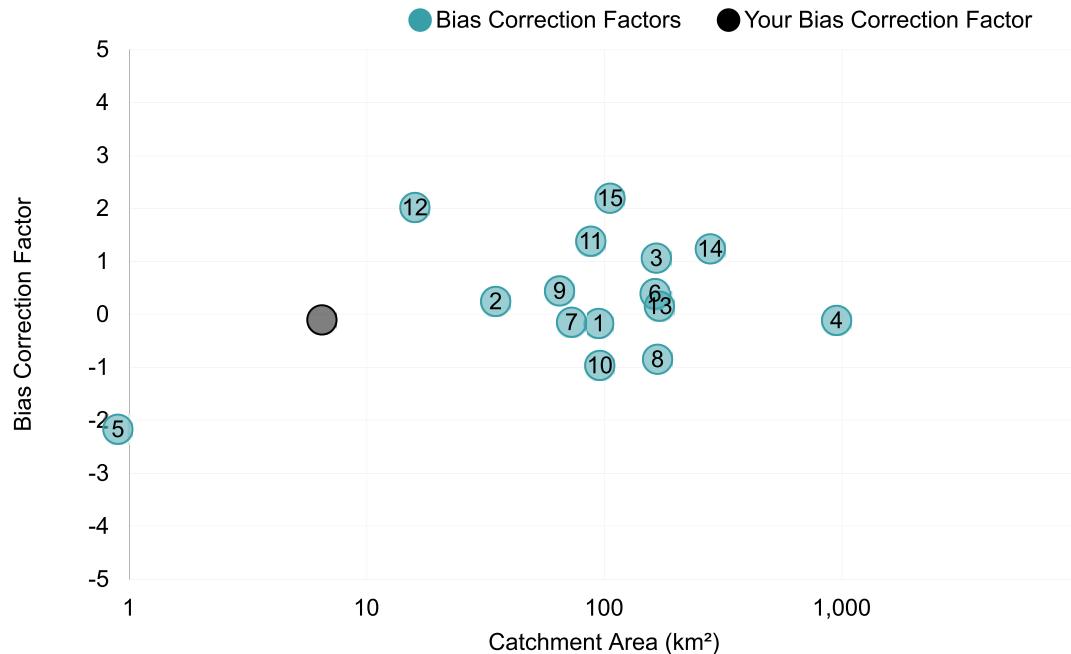

## Download


[TXT](#)
[Nearby](#)
[JSON](#)

### Input Data

Date/Time	2019-08-05 16:19
Catchment Name	Wowly
Latitude (Outlet)	-34.99499
Longitude (Outlet)	150.72876
Latitude (Centroid)	-34.98533
Longitude (Centroid)	150.727794
Catchment Area ( $\text{km}^2$ )	6.5
Distance to Nearest Gauged Catchment (km)	12.21
50% AEP 6 Hour Rainfall Intensity (mm/h)	10.724723
2% AEP 6 Hour Rainfall Intensity (mm/h)	24.131247
Rainfall Intensity Source (User/Auto)	Auto
Region	East Coast

## Input Data

Region Version	RFFE Model 2016 v1
Region Source (User/Auto)	Auto
Shape Factor	0.42*
Interpolation Method	Natural Neighbour
Bias Correction Value	-0.104

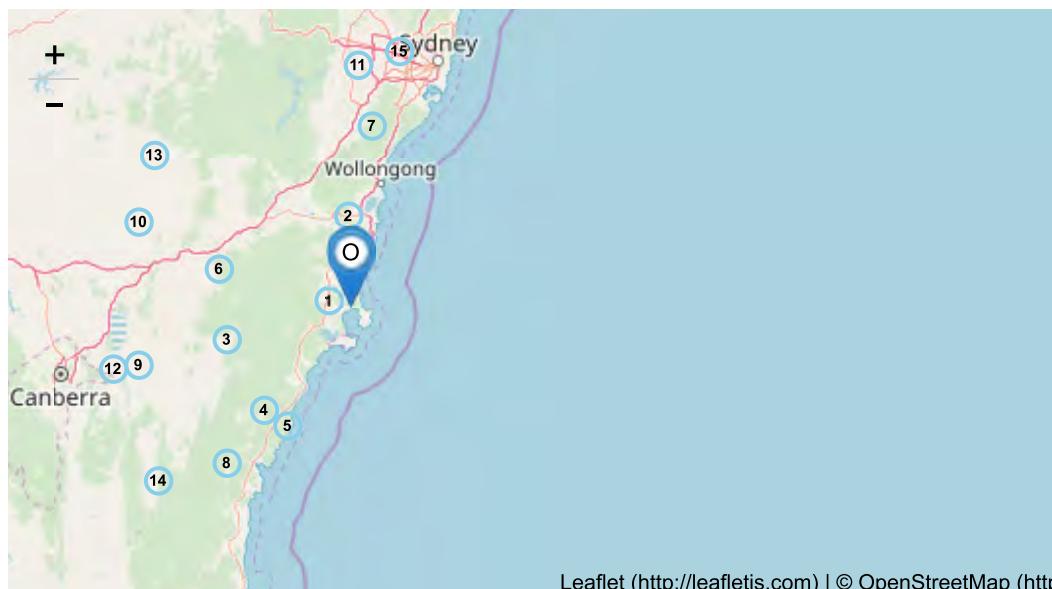

Leaflet (<http://leafletjs.com>) | © OpenStreetMap (<http://osm.org/copyright>) contributors

Method by Dr Ataur Rahman and Dr Khaled Haddad from Western Sydney University for the Australian Rainfall and Runoff Project. Full description of the project can be found at the project page (<http://arr.ga.gov.au/revision-projects/project-list/projects/project-5>) on the ARR website. Send any questions regarding the method or project here (mailto:[admin@arr-software.org](mailto:admin@arr-software.org)).





## **APPENDIX F**

### Pre-Development Modelling Results


## Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
  - 0.05 to 0.01
  - 0.10 to 0.20
  - 0.20 to 0.30
  - 0.30 to 0.40
  - 0.40 to 0.50
  - 0.50 to 0.60
  - 0.60 to 0.70
  - 0.70 to 0.80
  - 0.80 to 0.90
  - 0.90 to 1.0
  - >1.0

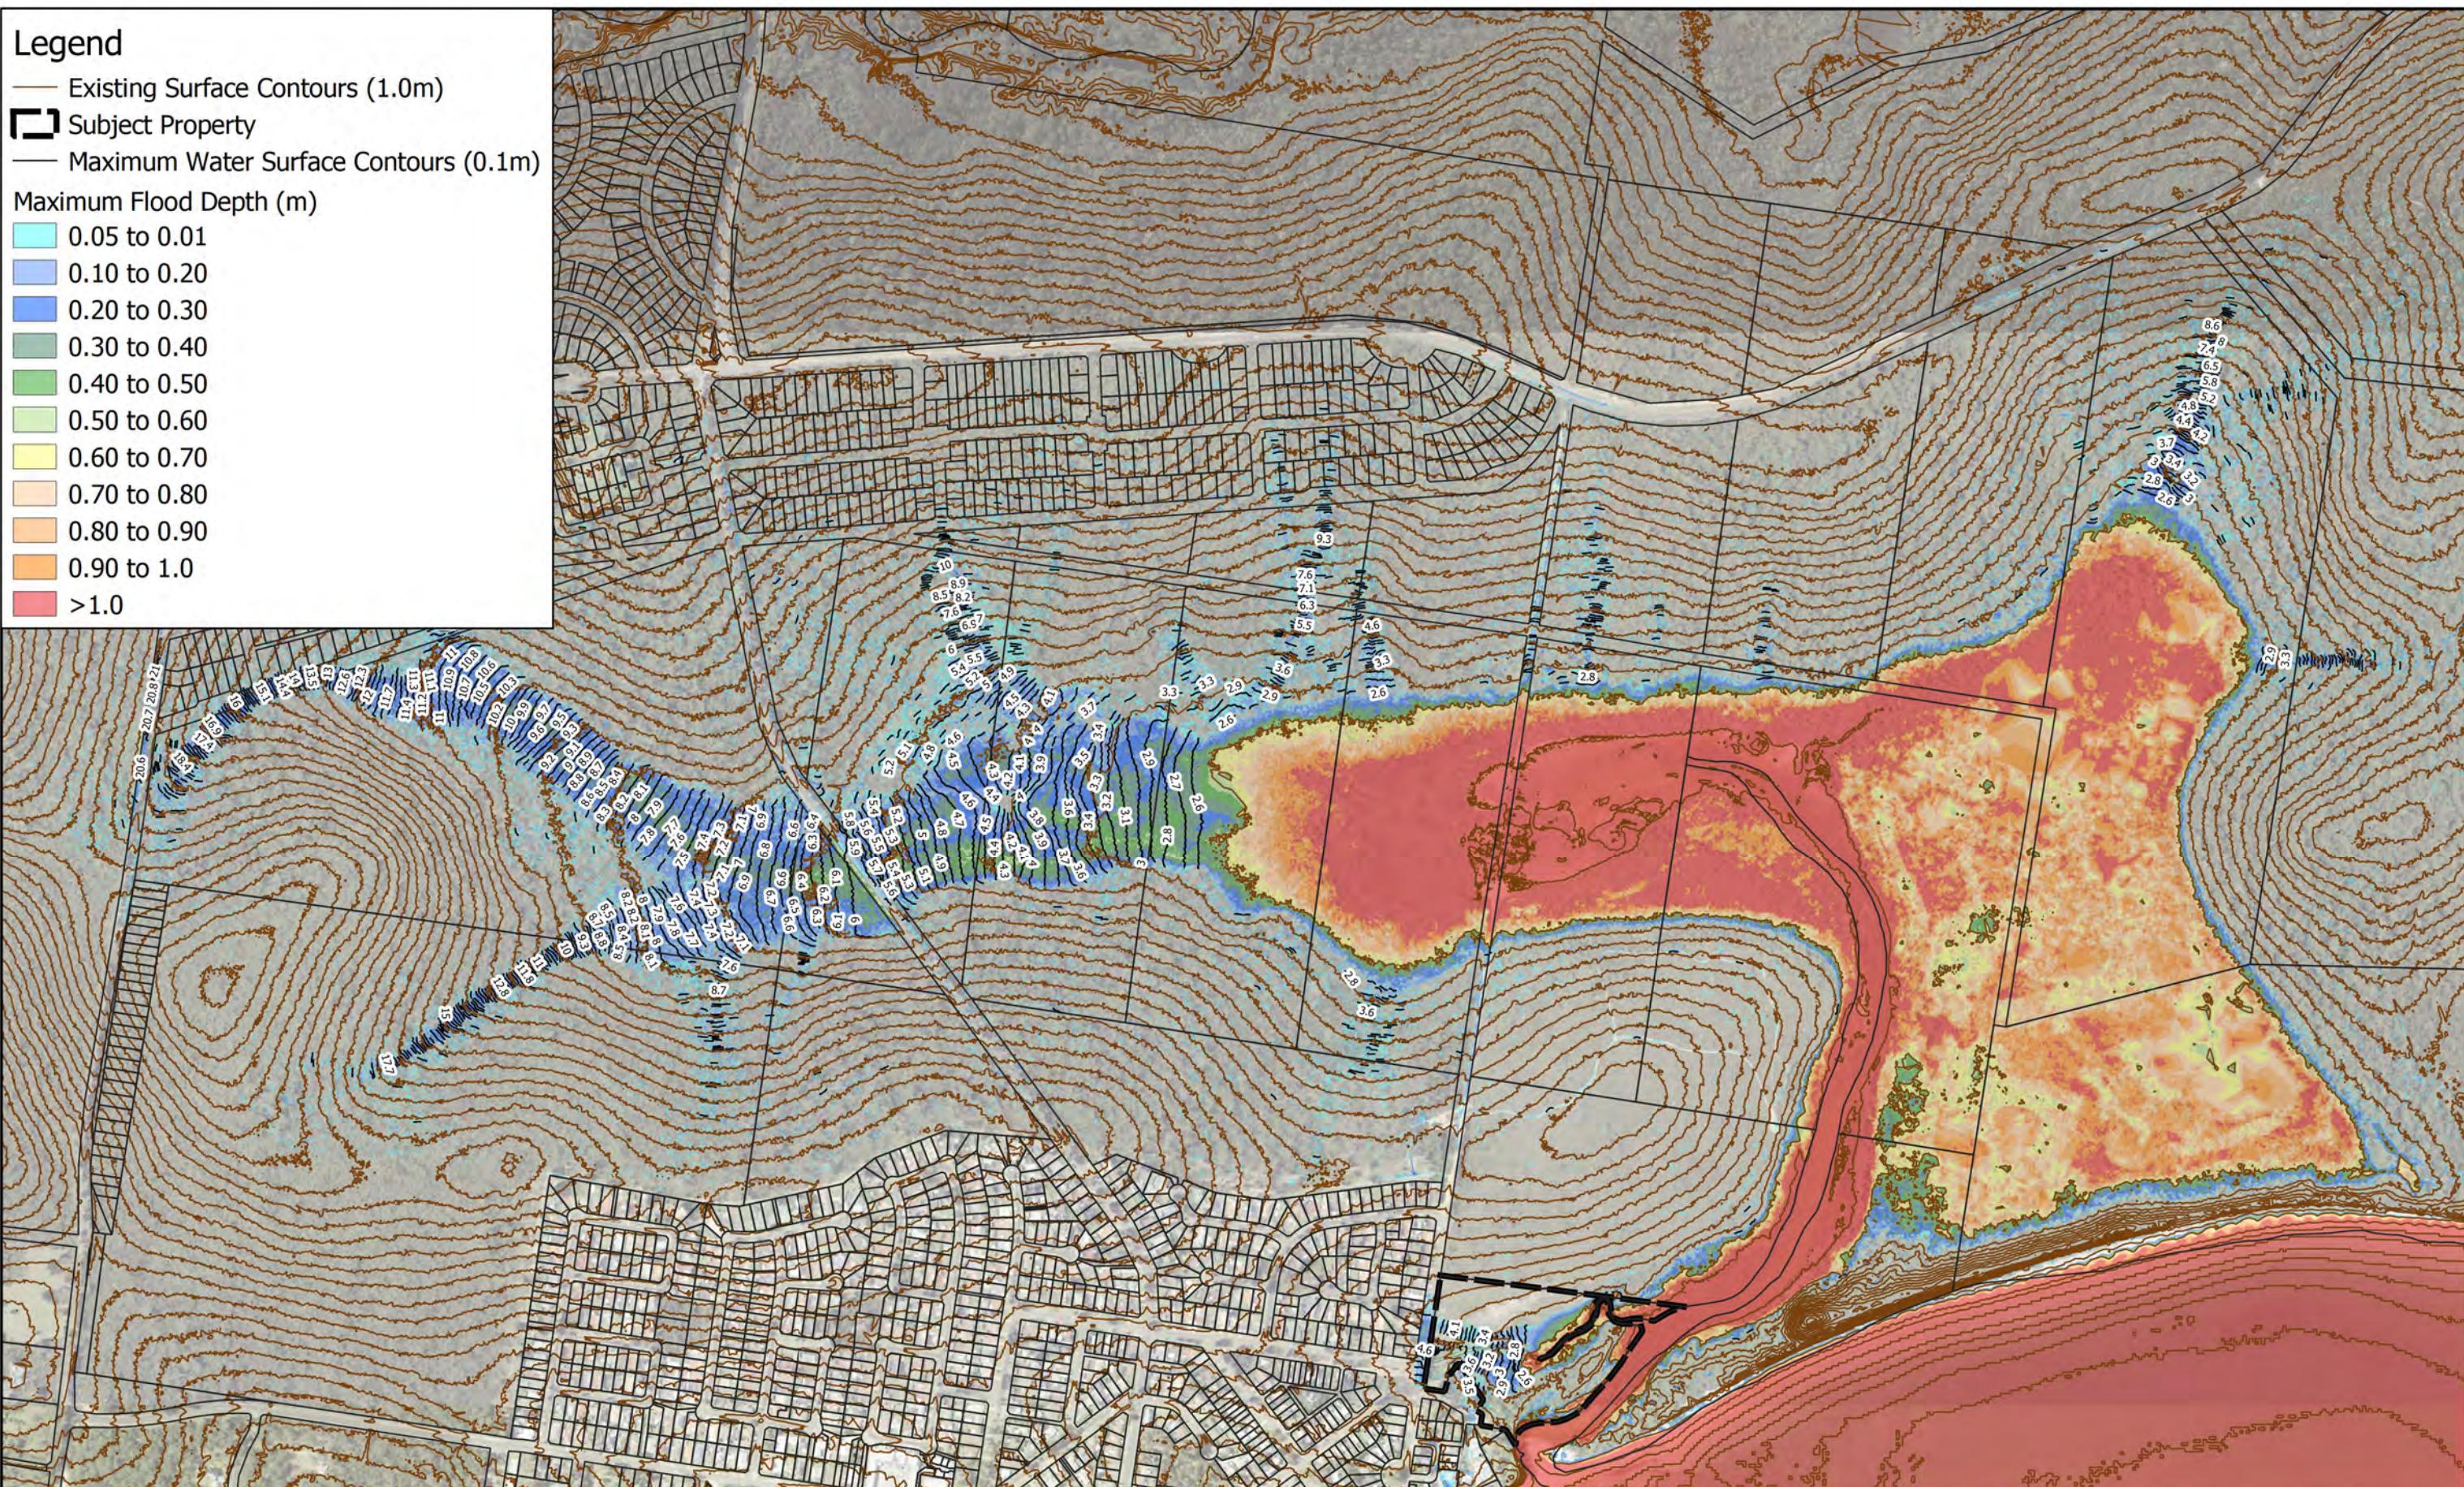


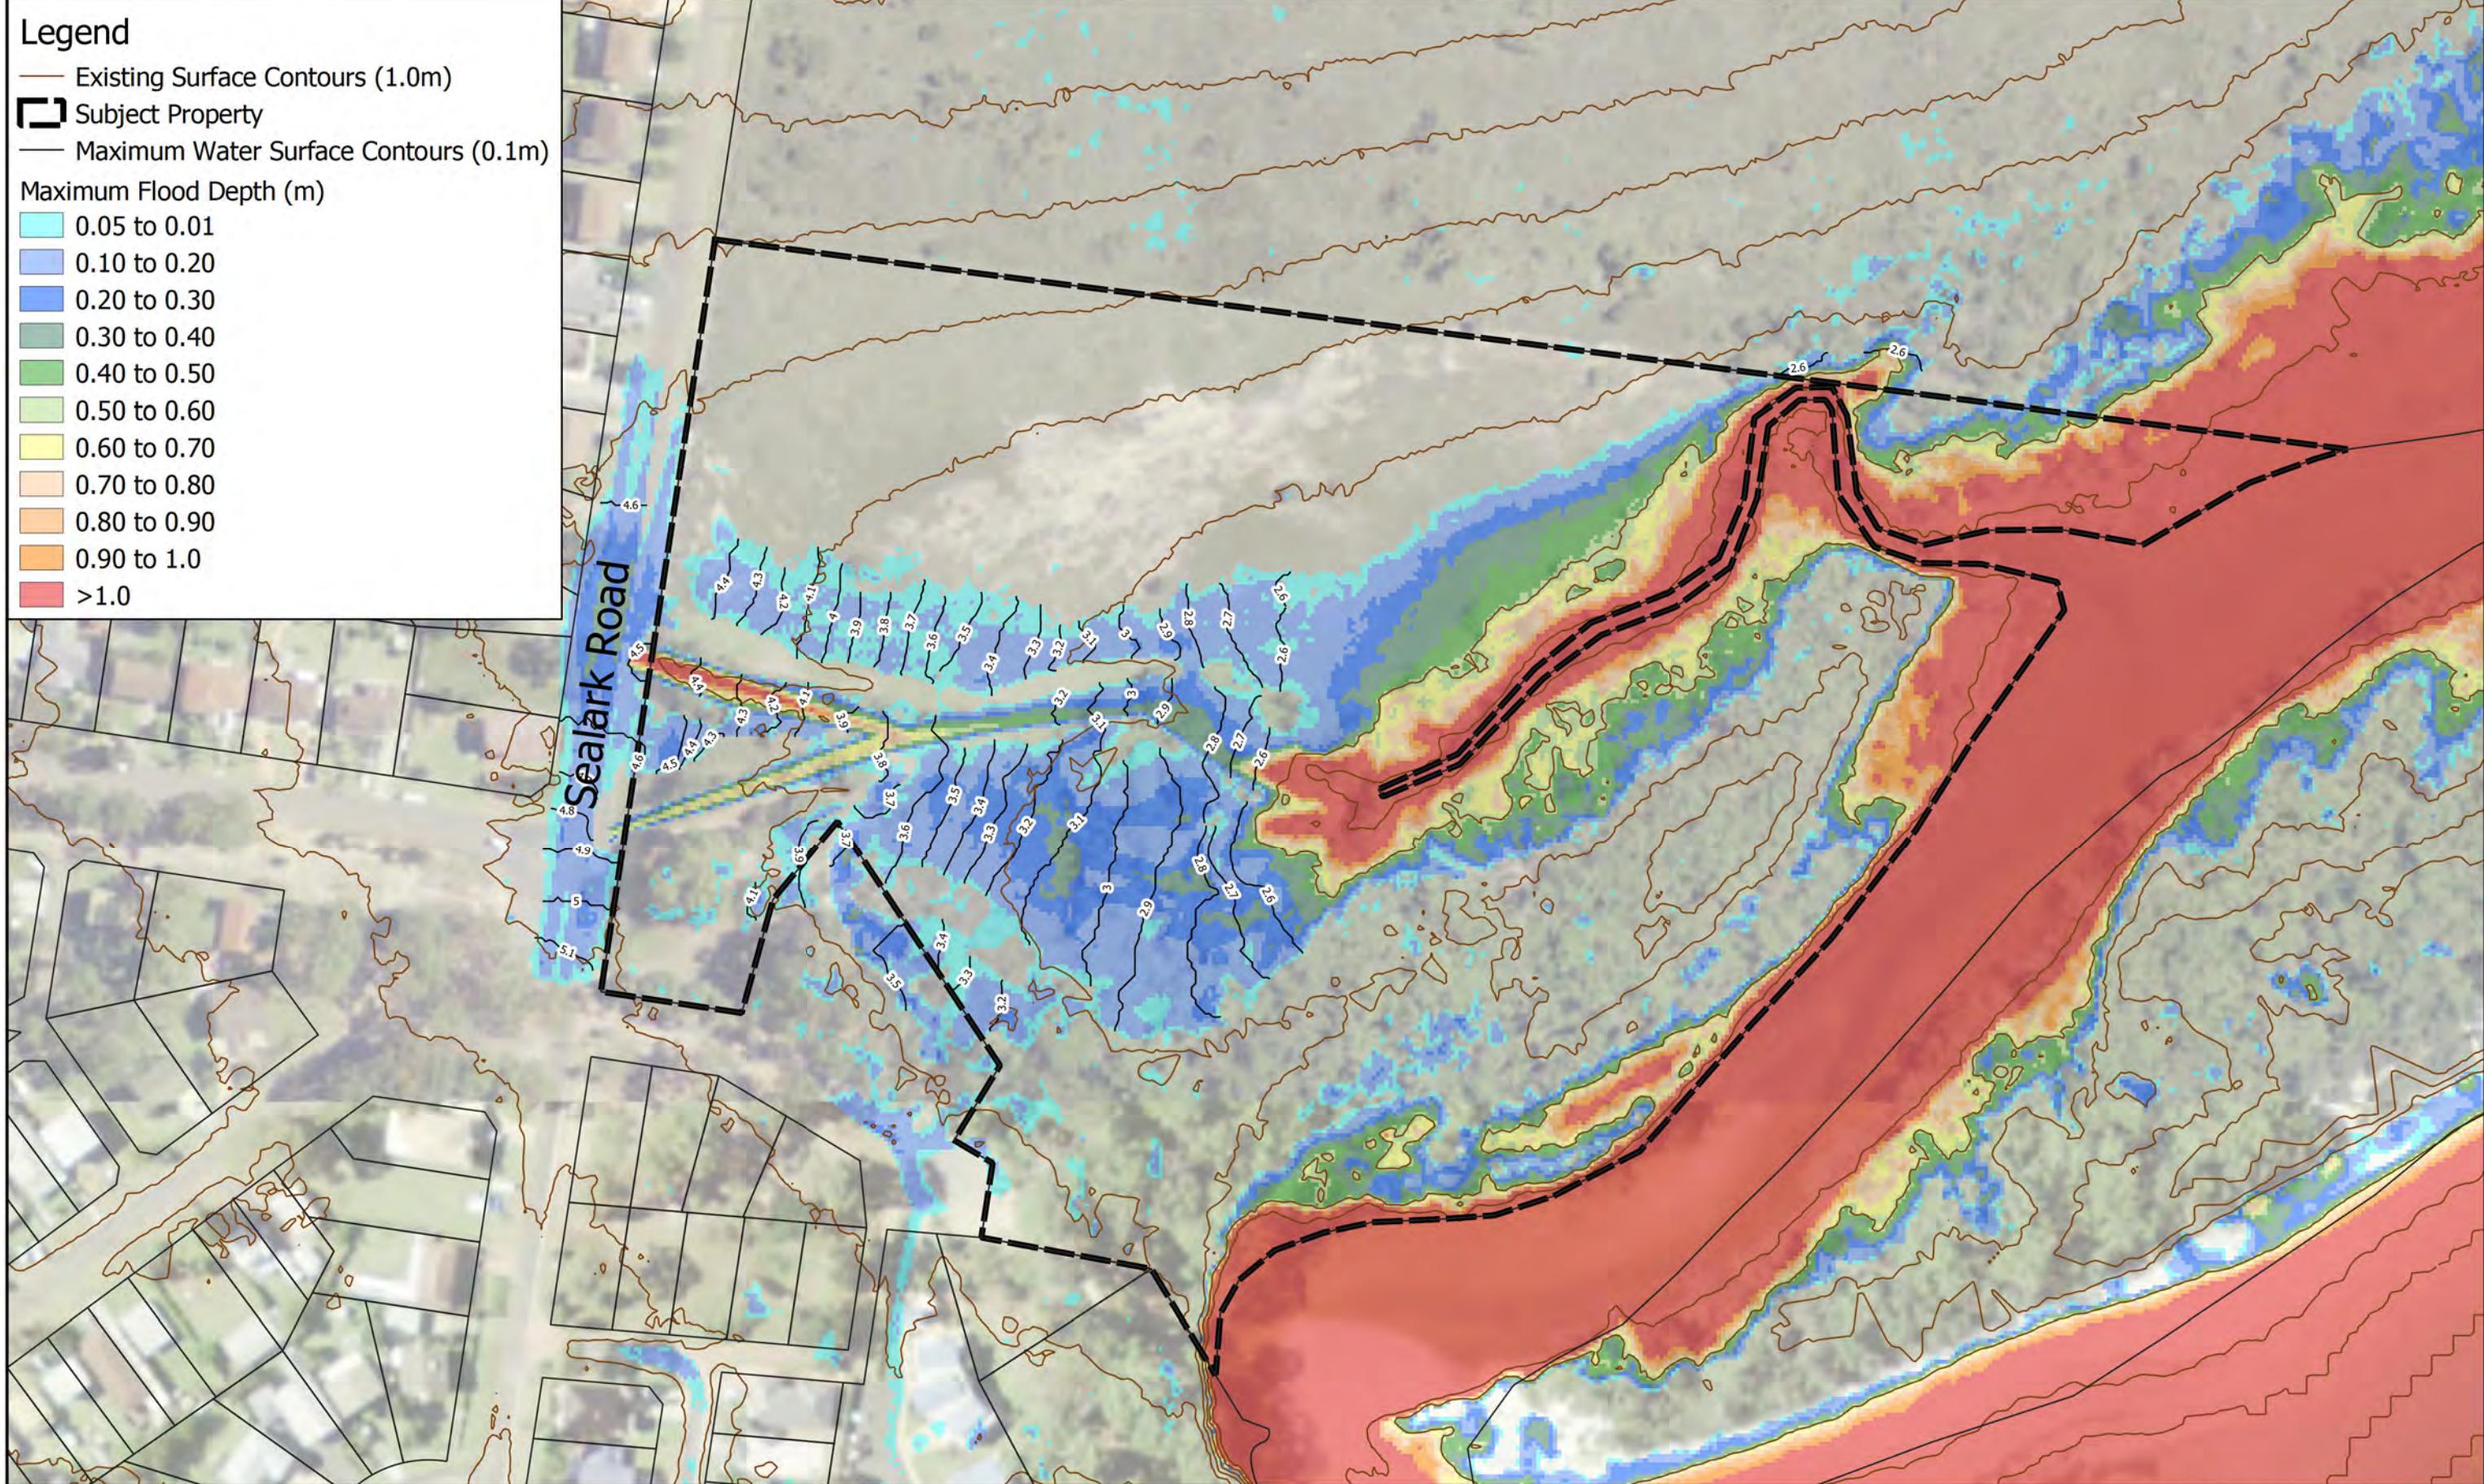



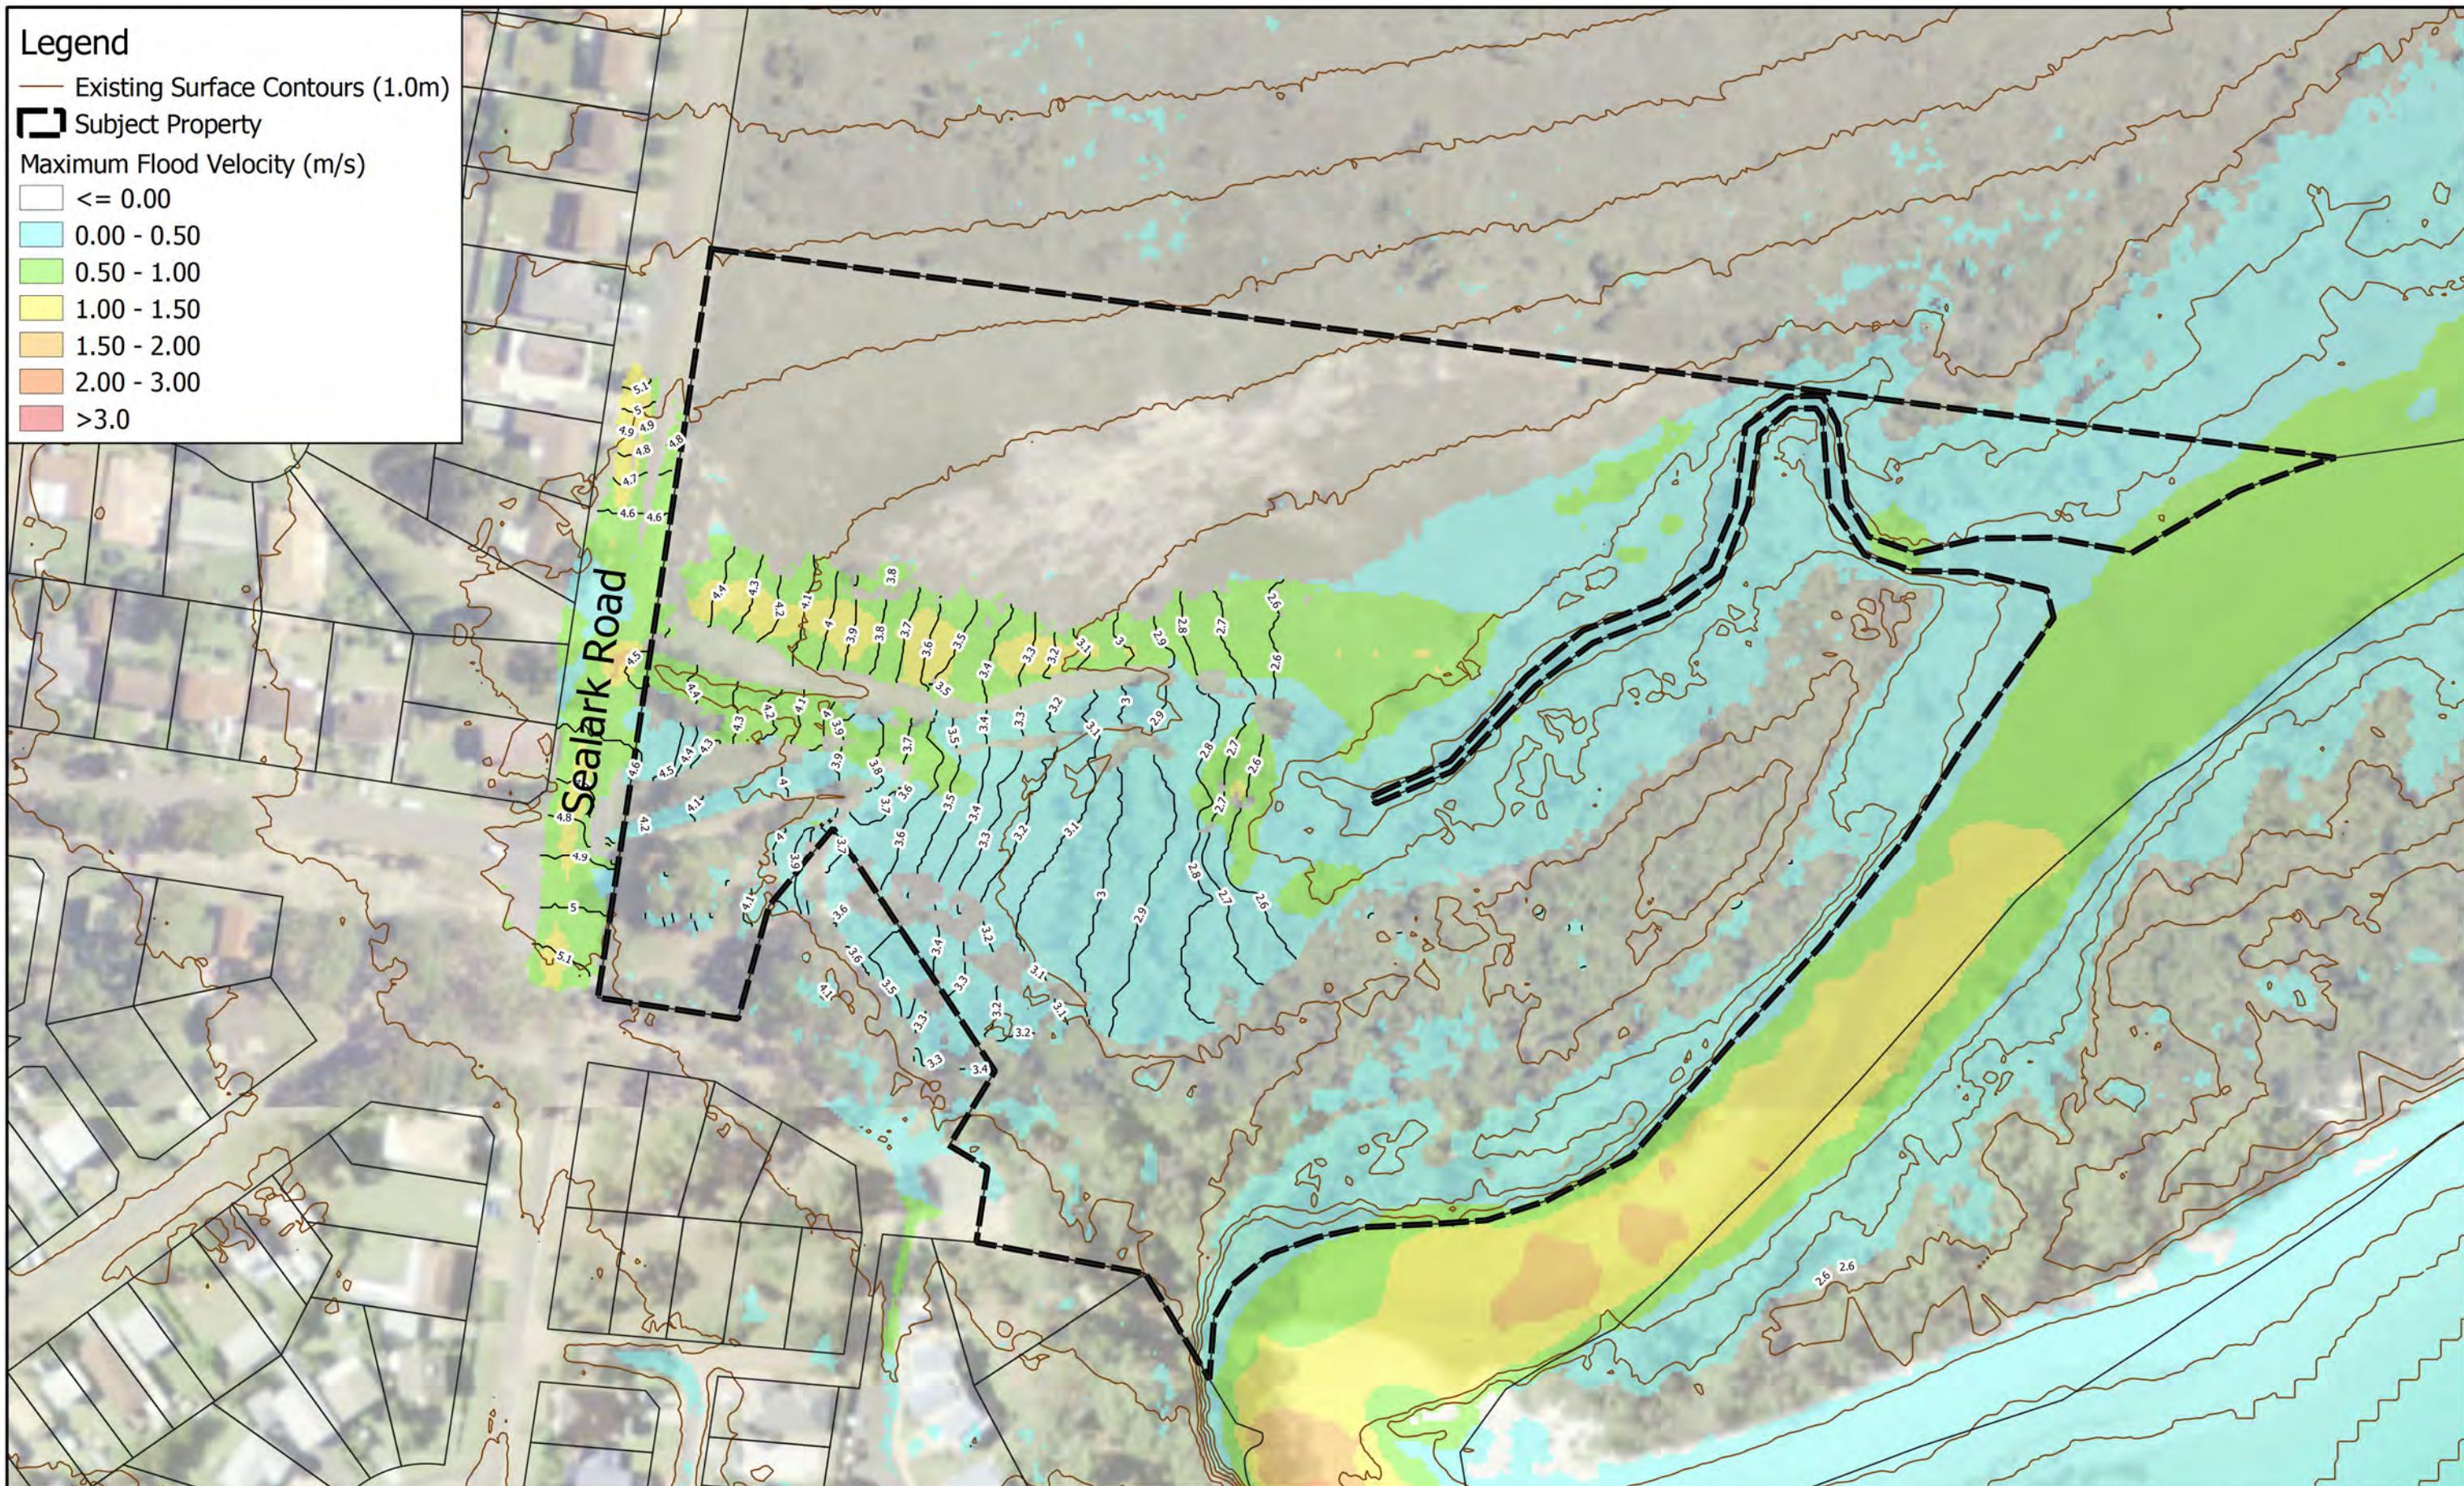

 **footprint.**  
sustainable engineering.  
210 jamberoo road, jamberoo  
nsw 2533 p: (02) 4237 6770

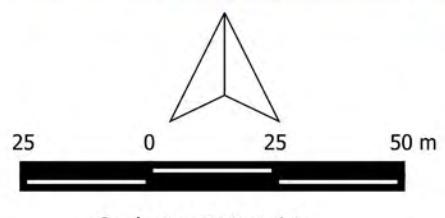

Footprint (NSW) Pty. Ltd. endeavors to ensure that the information provided in this map is correct at the time of publication. Footprint (NSW) Pty. Ltd. does not warrant, guarantee or make representations regarding the currency and accuracy of the information contained on this map.

## LOT 5 SEALARK ROAD, CALLALA BAY

FIGURE 1.2B  
ENVELOPE OF MAXIMUM FLOOD VELOCITIES  
1% AEP

## Legend

Existing Surface Contours (1.0m)

Subject Property

Maximum Flood Hazard (ARR2019)

H1

H2


H3

H4

H5

H6




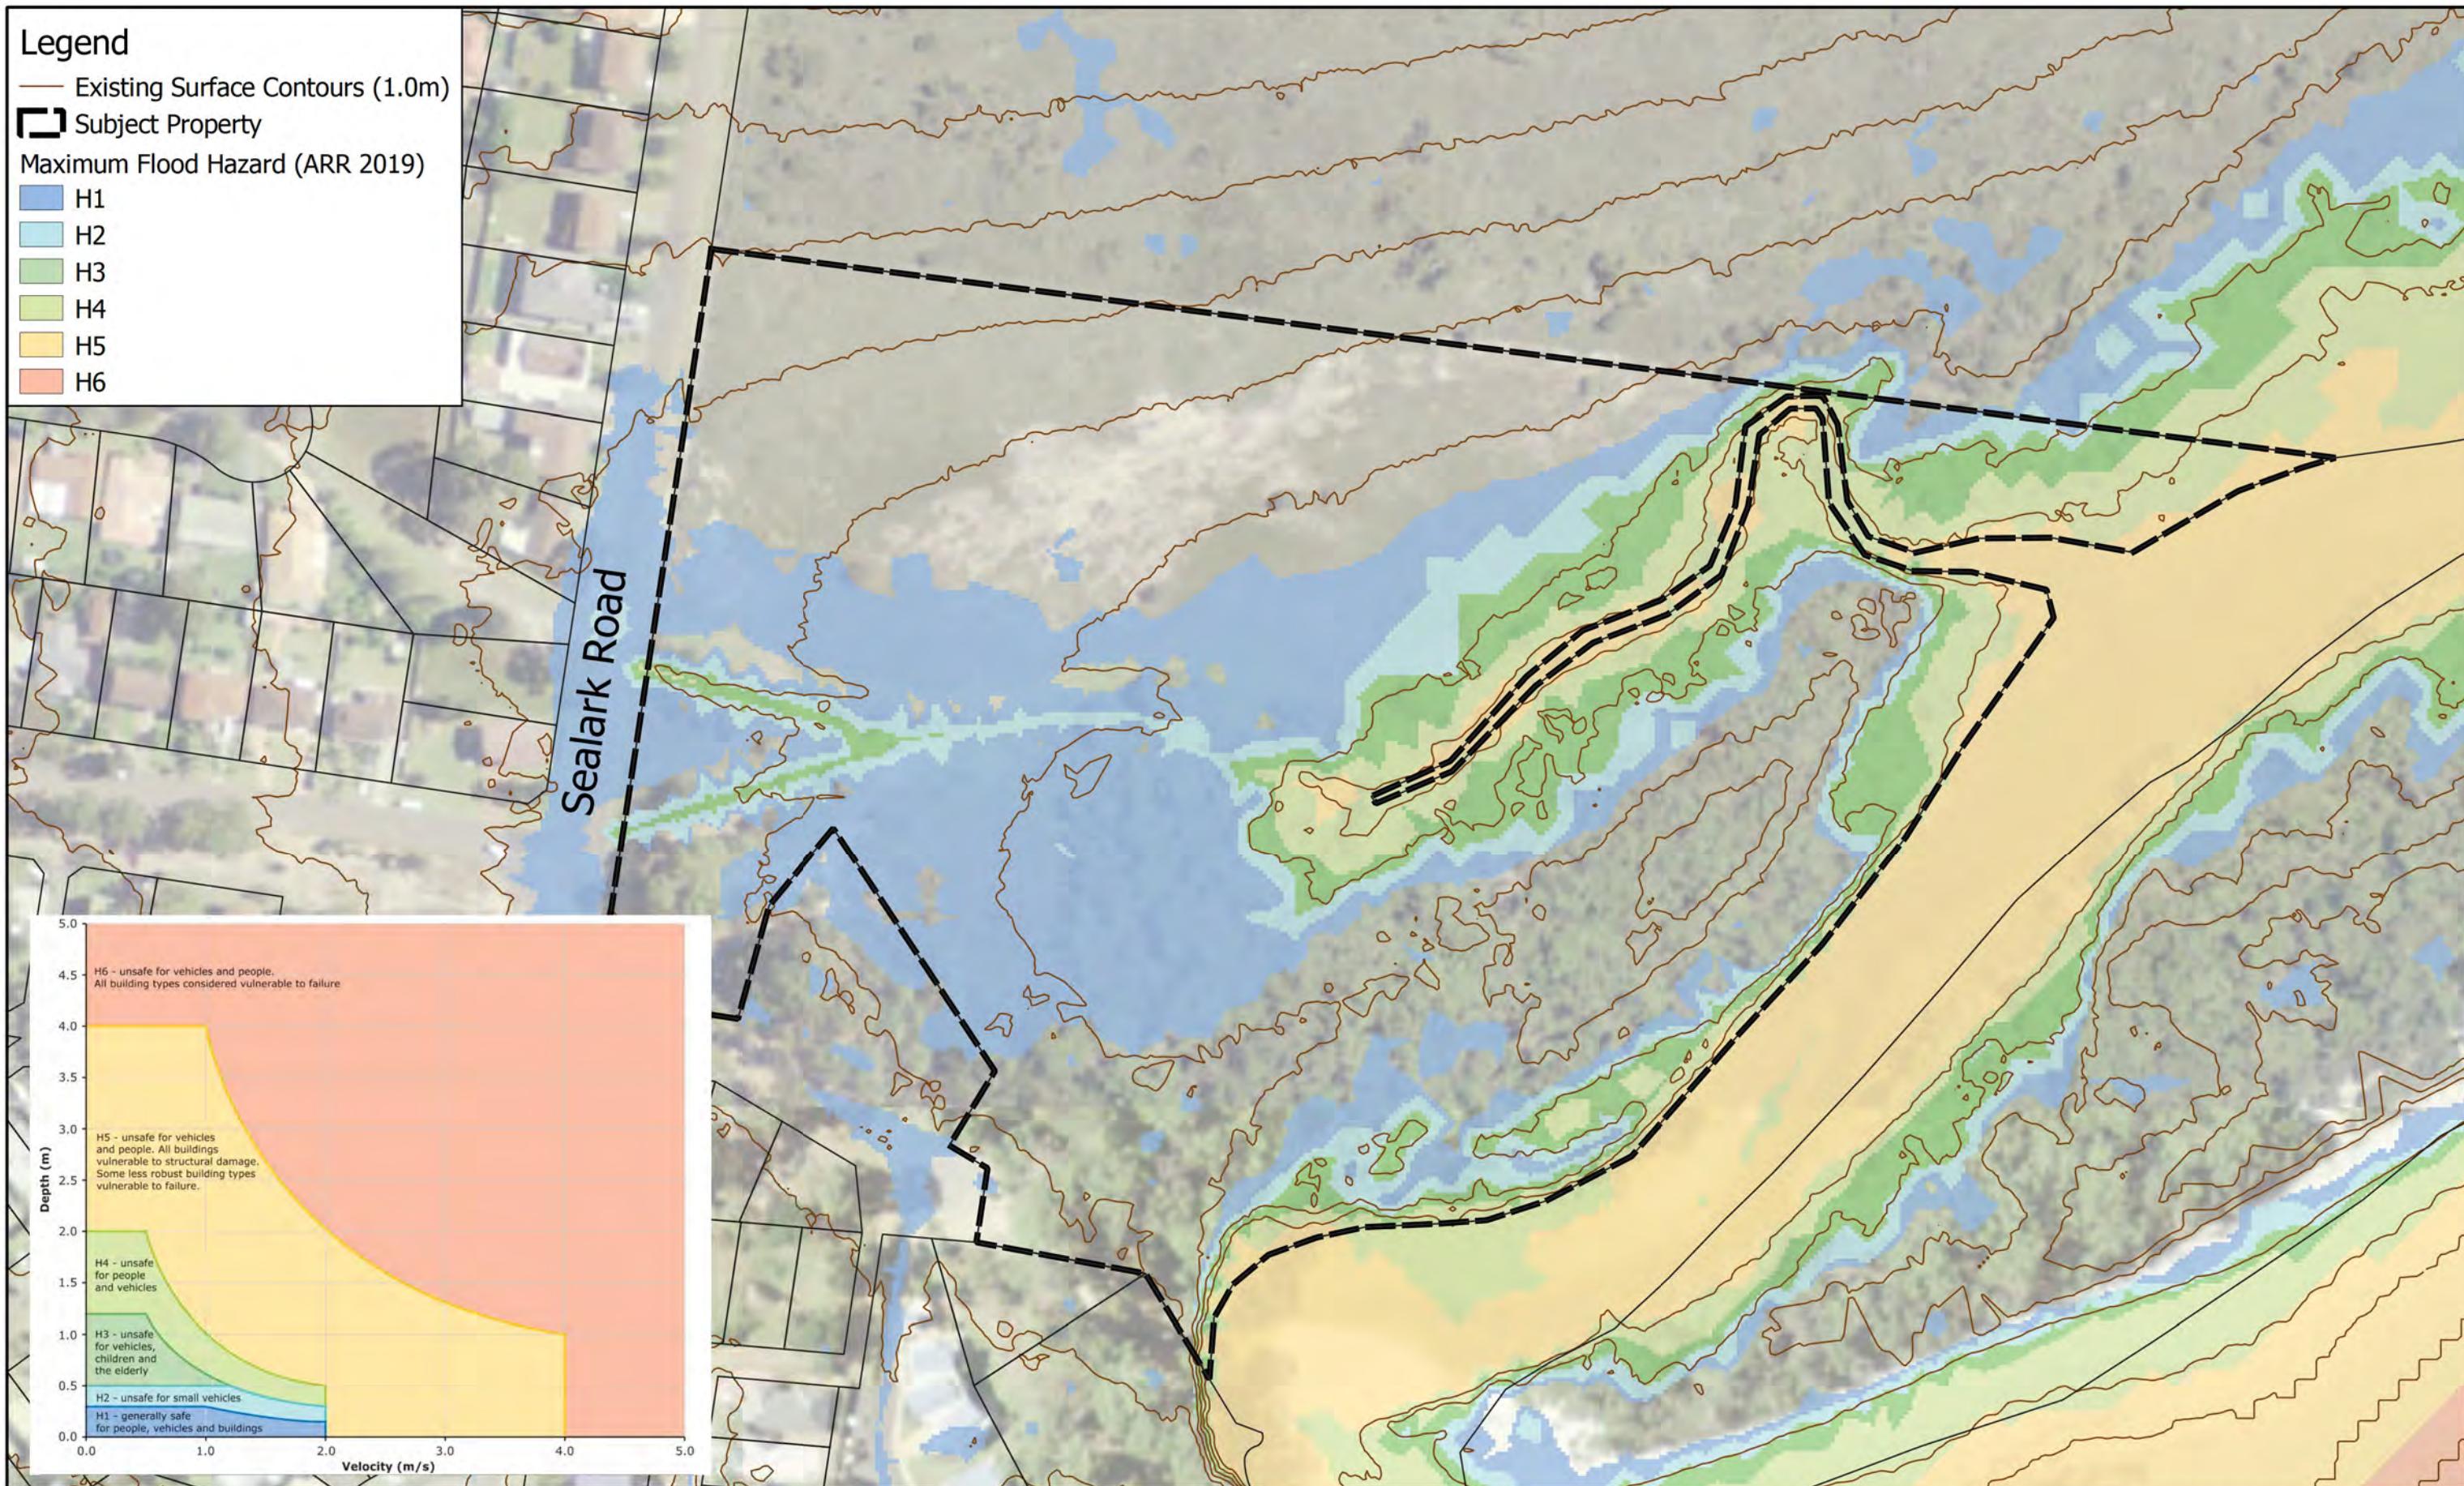


### Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Source of Maximum Flood Level
  - 1% AEP Catchment - 5% AEP Ocean
  - 5% AEP Catchment - 1% AEP Ocean




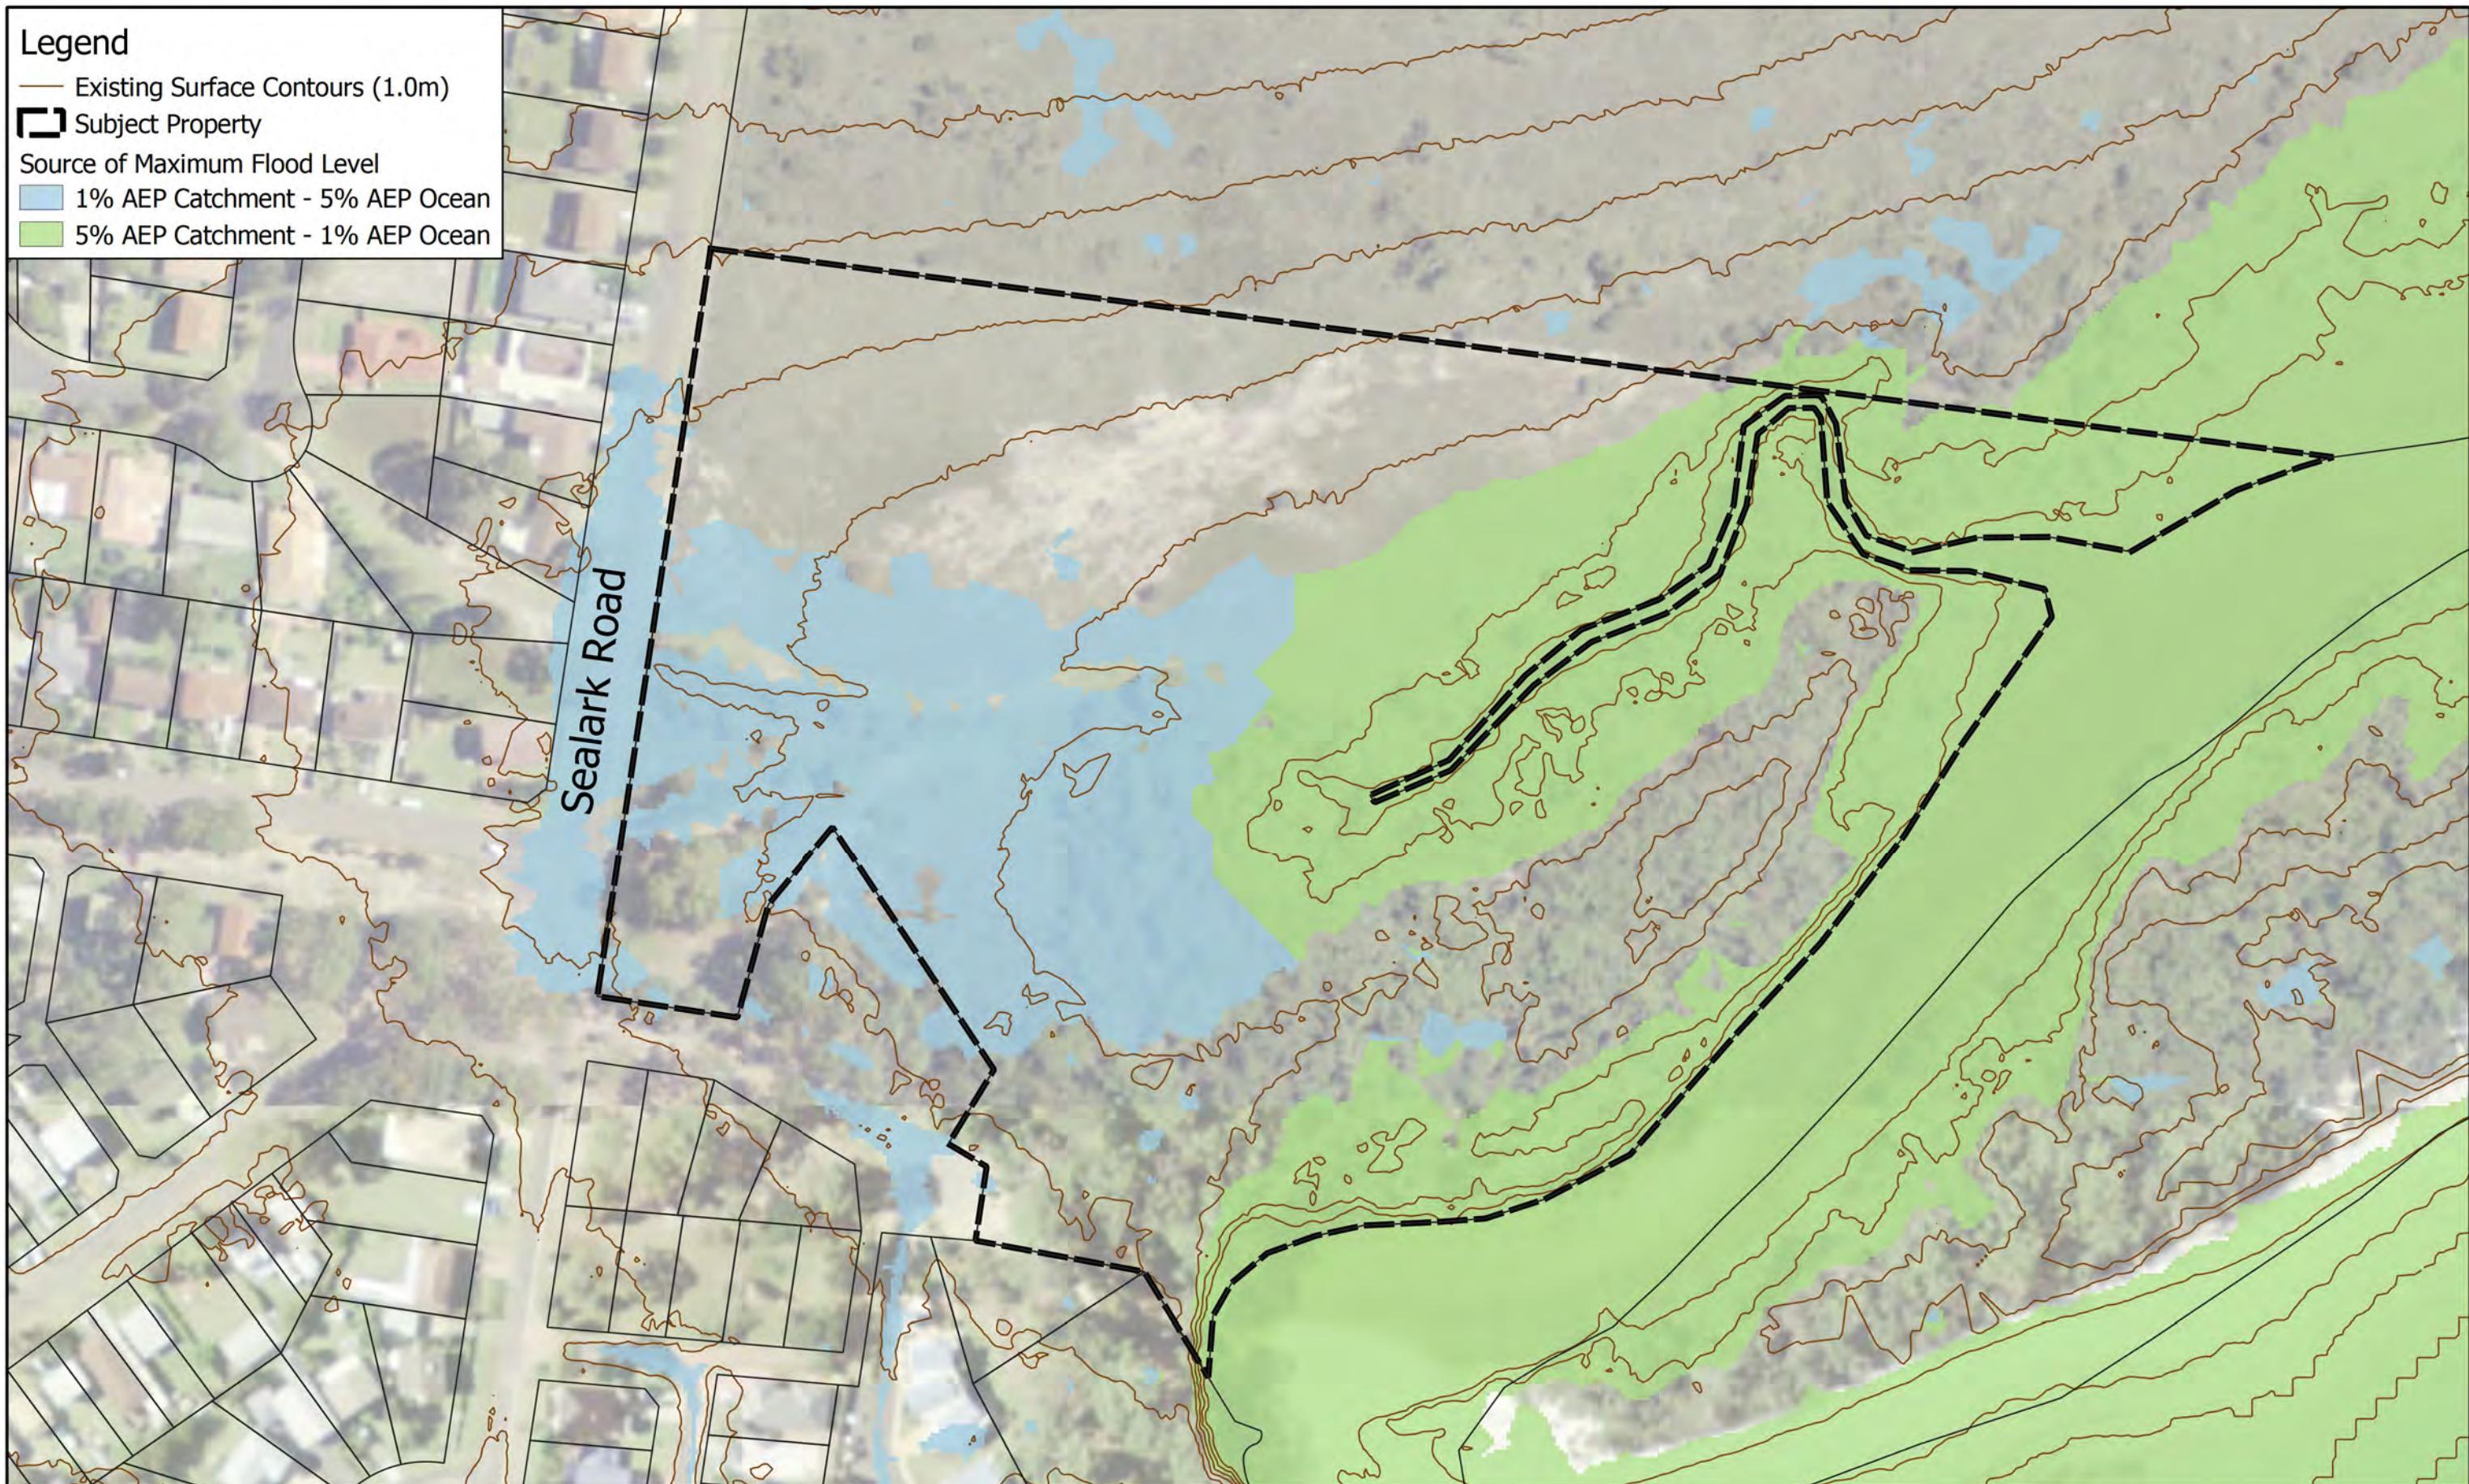


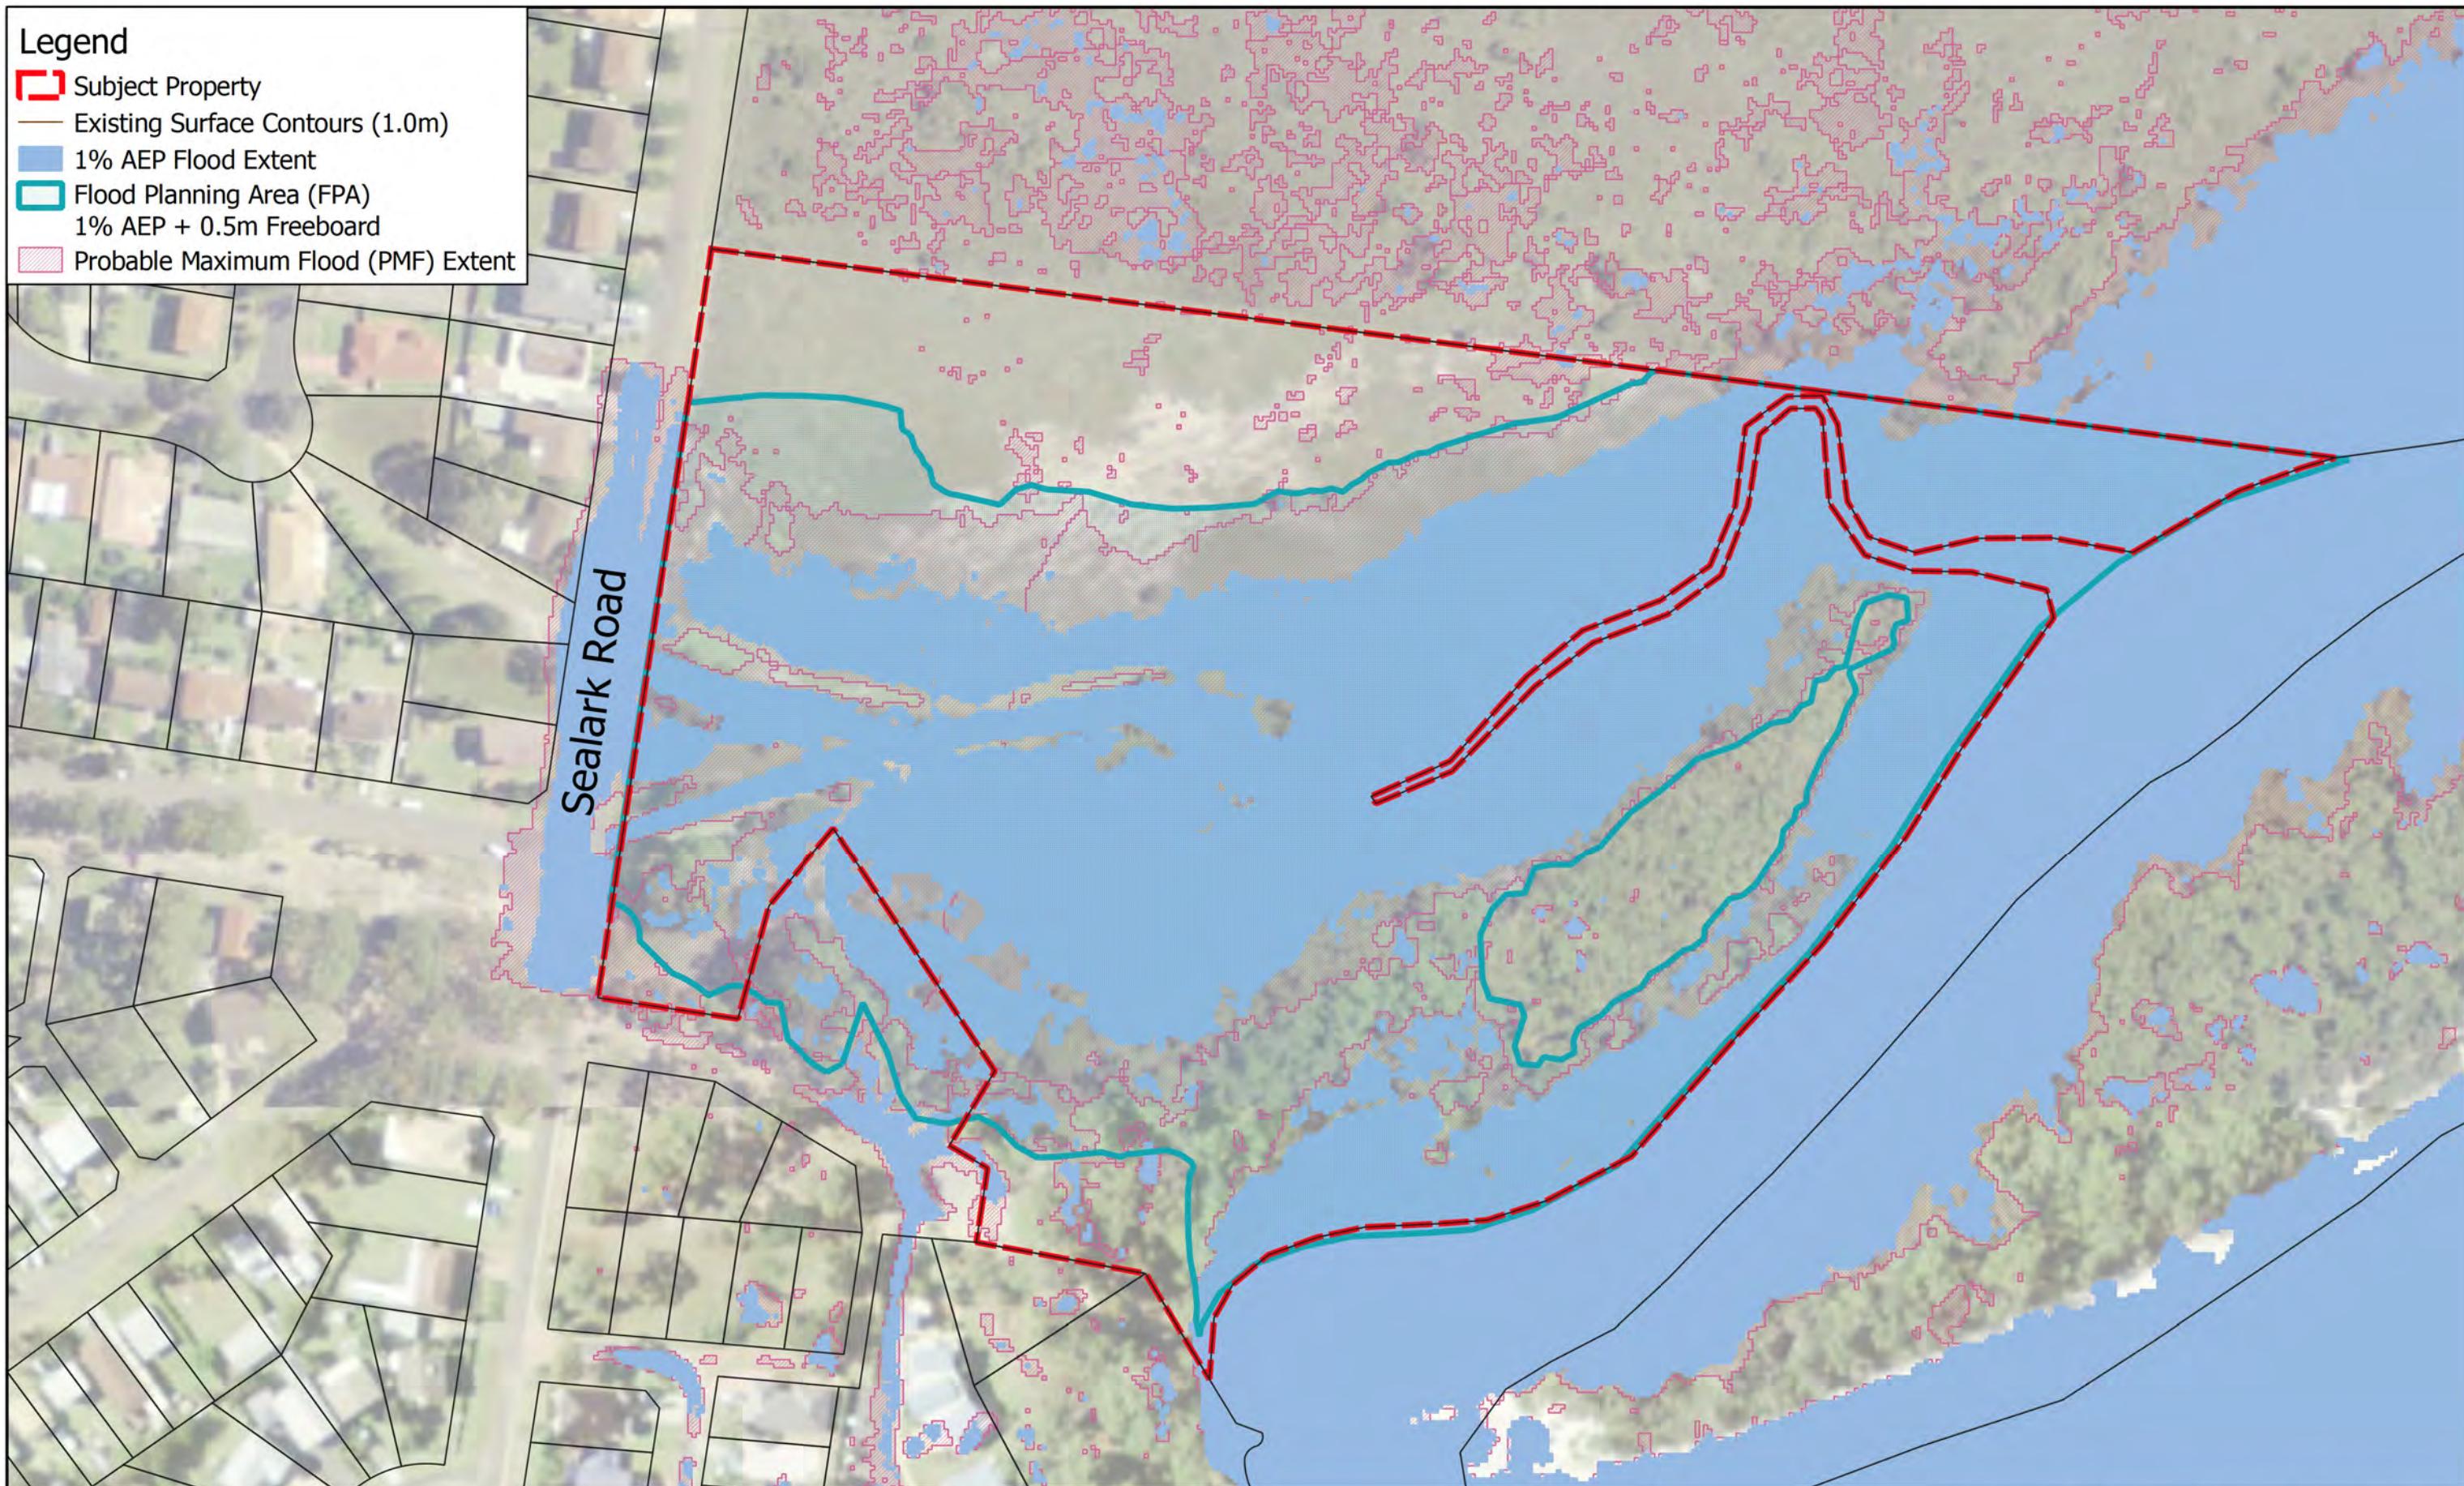


## Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
  - 0.05 to 0.01
  - 0.10 to 0.20
  - 0.20 to 0.30
  - 0.30 to 0.40
  - 0.40 to 0.50
  - 0.50 to 0.60
  - 0.60 to 0.70
  - 0.70 to 0.80
  - 0.80 to 0.90
  - 0.90 to 1.0
  - >1.0

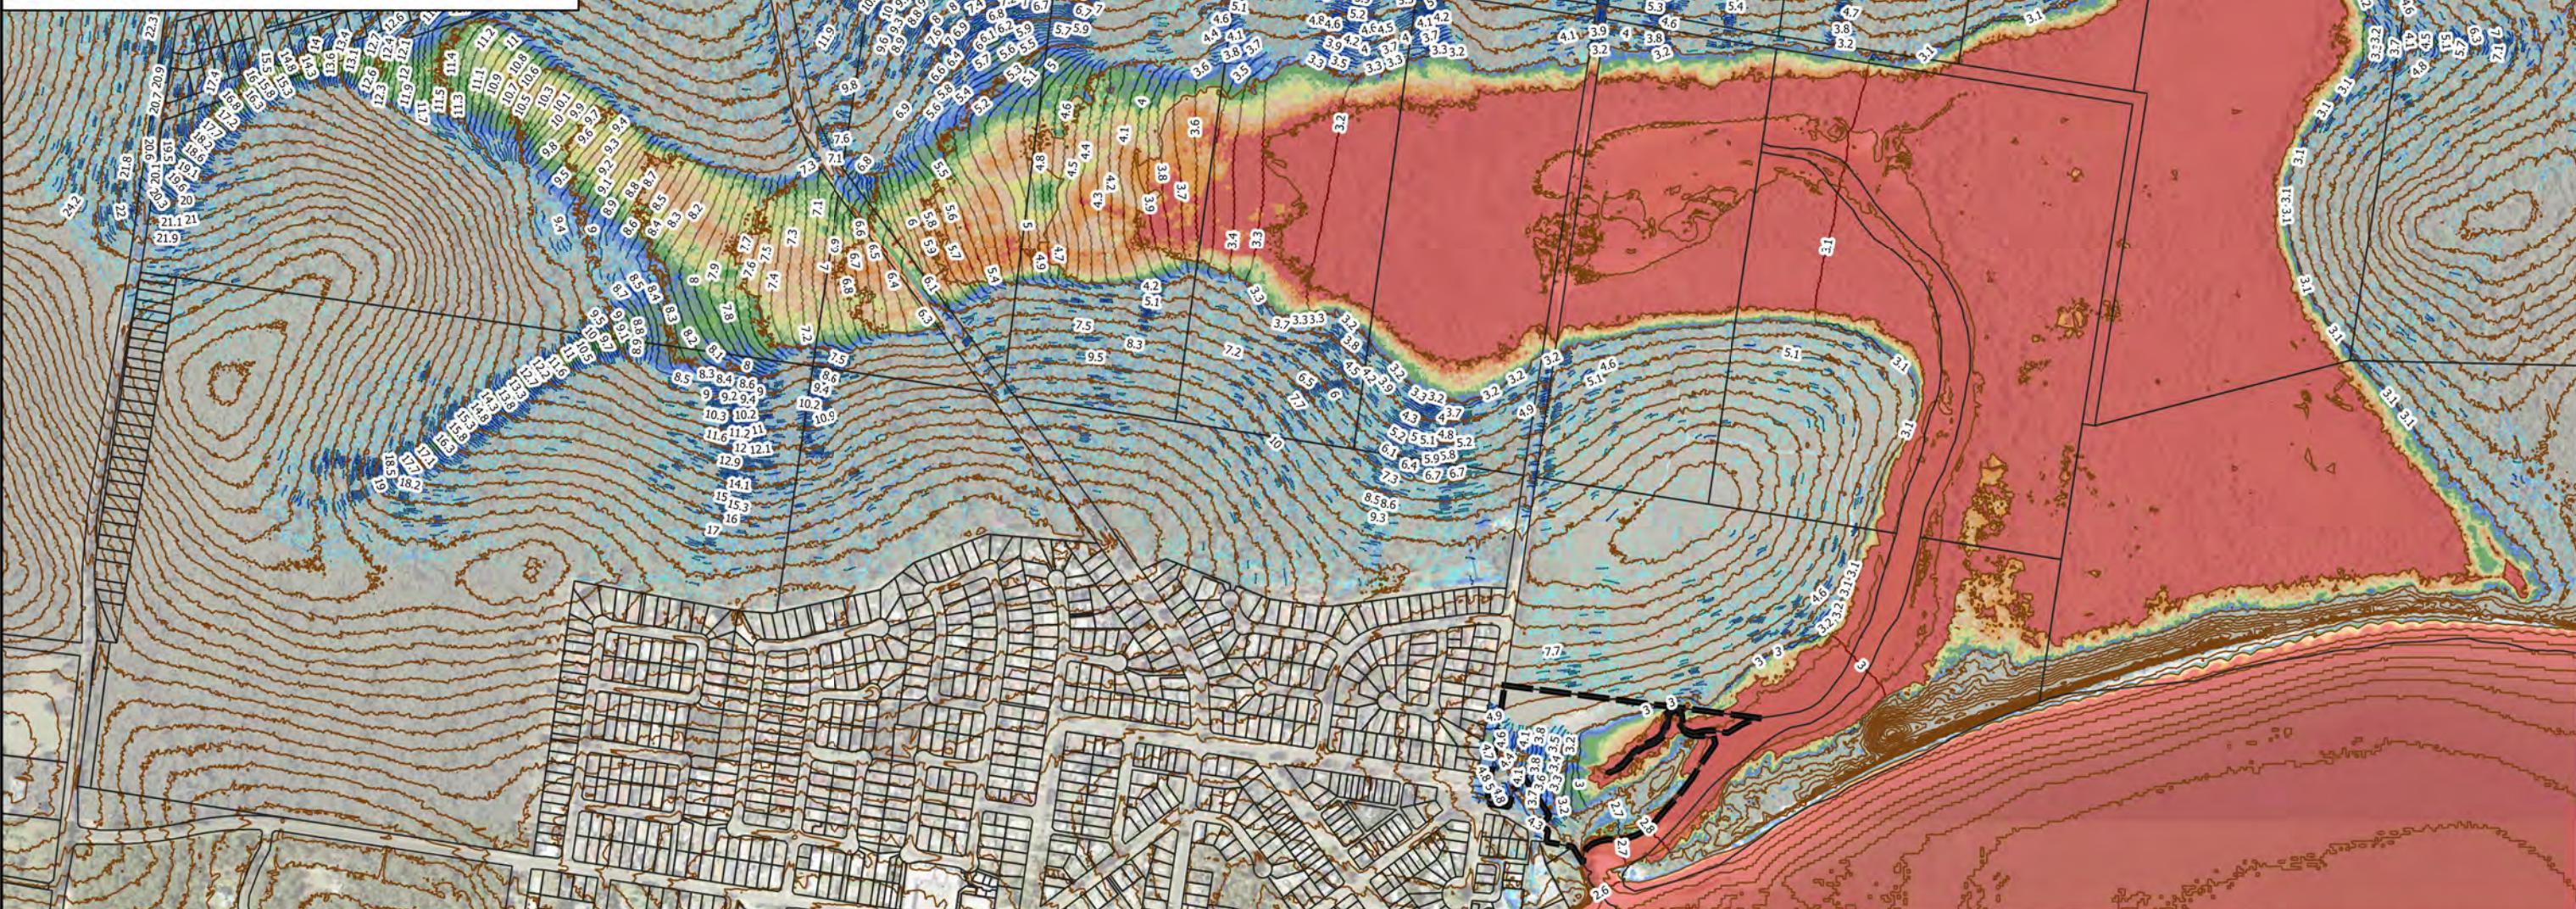


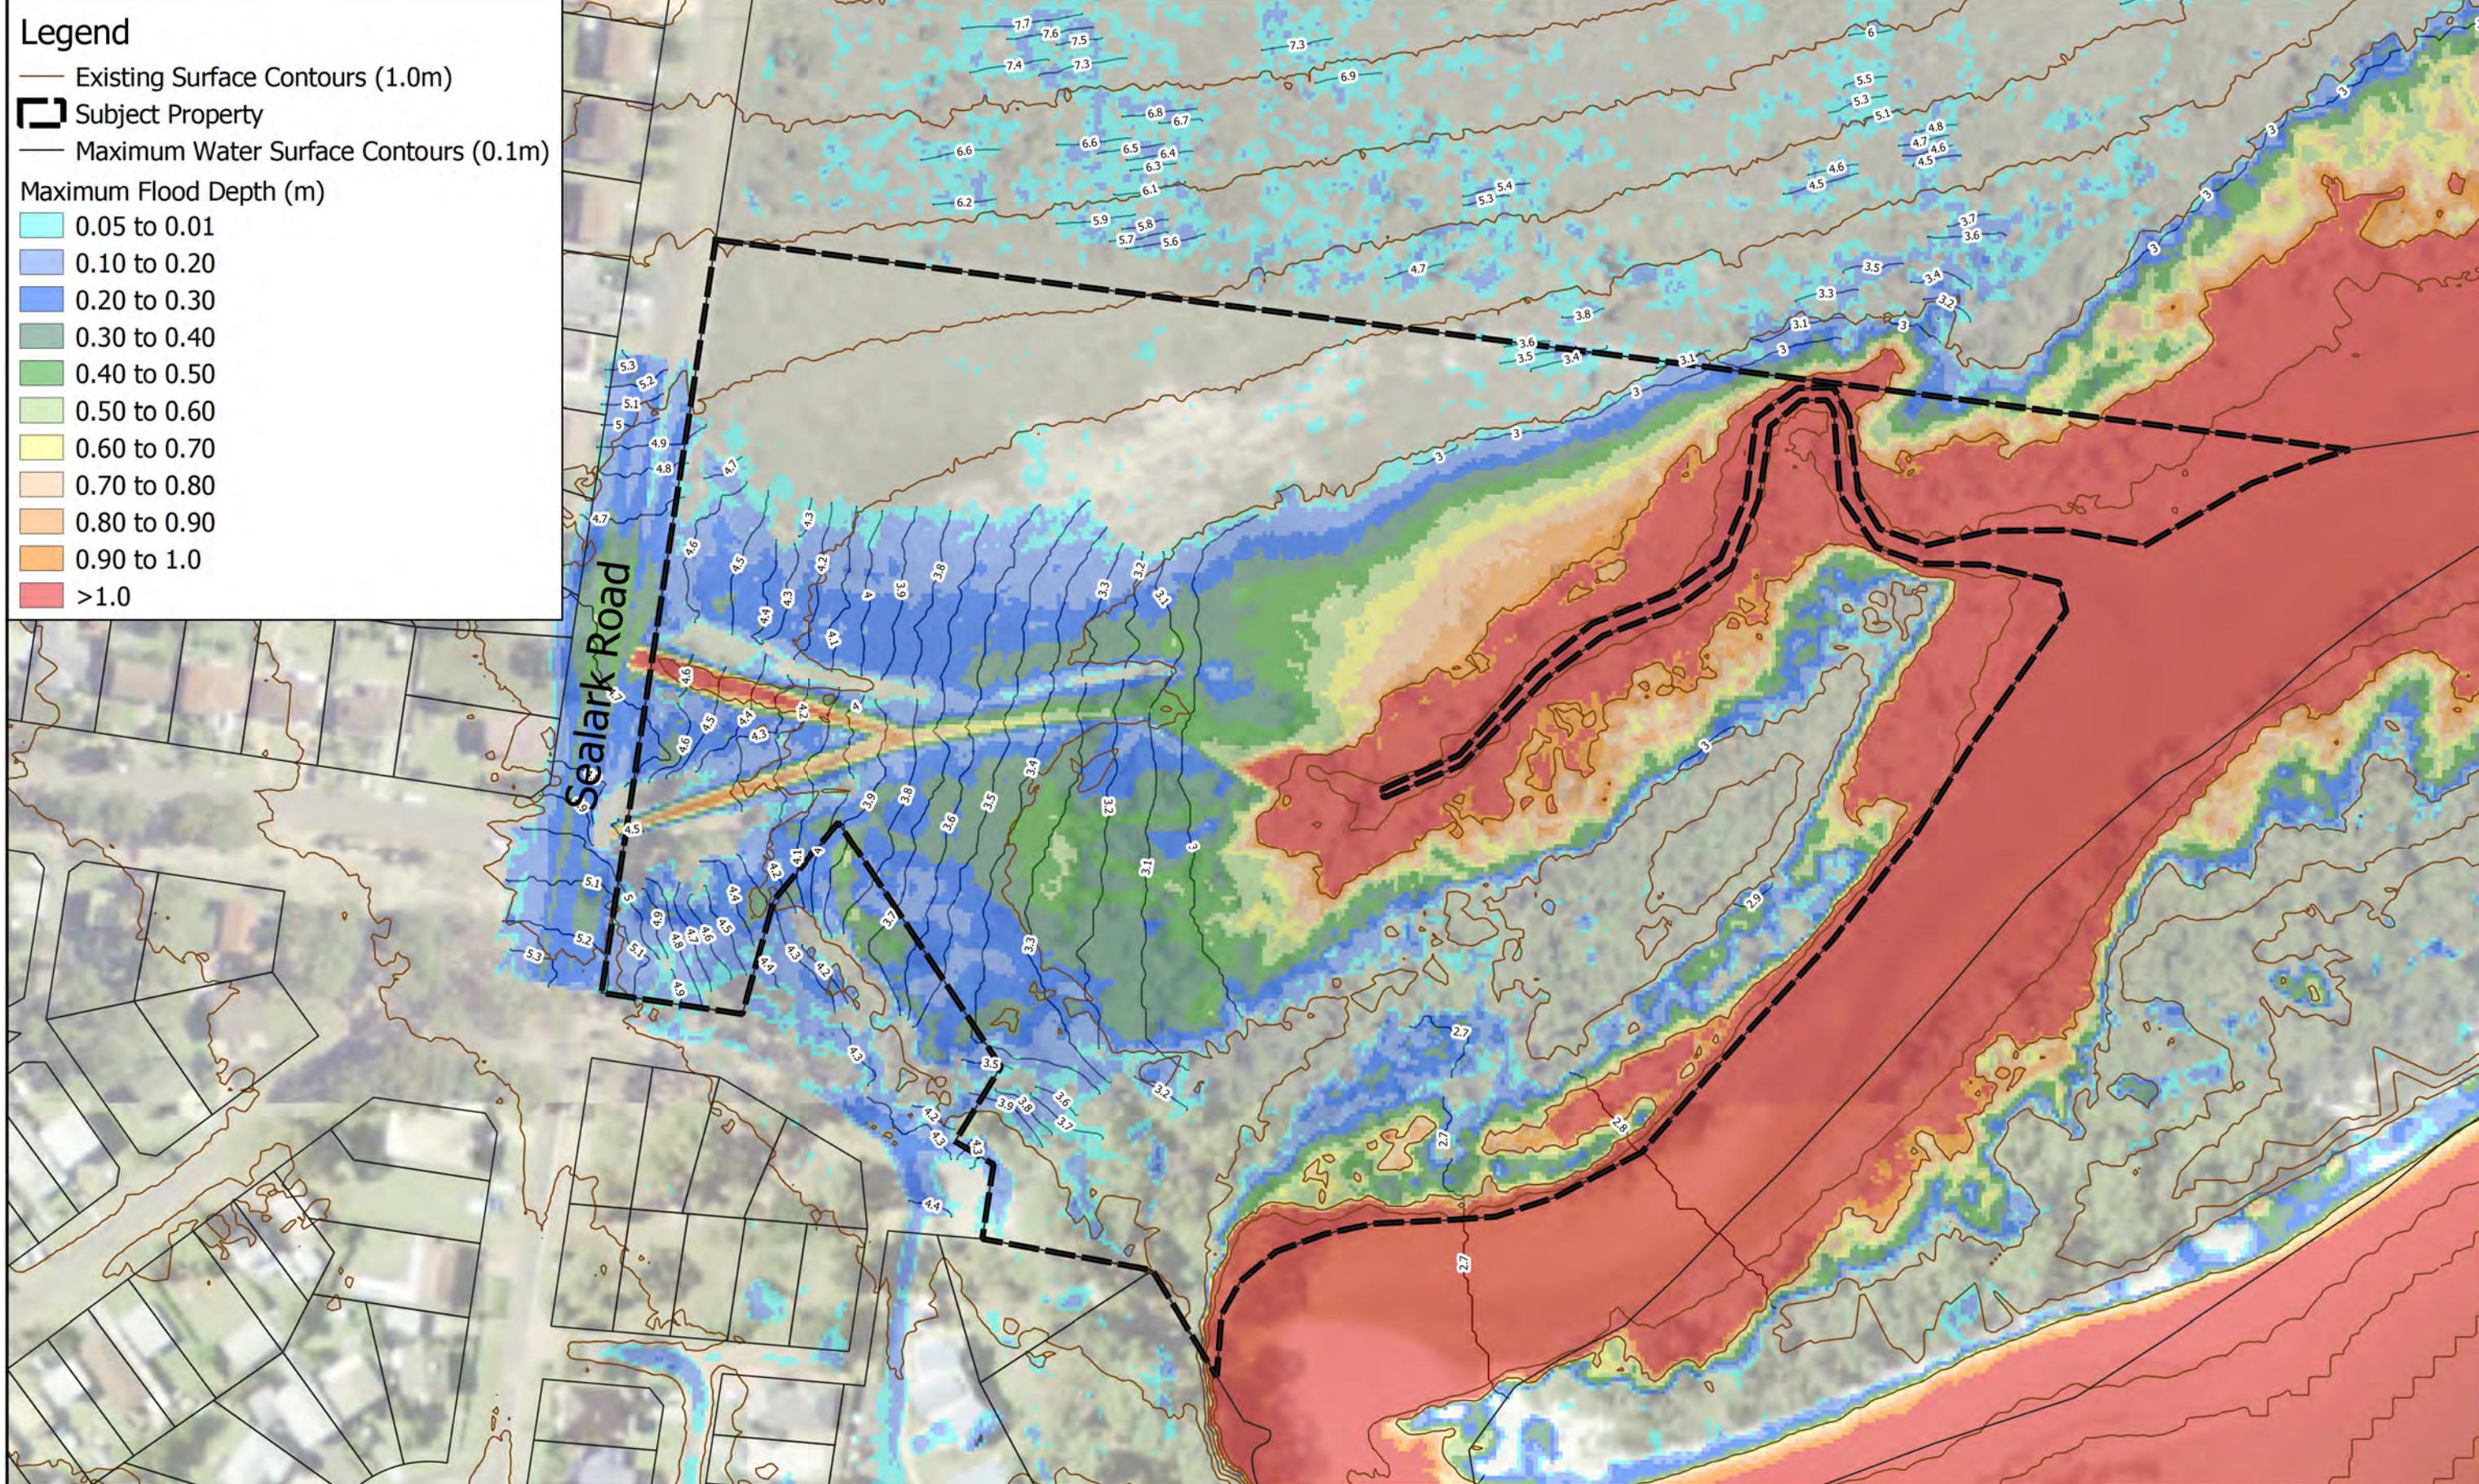



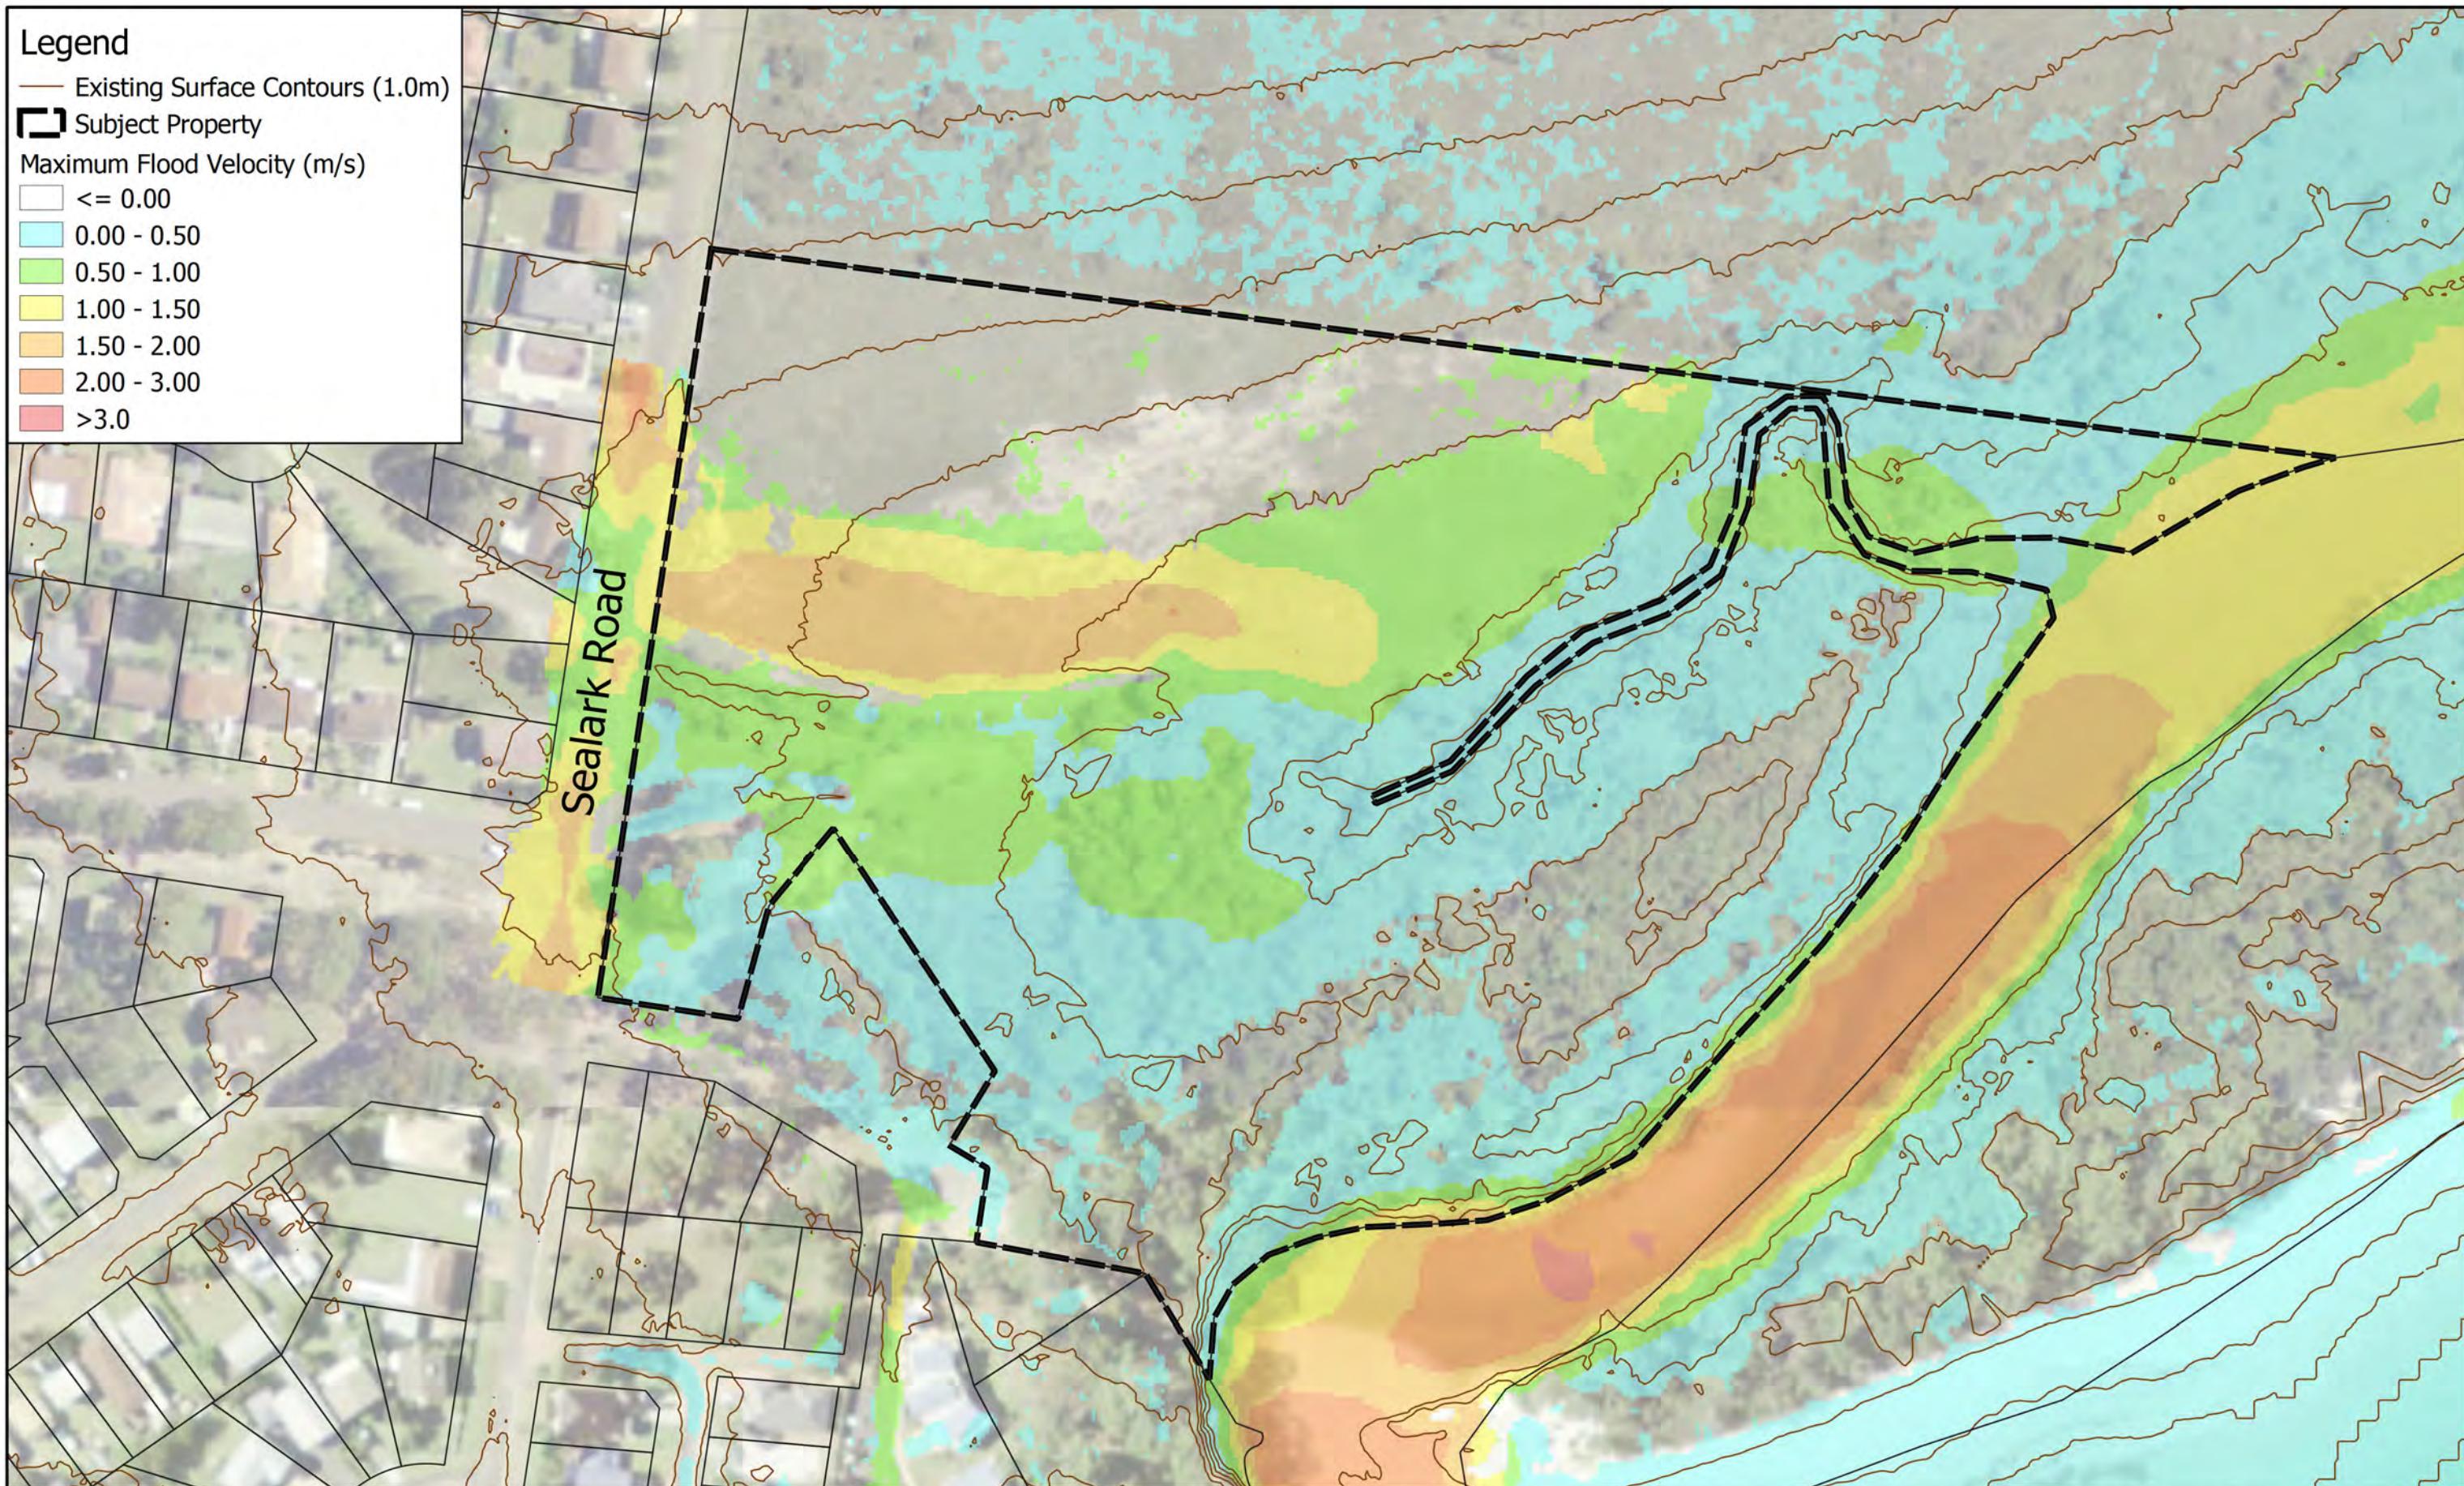


 **footprint.**  
sustainable engineering.  
210 jamberoo road, jamberoo  
nsw 2533 p: (02) 4237 6770

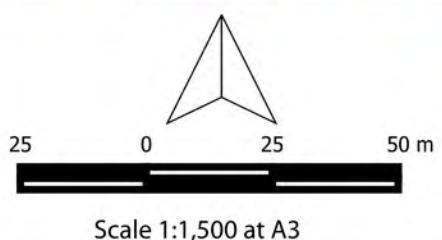


Footprint (NSW) Pty. Ltd. endeavors to ensure that the information provided in this map is correct at the time of publication. Footprint (NSW) Pty. Ltd. does not warrant, guarantee or make representations regarding the currency and accuracy of the information contained on this map.

## LOT 5 SEALARK ROAD, CALLALA BAY


FIGURE 2.2B  
MAXIMUM FLOOD VELOCITIES  
PMF

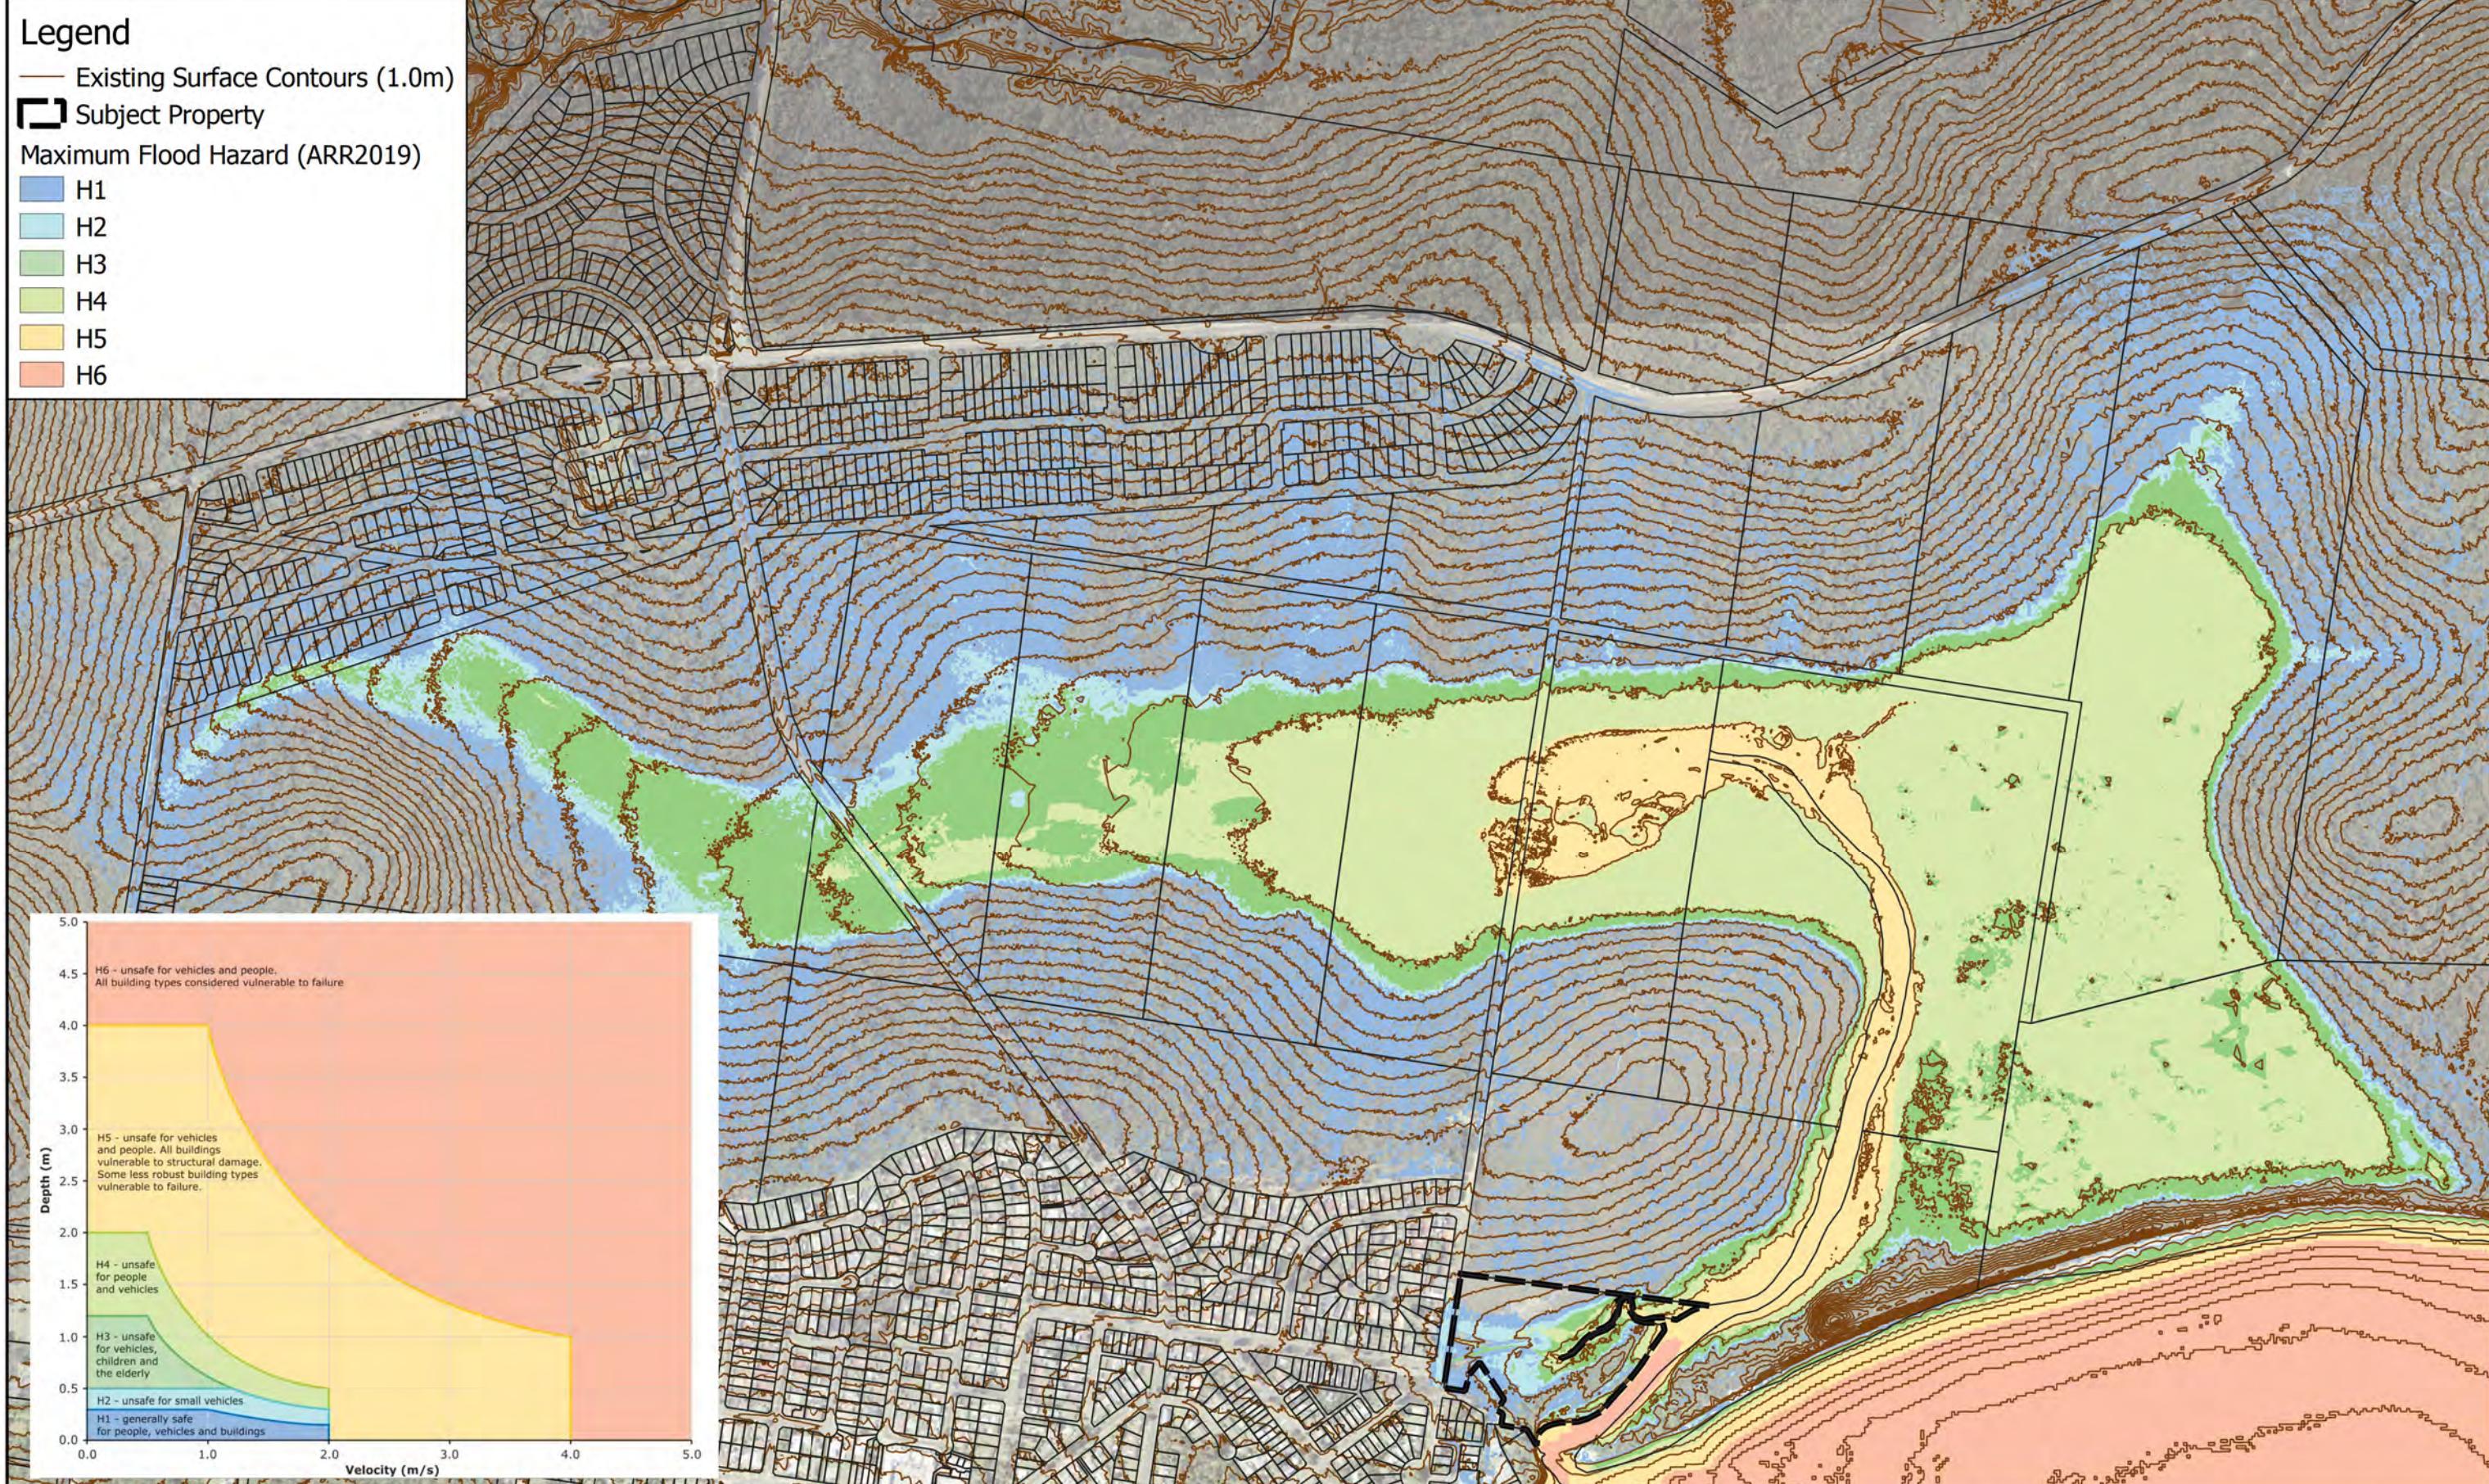


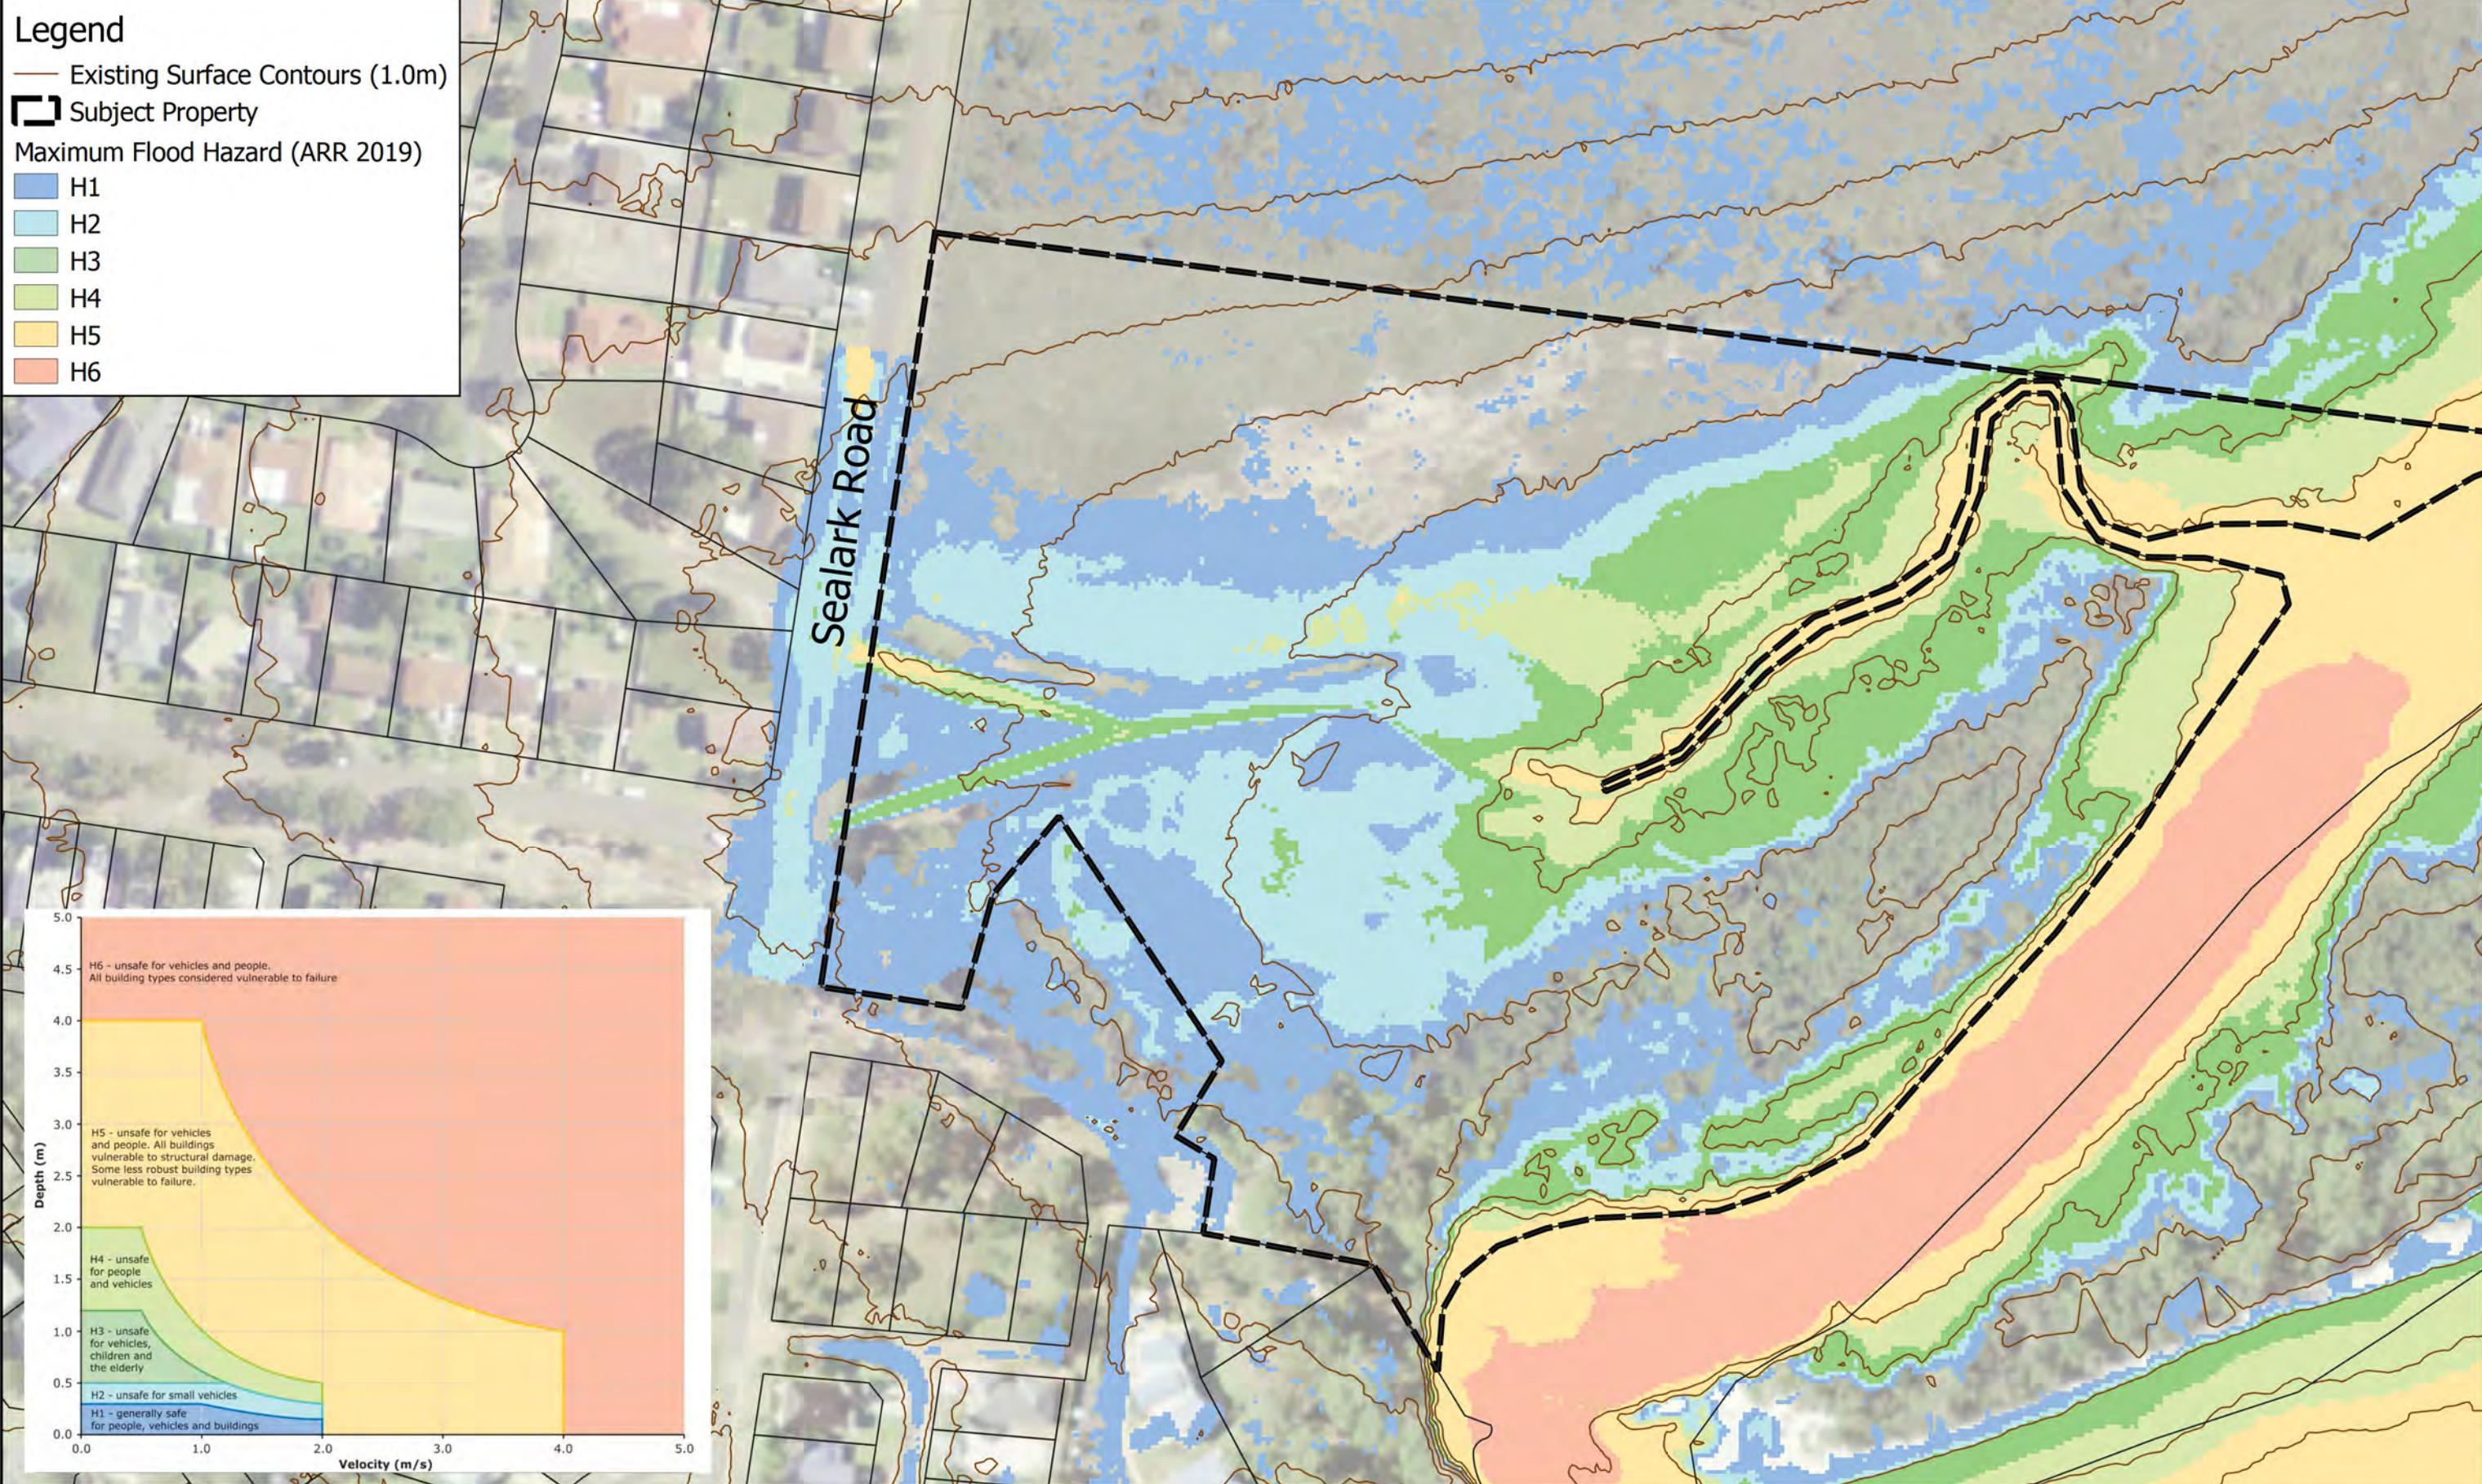


## Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
  - 0.05 to 0.01
  - 0.10 to 0.20
  - 0.20 to 0.30
  - 0.30 to 0.40
  - 0.40 to 0.50
  - 0.50 to 0.60
  - 0.60 to 0.70
  - 0.70 to 0.80
  - 0.80 to 0.90
  - 0.90 to 1.0
  - >1.0

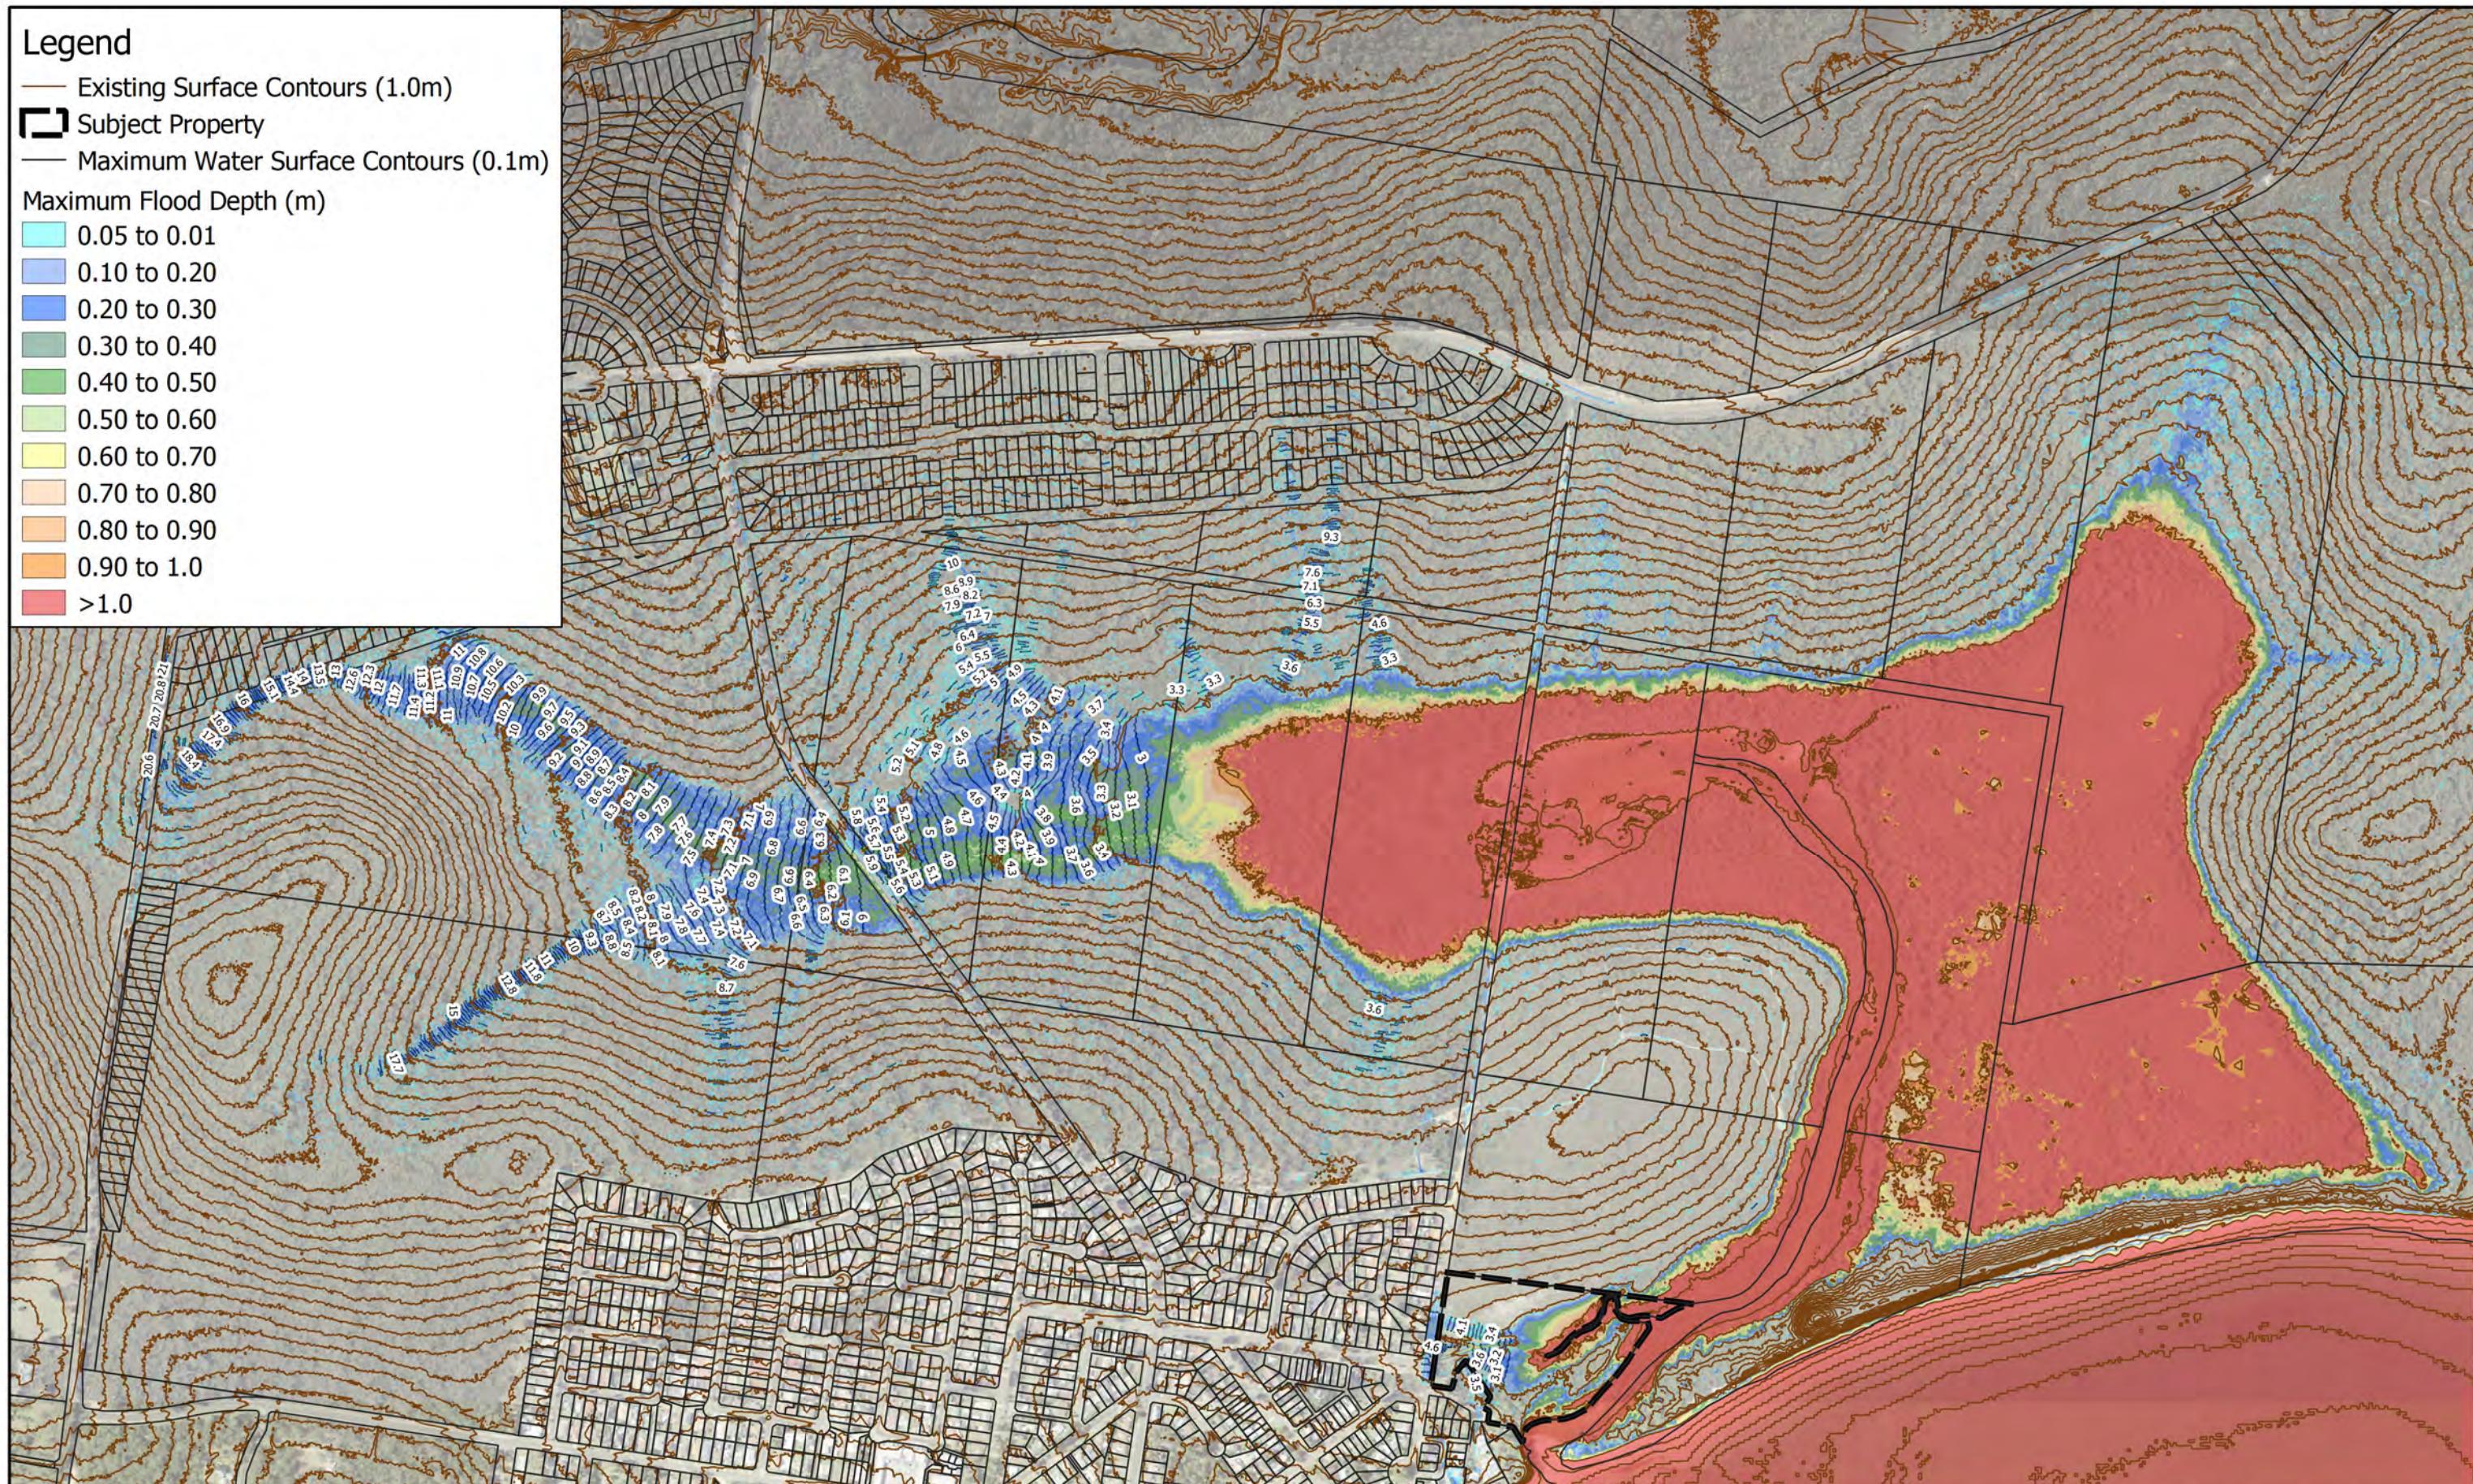

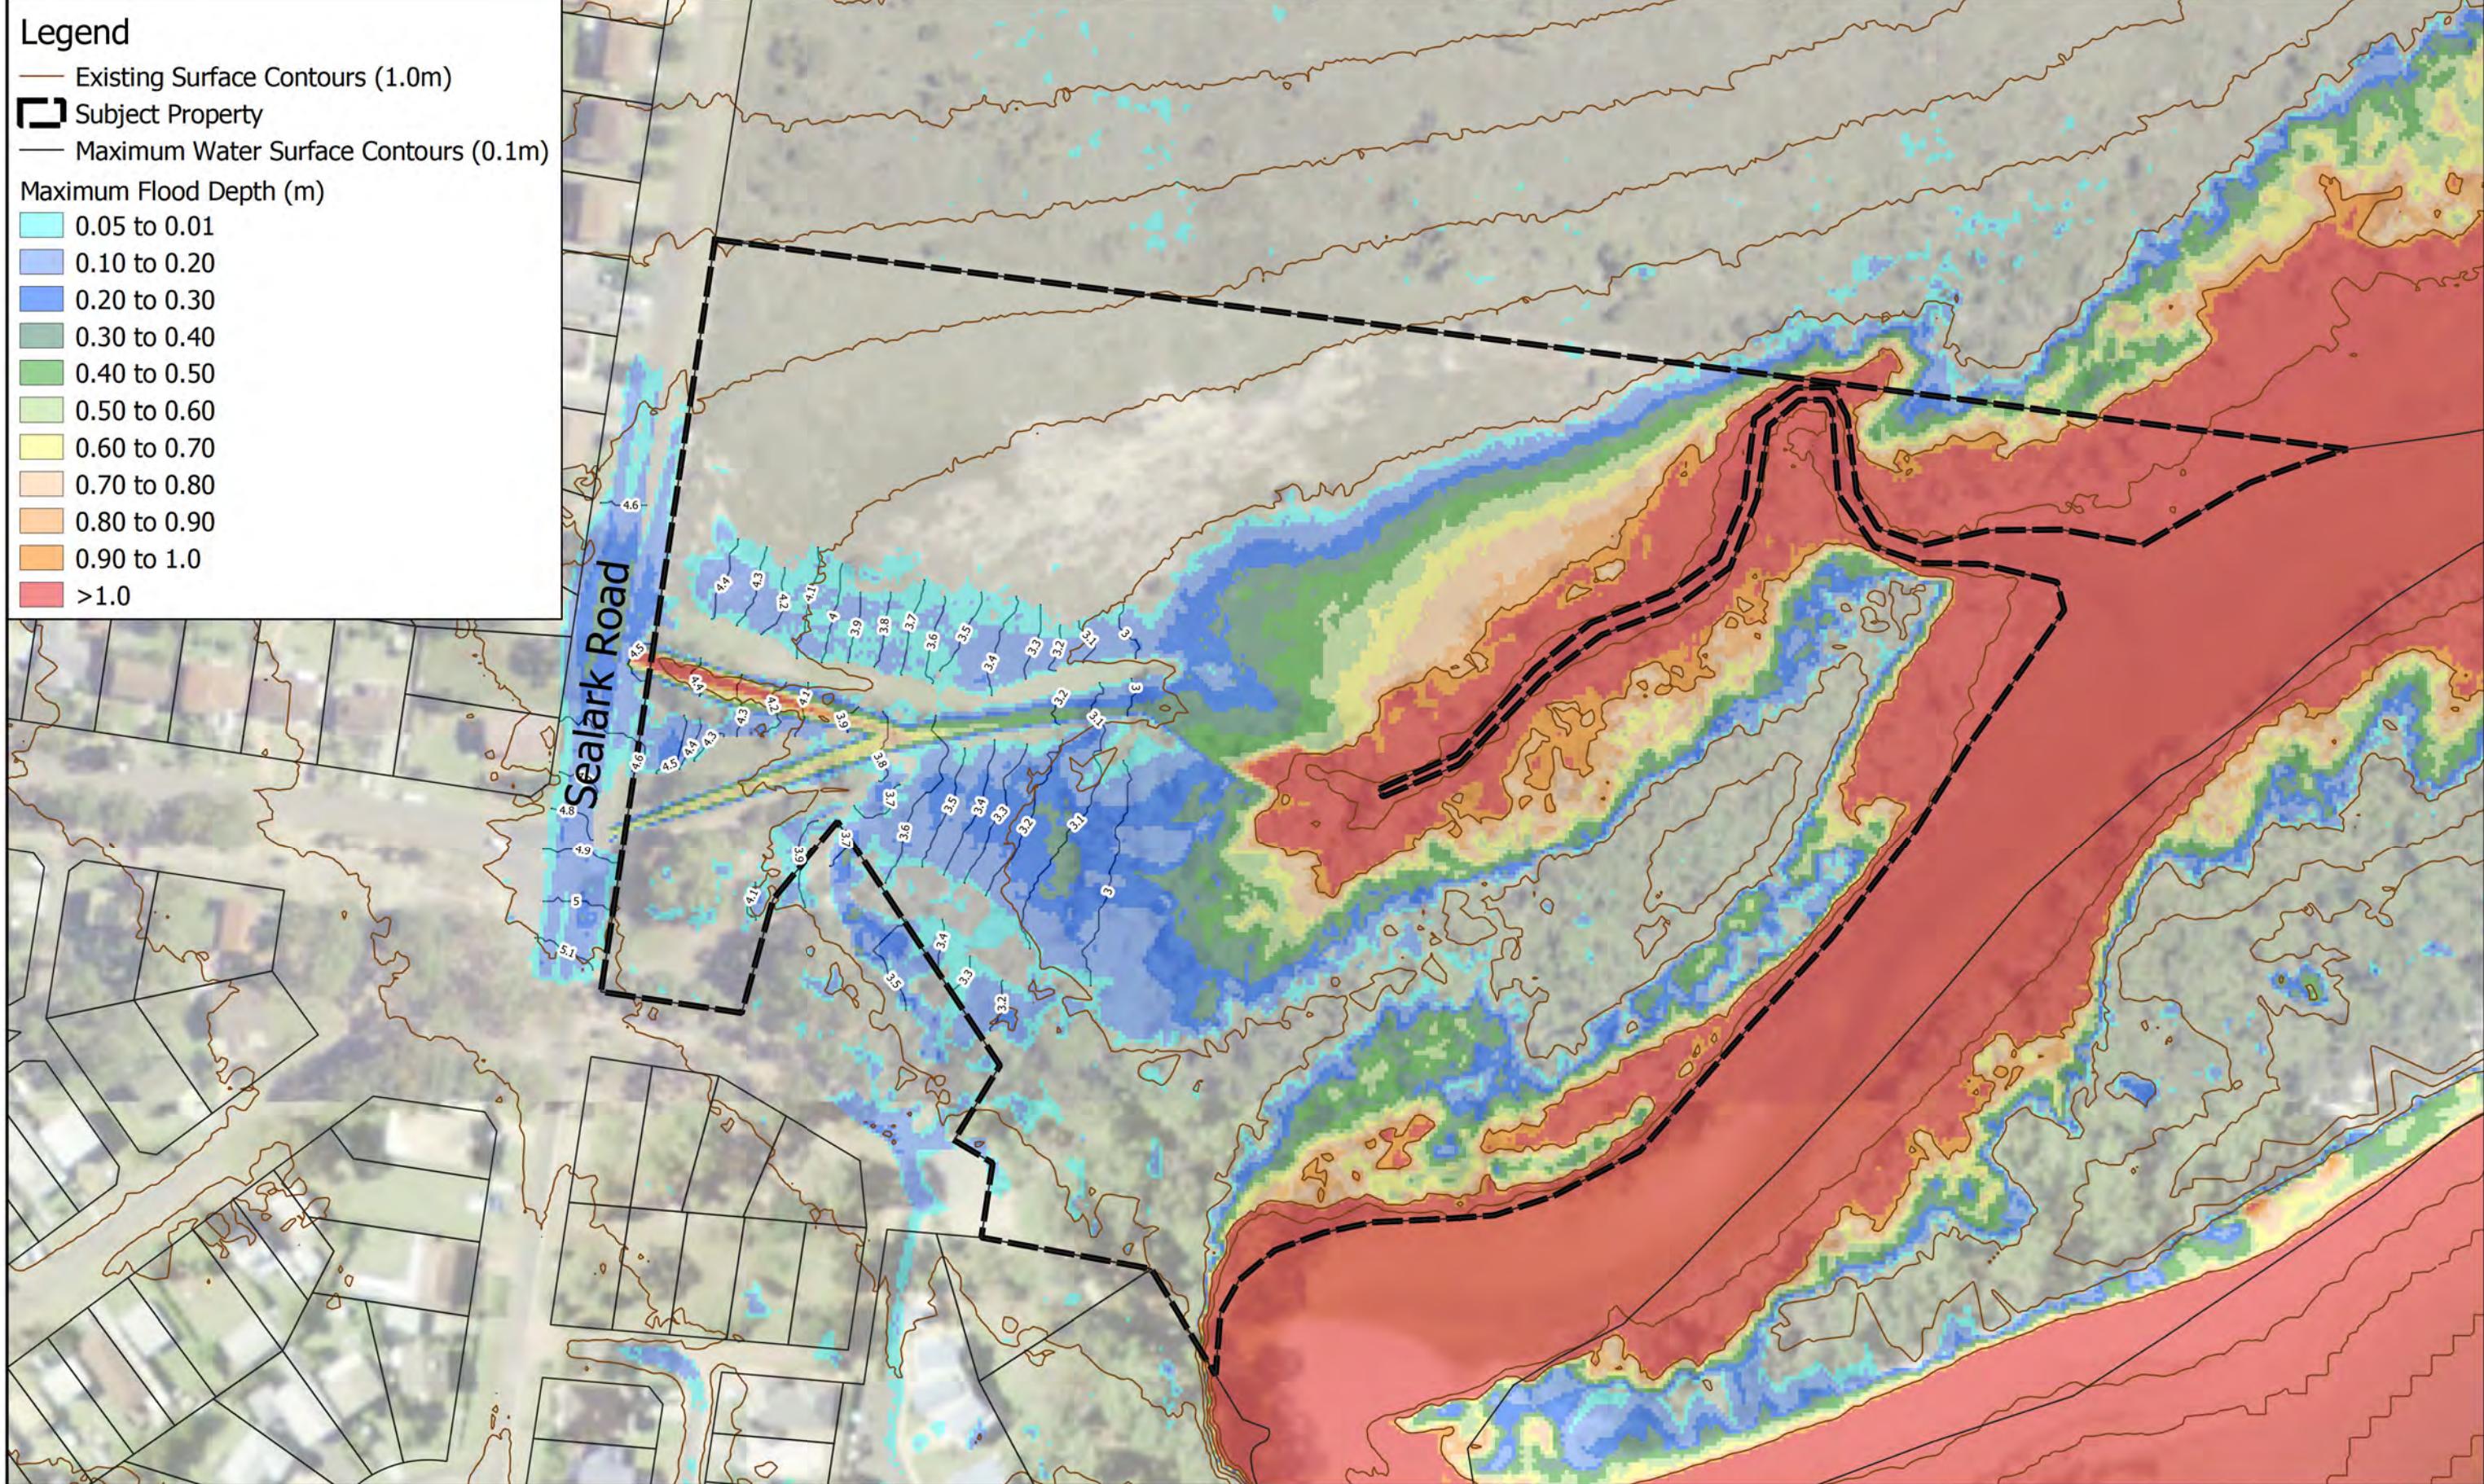





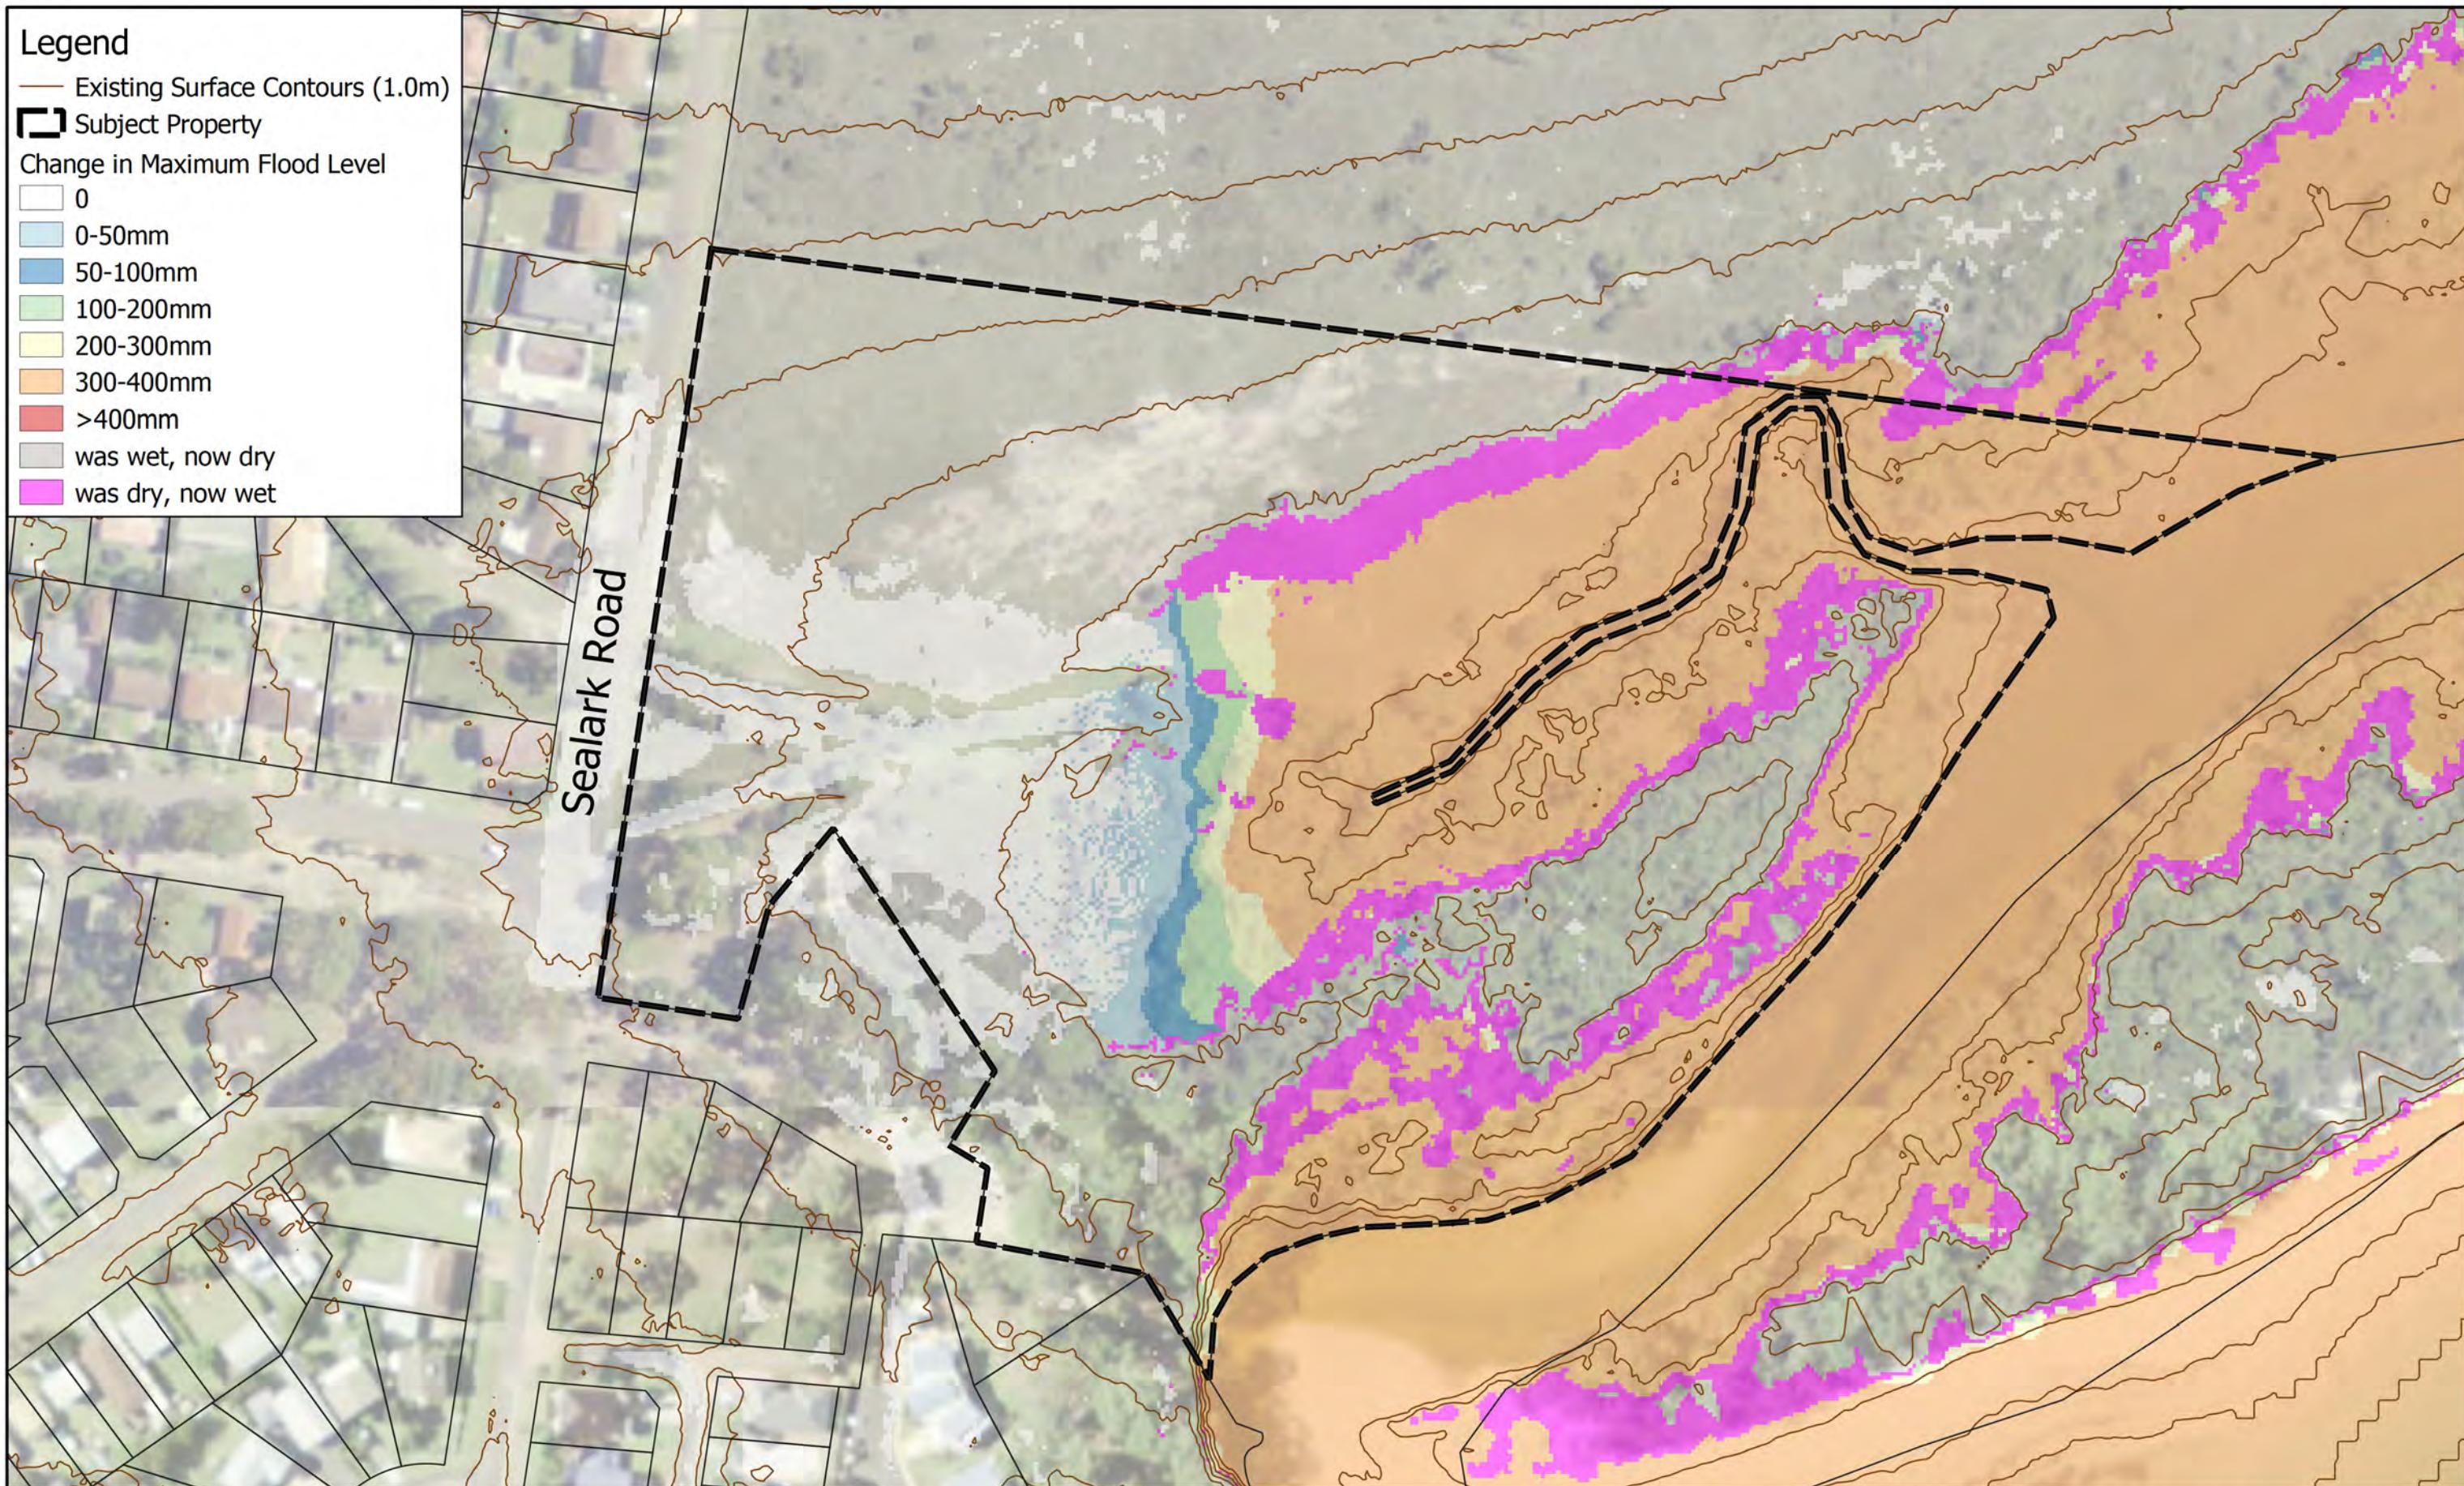


## Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
  - 0.05 to 0.01
  - 0.10 to 0.20
  - 0.20 to 0.30
  - 0.30 to 0.40
  - 0.40 to 0.50
  - 0.50 to 0.60
  - 0.60 to 0.70
  - 0.70 to 0.80
  - 0.80 to 0.90
  - 0.90 to 1.0
  - >1.0

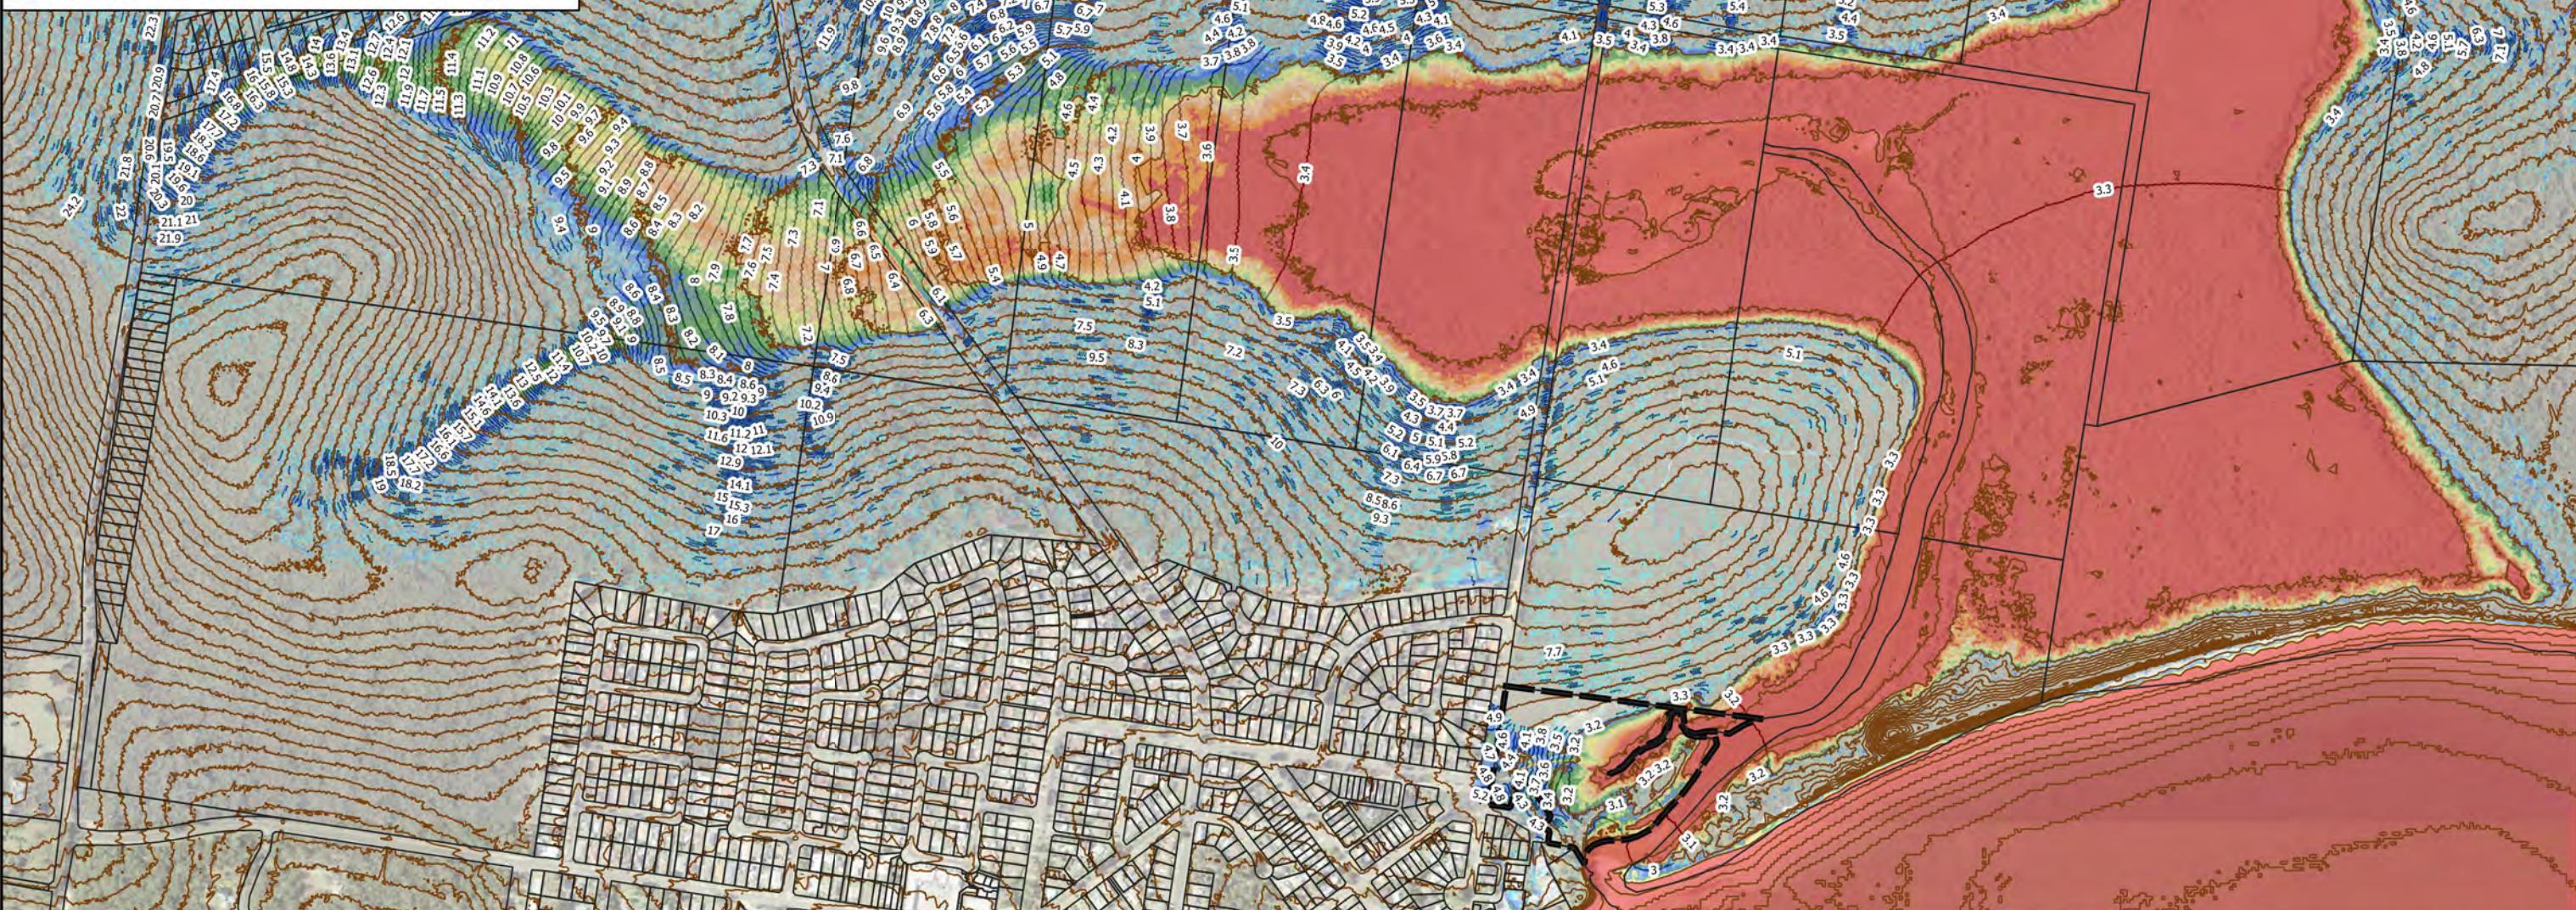

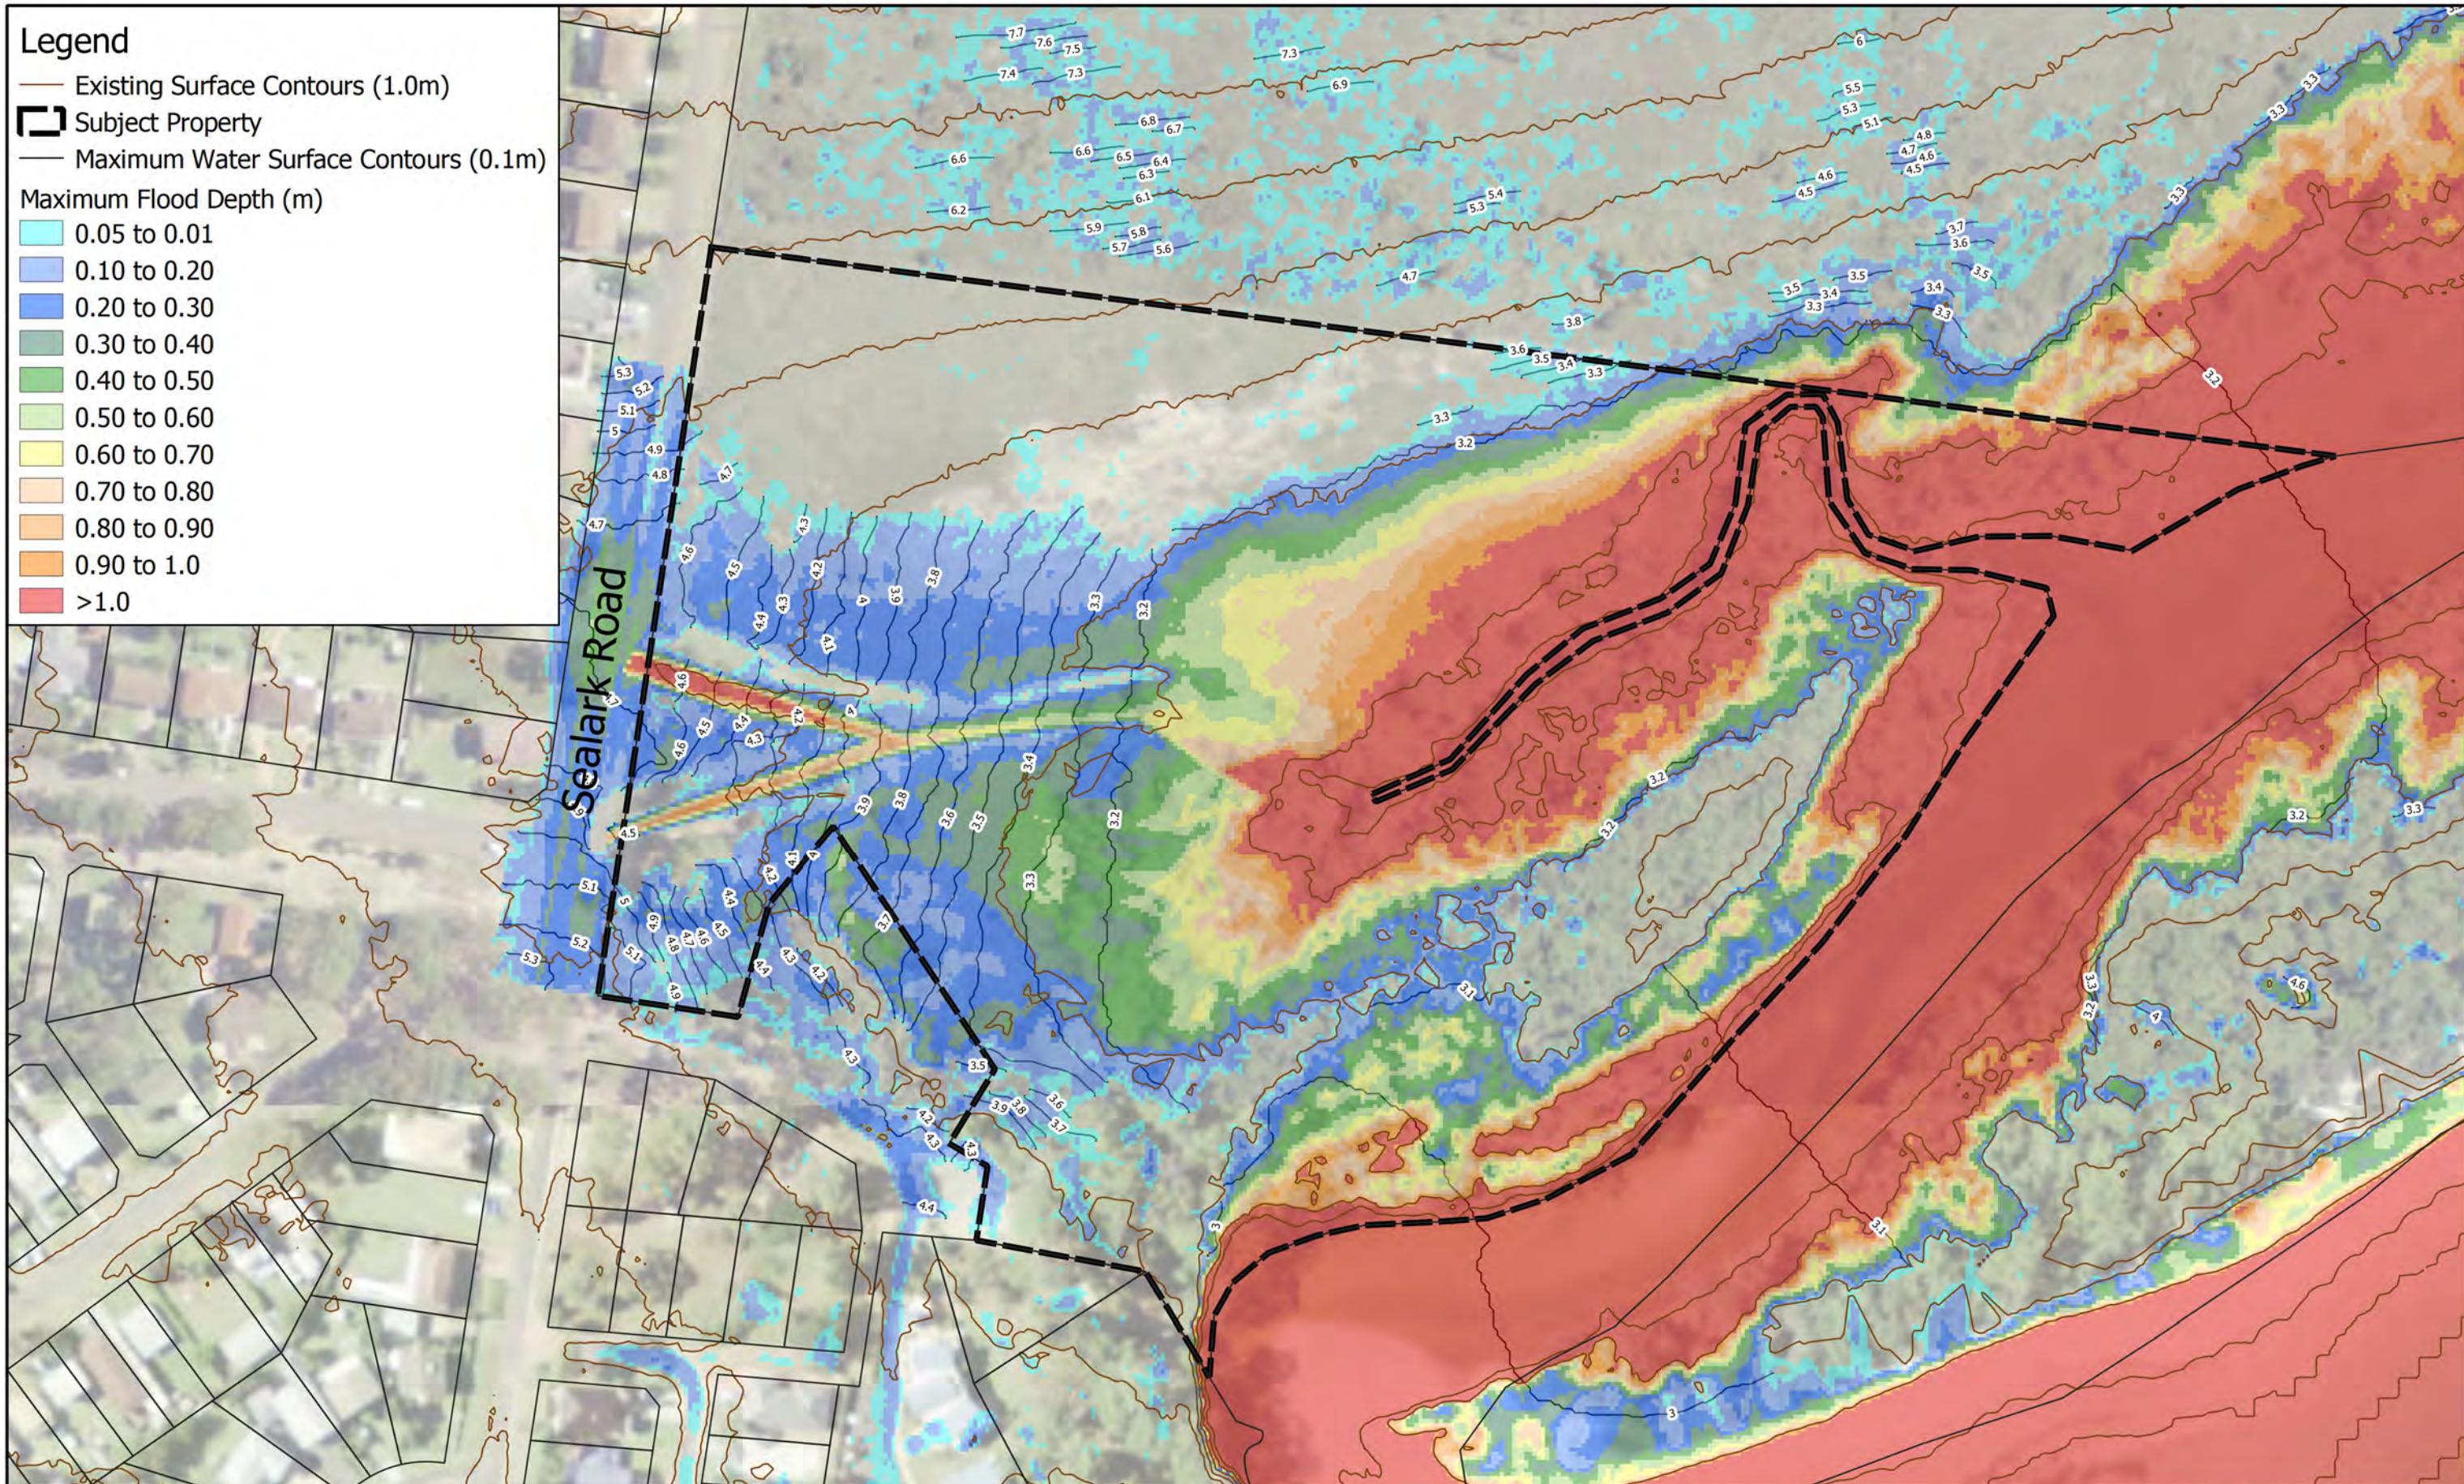





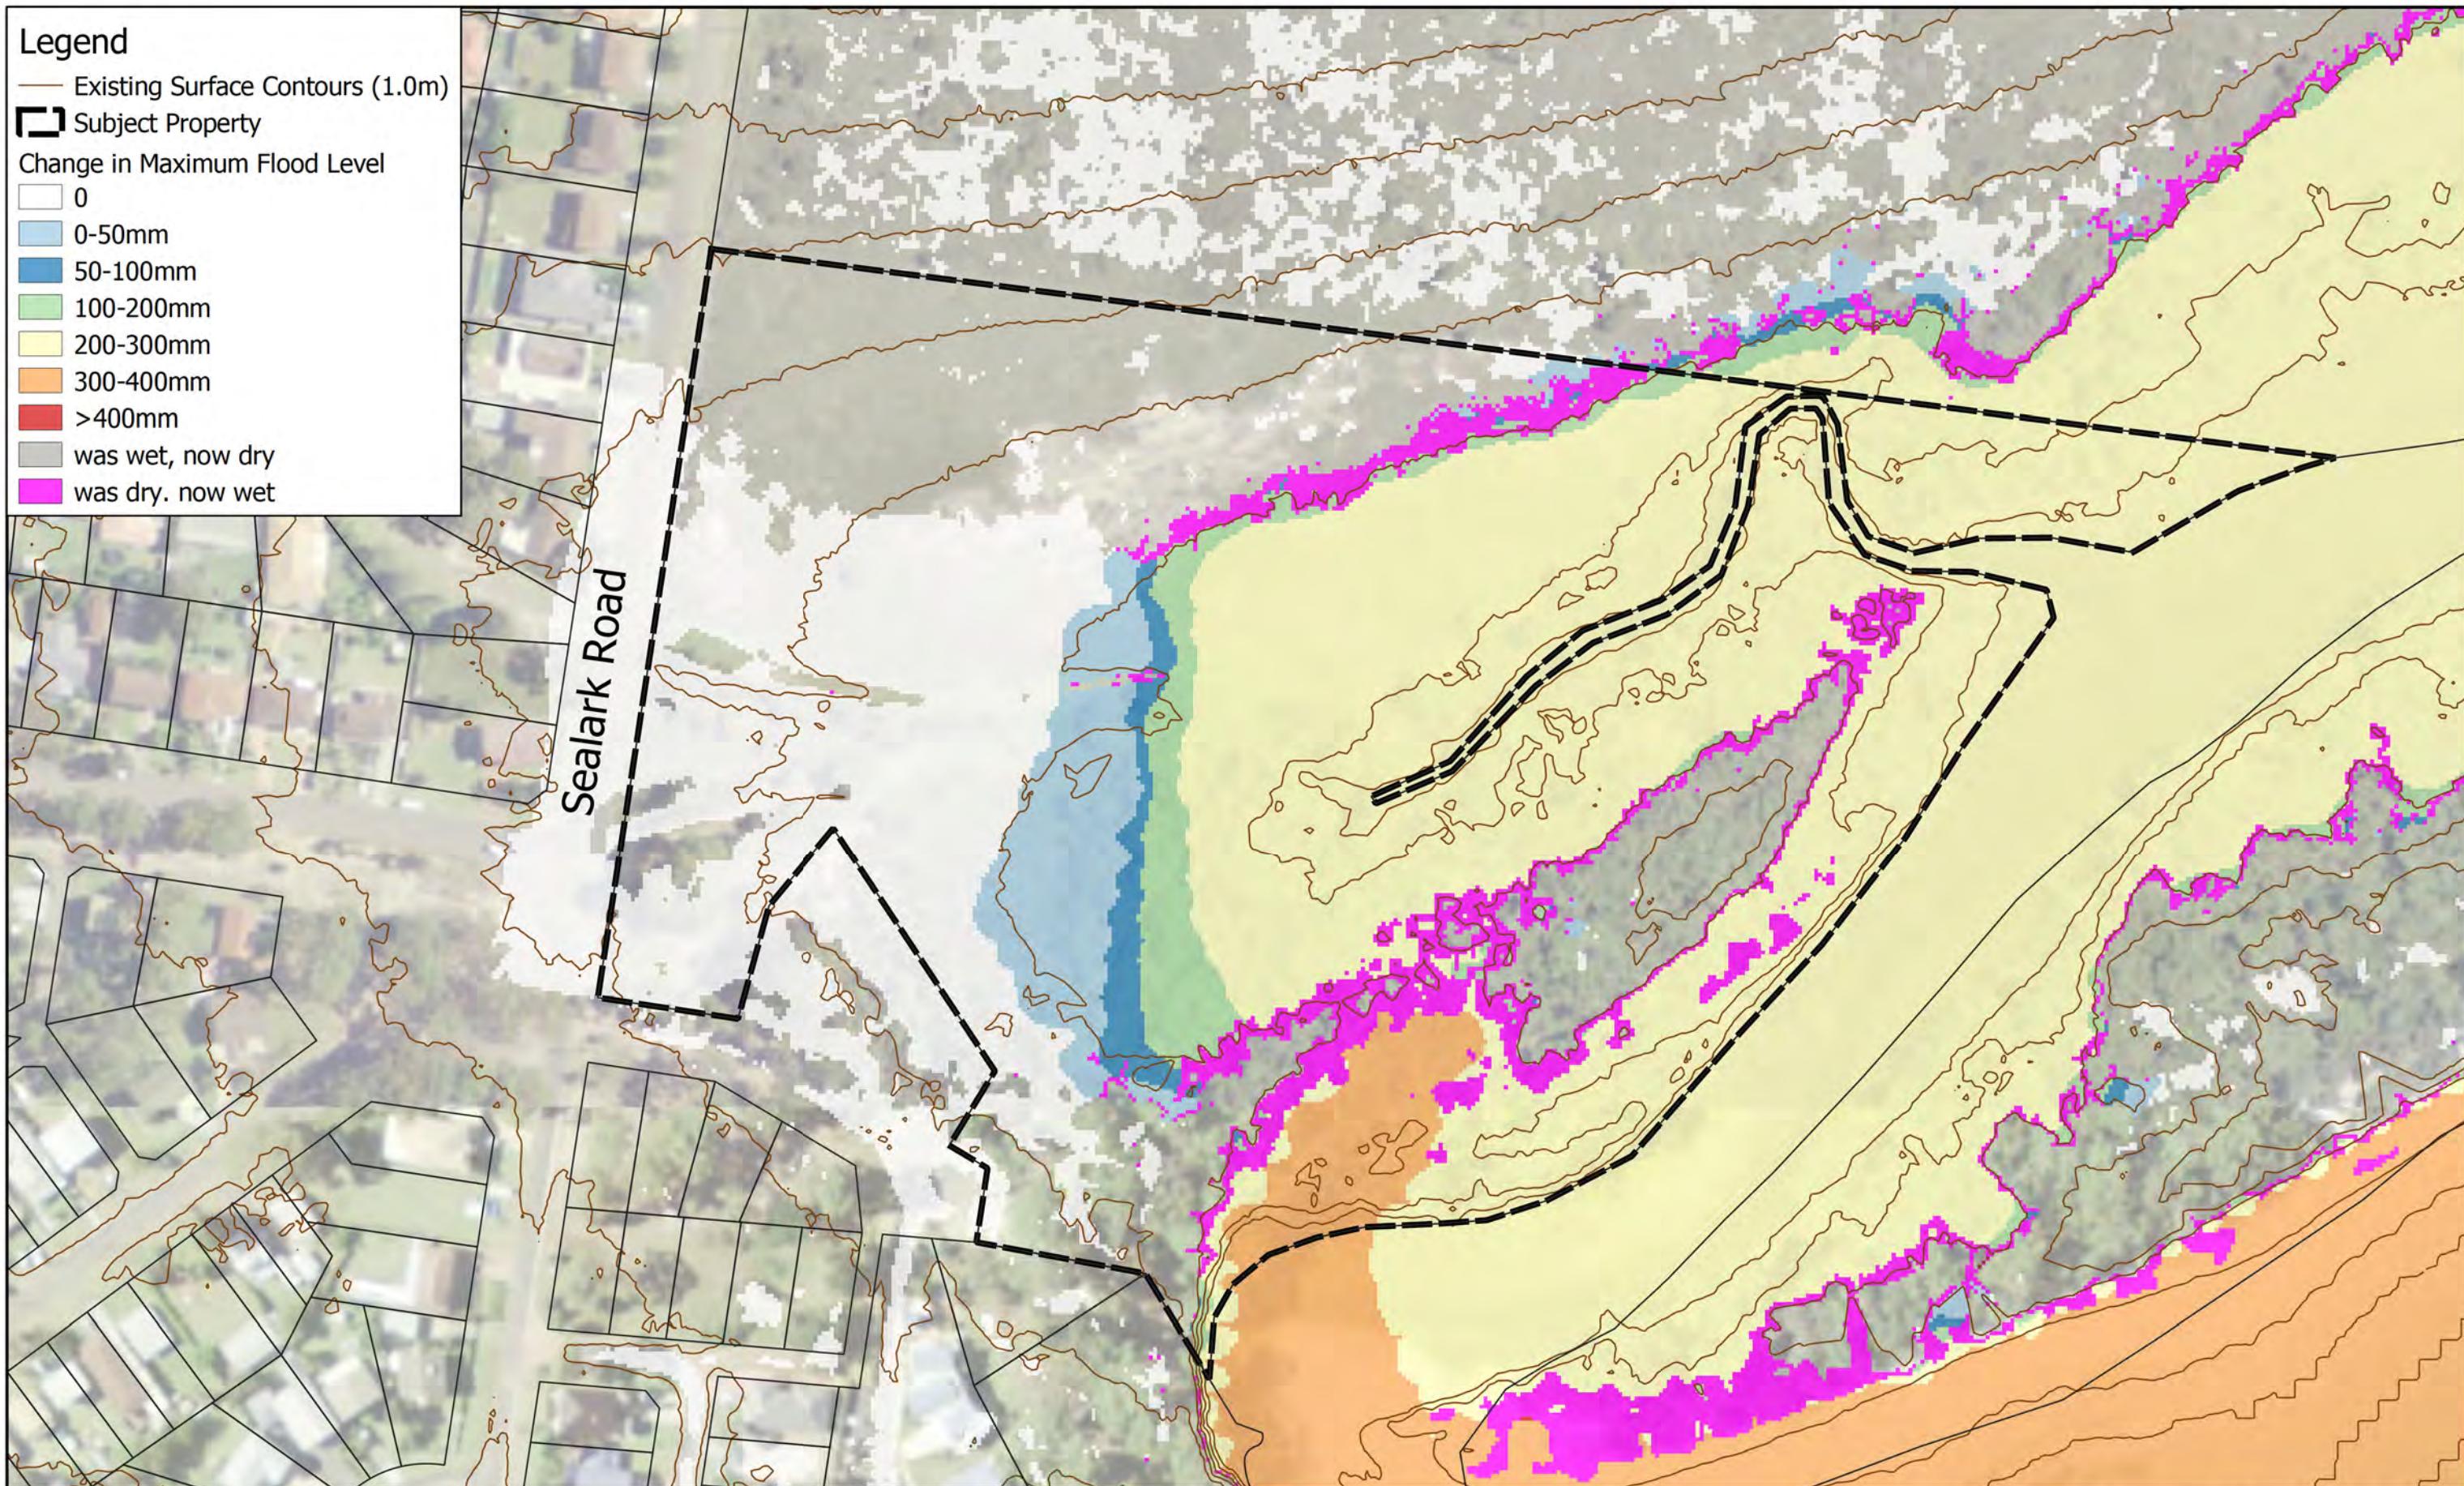

## Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
  - 0.05 to 0.01
  - 0.10 to 0.20
  - 0.20 to 0.30
  - 0.30 to 0.40
  - 0.40 to 0.50
  - 0.50 to 0.60
  - 0.60 to 0.70
  - 0.70 to 0.80
  - 0.80 to 0.90
  - 0.90 to 1.0
  - >1.0

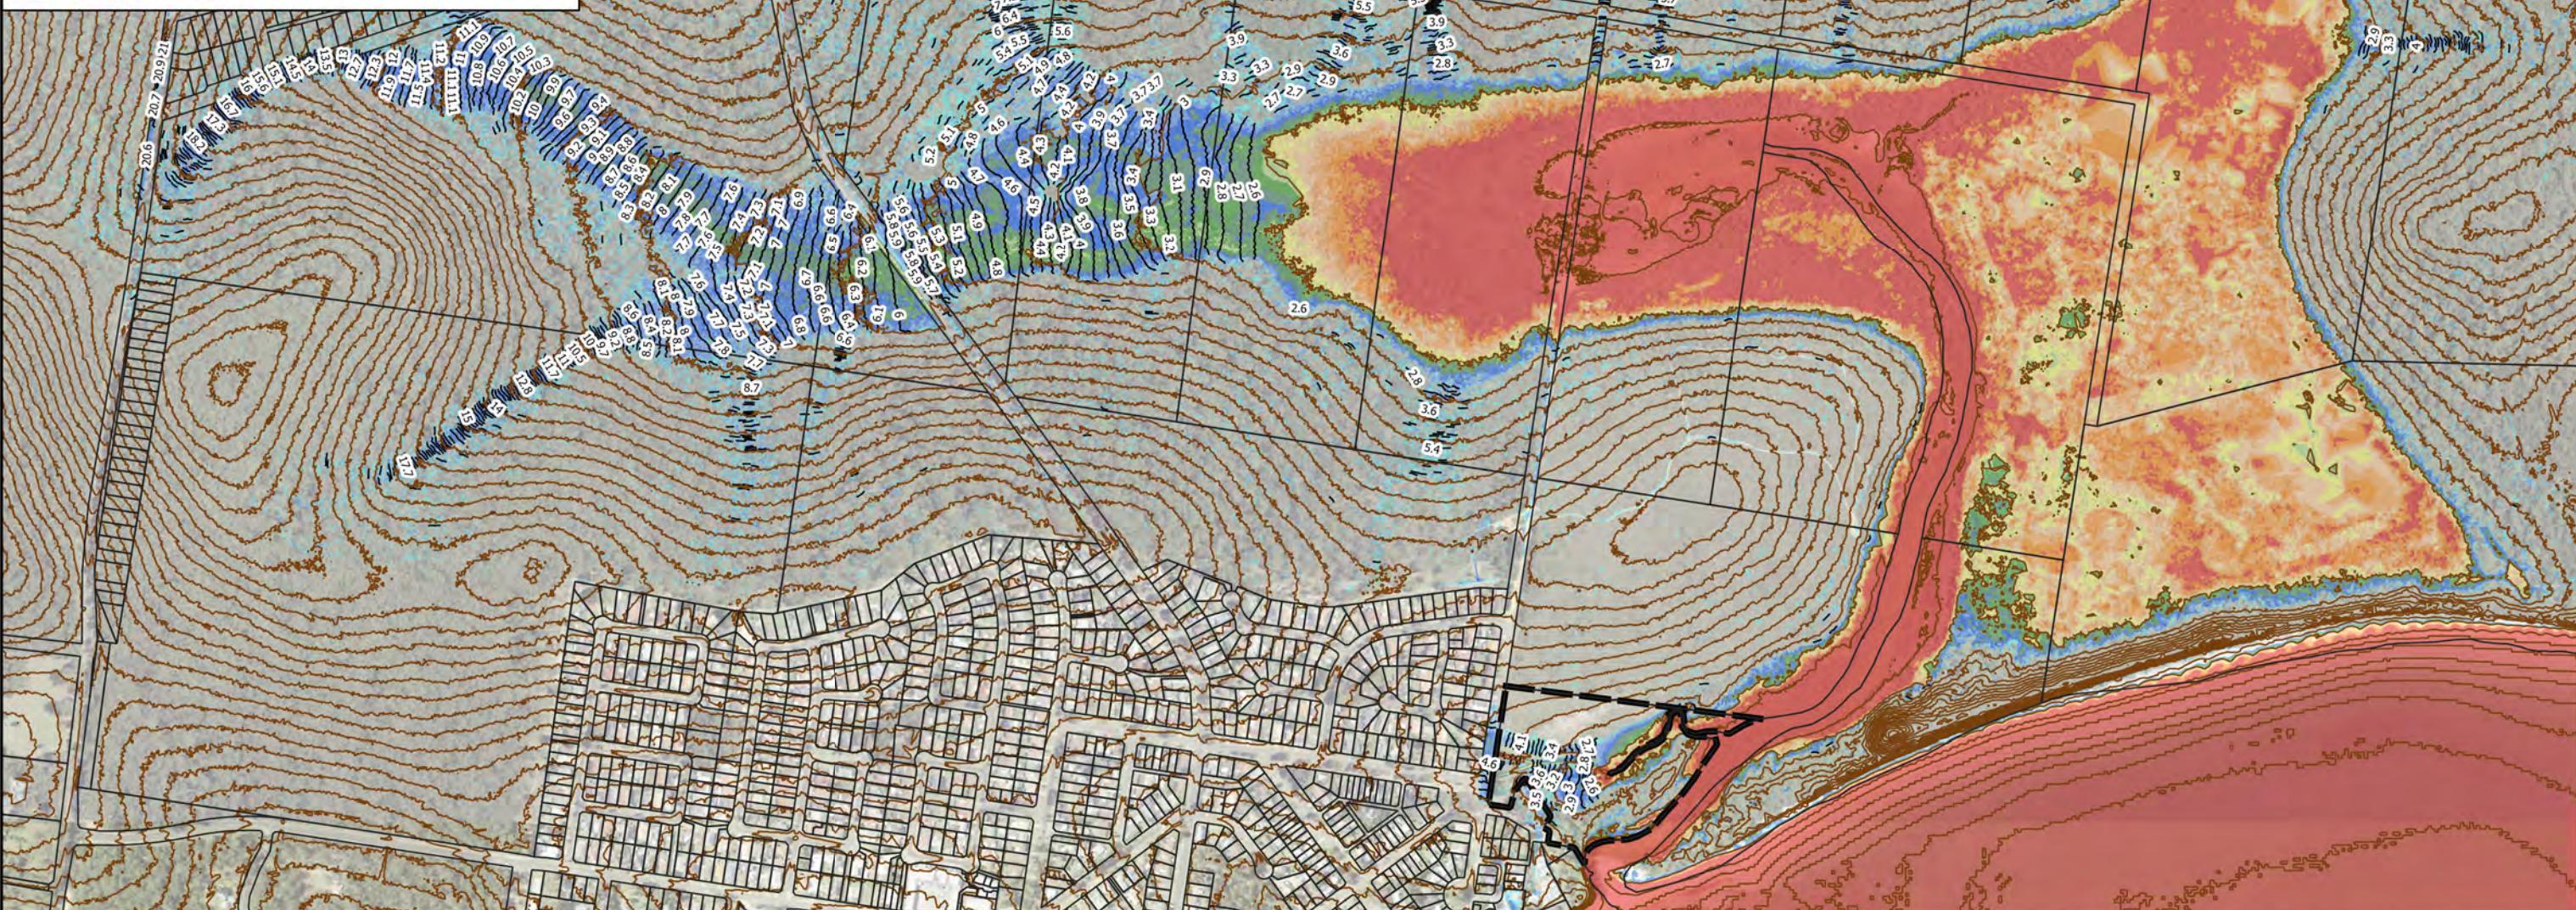

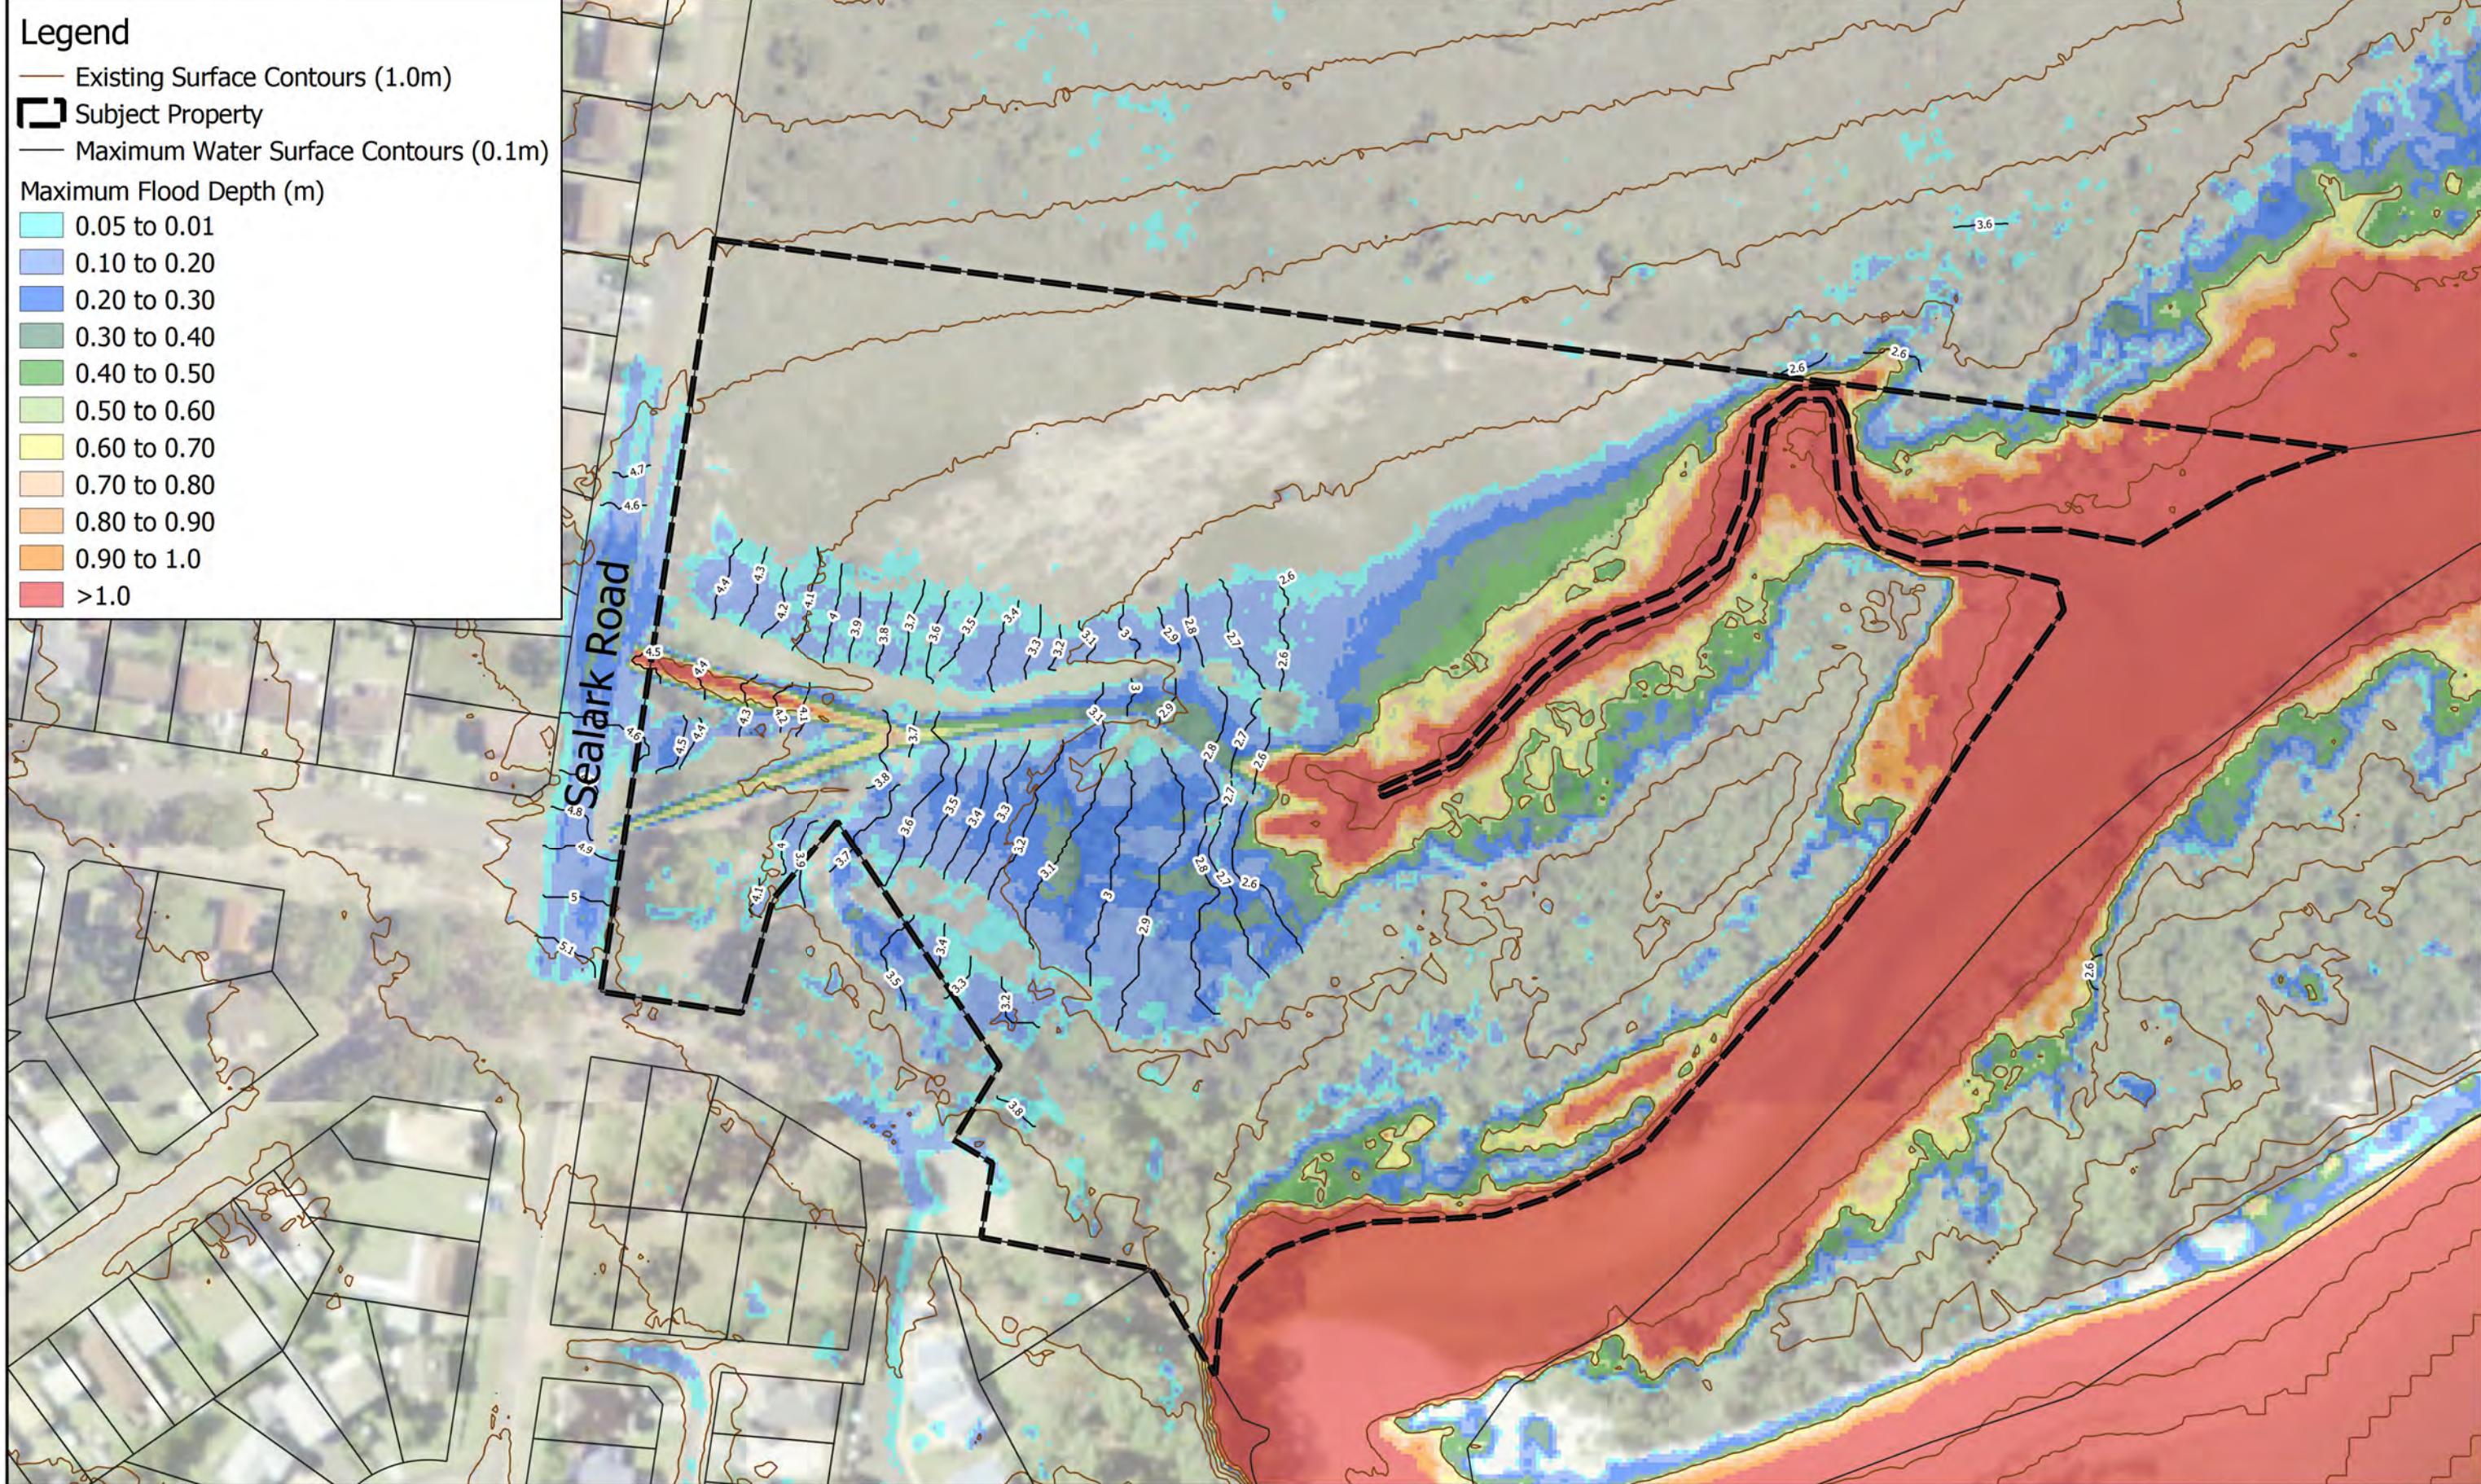

### Legend

Existing Surface Contours (1.0m)

Subject Property

Change in Maximum Flood Level

0

0-5mm

5-10mm

10-25mm

25-50mm


50-100mm

>100mm

was wet, now dry


was dry, now wet




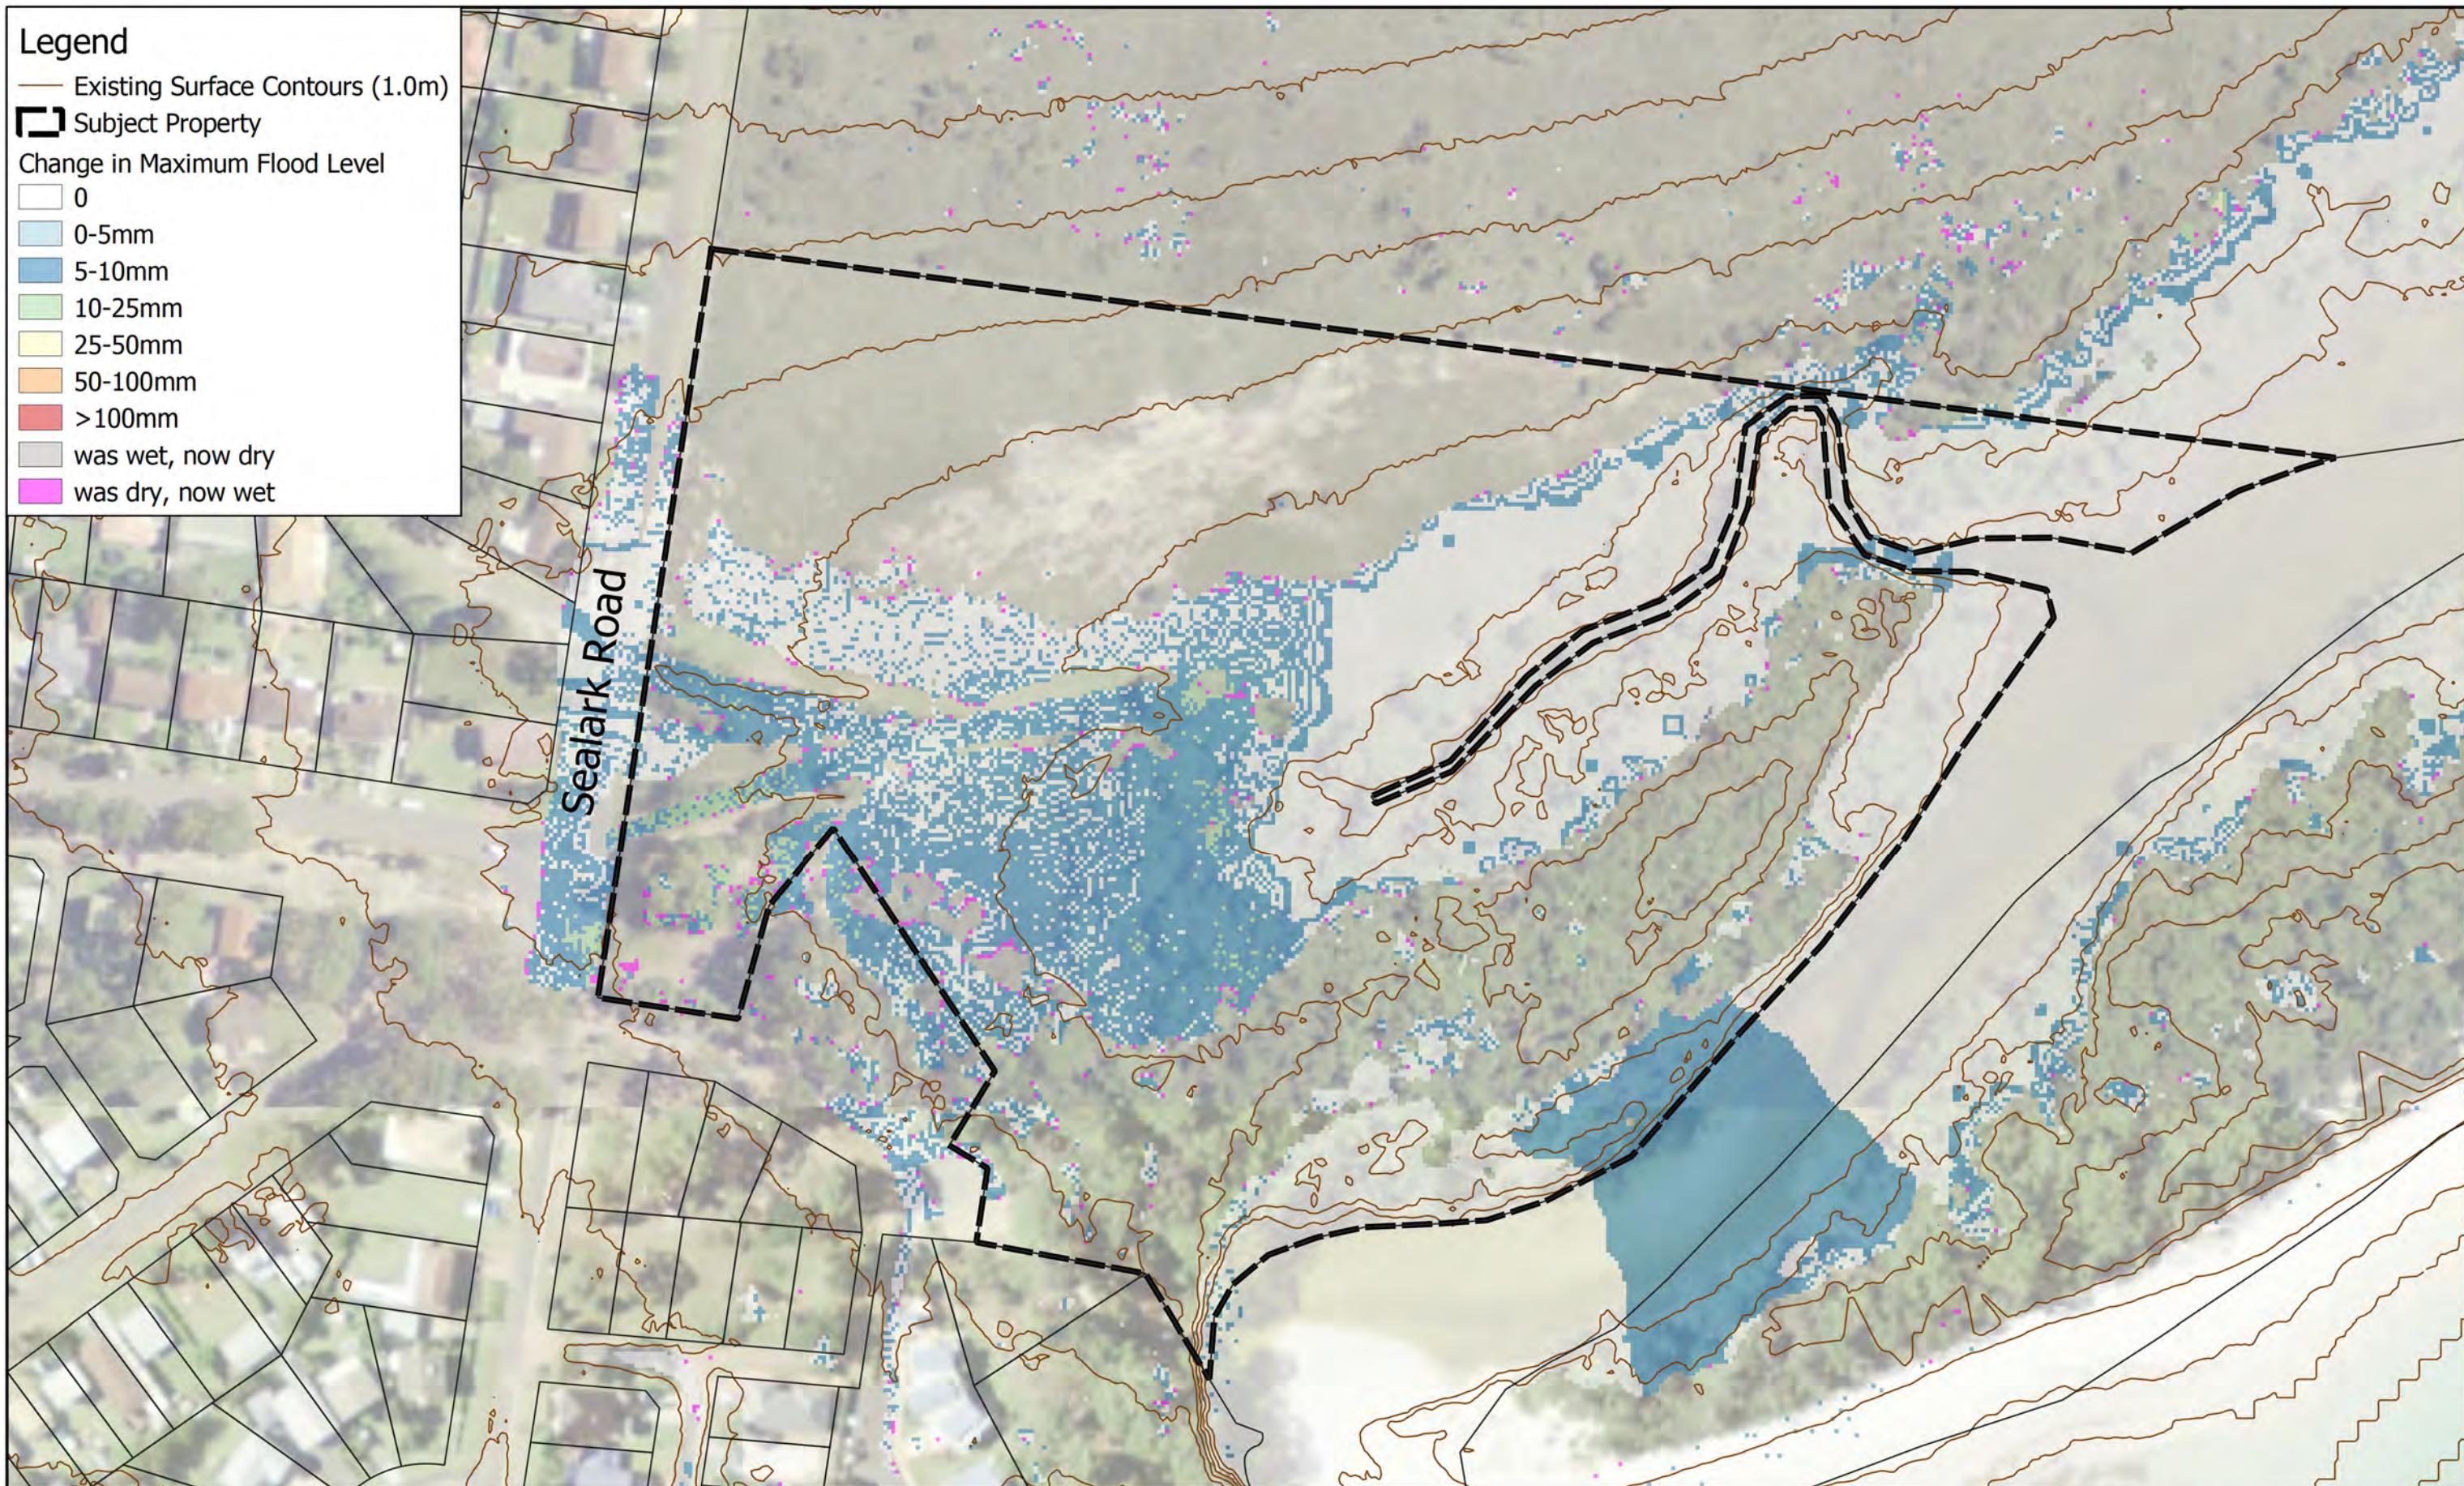


## Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
  - 0.05 to 0.01
  - 0.10 to 0.20
  - 0.20 to 0.30
  - 0.30 to 0.40
  - 0.40 to 0.50
  - 0.50 to 0.60
  - 0.60 to 0.70
  - 0.70 to 0.80
  - 0.80 to 0.90
  - 0.90 to 1.0
  - >1.0

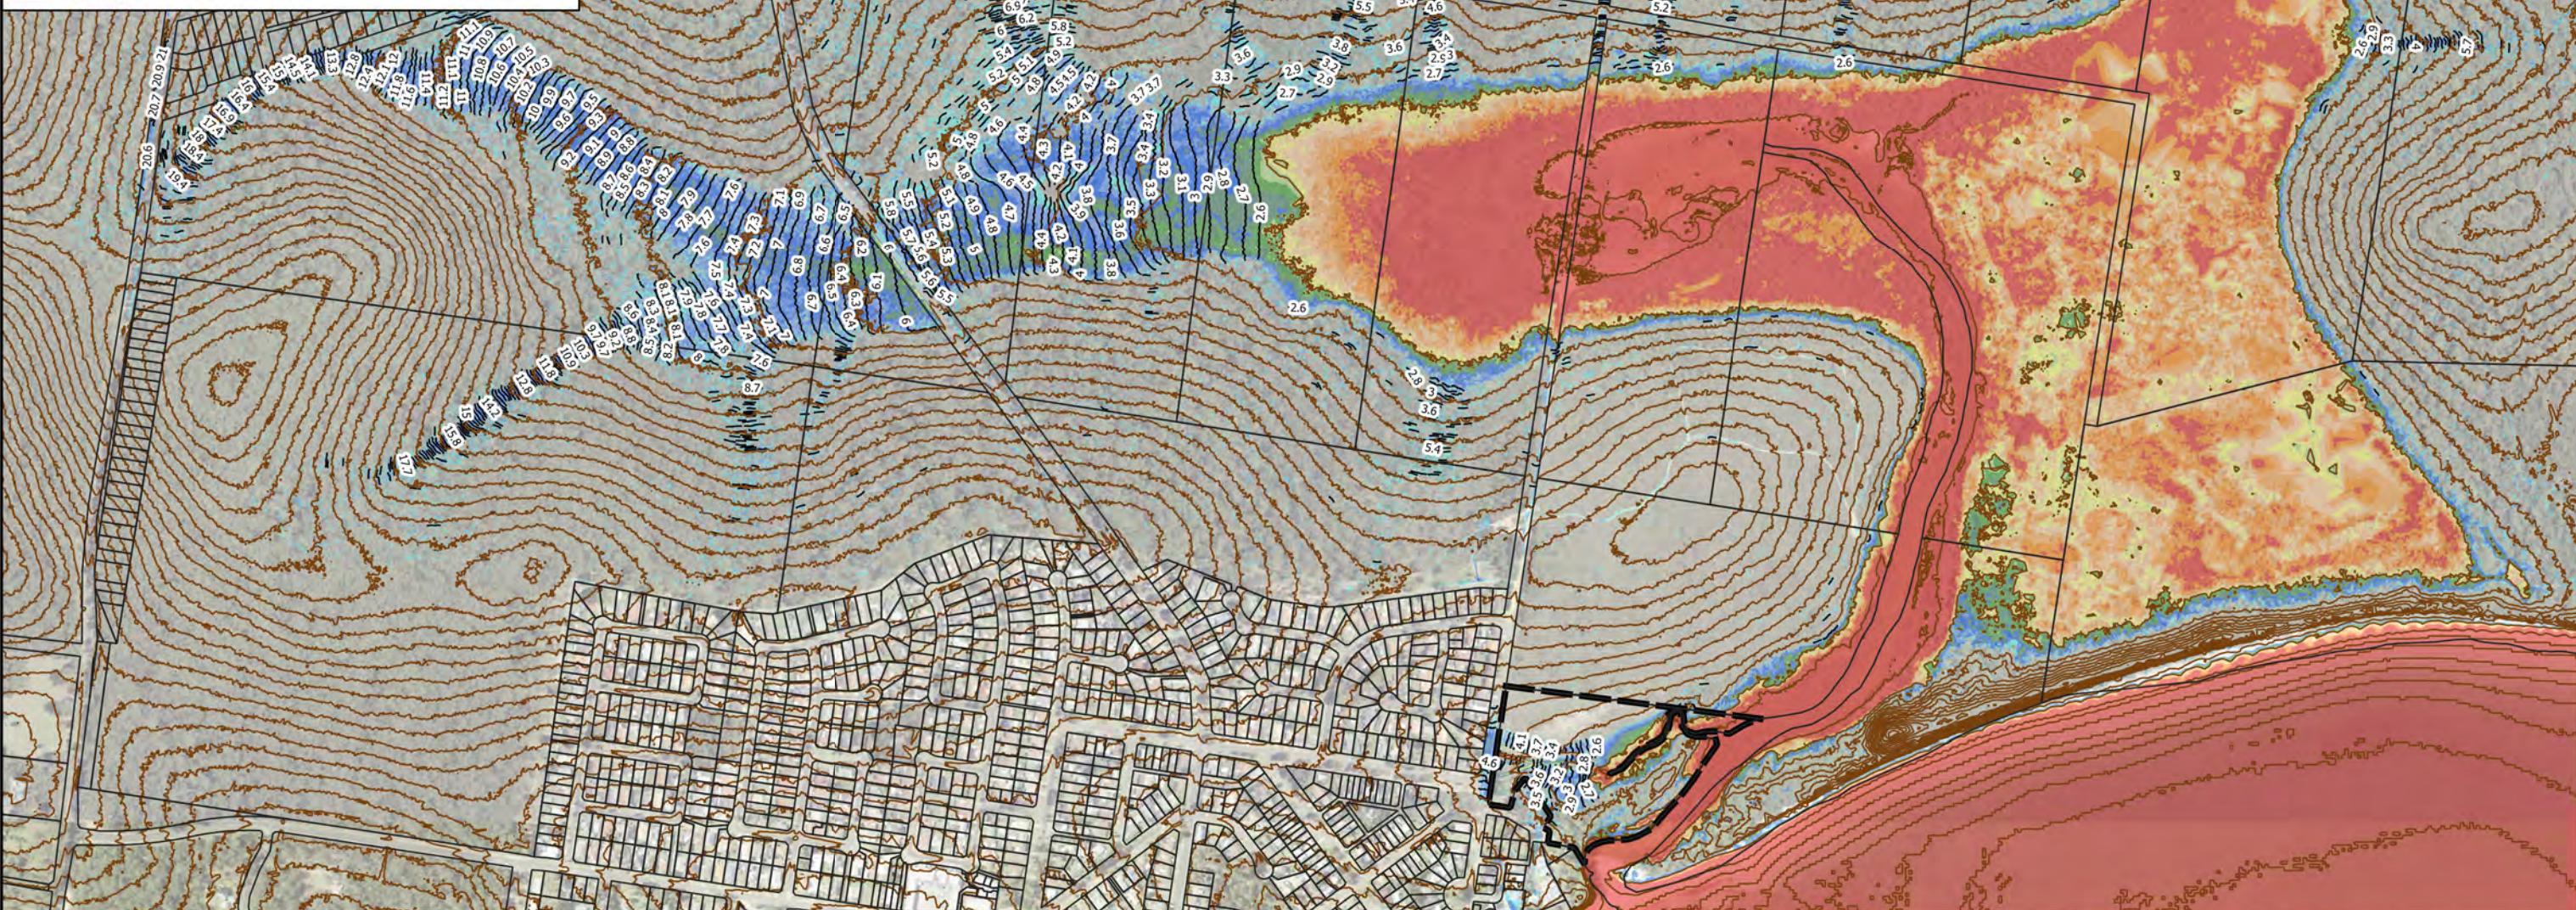

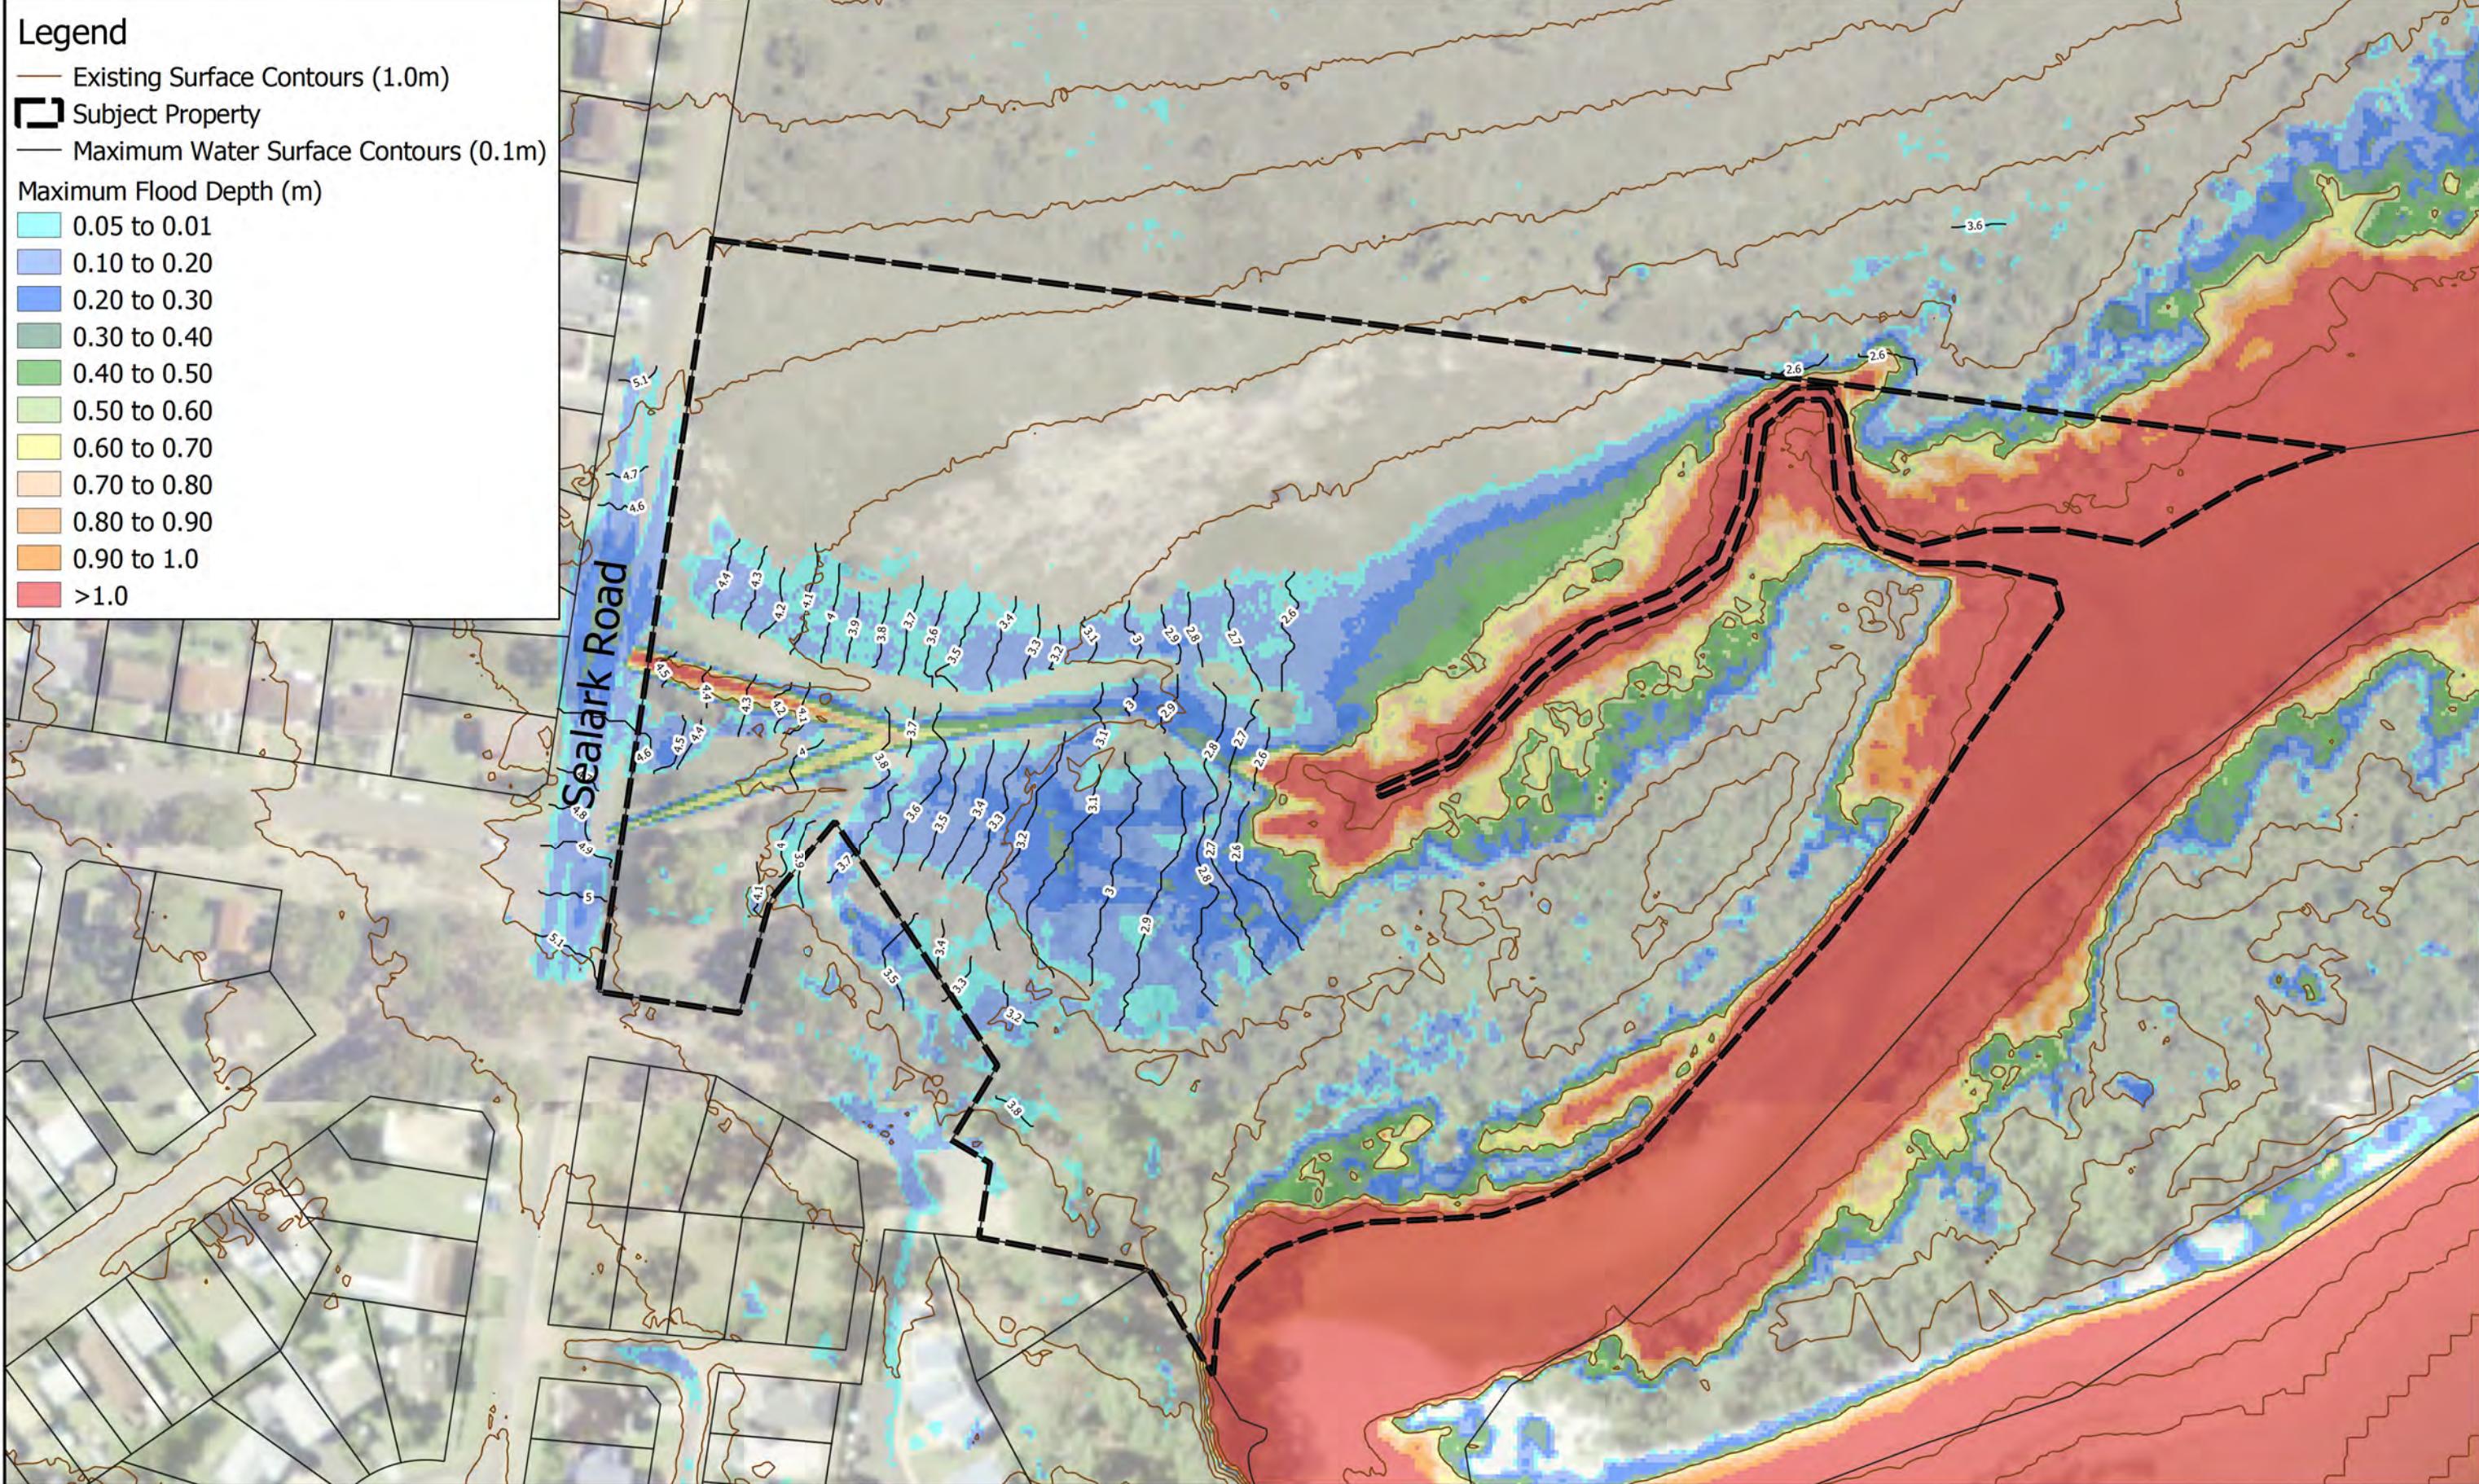





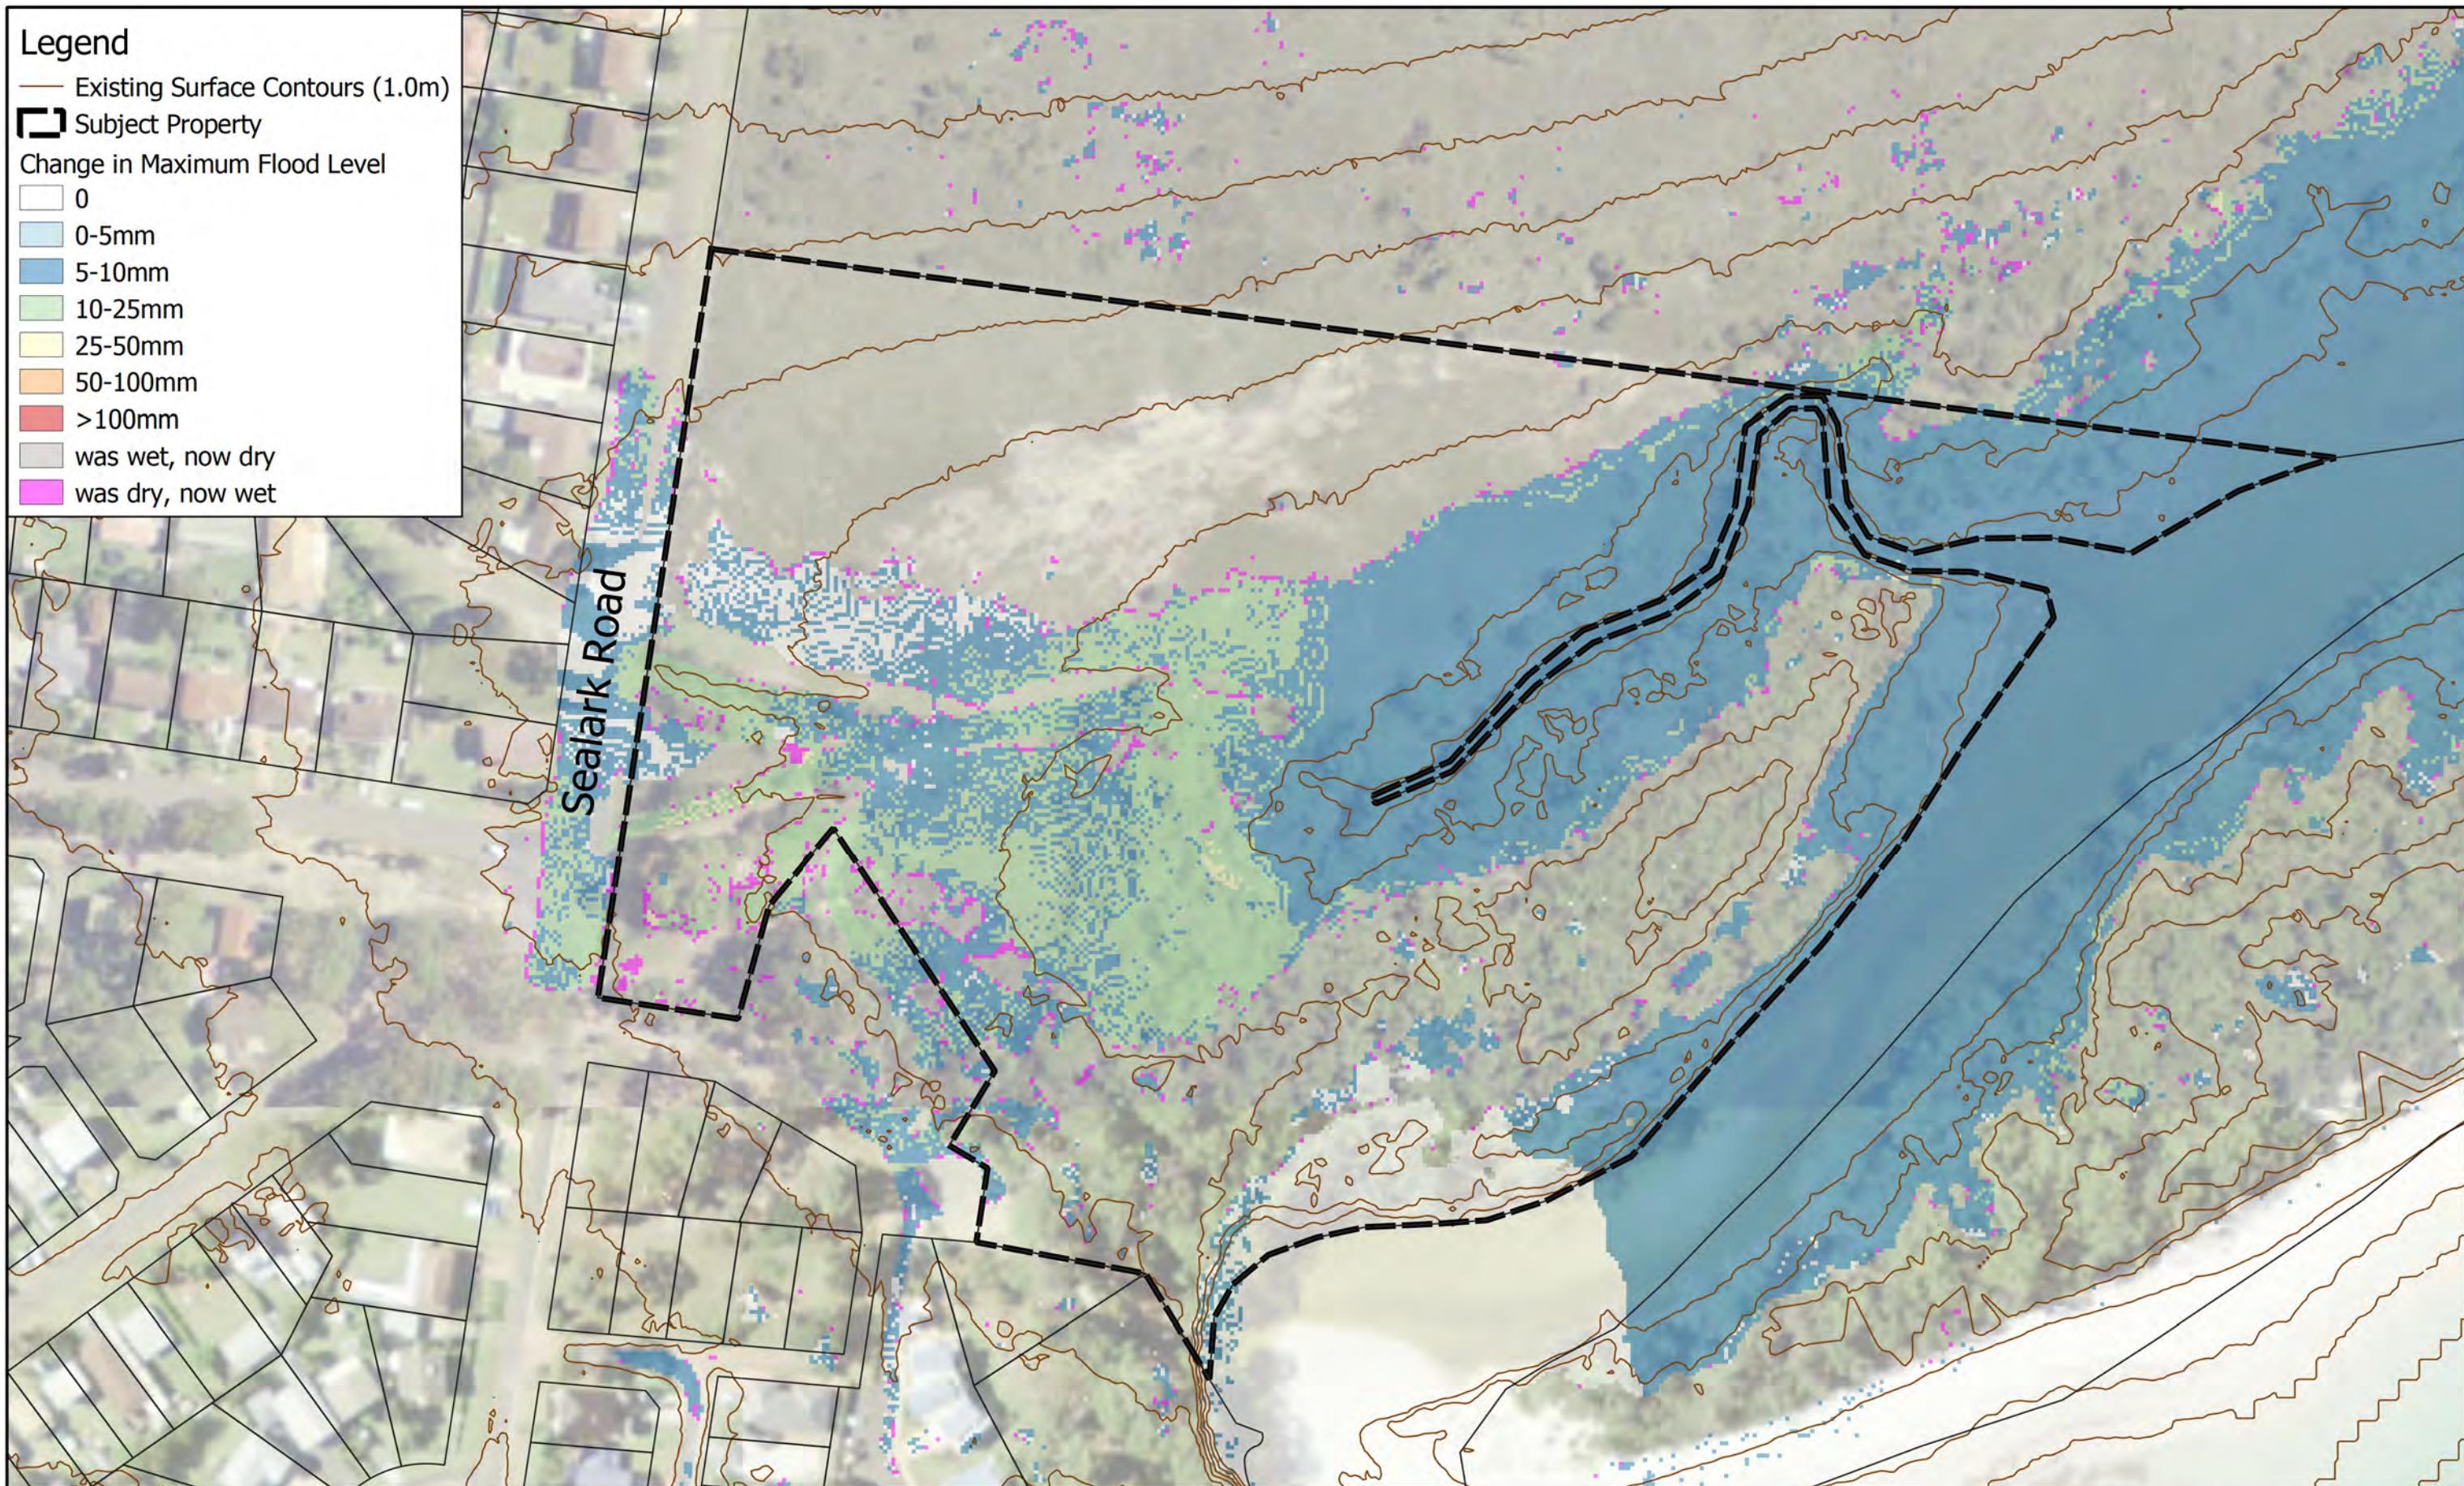


## Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
  - 0.05 to 0.01
  - 0.10 to 0.20
  - 0.20 to 0.30
  - 0.30 to 0.40
  - 0.40 to 0.50
  - 0.50 to 0.60
  - 0.60 to 0.70
  - 0.70 to 0.80
  - 0.80 to 0.90
  - 0.90 to 1.0
  - >1.0

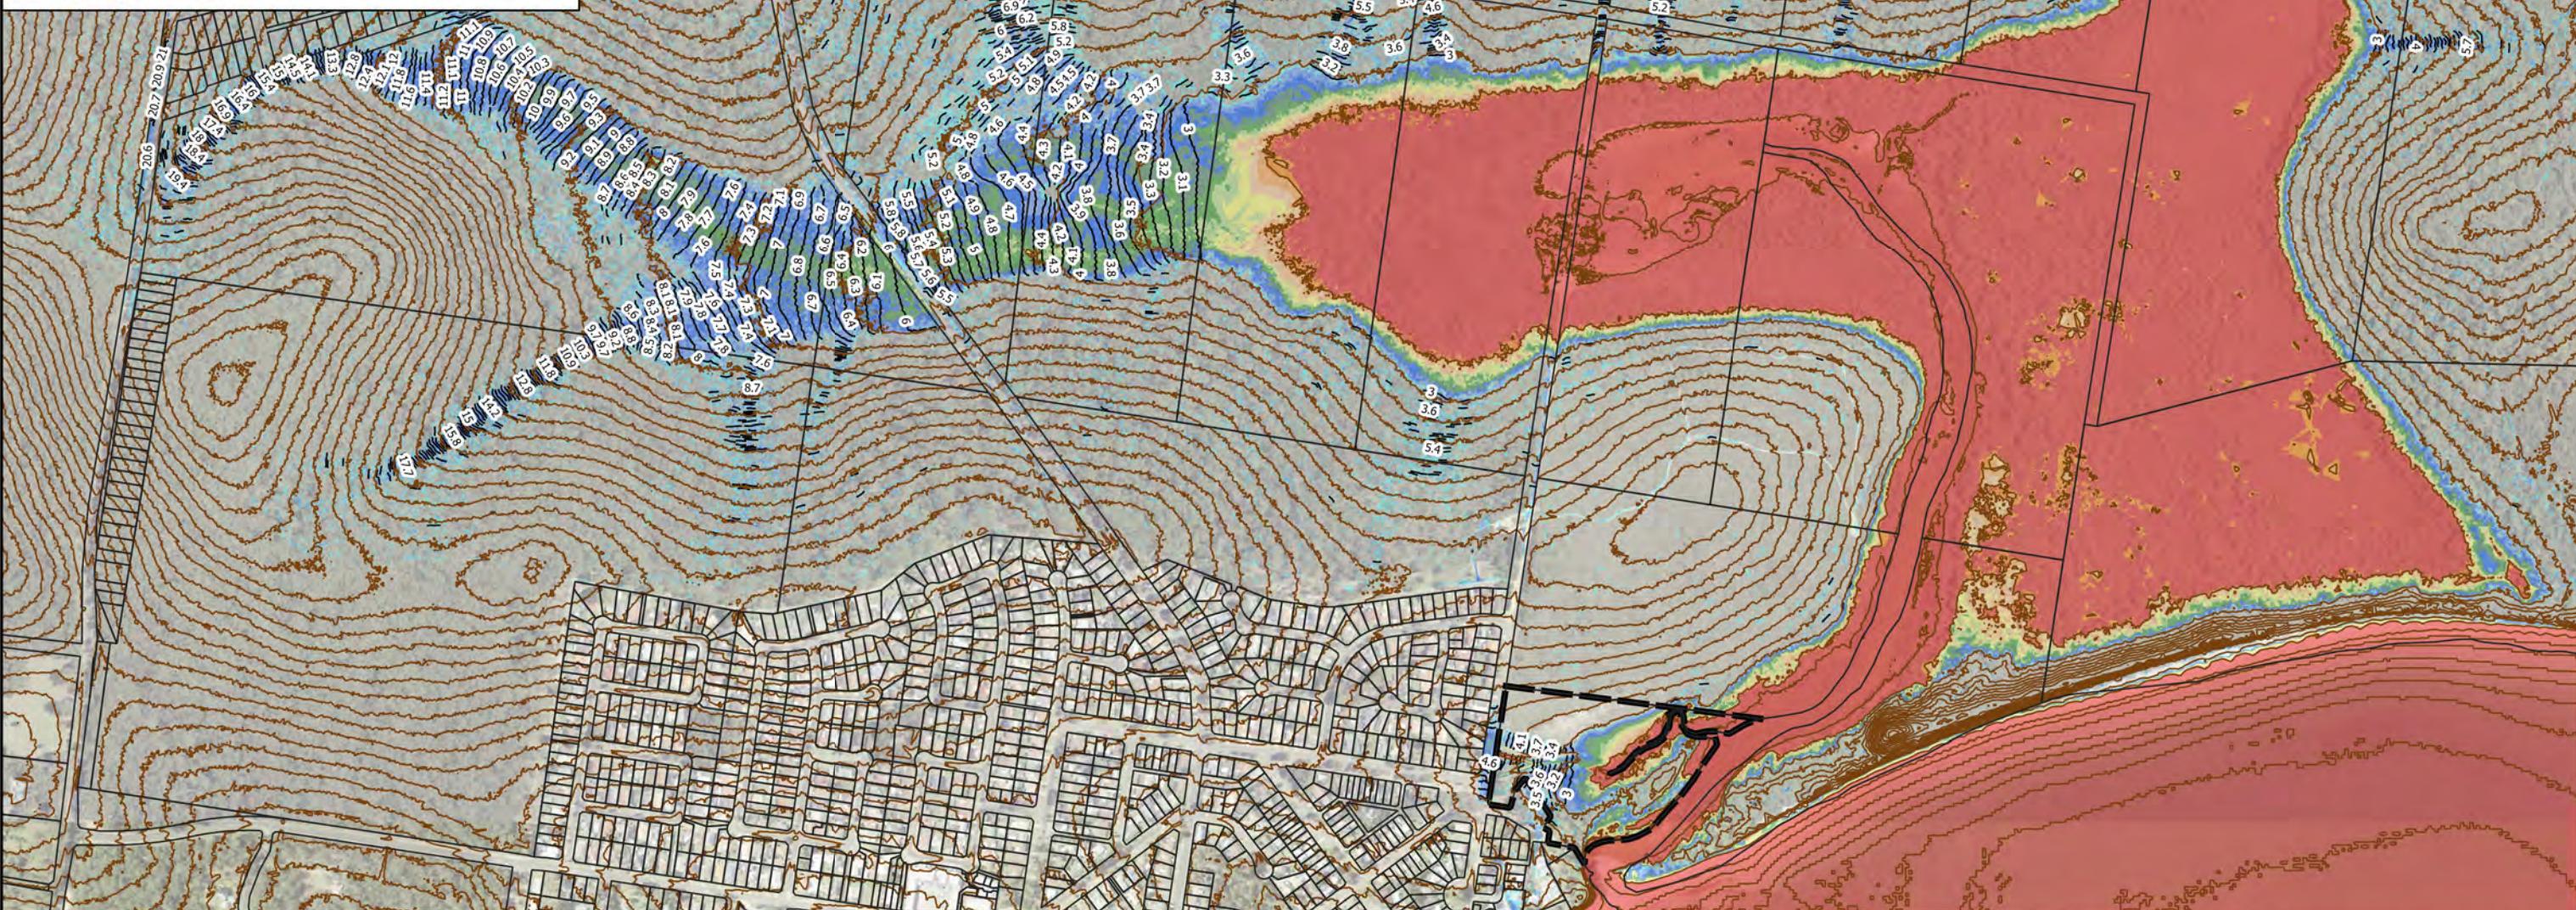


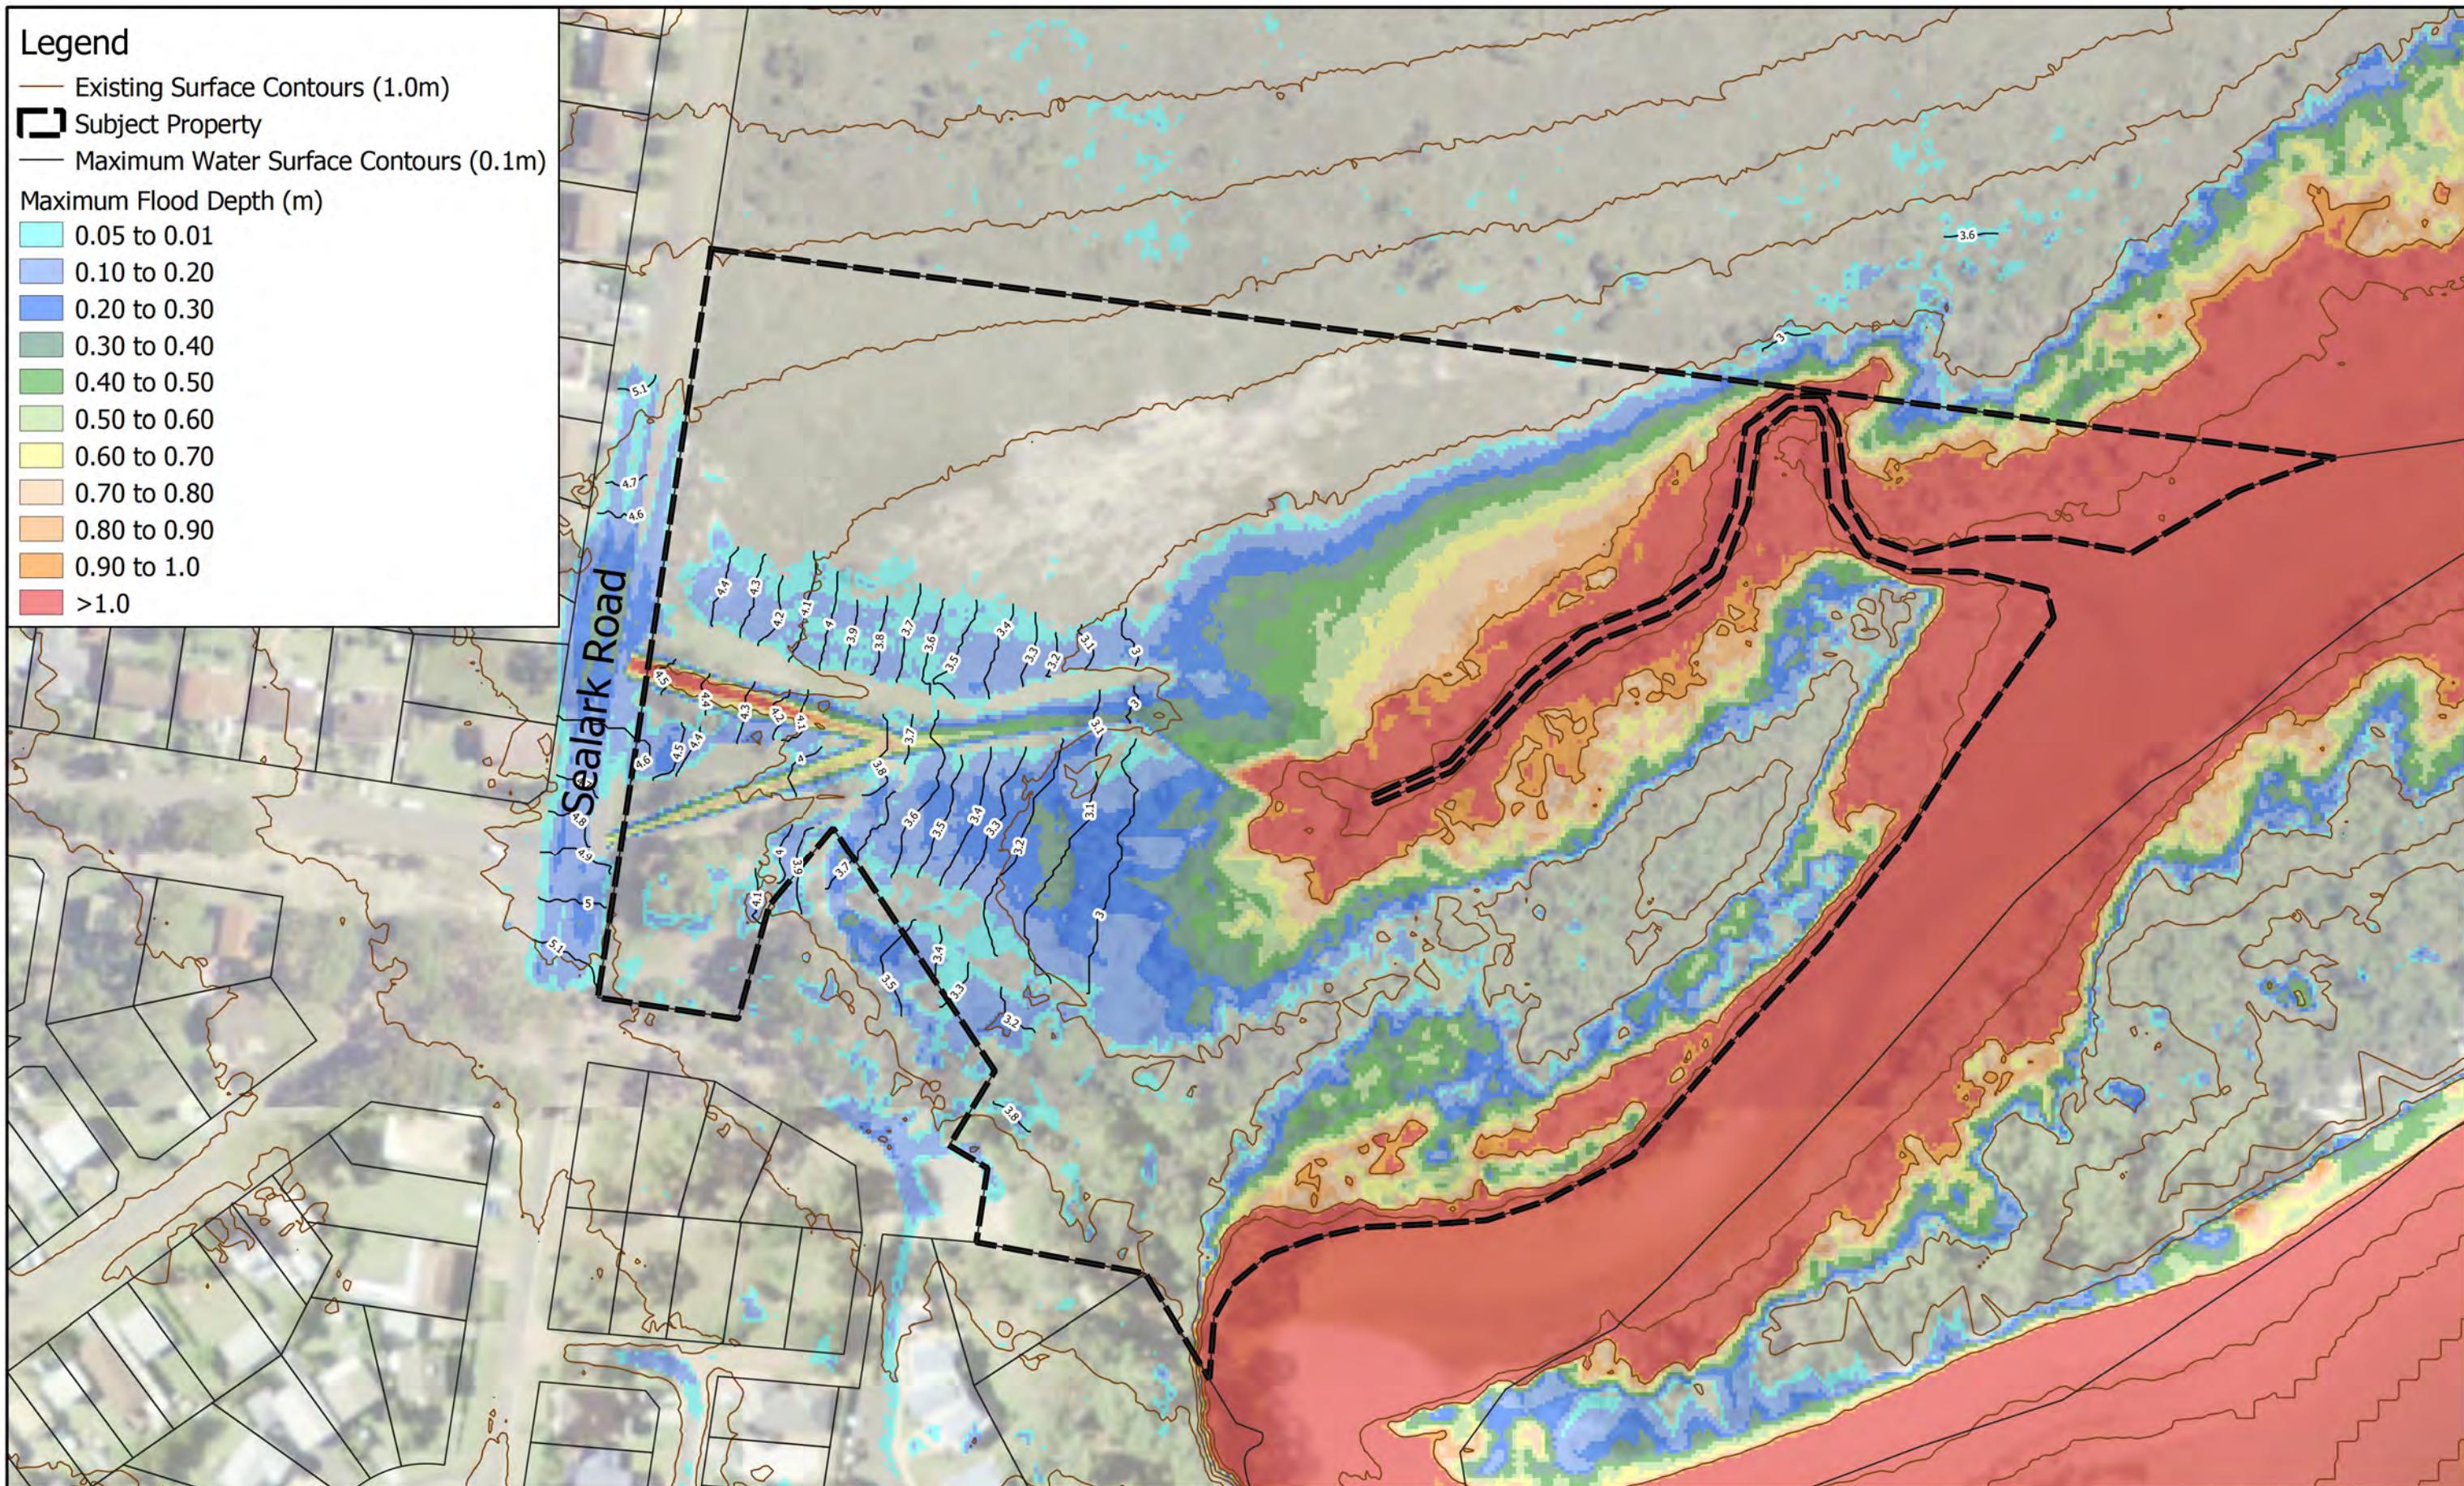



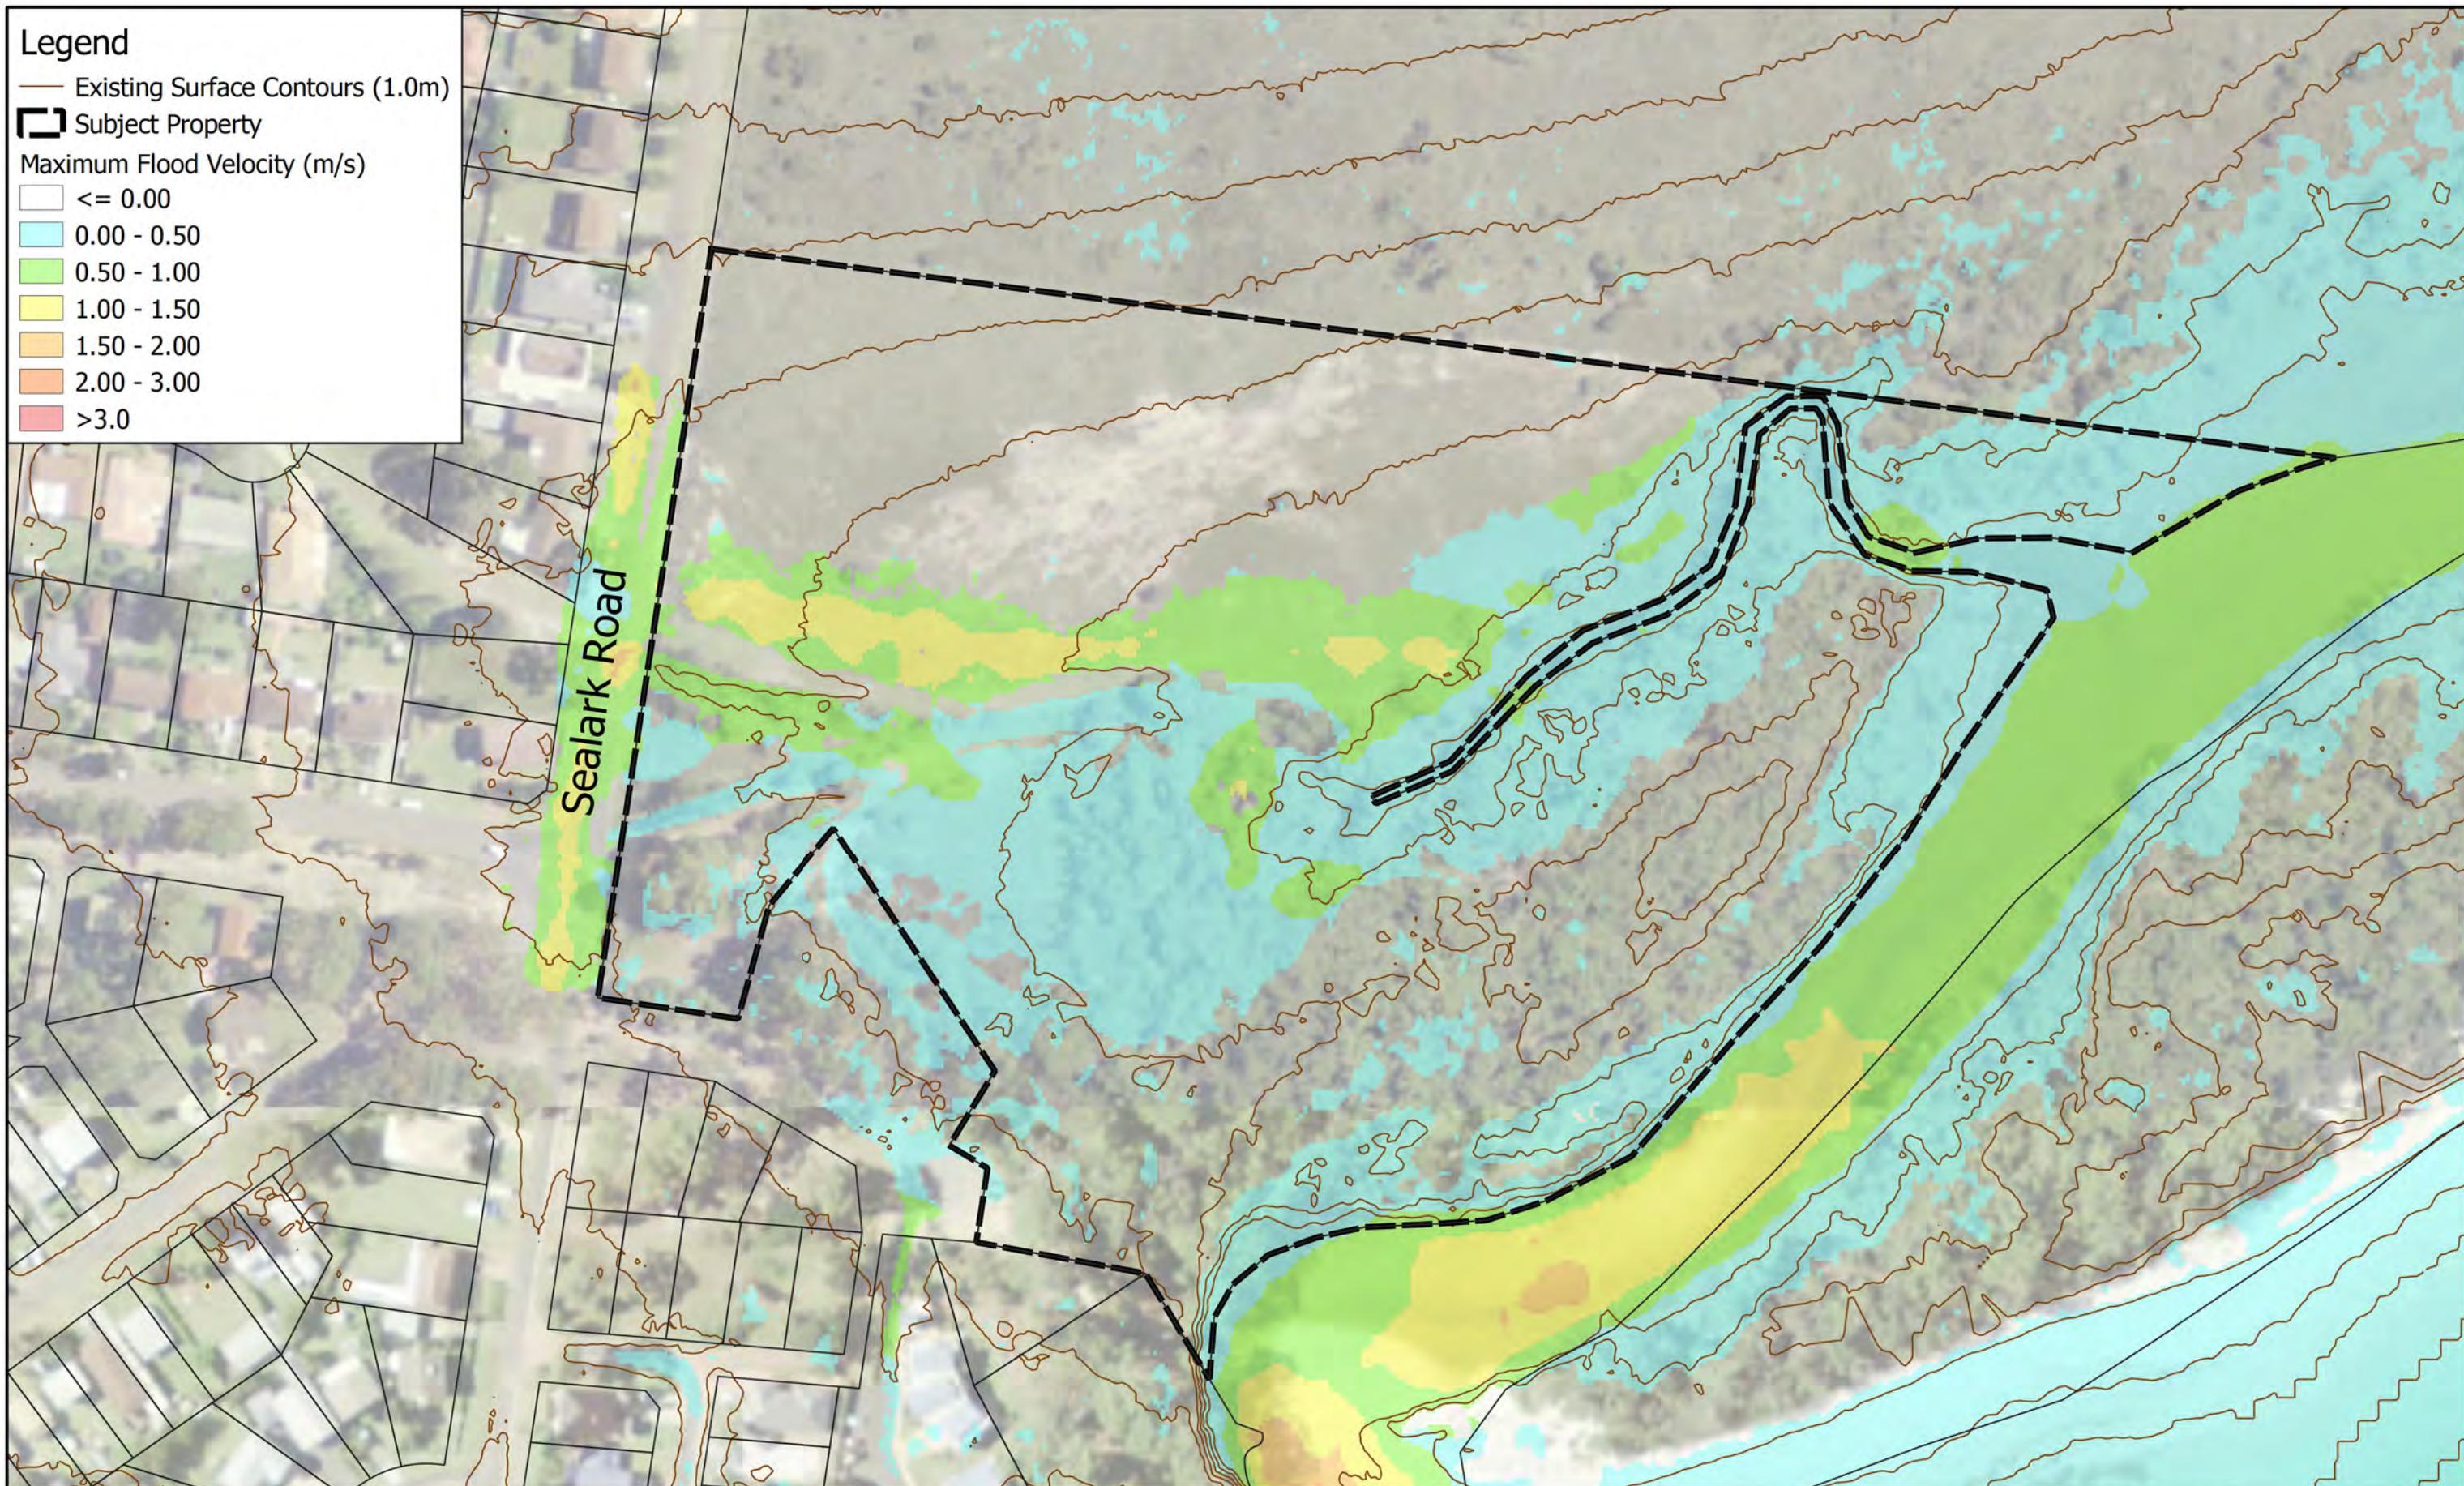




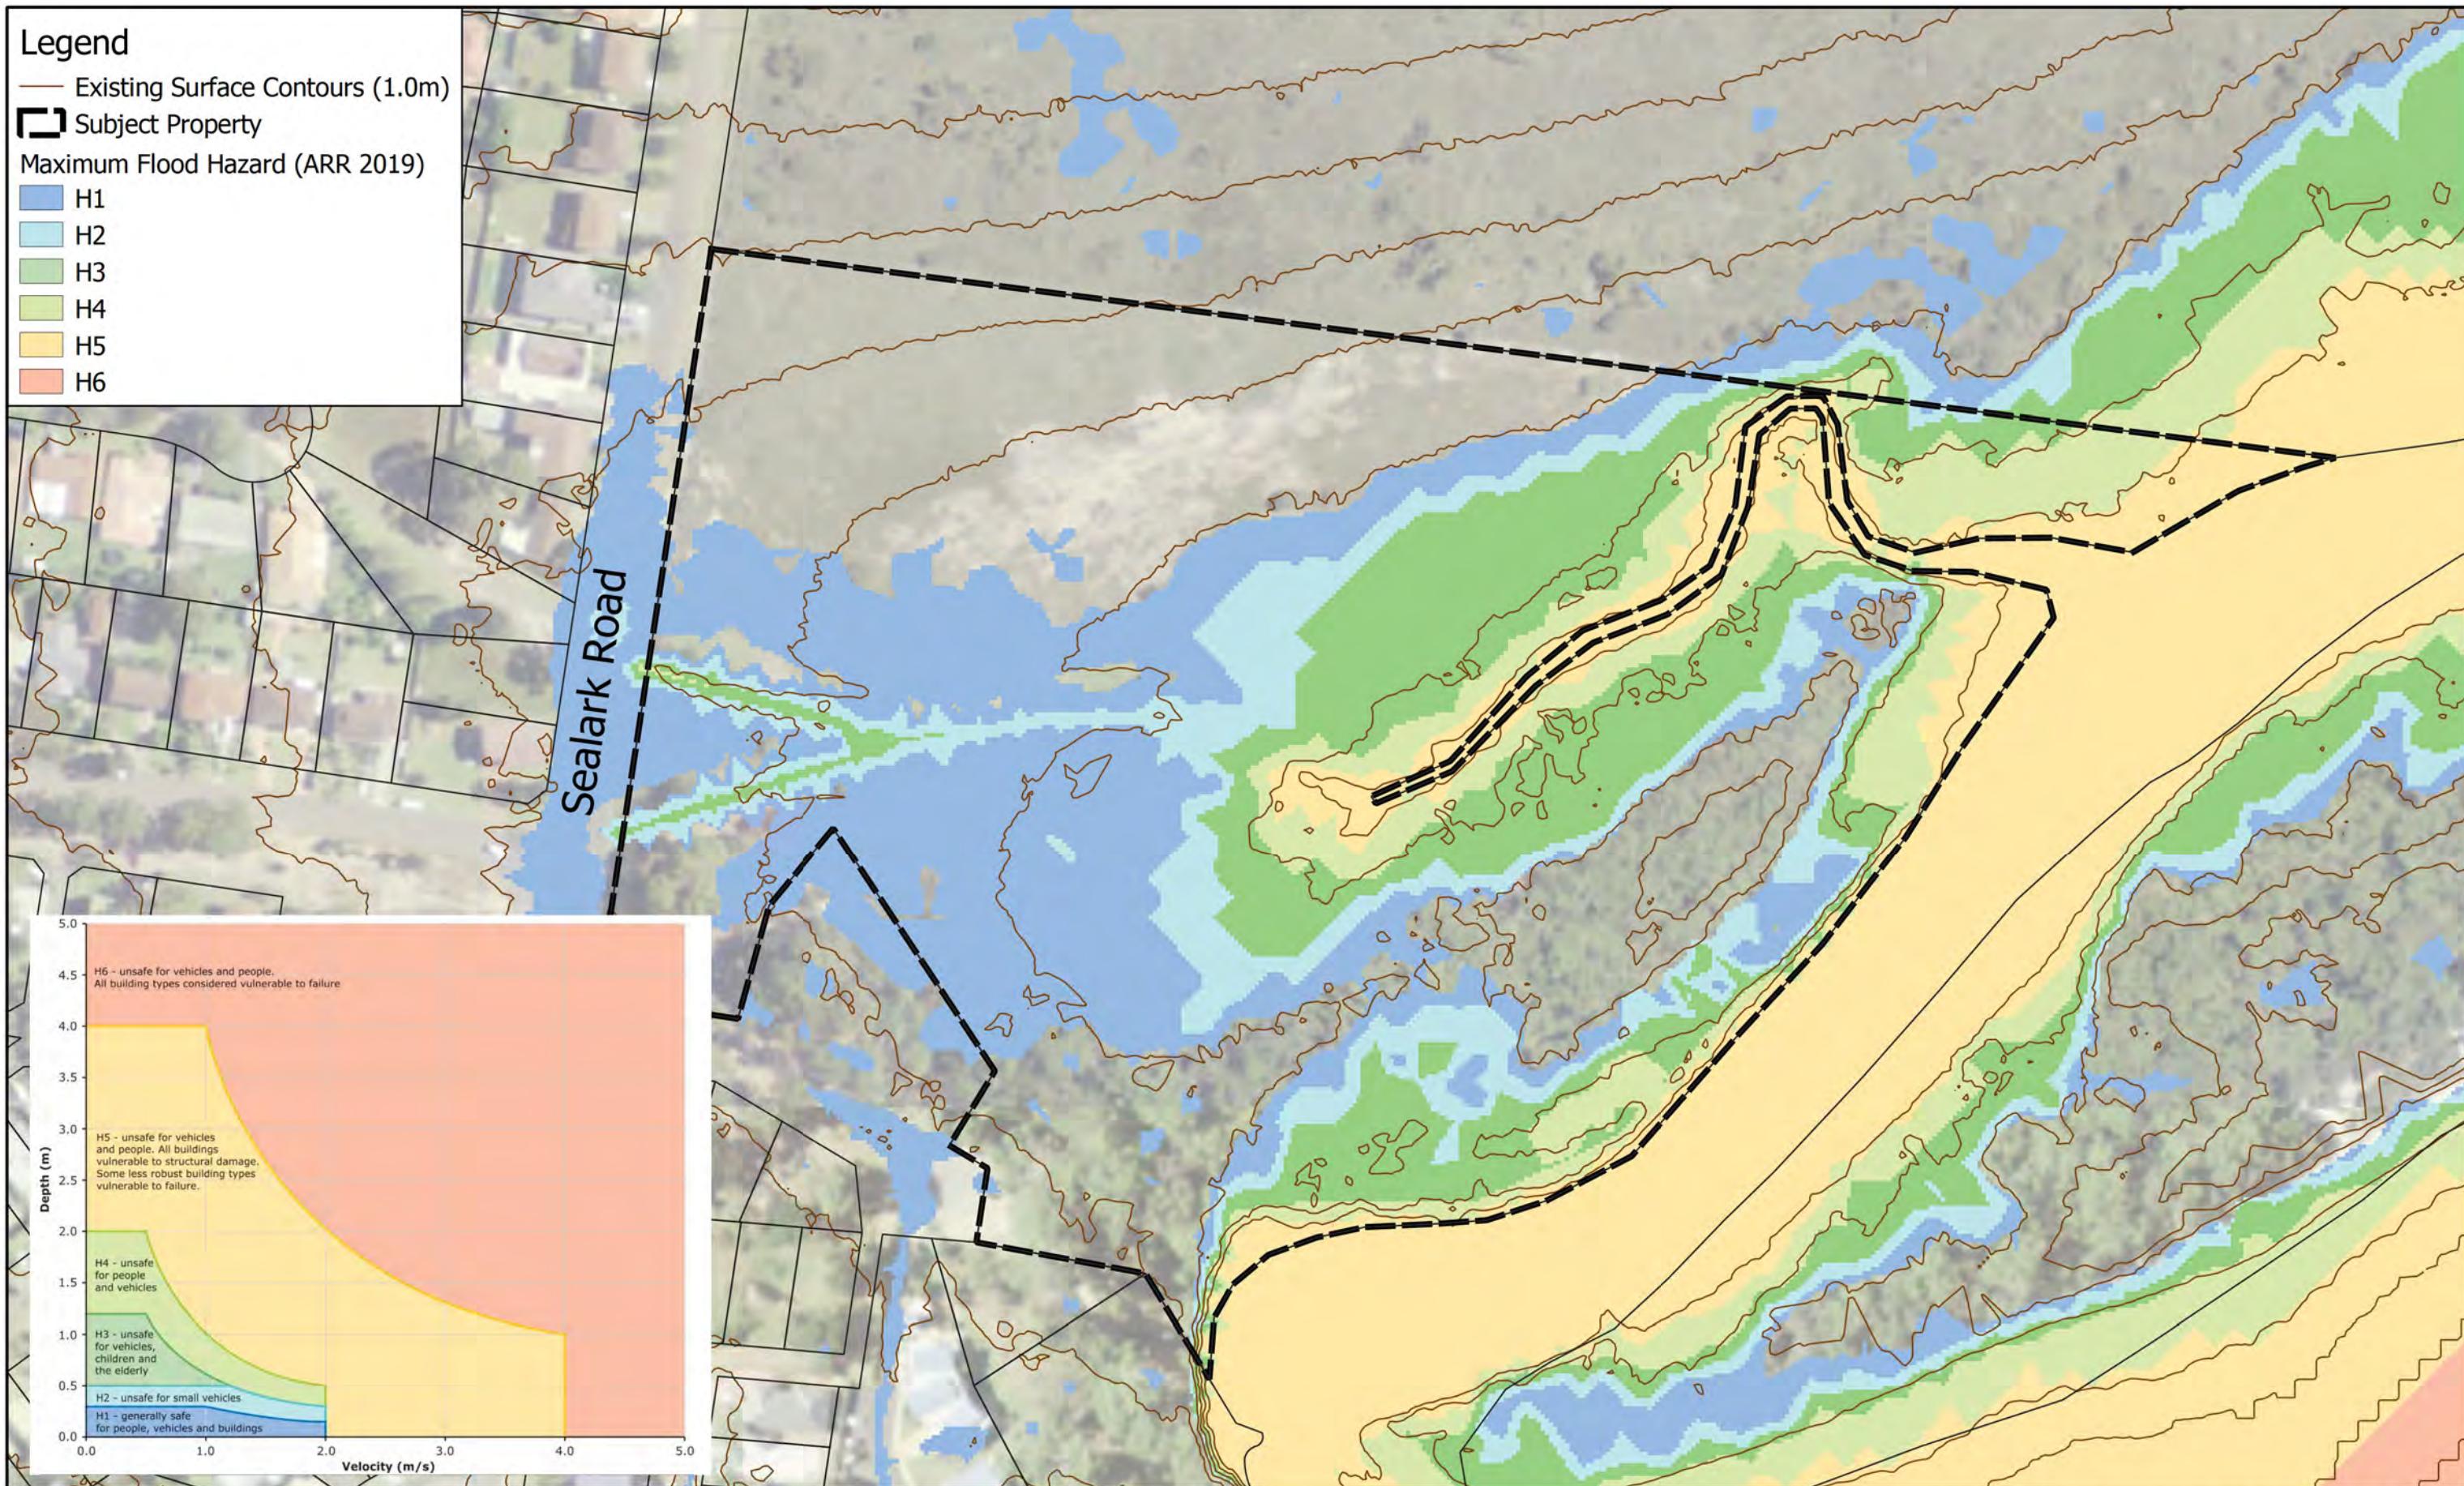

### Legend

- Existing Surface Contours (1.0m)
- Subject Property
- Change in Maximum Flood Level
  - 0
  - 0-50mm
  - 50-100mm
  - 100-200mm
  - 200-300mm
  - 300-400mm
  - >400mm
  - was wet, now dry
  - was dry, now wet



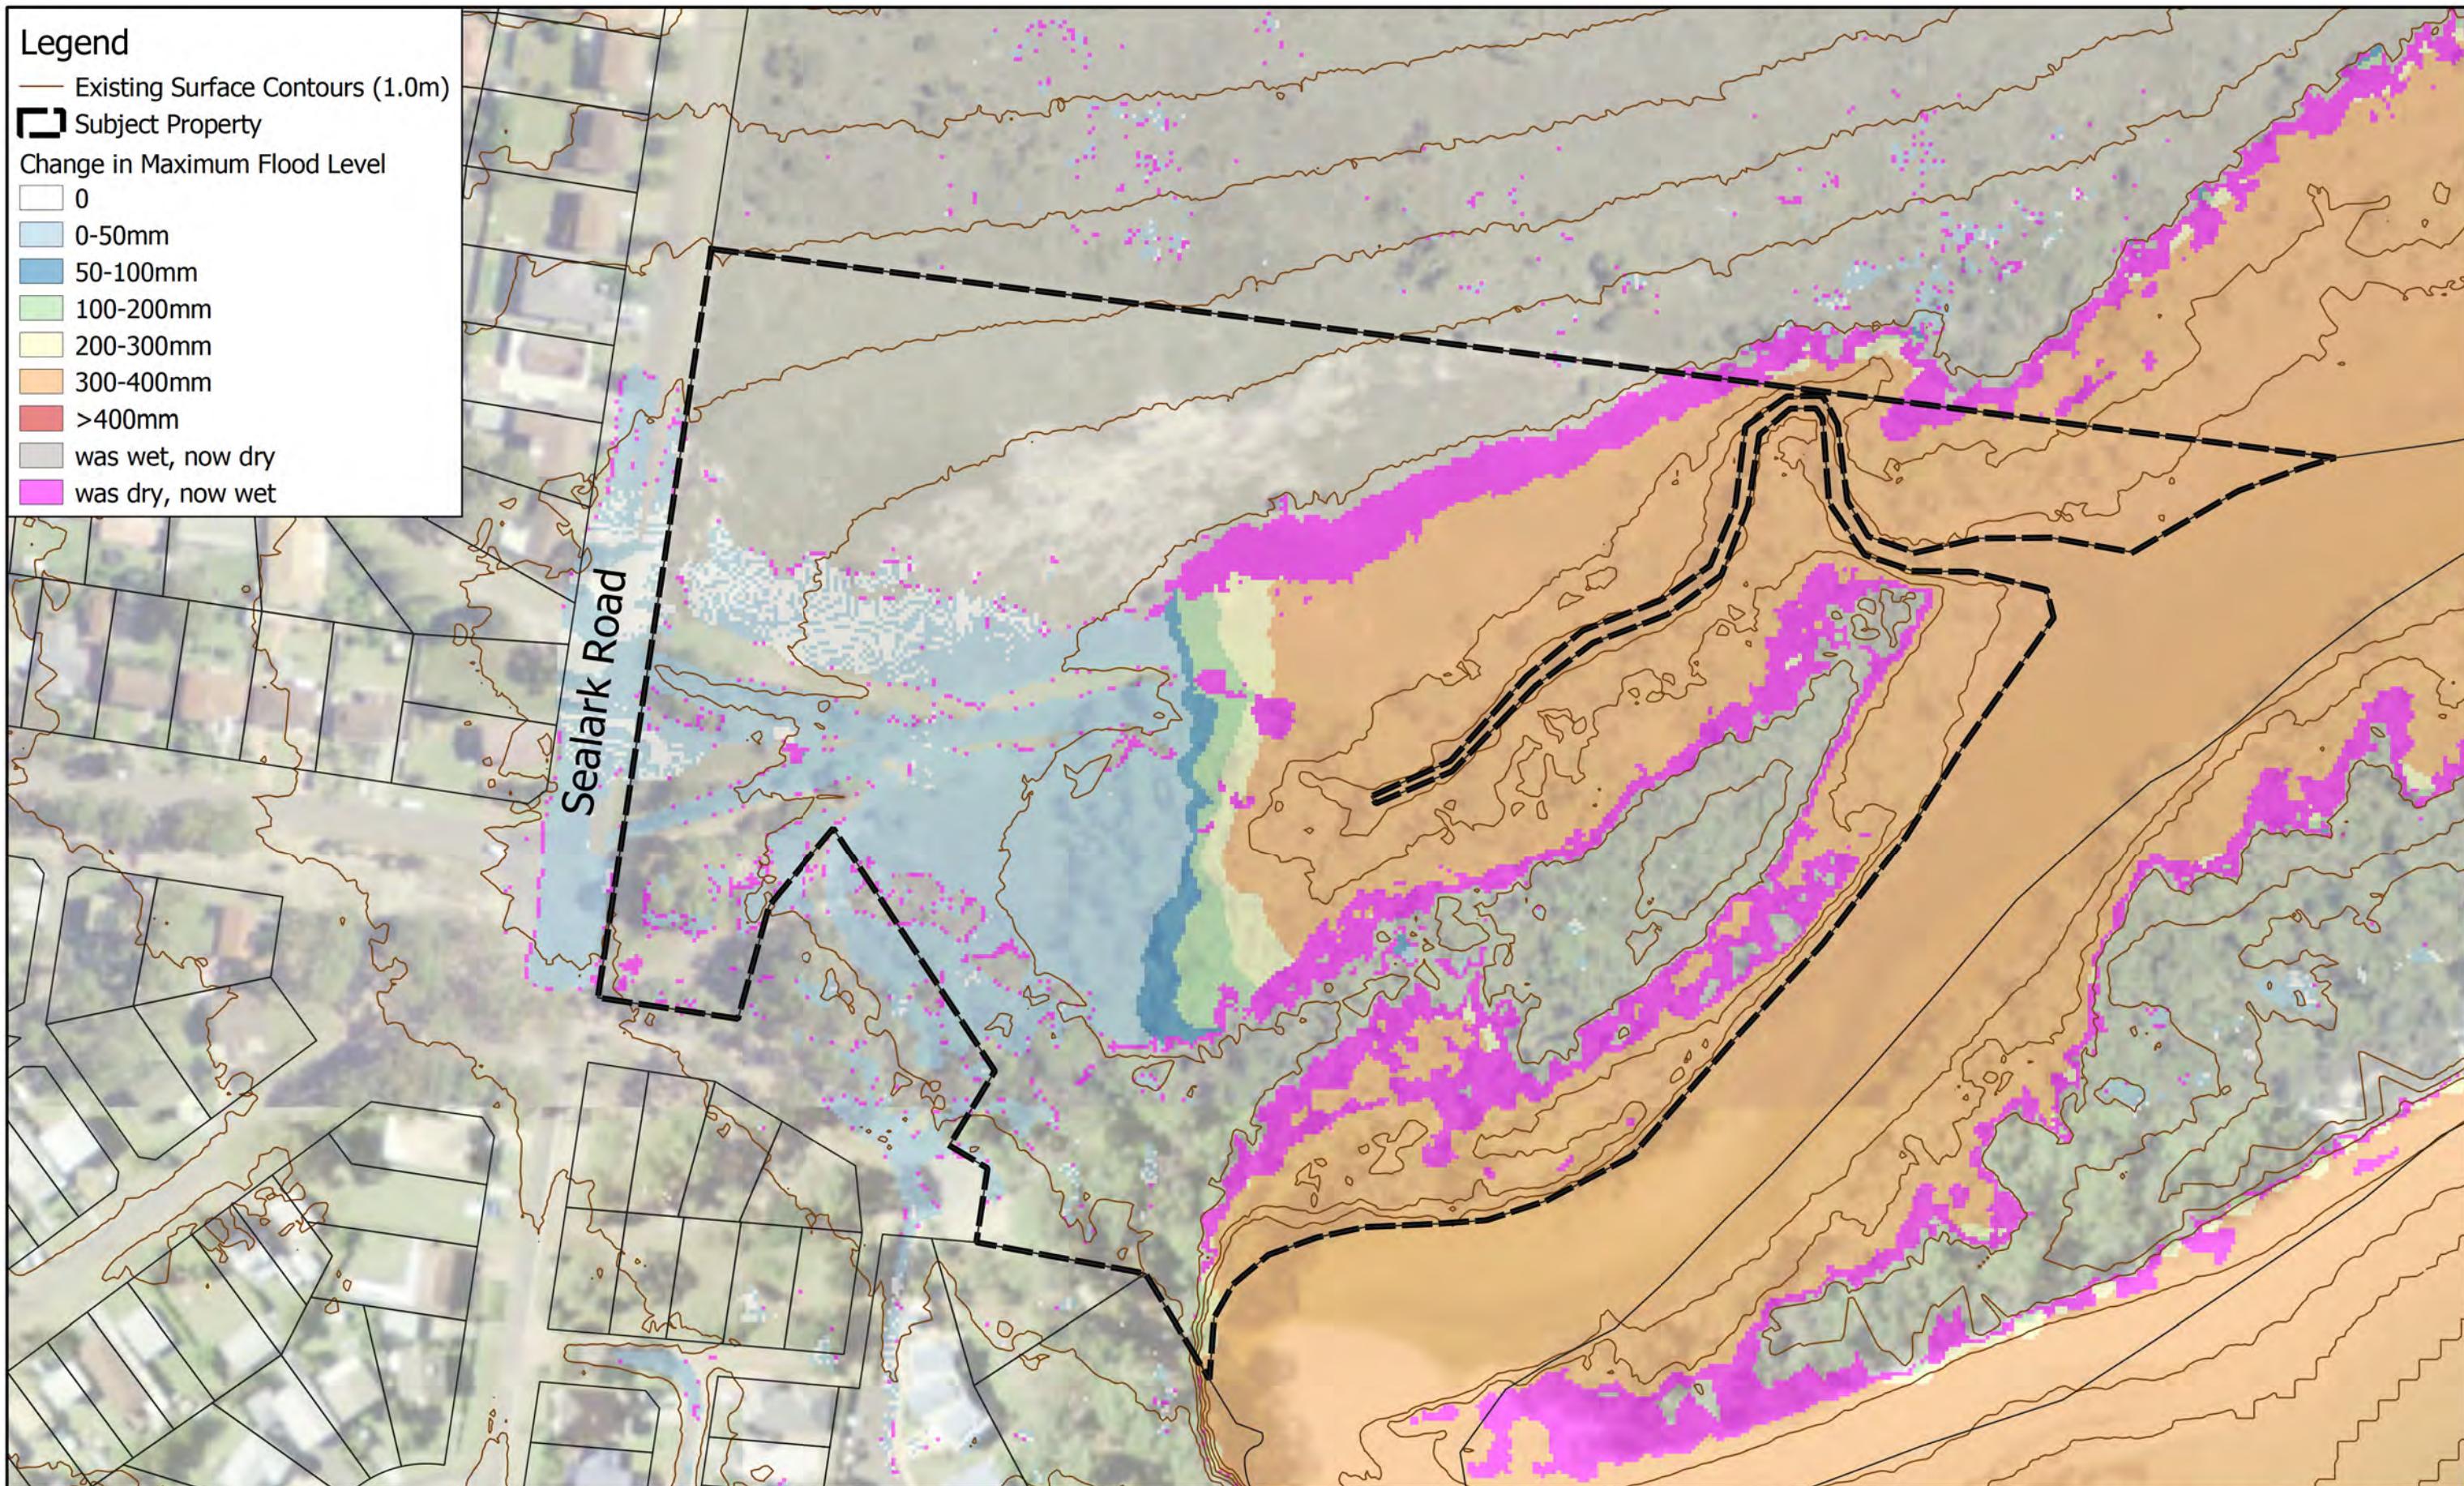

# APPENDIX G

## Preliminary Civil Design Drawings

# LOT 5 SEALARK ROAD, CALLALA BAY PLANNING PROPOSAL

## PRELIMINARY CIVIL DESIGN DRAWINGS



SHEET INDEX

DRAWING No.	DESCRIPTION
1861-C01	TITLE SHEET
1861-C02	GENERAL ARRANGEMENT PLAN
1861-C03	PRELIMINARY EARTHWORKS PLAN
1861-C04	PRELIMINARY EARTHWORKS SECTIONS
1861-C05	ROAD 1 LONGITUDINAL SECTION & CROSS SECTIONS – SHEET 1 OF 2
1861-C06	ROAD 1 CROSS SECTIONS SHEET 2 OF 2
1861-C07	ROAD 2 LONGITUDINAL SECTION & CROSS SECTIONS
1861-C08	PRELIMINARY STORMWATER MANAGEMENT PLAN
1861-C09	WATER QUALITY PRE AND POST DEVELOPMENT LAND USE PLAN
1861-C10	INDICATIVE SUBDIVISION PLAN

7	ISSUED FOR PLANNING PROPOSAL	15/07/24
6	RE-ISSUED FOR CONSULTANT REVIEW	02/06/24
5	FOR CONSULTANT REVIEW	15/05/24
4	RE-ISSUED FOR PLANNING PROPOSAL	12/01/24
3	RE-ISSUED FOR PLANNING PROPOSAL	22/11/21
2	RE-ISSUED FOR PLANNING PROPOSAL	18/10/21
1	FOR PLANNING PROPOSAL	30/10/20
ISSUE	DESCRIPTION	DATE

FOR PLANNING PROPOSAL  
NOT FOR CONSTRUCTION

FOOTPRINT (NSW) PTY. LTD. AUTHORISE THE USE OF THIS  
DRAWING ONLY FOR THE PURPOSE DEMONSTRATED BY THE  
STATUS STAMP SHOWN ABOVE.


SCALES	ORIGINAL	SURVEYOR:	ALLEN PRICE
N.T.S	A1	DATUM:	AHD
		AZIMUTH:	CDA 94, MGA56
		DRAWN:	AB
		DESIGNED:	AB
		DESIGNED DATE:	JAN '24
		CHECKED:	AB



**footprint**  
sustainable engineering  
a. 15 meehan drive  
kiama downs nsw 2533  
p. 02 4237 6770  
f. 02 4237 8962

LOT 5 SEALARK ROAD, CALLALA BAY  
PLANNING PROPOSAL  
PRELIMINARY CIVIL DESIGN  
TITLE SHEET

DRAWING NO.  
1861-C01  
ISSUE.  
7  
SHEET 1 OF 10

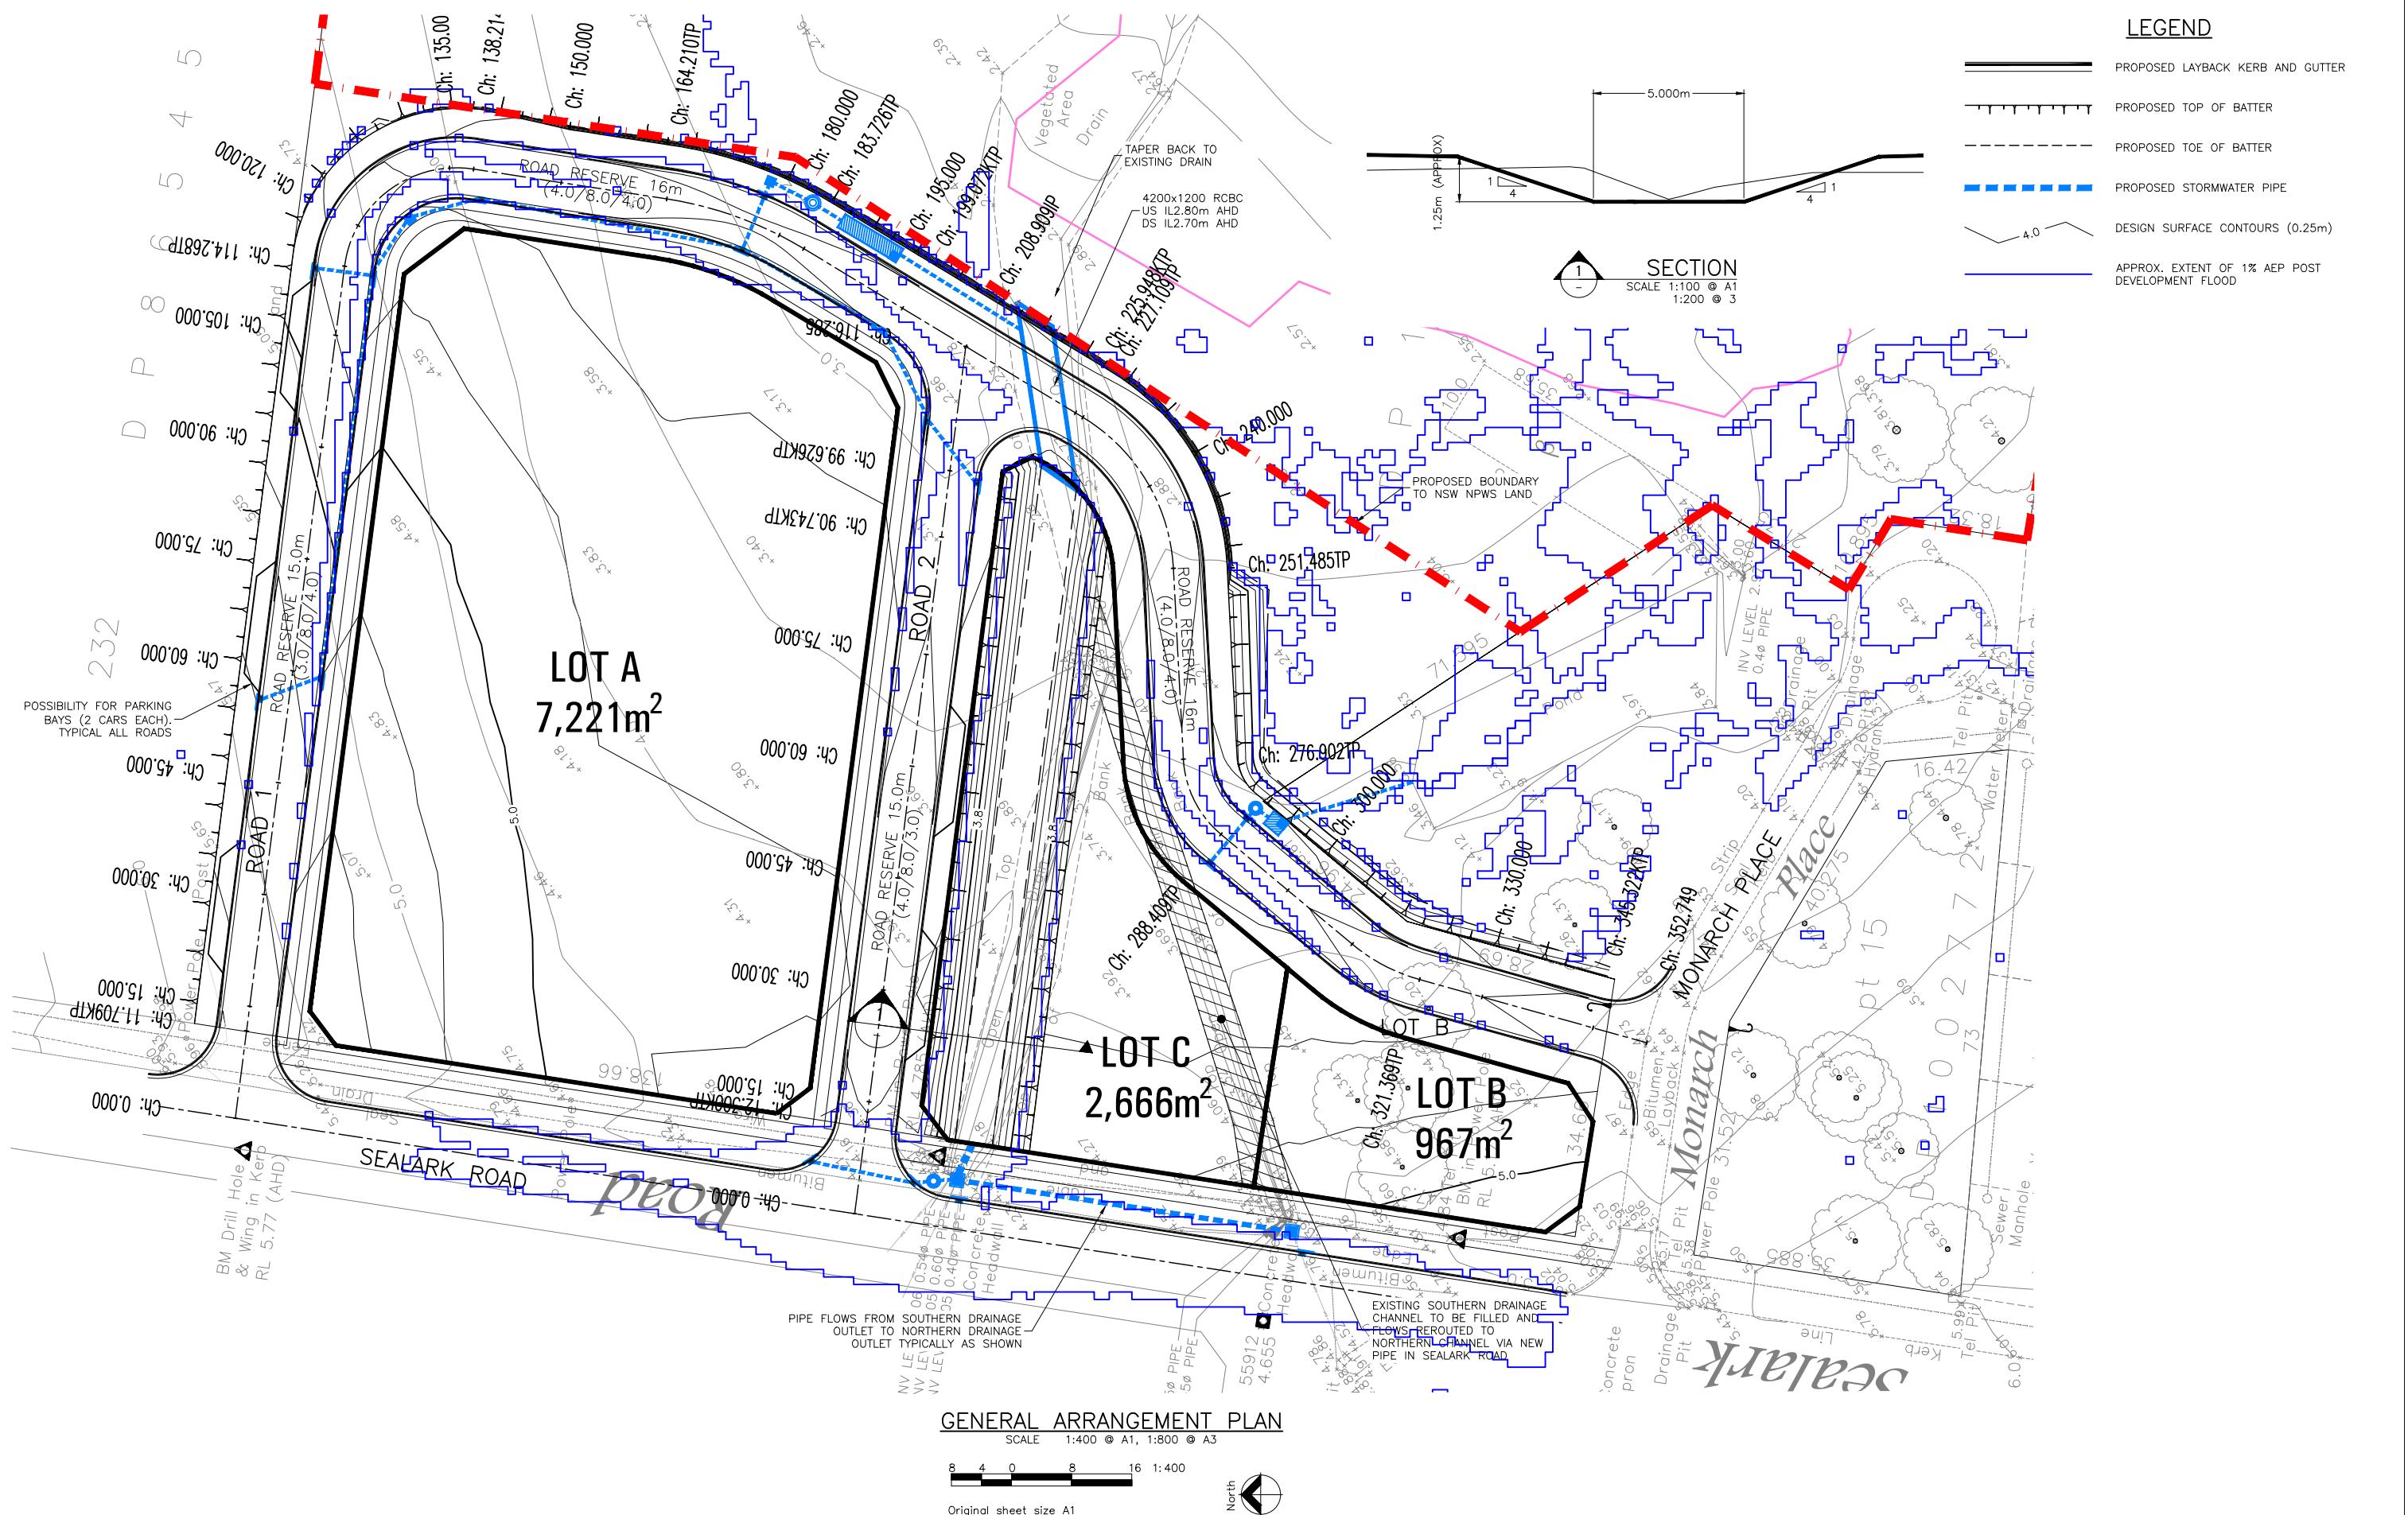

7	ISSUED FOR PLANNING PROPOSAL	15/07/24
6	RE-ISSUED FOR CONSULTANT REVIEW	02/06/24
5	ISSUED FOR CONSULTANT REVIEW	15/05/24
4	RE-ISSUED FOR PLANNING PROPOSAL	12/01/24
3	RE-ISSUED FOR PLANNING PROPOSAL	22/11/21
2	RE-ISSUED FOR PLANNING PROPOSAL	22/11/21
1	FOR PLANNING PROPOSAL	22/10/20
ISSUE	DESCRIPTION	DATE

FOR PLANNING PROPOSAL  
NOT FOR CONSTRUCTION

FOOTPRINT (NSW) PTY. LTD. AUTHORISE THE USE OF THIS DRAWING ONLY FOR THE PURPOSE DEMONSTRATED BY THE STATUS STAMP SHOWN ABOVE.

SCALES AS NOTED ORIGINAL A1  
CLIENT: HARE BAY CONSORTIA


SURVEYOR: ALLEN PRICE  
DATUM: AHD  
AZIMUTH: CDA 94, MGA56  
DRAWN: AB  
DESIGNED: AB  
DESIGNED DATE: DEC '23  
CHECKED: AB



a. 15 meehan drive  
kiama downs nsw 2533  
p. 02 4237 6770  
f. 02 4237 8962

**LOT 5 SEALARK ROAD, CALLALA BAY**  
PLANNING PROPOSAL  
PRELIMINARY CIVIL DESIGN  
GENERAL ARRANGEMENT PLAN

DRAWING NO.  
1861-C06  
ISSUE.  
7  
SHEET 2 OF 10





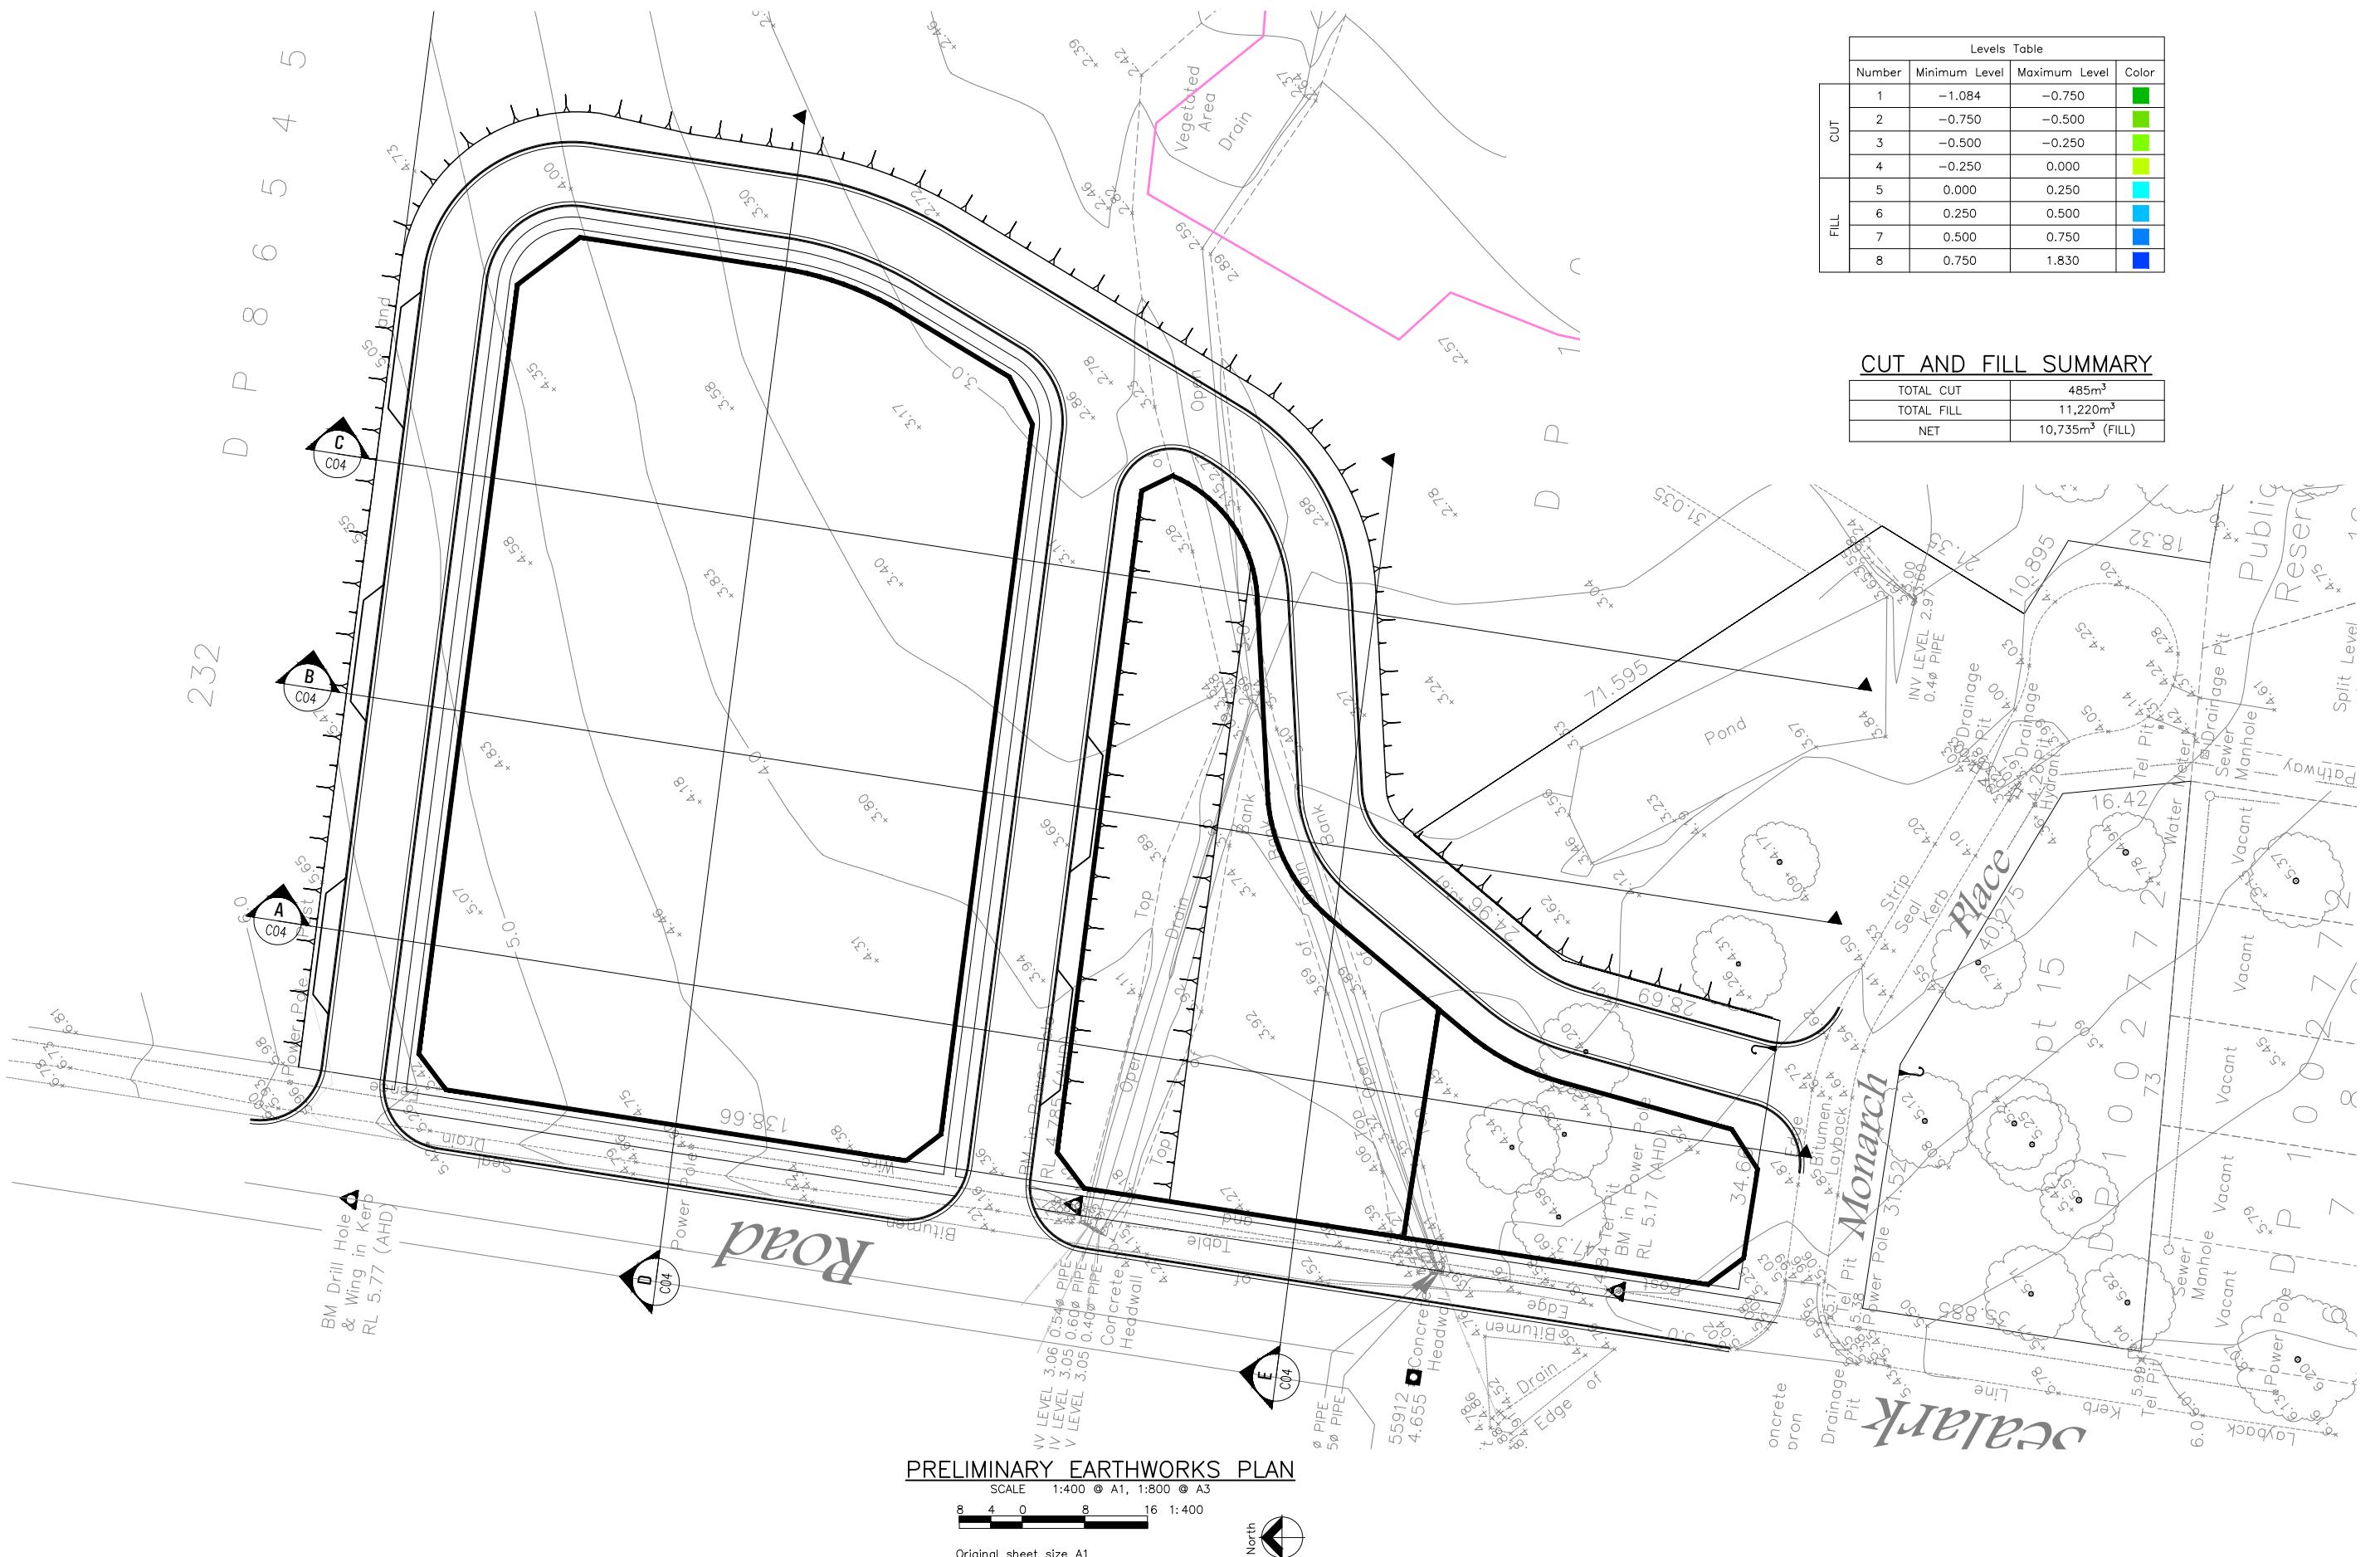


7	ISSUED FOR PLANNING PROPOSAL	15/07/24
6	RE-ISSUED FOR CONSULTANT REVIEW	02/06/24
5	FOR CONSULTANT REVIEW	15/05/24
4	RE-ISSUED FOR PLANNING PROPOSAL	12/01/24
3	RE-ISSUED FOR PLANNING PROPOSAL	22/11/21
2	RE-ISSUED FOR PLANNING PROPOSAL	22/11/21
1	FOR PLANNING PROPOSAL	30/10/20
ISSUE	DESCRIPTION	DATE

FOR PLANNING PROPOSAL  
NOT FOR CONSTRUCTION

FOOTPRINT (NSW) PTY. LTD. AUTHORISE THE USE OF THIS  
DRAWING ONLY FOR THE PURPOSE DEMONSTRATED BY THE  
STATUS STAMP SHOWN ABOVE.

SCALES	ORIGINAL	SURVEYOR:	ALLEN PRICE
AS NOTED	A1	DATUM:	AHD
CLIENT: HARE BAY CONSORTIA		AZIMUTH:	CDA 94, MGA56
DRAWN:	AB	DESIGNED:	AB
DESIGNED DATE:	DEC '23	CHECKED:	AB

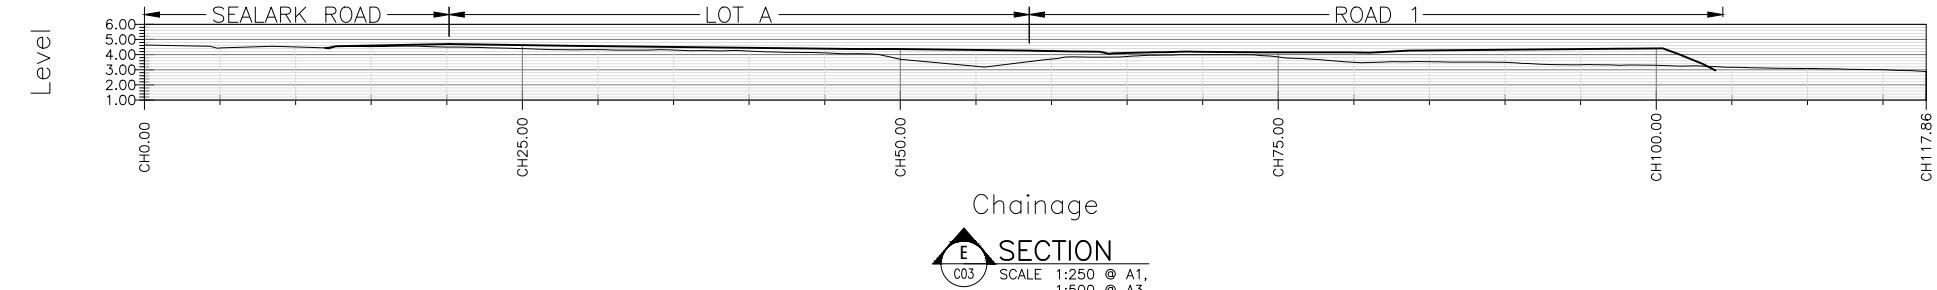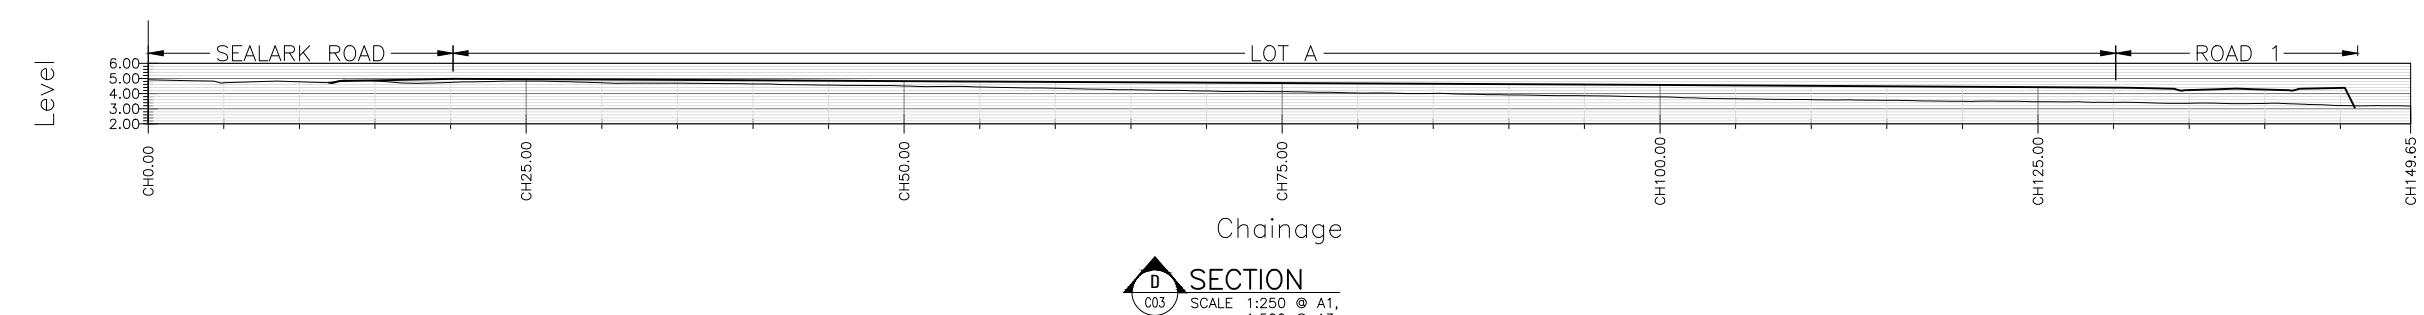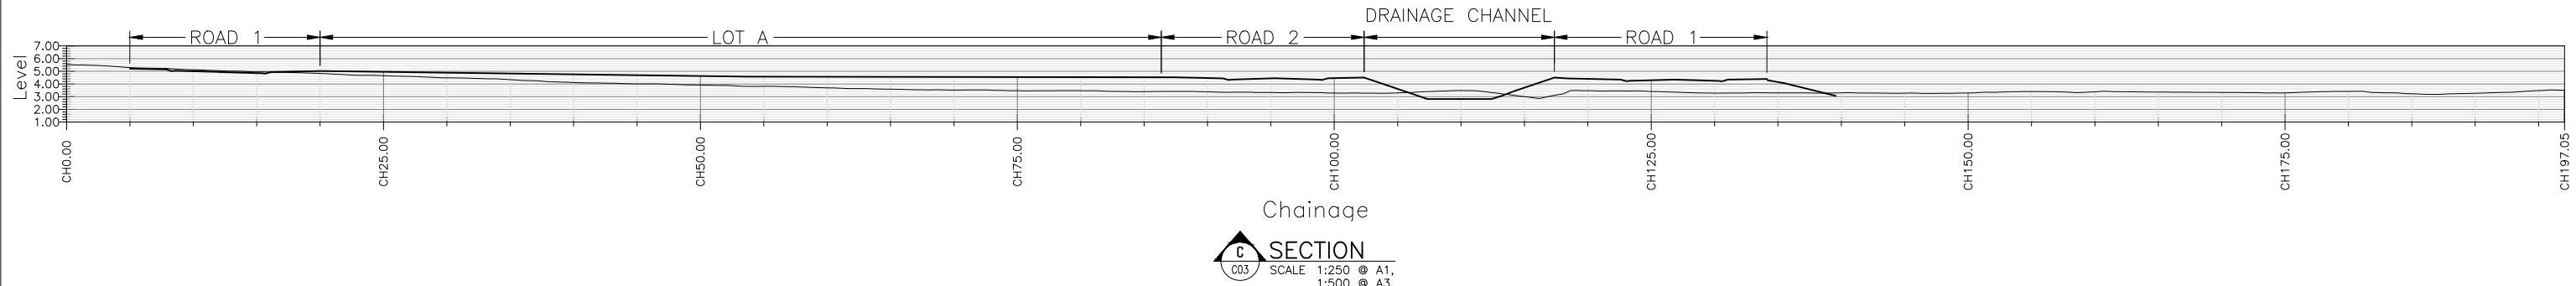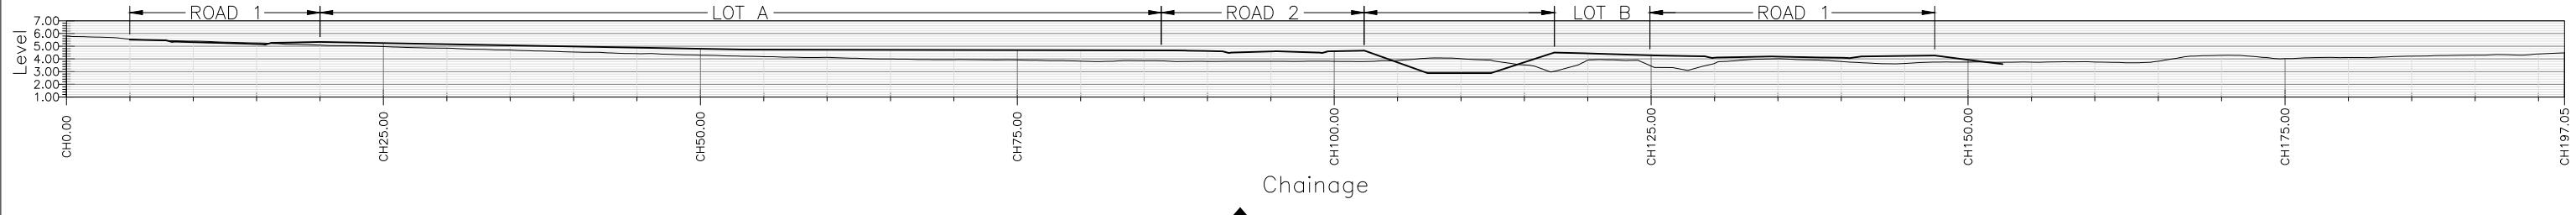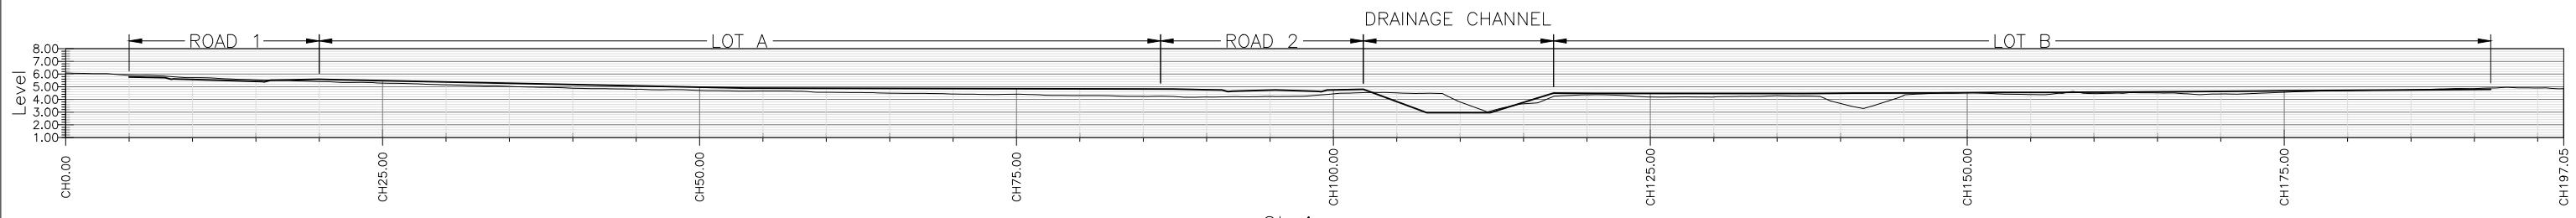

7	ISSUED FOR PLANNING PROPOSAL	15/07/24	
6	RE-ISSUED FOR CONSULTANT REVIEW	02/06/24	
5	FOR CONSULTANT REVIEW	15/05/24	
4	FOR PLANNING PROPOSAL	12/01/24	
ISSUE	DESCRIPTION	DATE	

FOR PLANNING PROPOSAL  
NOT FOR CONSTRUCTION

FOOTPRINT (NSW) PTY. LTD. AUTHORISE THE USE OF THIS  
DRAWING ONLY FOR THE PURPOSE DEMONSTRATED BY THE  
STATUS STAMP SHOWN ABOVE.


SCALES	ORIGINAL
AS NOTED	A1
CLIENT: HARE BAY CONSORTIA	


SURVEYOR:	ALLEN PRICE
DATUM:	AHD
AZIMUTH:	CDA 94, MGA56
DRAWN:	AB
DESIGNED:	AB
DESIGNED DATE:	DEC '23
CHECKED:	AB



LOT 5 SEALARK ROAD, CALLALA BAY  
PLANNING PROPOSAL  
PRELIMINARY CIVIL DESIGN  
PRELIMINARY EARTHWORKS SECTIONS

DRAWING NO.  
1861-C04  
ISSUE.  
7  
SHEET 4 OF 10

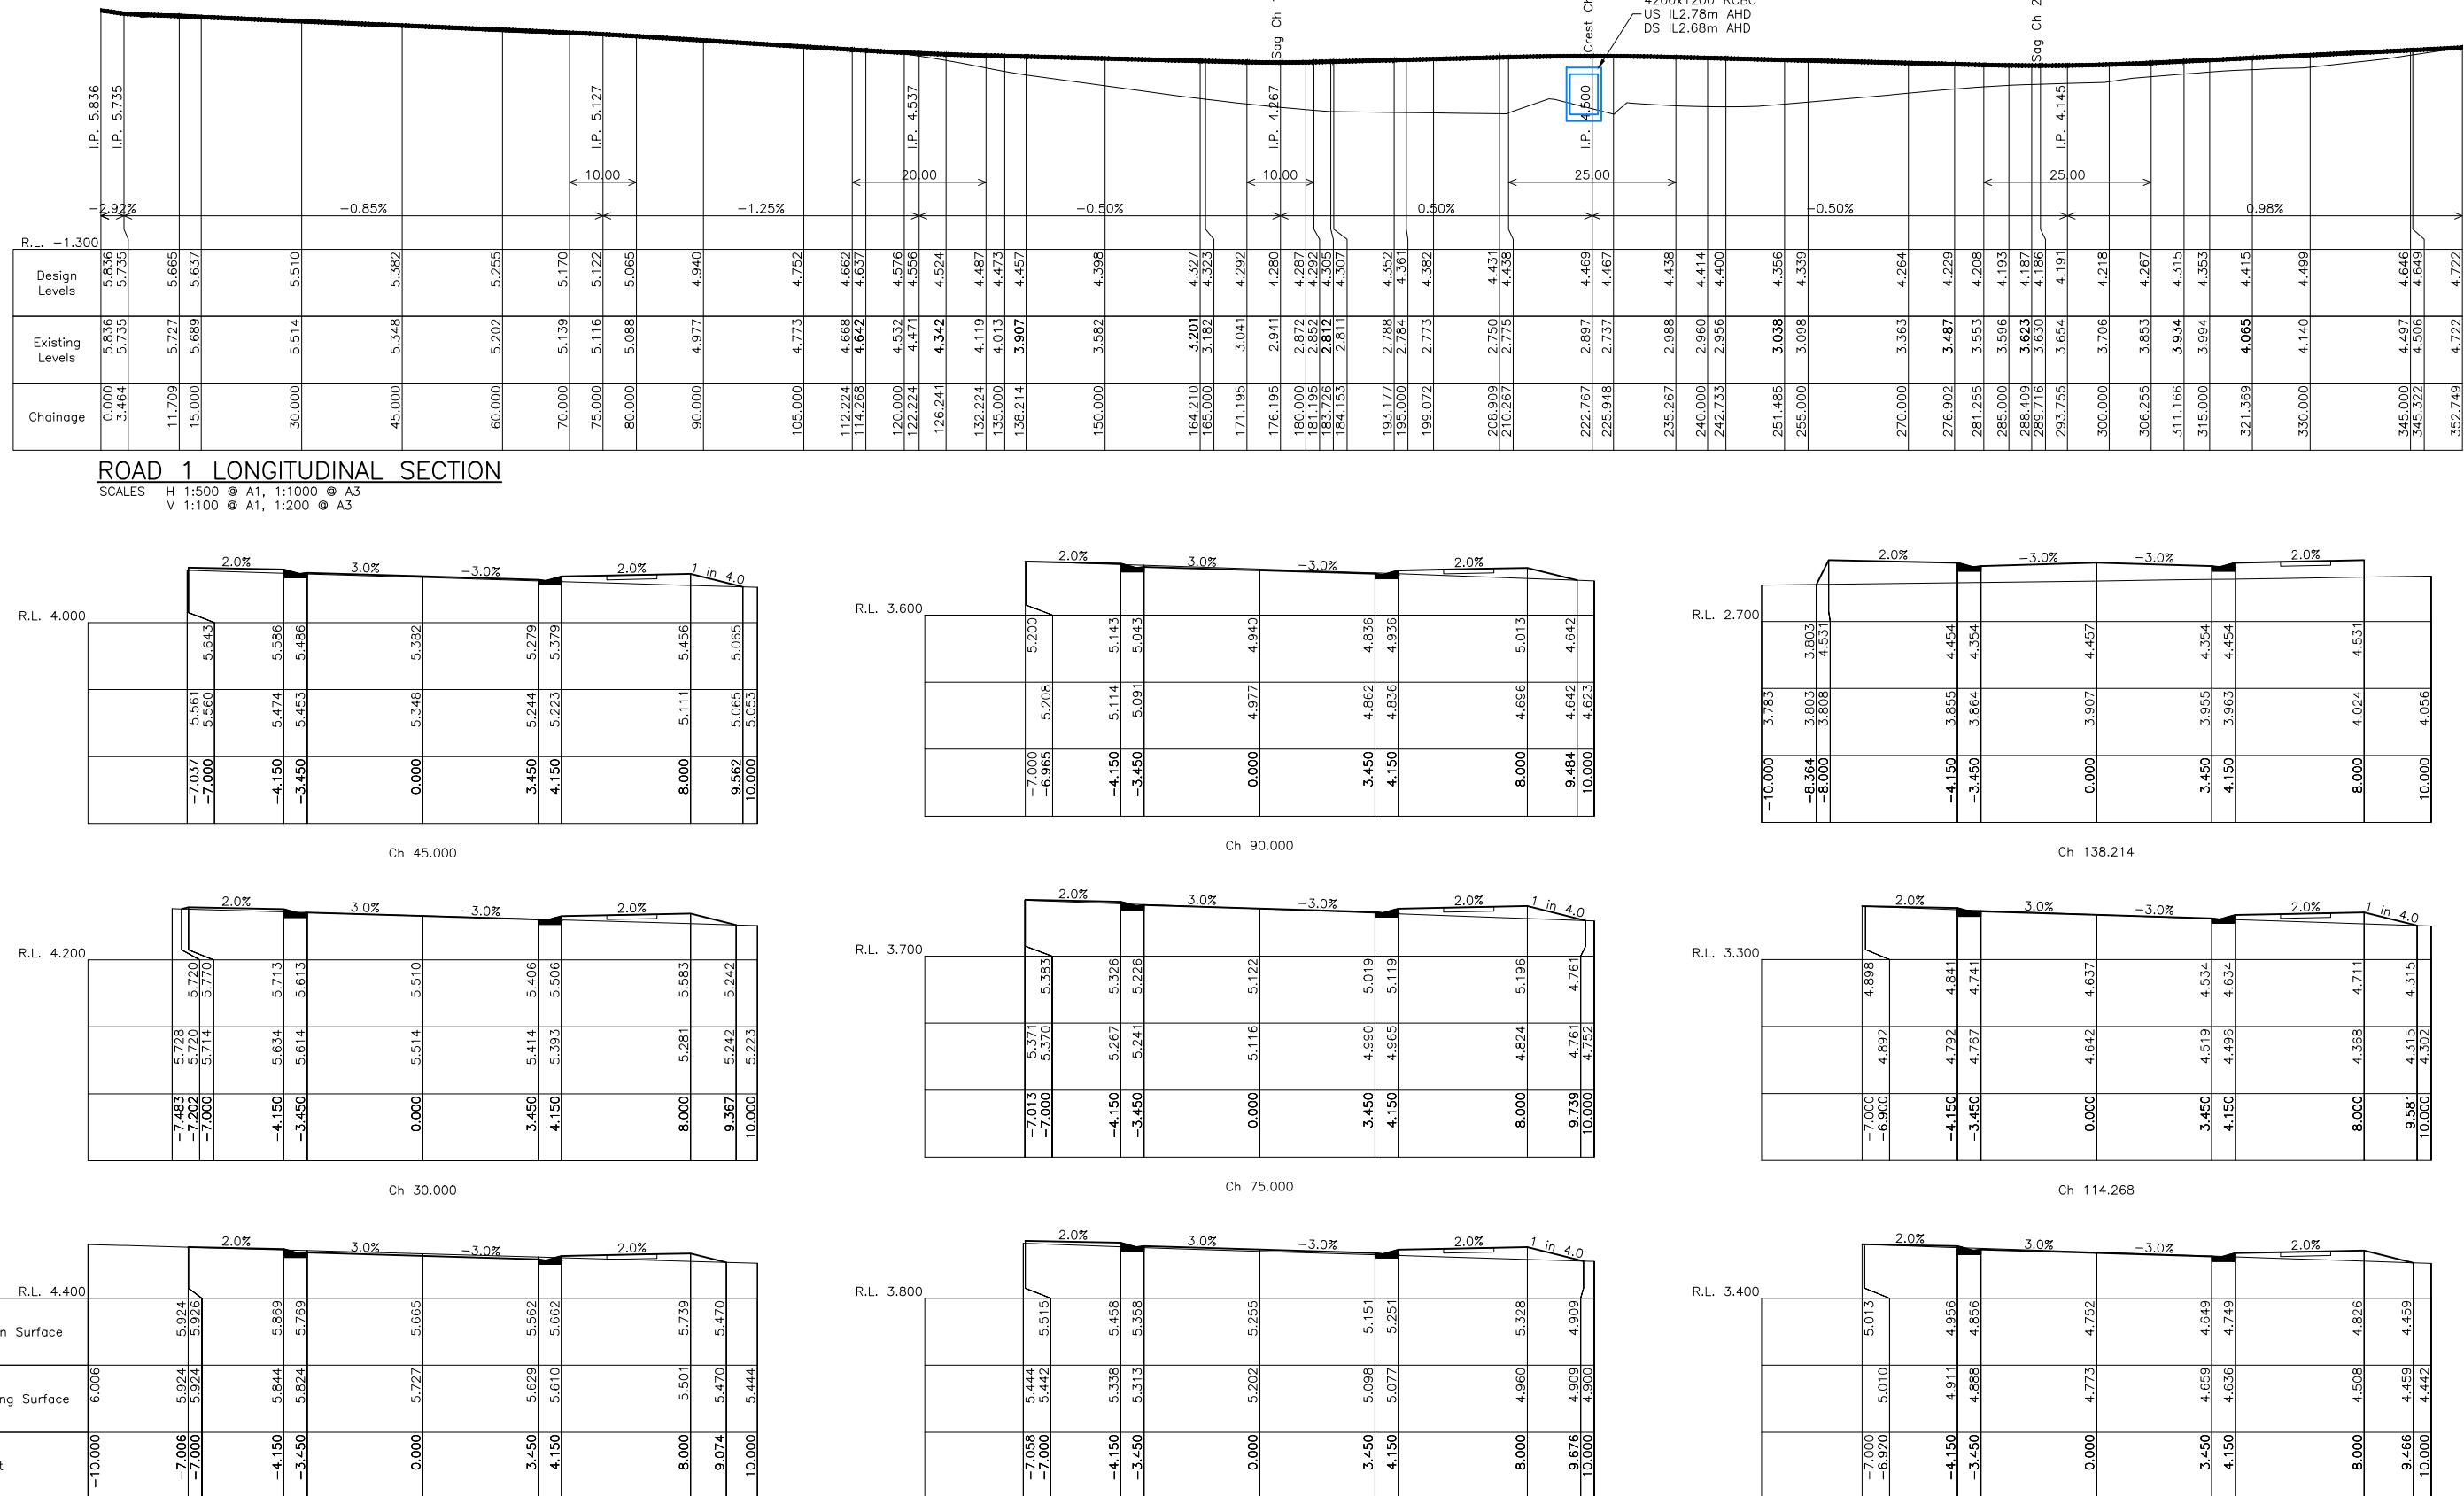

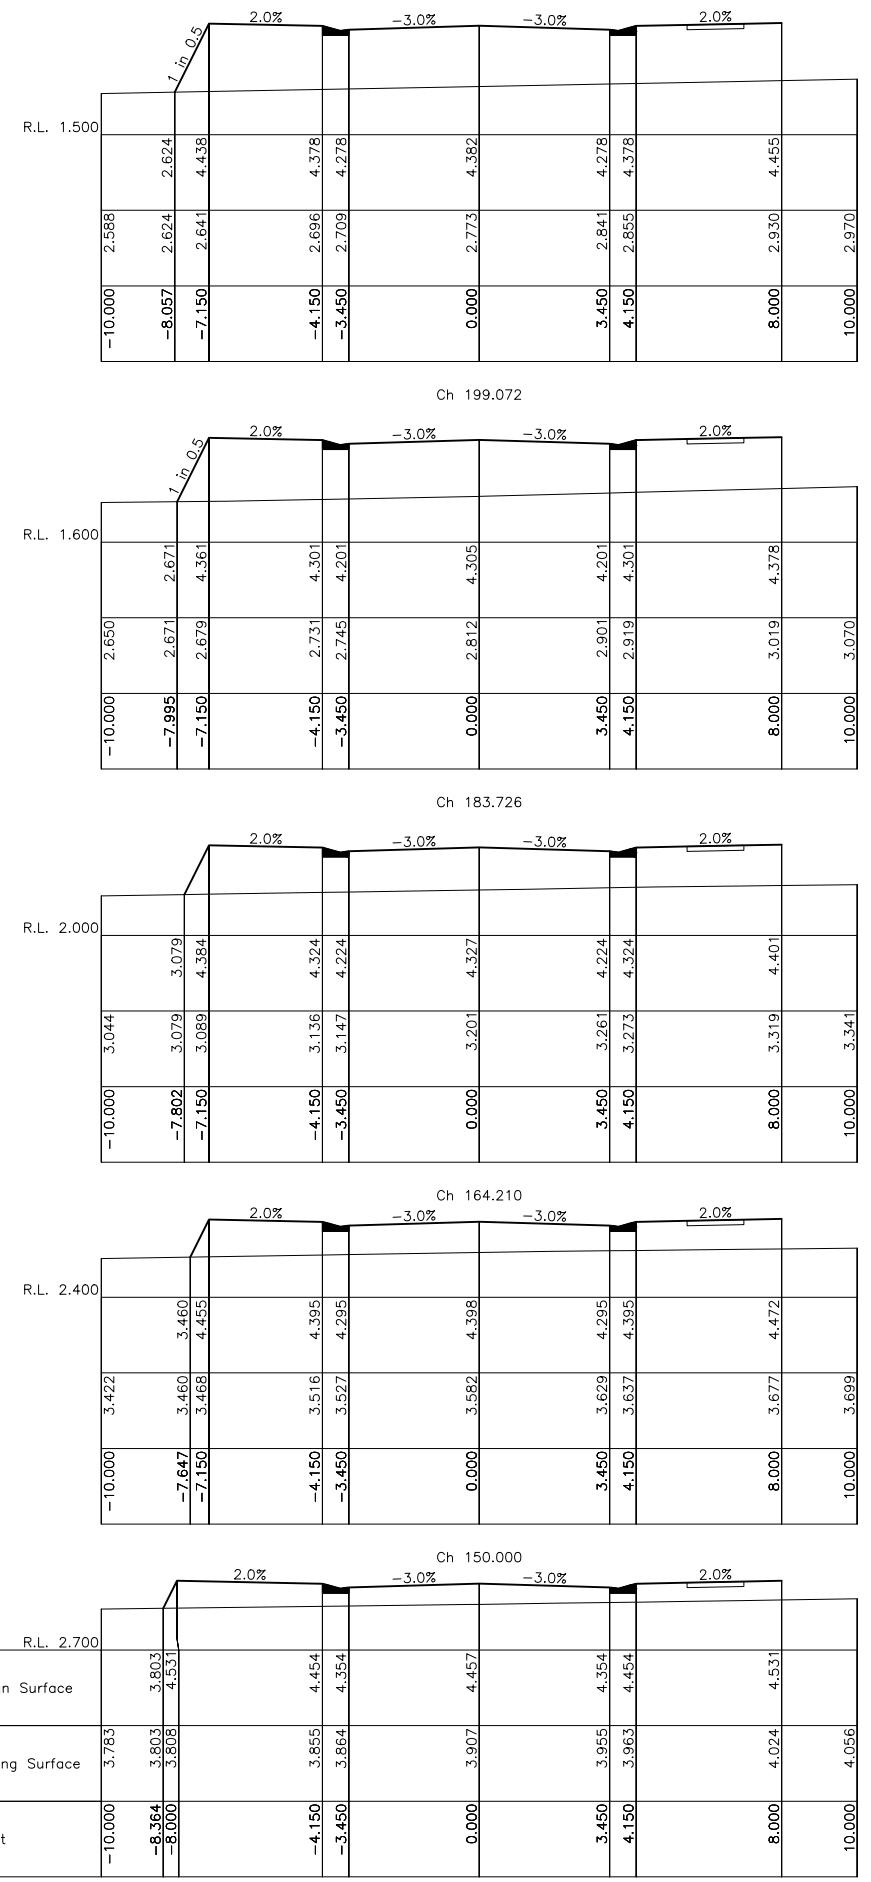

7	ISSUED FOR PLANNING PROPOSAL	15/01/2018
6	RE-ISSUED FOR CONSULTANT REVIEW	02/02/2018
5	FOR CONSULTANT REVIEW	15/02/2018
4	RE-ISSUED FOR PLANNING PROPOSAL	12/03/2018
3	RE-ISSUED FOR PLANNING PROPOSAL	22/03/2018
2	RE-ISSUED FOR PLANNING PROPOSAL	22/03/2018
1	FOR PLANNING PROPOSAL	30/03/2018
ISSUE	DESCRIPTION	DATE

FOR PLANNING PROPOSAL  
NOT FOR CONSTRUCTION

FOOTPRINT (NSW) PTY. LTD. AUTHORISE THE USE OF THIS  
DRAWING ONLY FOR THE PURPOSE DEMONSTRATED BY THE  
STATUS STAMP SHOWN ABOVE.

SCALES  
1:200 NAT  
CLIENT:  
HARE BAY CONS

ORIGINAL	SURVEYOR:	ALLEN PRICE
A3	DATUM:	AHD
SORTIA	AZIMUTH:	GDA 94, MGA56
	DRAWN:	AB
	DESIGNED:	AB
	DESIGNED DATE:	DEC' 23
	CHECKED:	AB



**footprint**  
sustainable engineering  
a. 15 meehan drive  
kiama downs nsw 253  
p. 02 4237 6770  
f. 02 4237 8962

**LOT 5 SEALARK ROAD, CALLALA BAY**

**PLANNING PROPOSAL**





**PRELIMINARY CIVIL DESIGN**

**ROAD 1 CROSS SECTIONS - SHEET 2 OF 2**

DRAWING NO.  
1861-C06  
ISSUE.  
7  
CET 6 OF 10

		R.L. 3.000
Design Surface		
Existing Surface		
Offset		

Ch 12.300

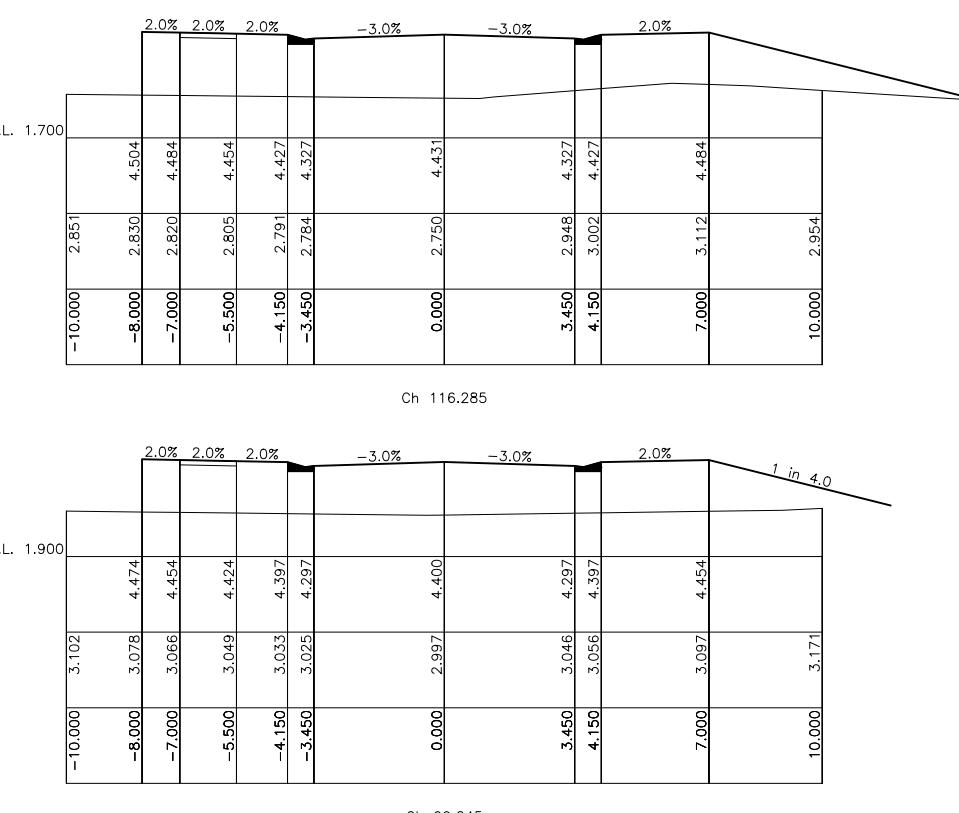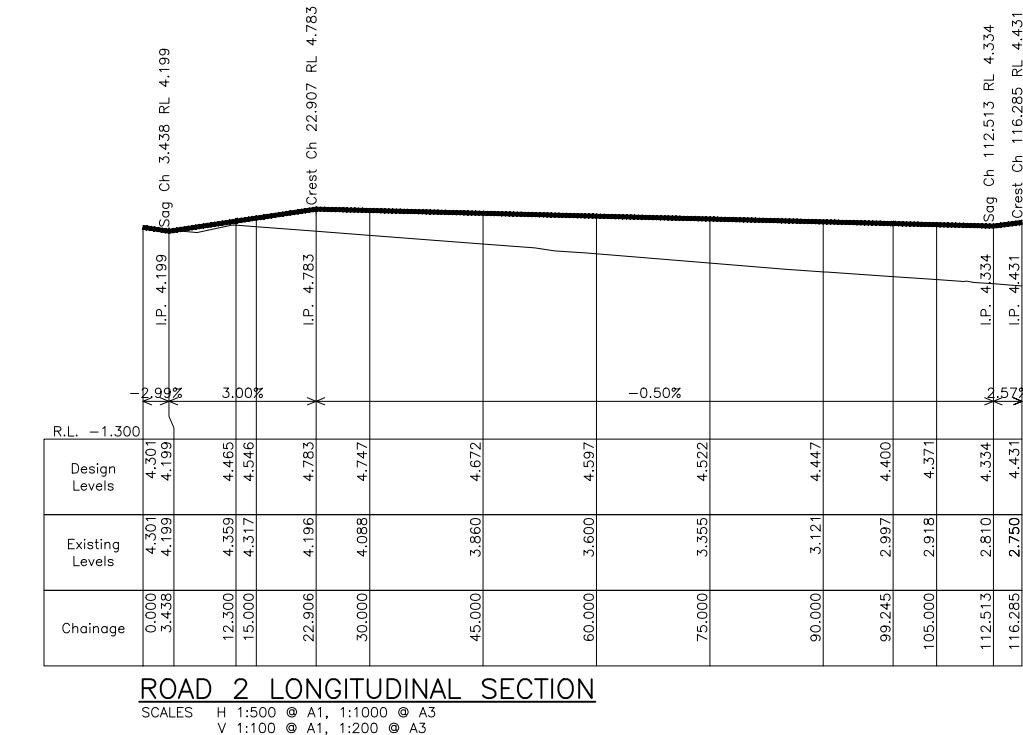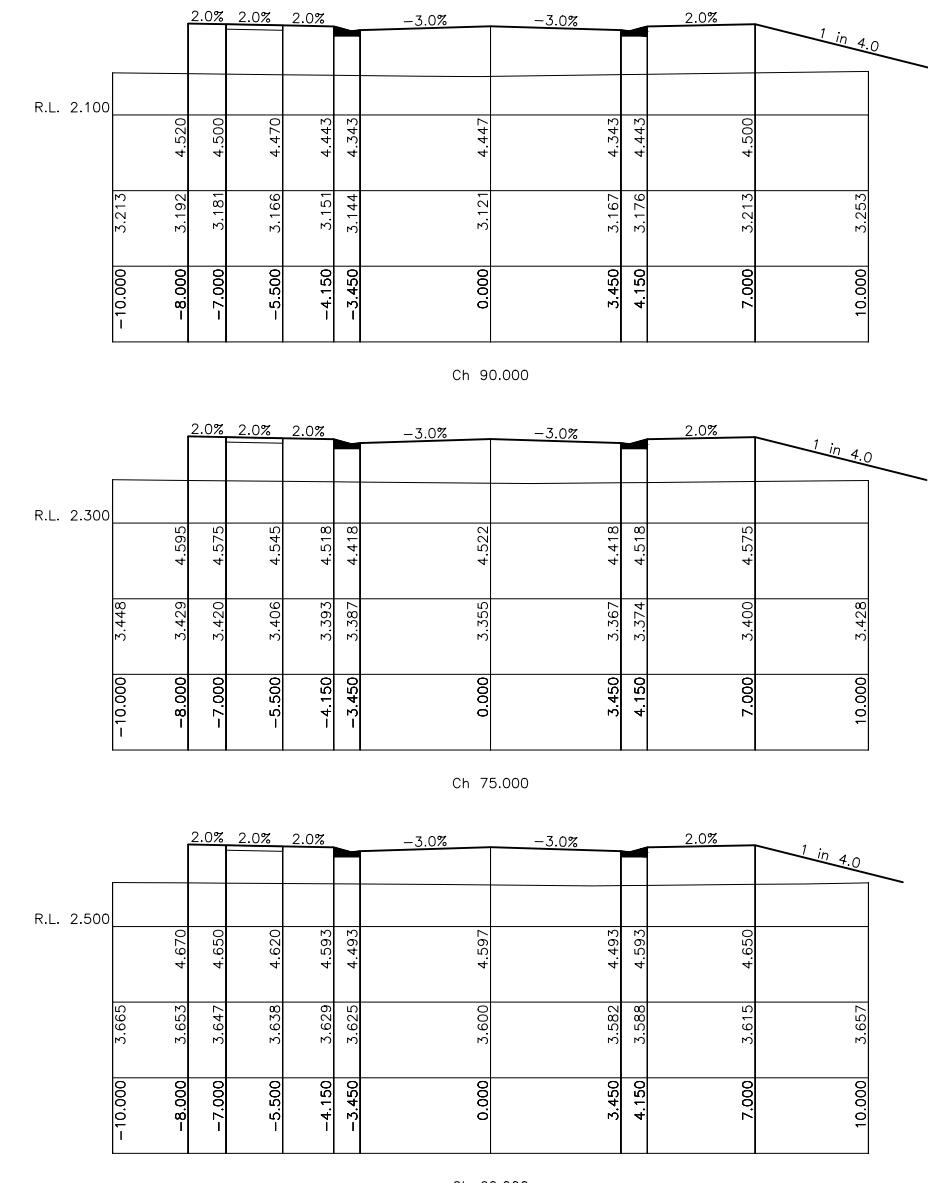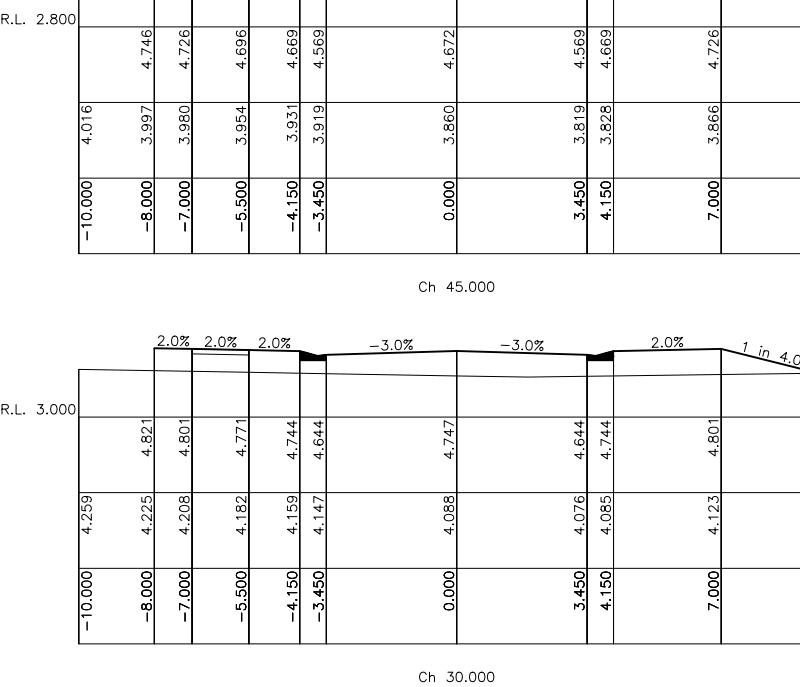

ISSUE	DESCRIPTION	DATE
7	ISSUED FOR PLANNING PROPOSAL	15/07/24
6	RE-ISSUED FOR CONSULTANT REVIEW	02/06/24
5	FOR CONSULTANT REVIEW	15/05/24
4	FOR PLANNING PROPOSAL	12/01/24
ISSUE	DESCRIPTION	DATE

**FOR PLANNING PROPOSAL  
NOT FOR CONSTRUCTION**

FOOTPRINT (NSW) PTY. LTD. AUTHORISE THE USE OF THIS  
DRAWING ONLY FOR THE PURPOSE DEMONSTRATED BY THE  
STATUS STAMP SHOWN ABOVE.

SCALES	ORIGINAL	SURVEYOR:	ALLEN PRICE
1:100 UNO	A1	DATUM:	AHD
CLIENT: HARE BAY CONSORTIA		AZIMUTH:	CDA 94, MGA56
DESIGNED:	AB	DRAWN:	AB
DESIGNED DATE:	DEC '23	CHECKED:	AB




**footprint**  
sustainable engineering  
a. 15 meehan drive  
kiama downs nsw 2533  
p. 02 4237 6770  
f. 02 4237 8962

**LOT 5 SEALARK ROAD, CALLALA BAY**  
PLANNING PROPOSAL  
PRELIMINARY CIVIL DESIGN  
ROAD 2 LONGITUDINAL SECTION & CROSS SECTIONS

DRAWING NO.  
1861-C07  
ISSUE.  
7  
SHEET 7 OF 10

I.P. 4.199 Sag Ch 3.438 RL 4.199  
I.P. 4.199 Sag Ch 3.438 RL 4.199  
I.P. 4.334 Sag Ch 112.513 RL 4.334  
I.P. 4.431 Sag Ch 116.285 RL 4.431

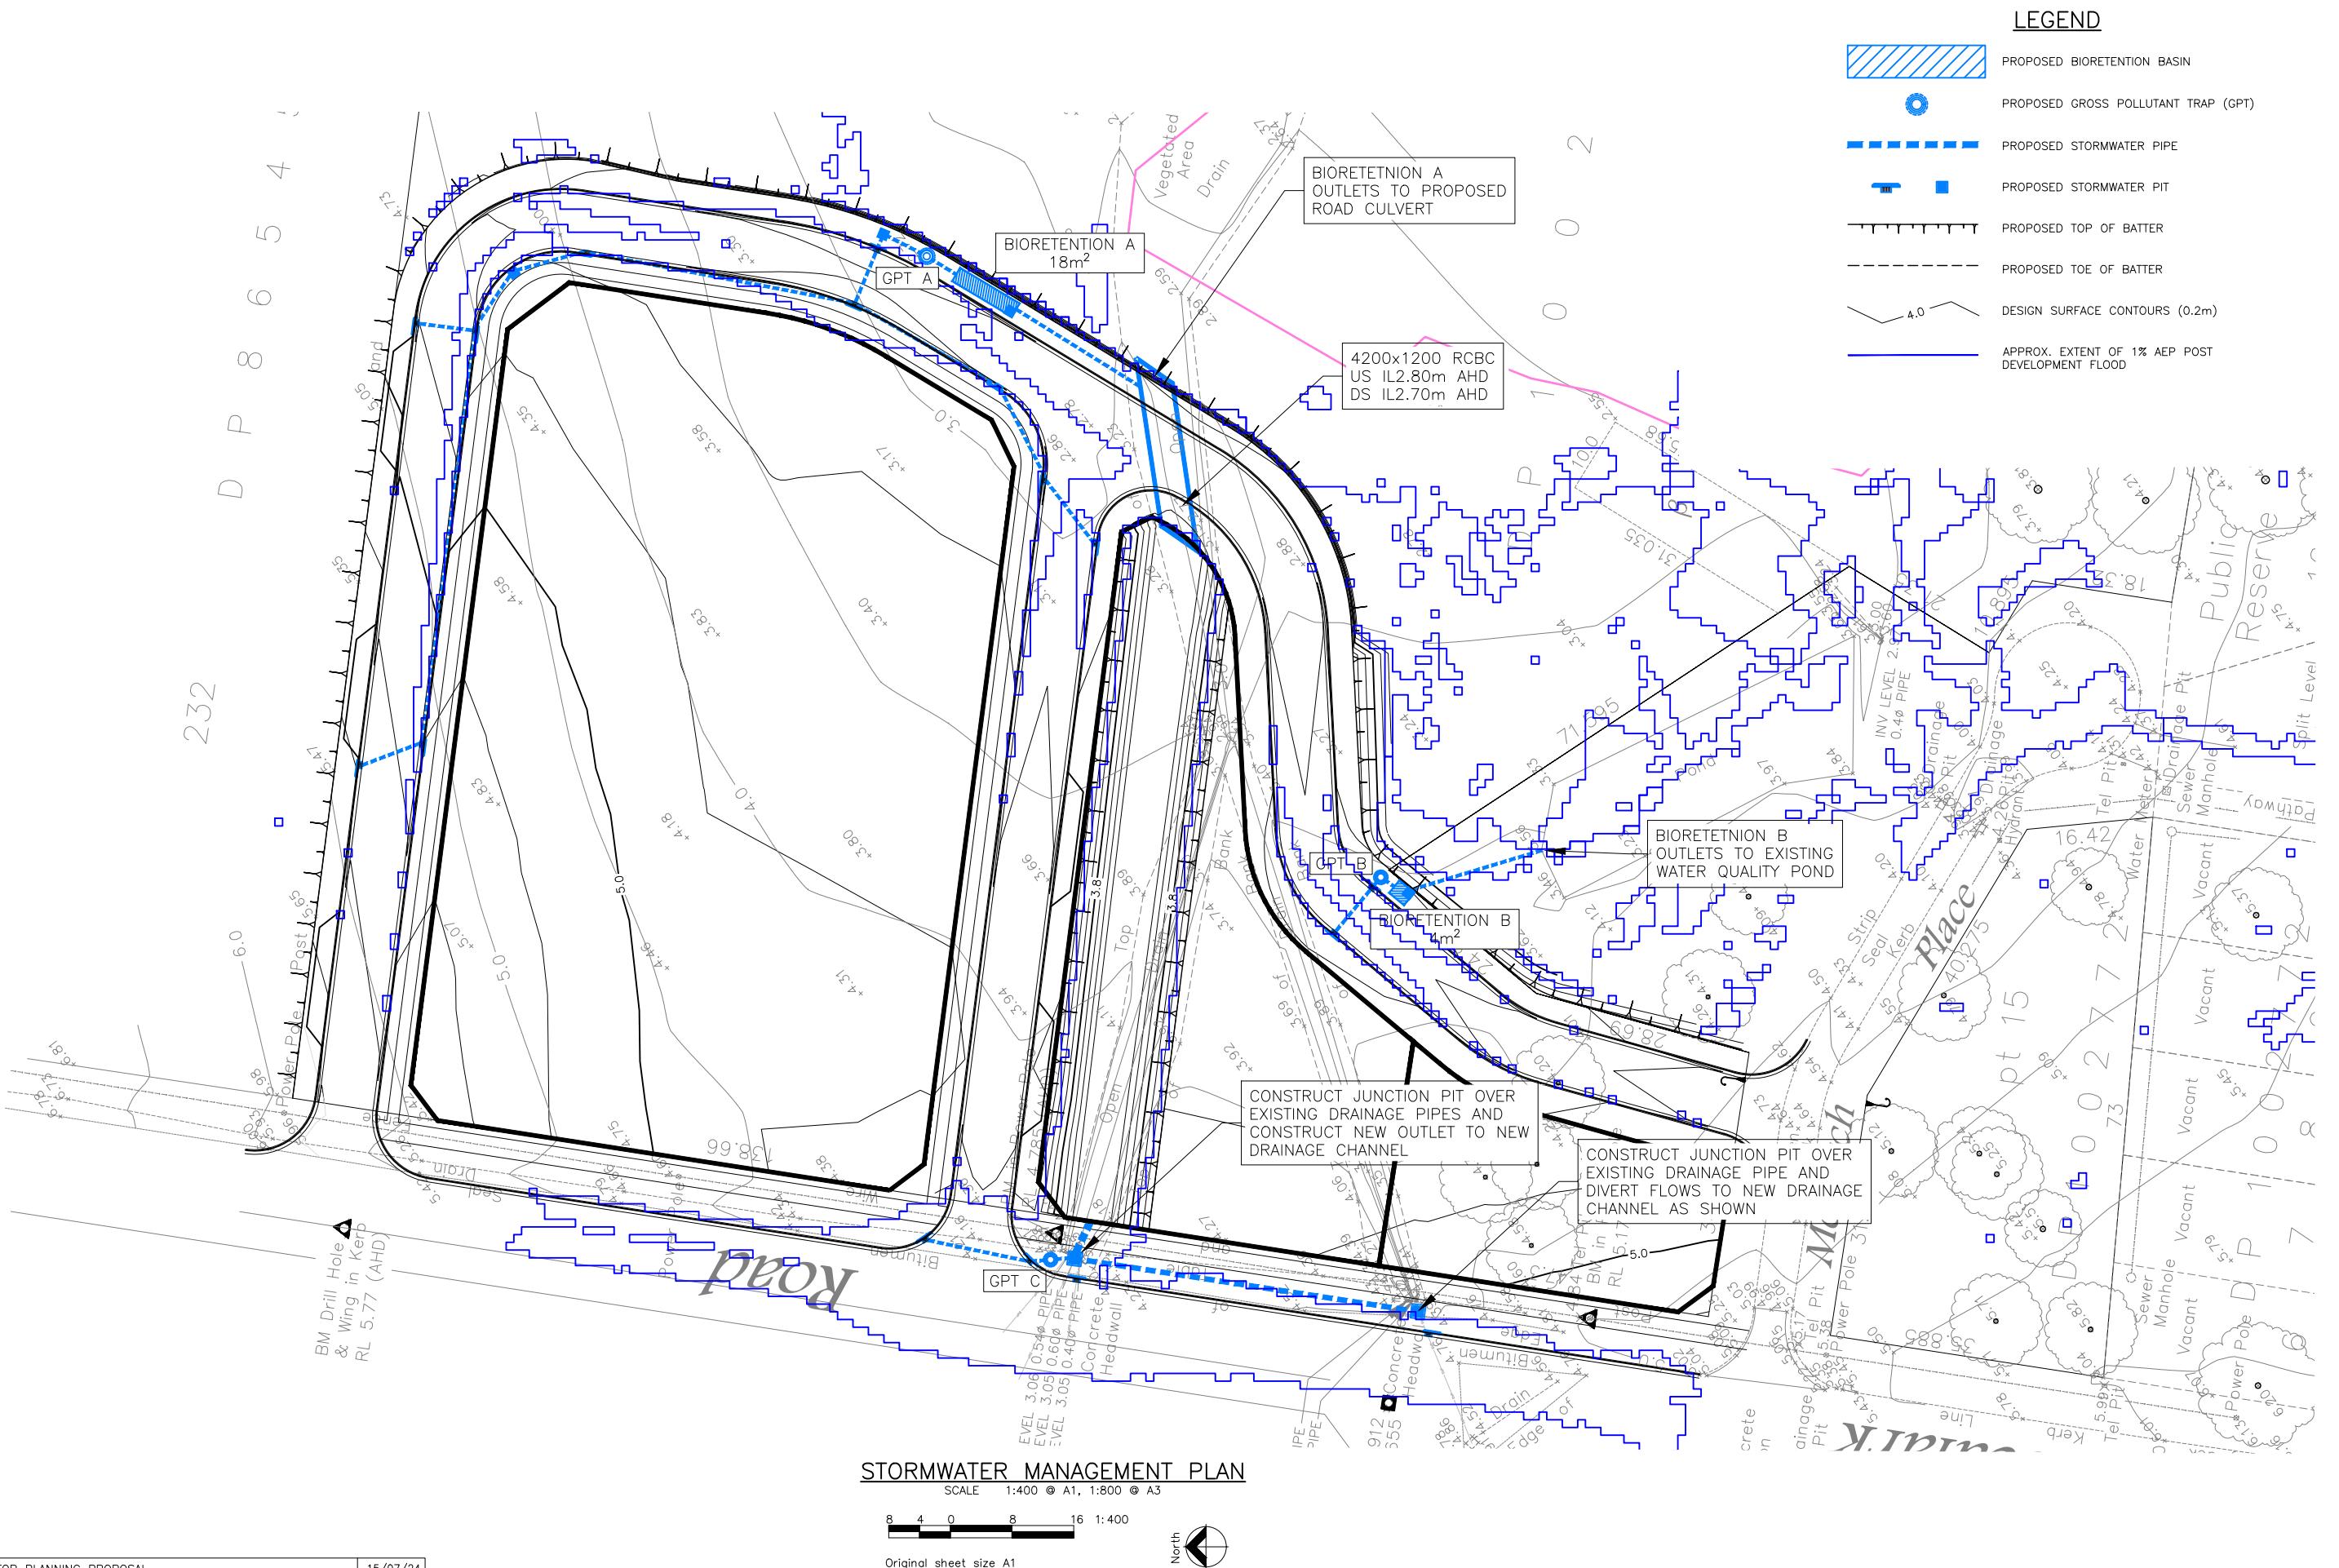

7	ISSUED FOR PLANNING PROPOSAL	15/07/24
6	RE-ISSUED FOR CONSULTANT REVIEW	02/06/24
5	FOR CONSULTANT REVIEW	15/05/24
4	RE-ISSUED FOR PLANNING PROPOSAL	12/01/24
3	RE-ISSUED FOR PLANNING PROPOSAL	22/11/21
2	RE-ISSUED FOR PLANNING PROPOSAL	22/11/21
1	FOR PLANNING PROPOSAL	30/10/20
ISSUE	DESCRIPTION	DATE

FOR PLANNING PROPOSAL  
NOT FOR CONSTRUCTION

FOOTPRINT (NSW) PTY. LTD. AUTHORISE THE USE OF THIS  
DRAWING ONLY FOR THE PURPOSE DEMONSTRATED BY THE  
STATUS STAMP SHOWN ABOVE.

SCALES      ORIGINAL  
AS NOTED      A1  
CLIENT: HARE BAY CONSORTIA


SURVEYOR: ALLEN PRICE  
DATUM: AHD  
AZIMUTH: CDA 94, MGA56  
DRAWN: AB  
DESIGNED: AB  
DESIGNED DATE: DEC '23  
CHECKED: AB



a. 15 mearan drive  
kiama downs nsw 2533  
p. 02 4237 6770  
f. 02 4237 8962

LOT 5 SEALARK ROAD, CALLALA BAY  
PLANNING PROPOSAL  
PRELIMINARY CIVIL DESIGN  
PRELIMINARY STORMWATER MANAGEMENT PLAN

DRAWING NO.  
1861-C08  
ISSUE.  
7  
SHEET 8 OF 10

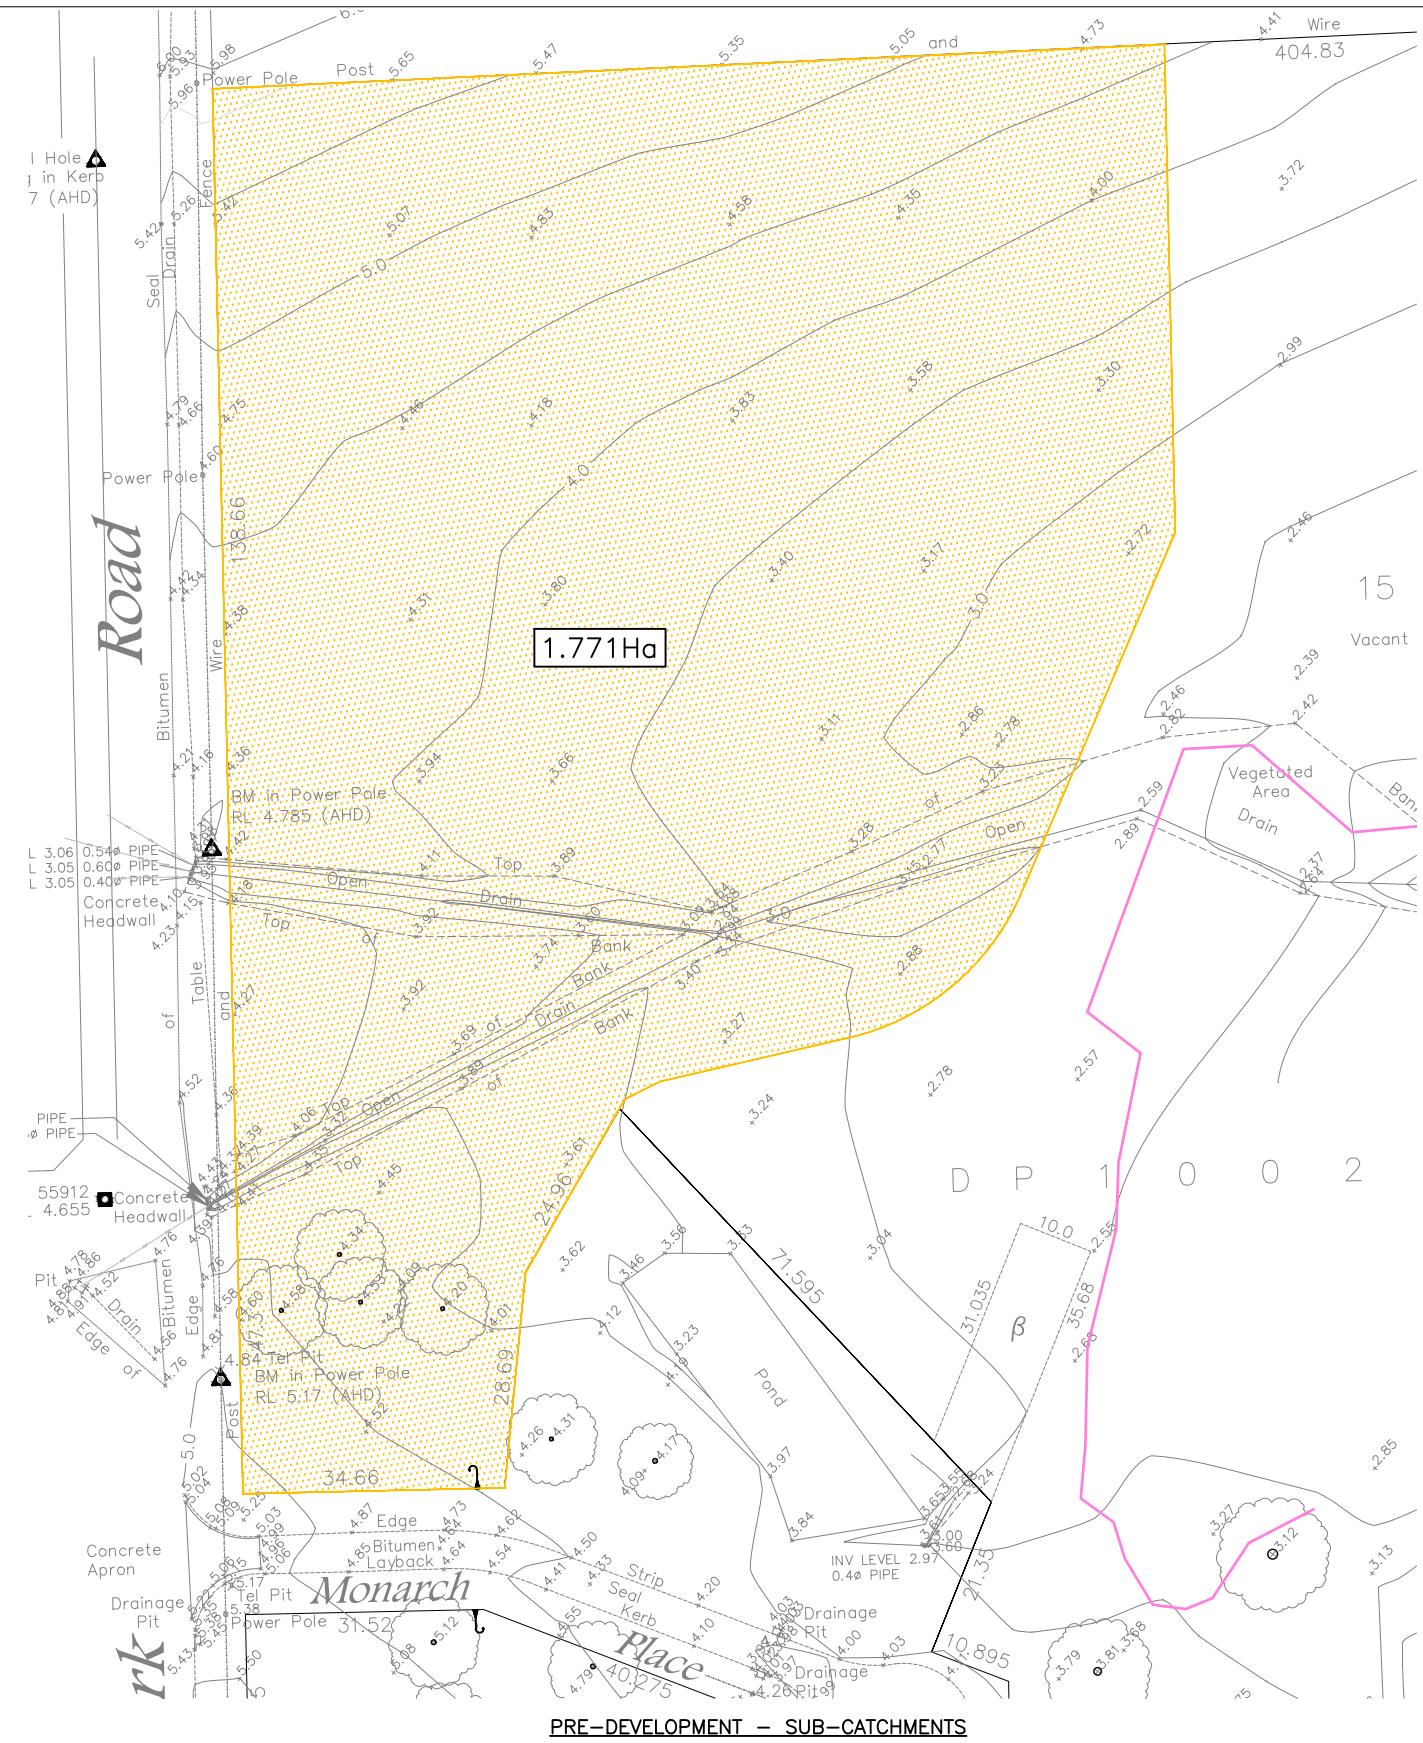


## PRE-DEVELOPMENT – SUB-CATCHMENTS

LEGEND



RURAL RESIDENTIAL LANDUSE

8 4 0 8 16 1:80

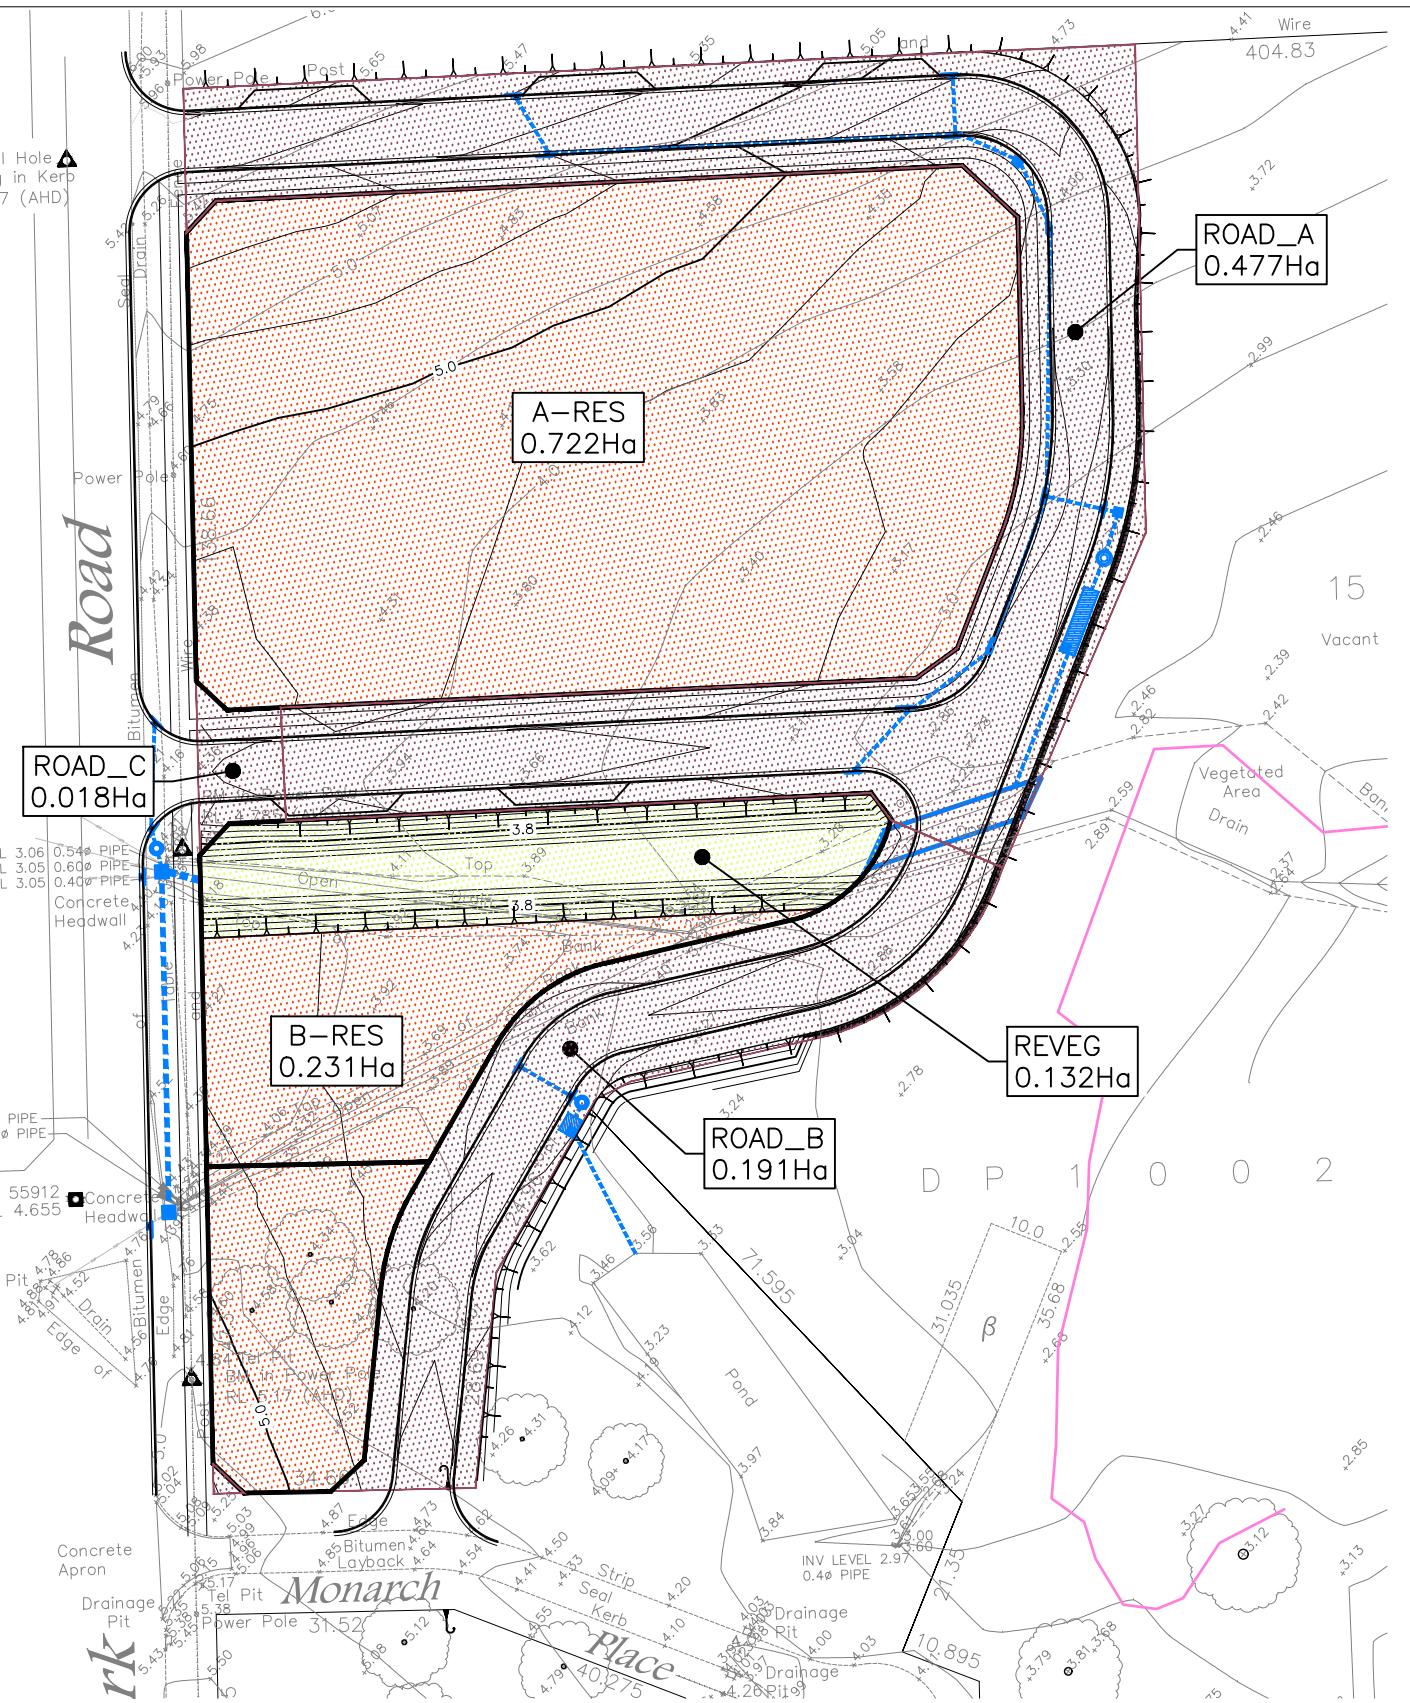

## POST-DEVELOPMENT – SUB-CATCHMENTS

## LEGEND




nt  
e engineering  
an drive  
owns nsw 2533  
6770  
8962

LOT 5 SEALARK ROAD, CALLALA BAY

# PLANNING PROPOSAL PRELIMINARY CIVIL DESIGN

## WATER QUALITY PRE AND POST DEVELOPMENT LAND USE PLAN

7	ISSUED FOR PLANNING PROPOSAL	15/07/24
6	RE-ISSUED FOR CONSULTANT REVIEW	02/06/24
5	FOR CONSULTANT REVIEW	15/05/24
4	RE-ISSUED FOR PLANNING PROPOSAL	12/01/24
3	RE-ISSUED FOR PLANNING PROPOSAL	22/11/23
2	RE-ISSUED FOR PLANNING PROPOSAL	22/11/23
1	FOR PLANNING PROPOSAL	30/10/23
ISSUE	DESCRIPTION	DATE

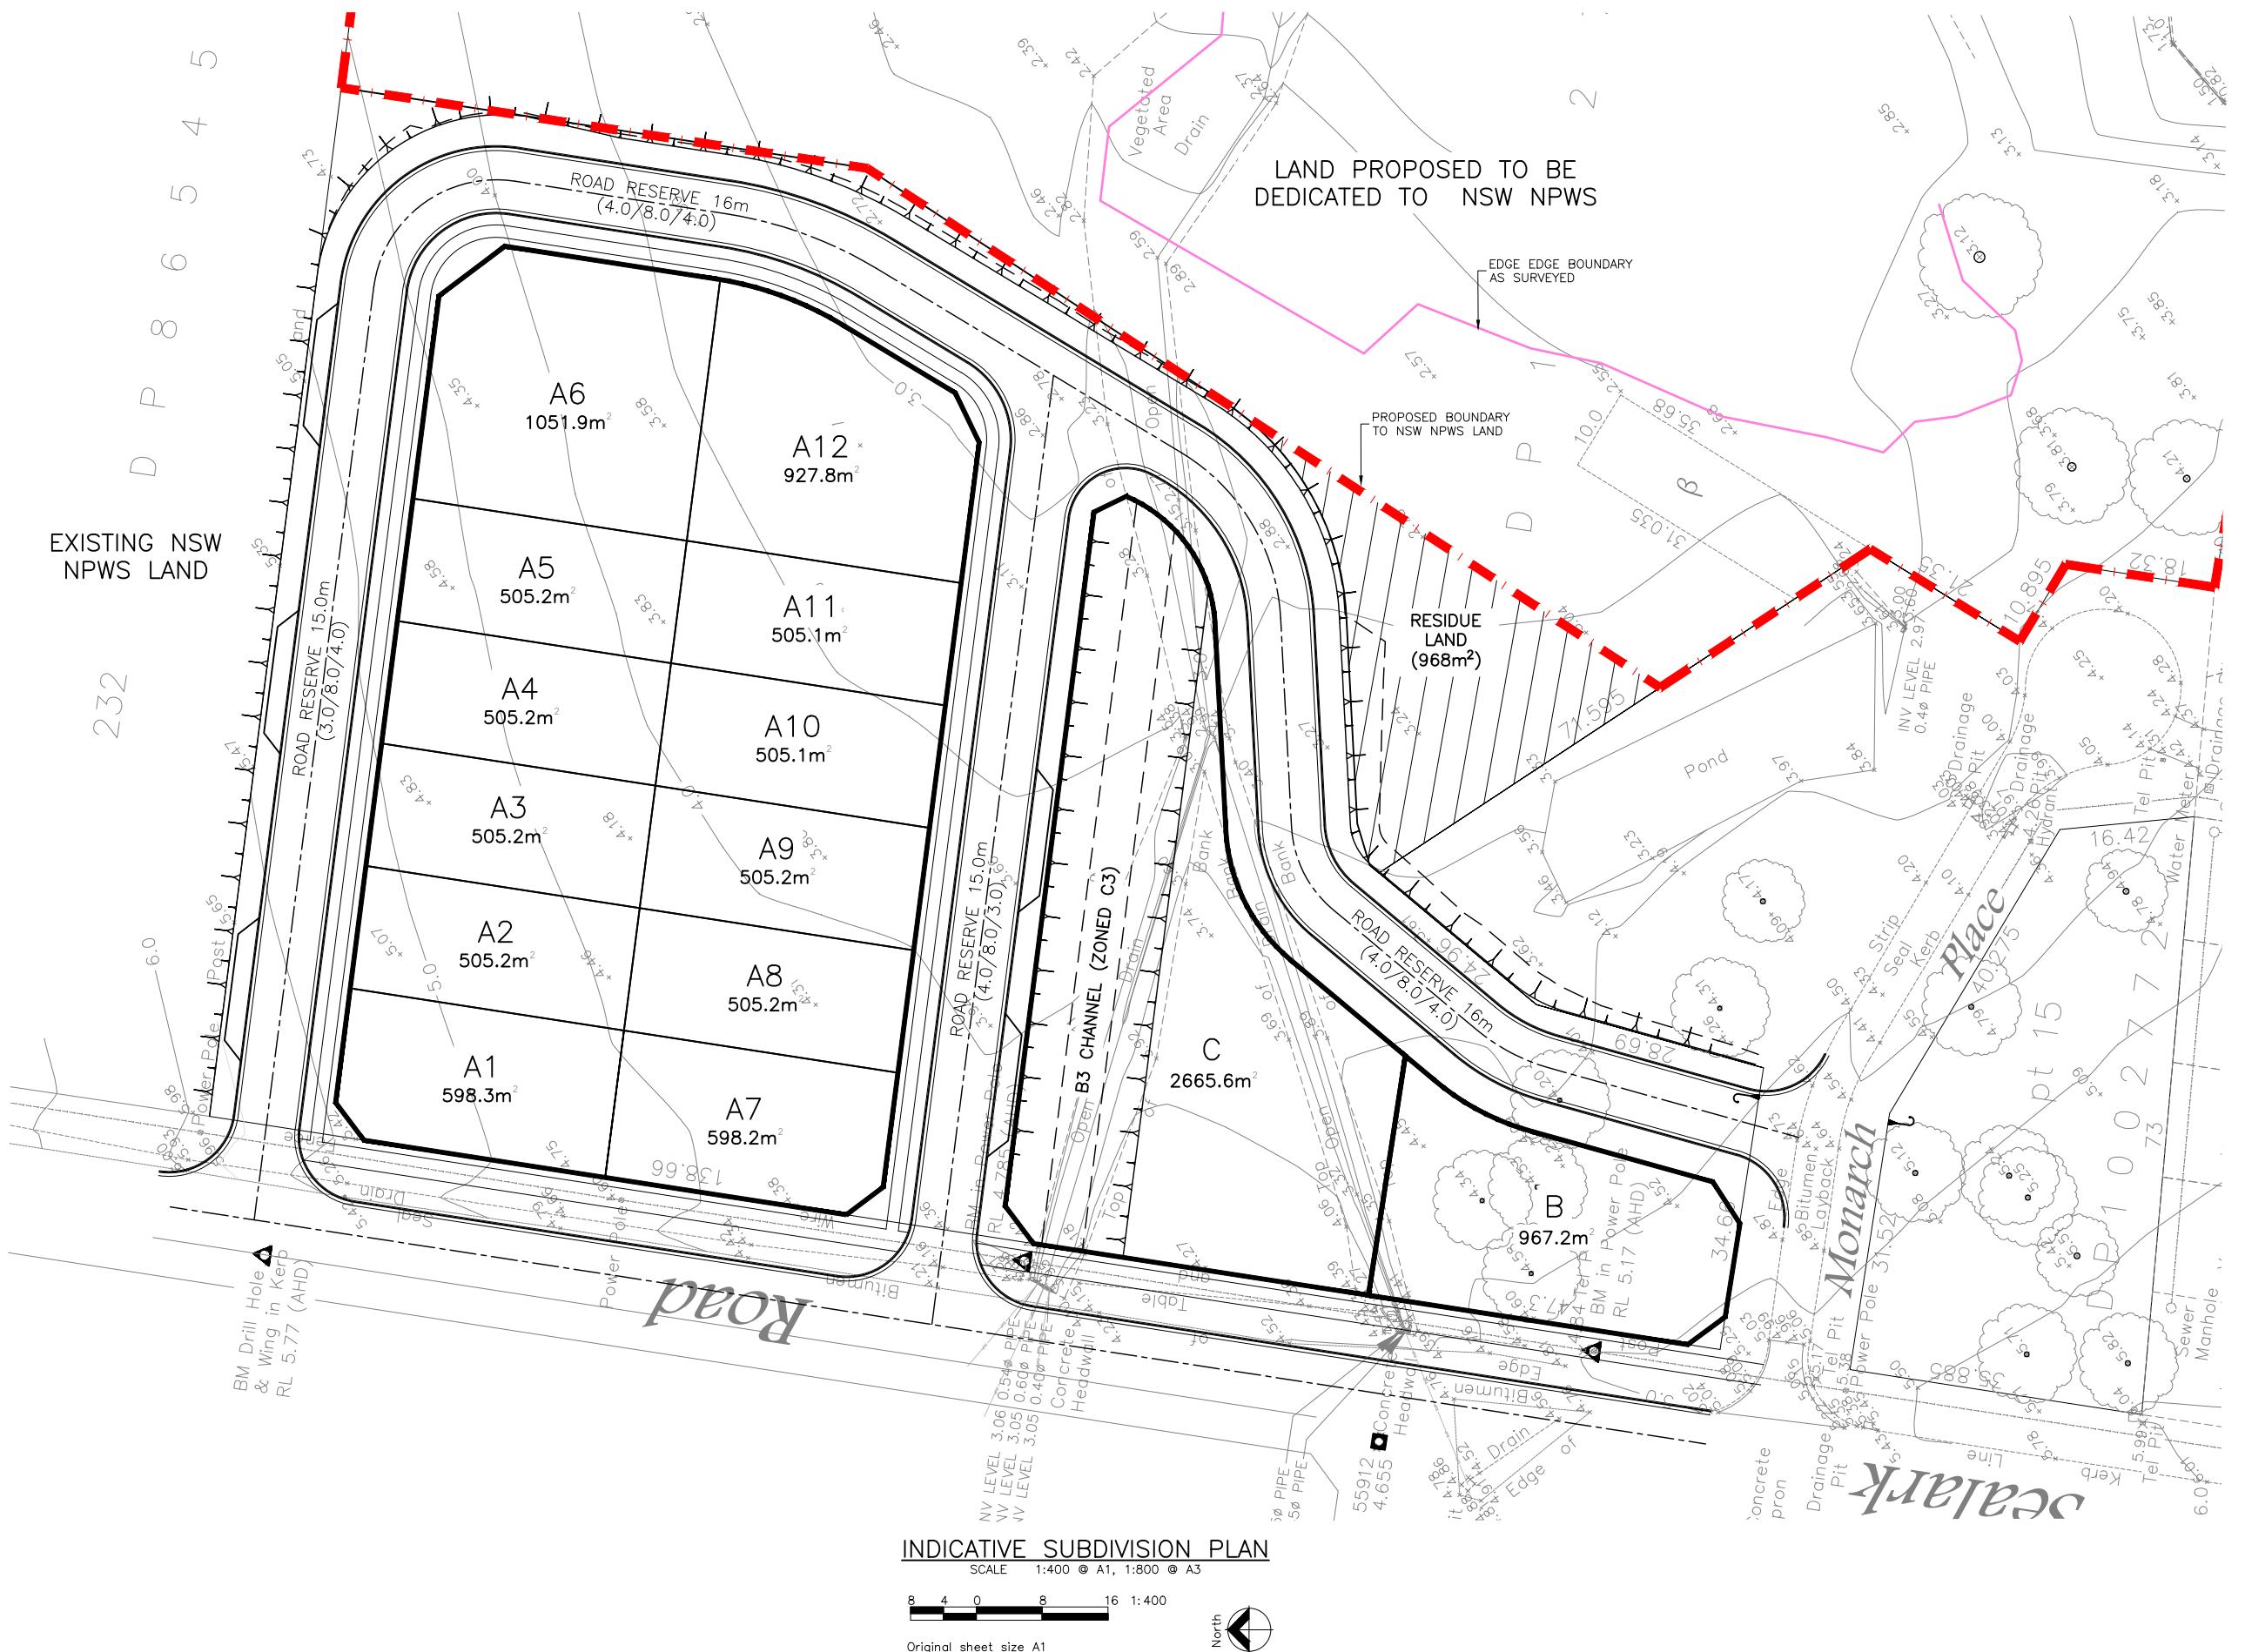

ISSUE	DESCRIPTION	DATE
7	ISSUED FOR PLANNING PROPOSAL	15/07/24
6	RE-ISSUED FOR CONSULTANT REVIEW	02/06/24
5	FOR CONSULTANT REVIEW	15/05/24
4	FOR PLANNING PROPOSAL	12/01/24
ISSUE	DESCRIPTION	DATE



**footprint**  
sustainable engineering

a. 15 mearhan drive  
kiama downs nsw 2533  
p. 02 4237 6770  
f. 02 4237 8962

**LOT 5 SEALARK ROAD, CALLALA BAY**

**PLANNING PROPOSAL**

**PRELIMINARY CIVIL DESIGN**

**INDICATIVE SUBDIVISION PLAN**



# APPENDIX H

## Post Development Modelling Results

## Legend

- Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Culvert
- Proposed Surface Contours (0.25m)
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
  - 0.05 to 0.01
  - 0.10 to 0.20
  - 0.20 to 0.30
  - 0.30 to 0.40
  - 0.40 to 0.50
  - 0.50 to 0.60
  - 0.60 to 0.70
  - 0.70 to 0.80
  - 0.80 to 0.90
  - 0.90 to 1.0
  - >1.0

Note: Flooding shown on the proposed roads is as a result of rainfall on grid (direct rainfall) modelling and these flows would be managed locally through a network of pits, pipes and overland flow paths and are therefore not representative of actual flow behaviour in these locations.

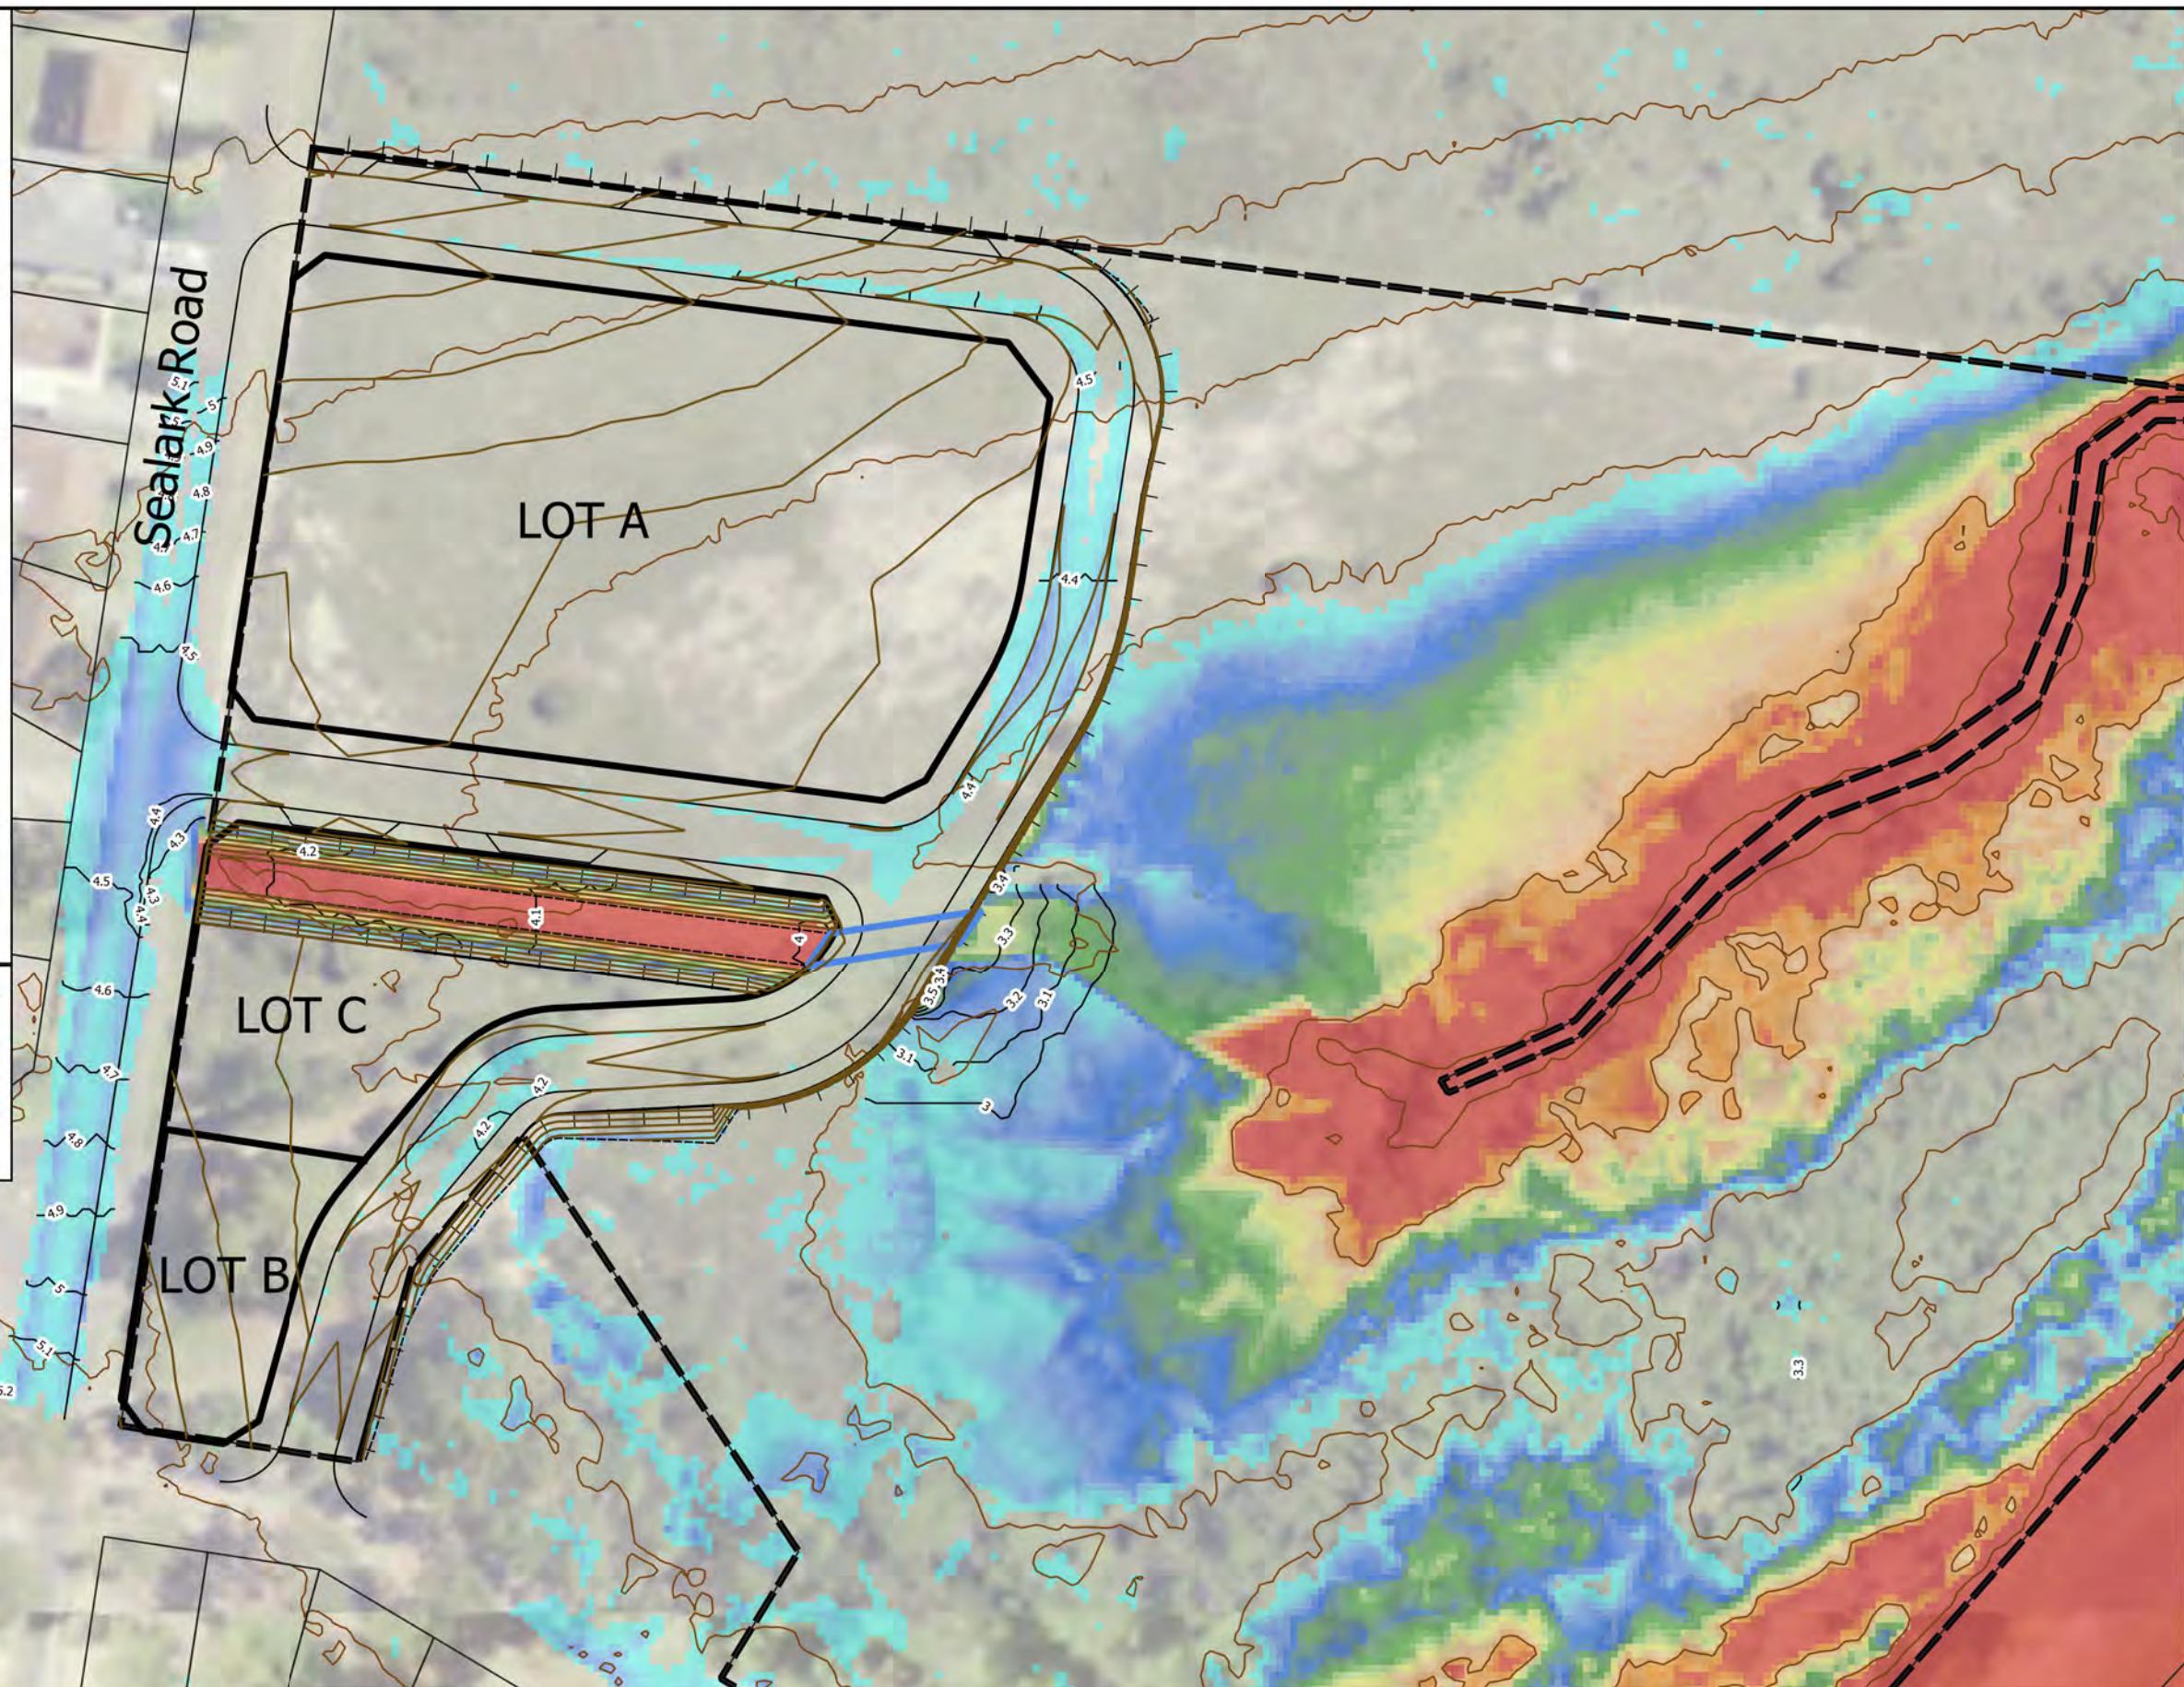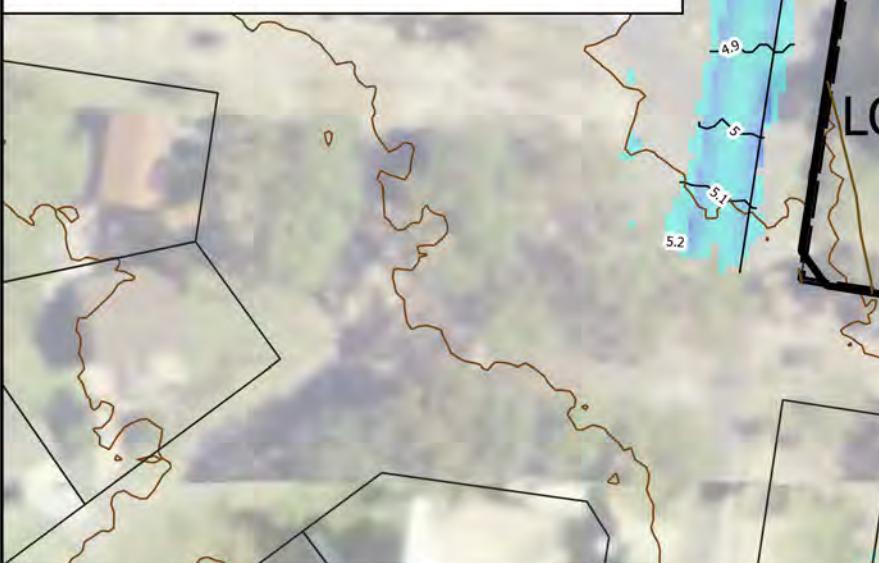


### Legend

- Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Culvert
- Proposed Surface Contours (0.25m)

### Maximum Flood Velocity (m/s)

- <= 0.00
- 0.00 - 0.50
- 0.50 - 1.00
- 1.00 - 1.50
- 1.50 - 2.00
- 2.00 - 3.00
- >3.0

Note: Flooding shown on the proposed roads is as a result of rainfall on grid (direct rainfall) modelling and these flows would be managed locally through a network of pits, pipes and overland flow paths and are therefore not representative of actual flow behaviour in these locations.

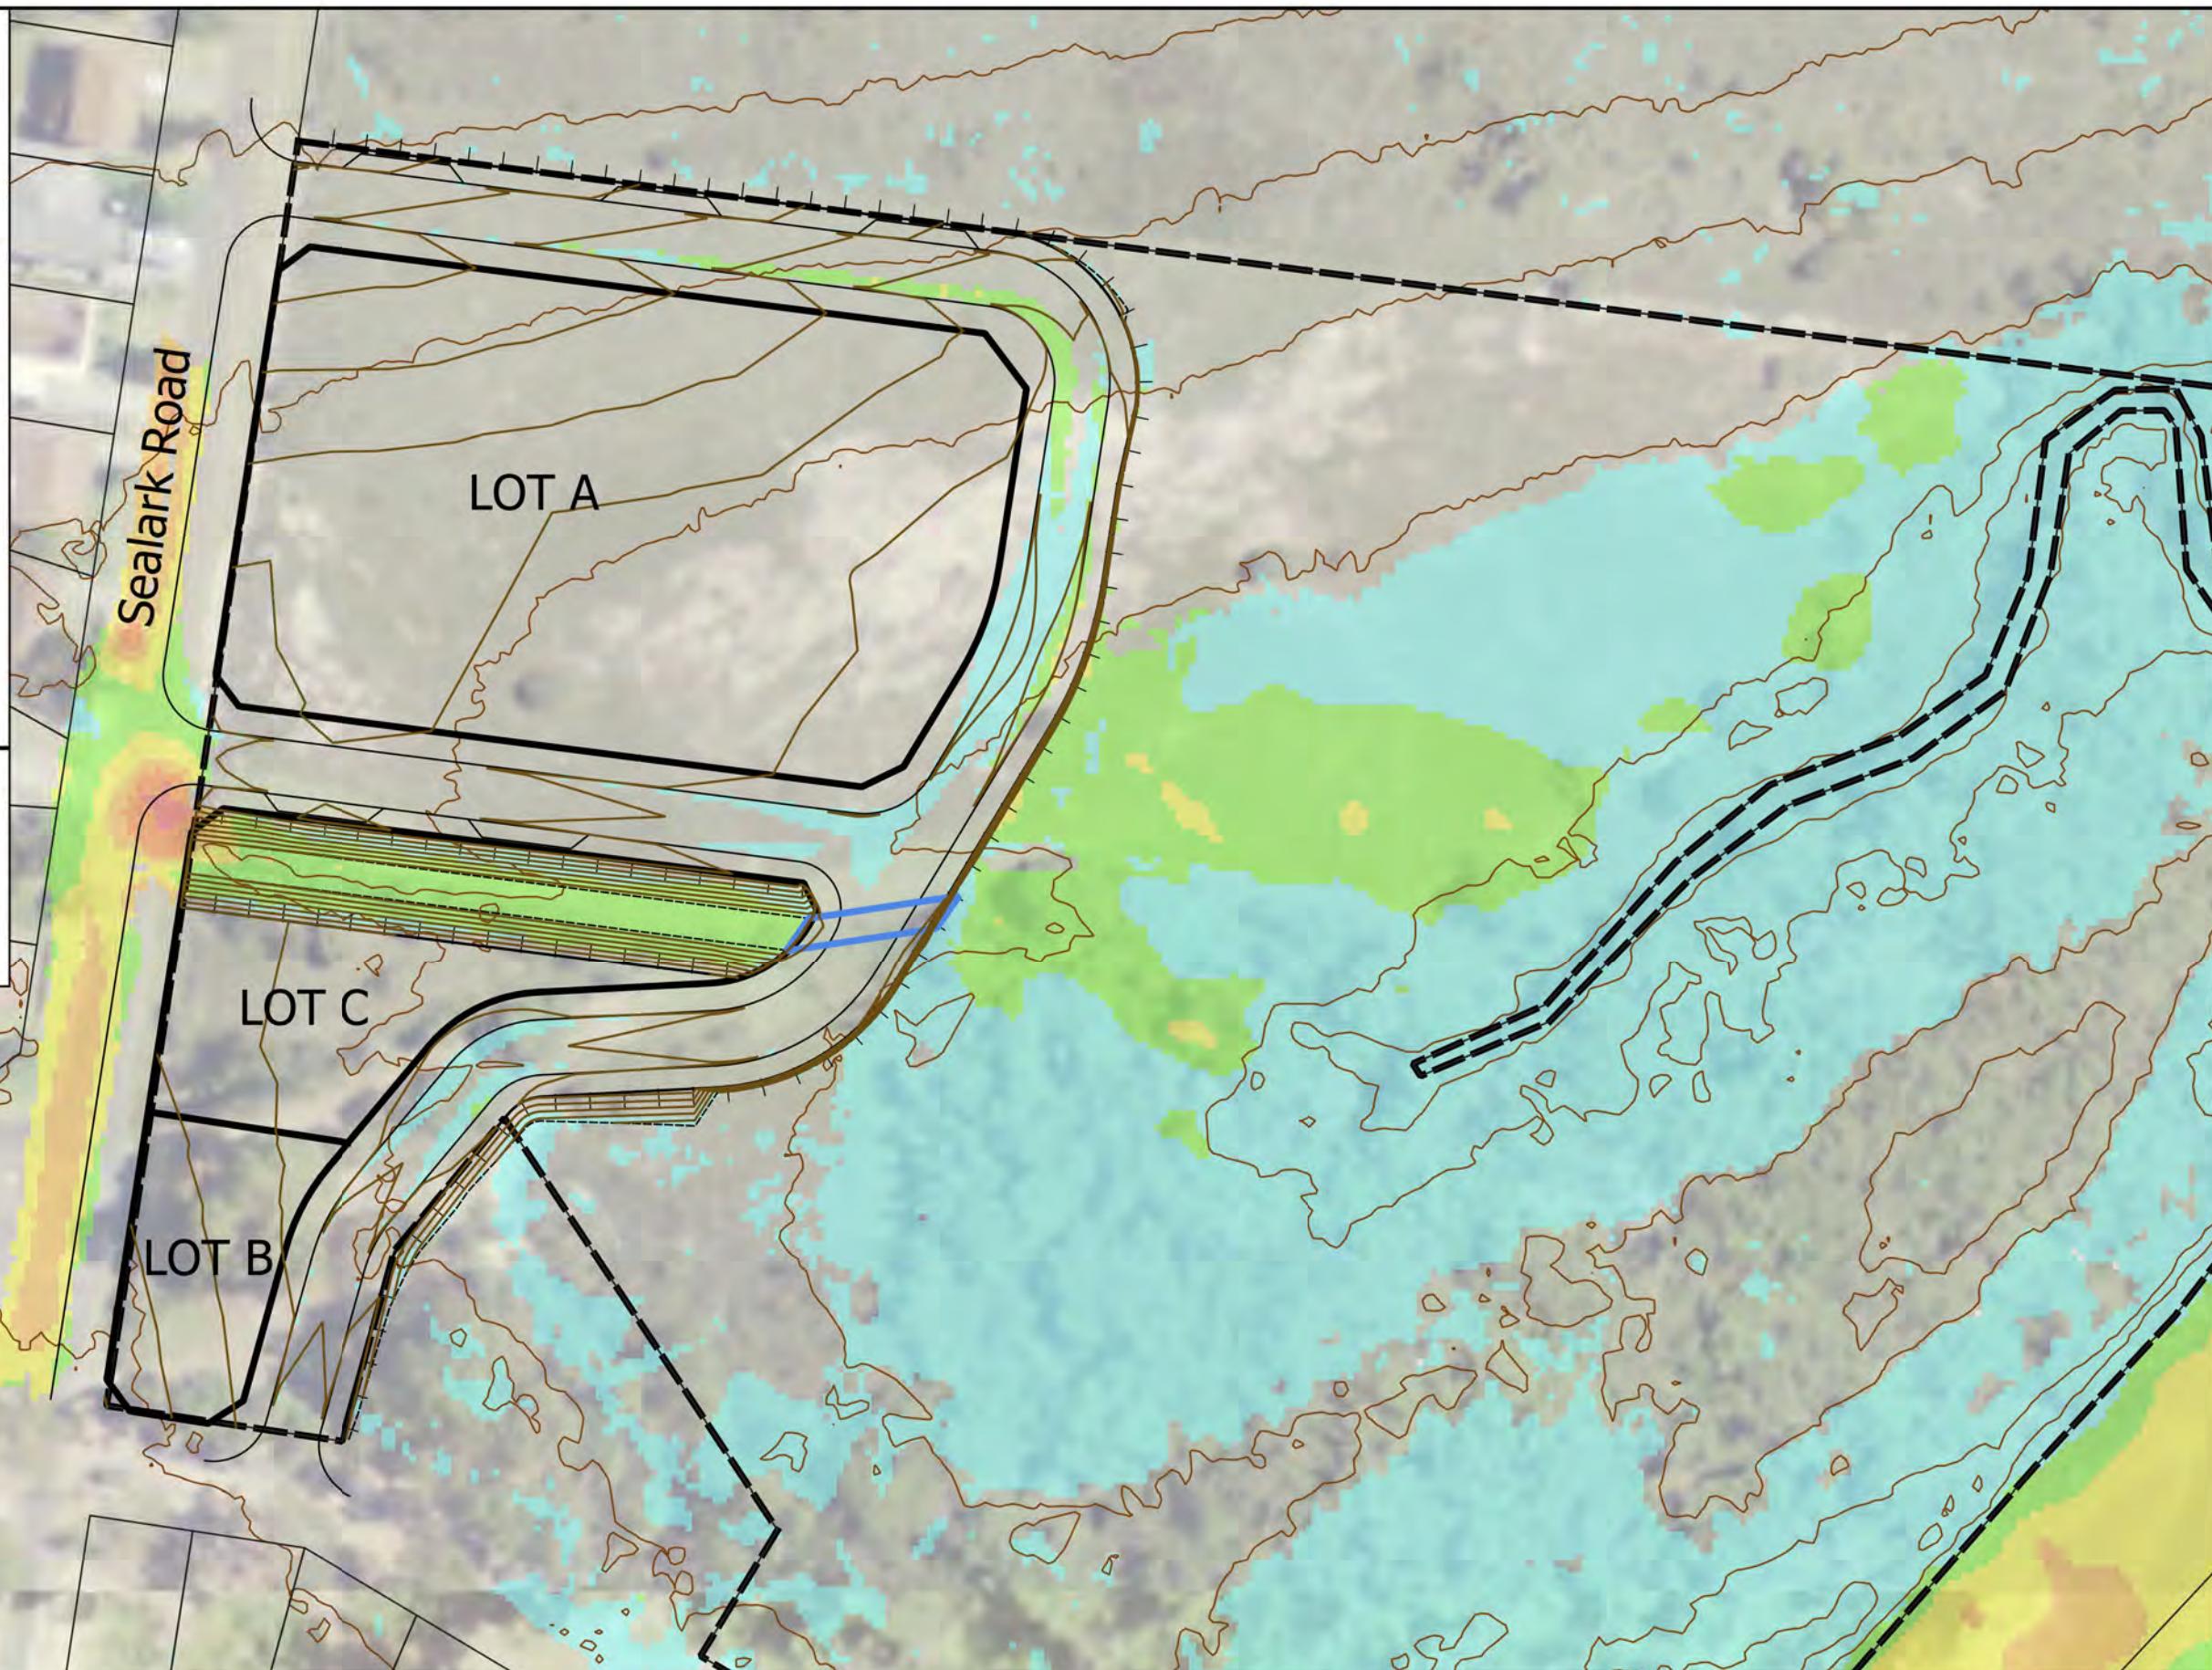



## Legend

- Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Culvert
- Proposed Surface Contours (0.25m)

## Maximum Flood Hazard (ARR2019)

- H1
- H2
- H3
- H4
- H5
- H6

Note: Flooding shown on Lots A, B and C and the proposed roads are as a result of rainfall on grid (direct rainfall) modelling and these flows would be managed locally through a network of pits, pipes and overland flow paths and are therefore not representative of actual flow behaviour in these locations.

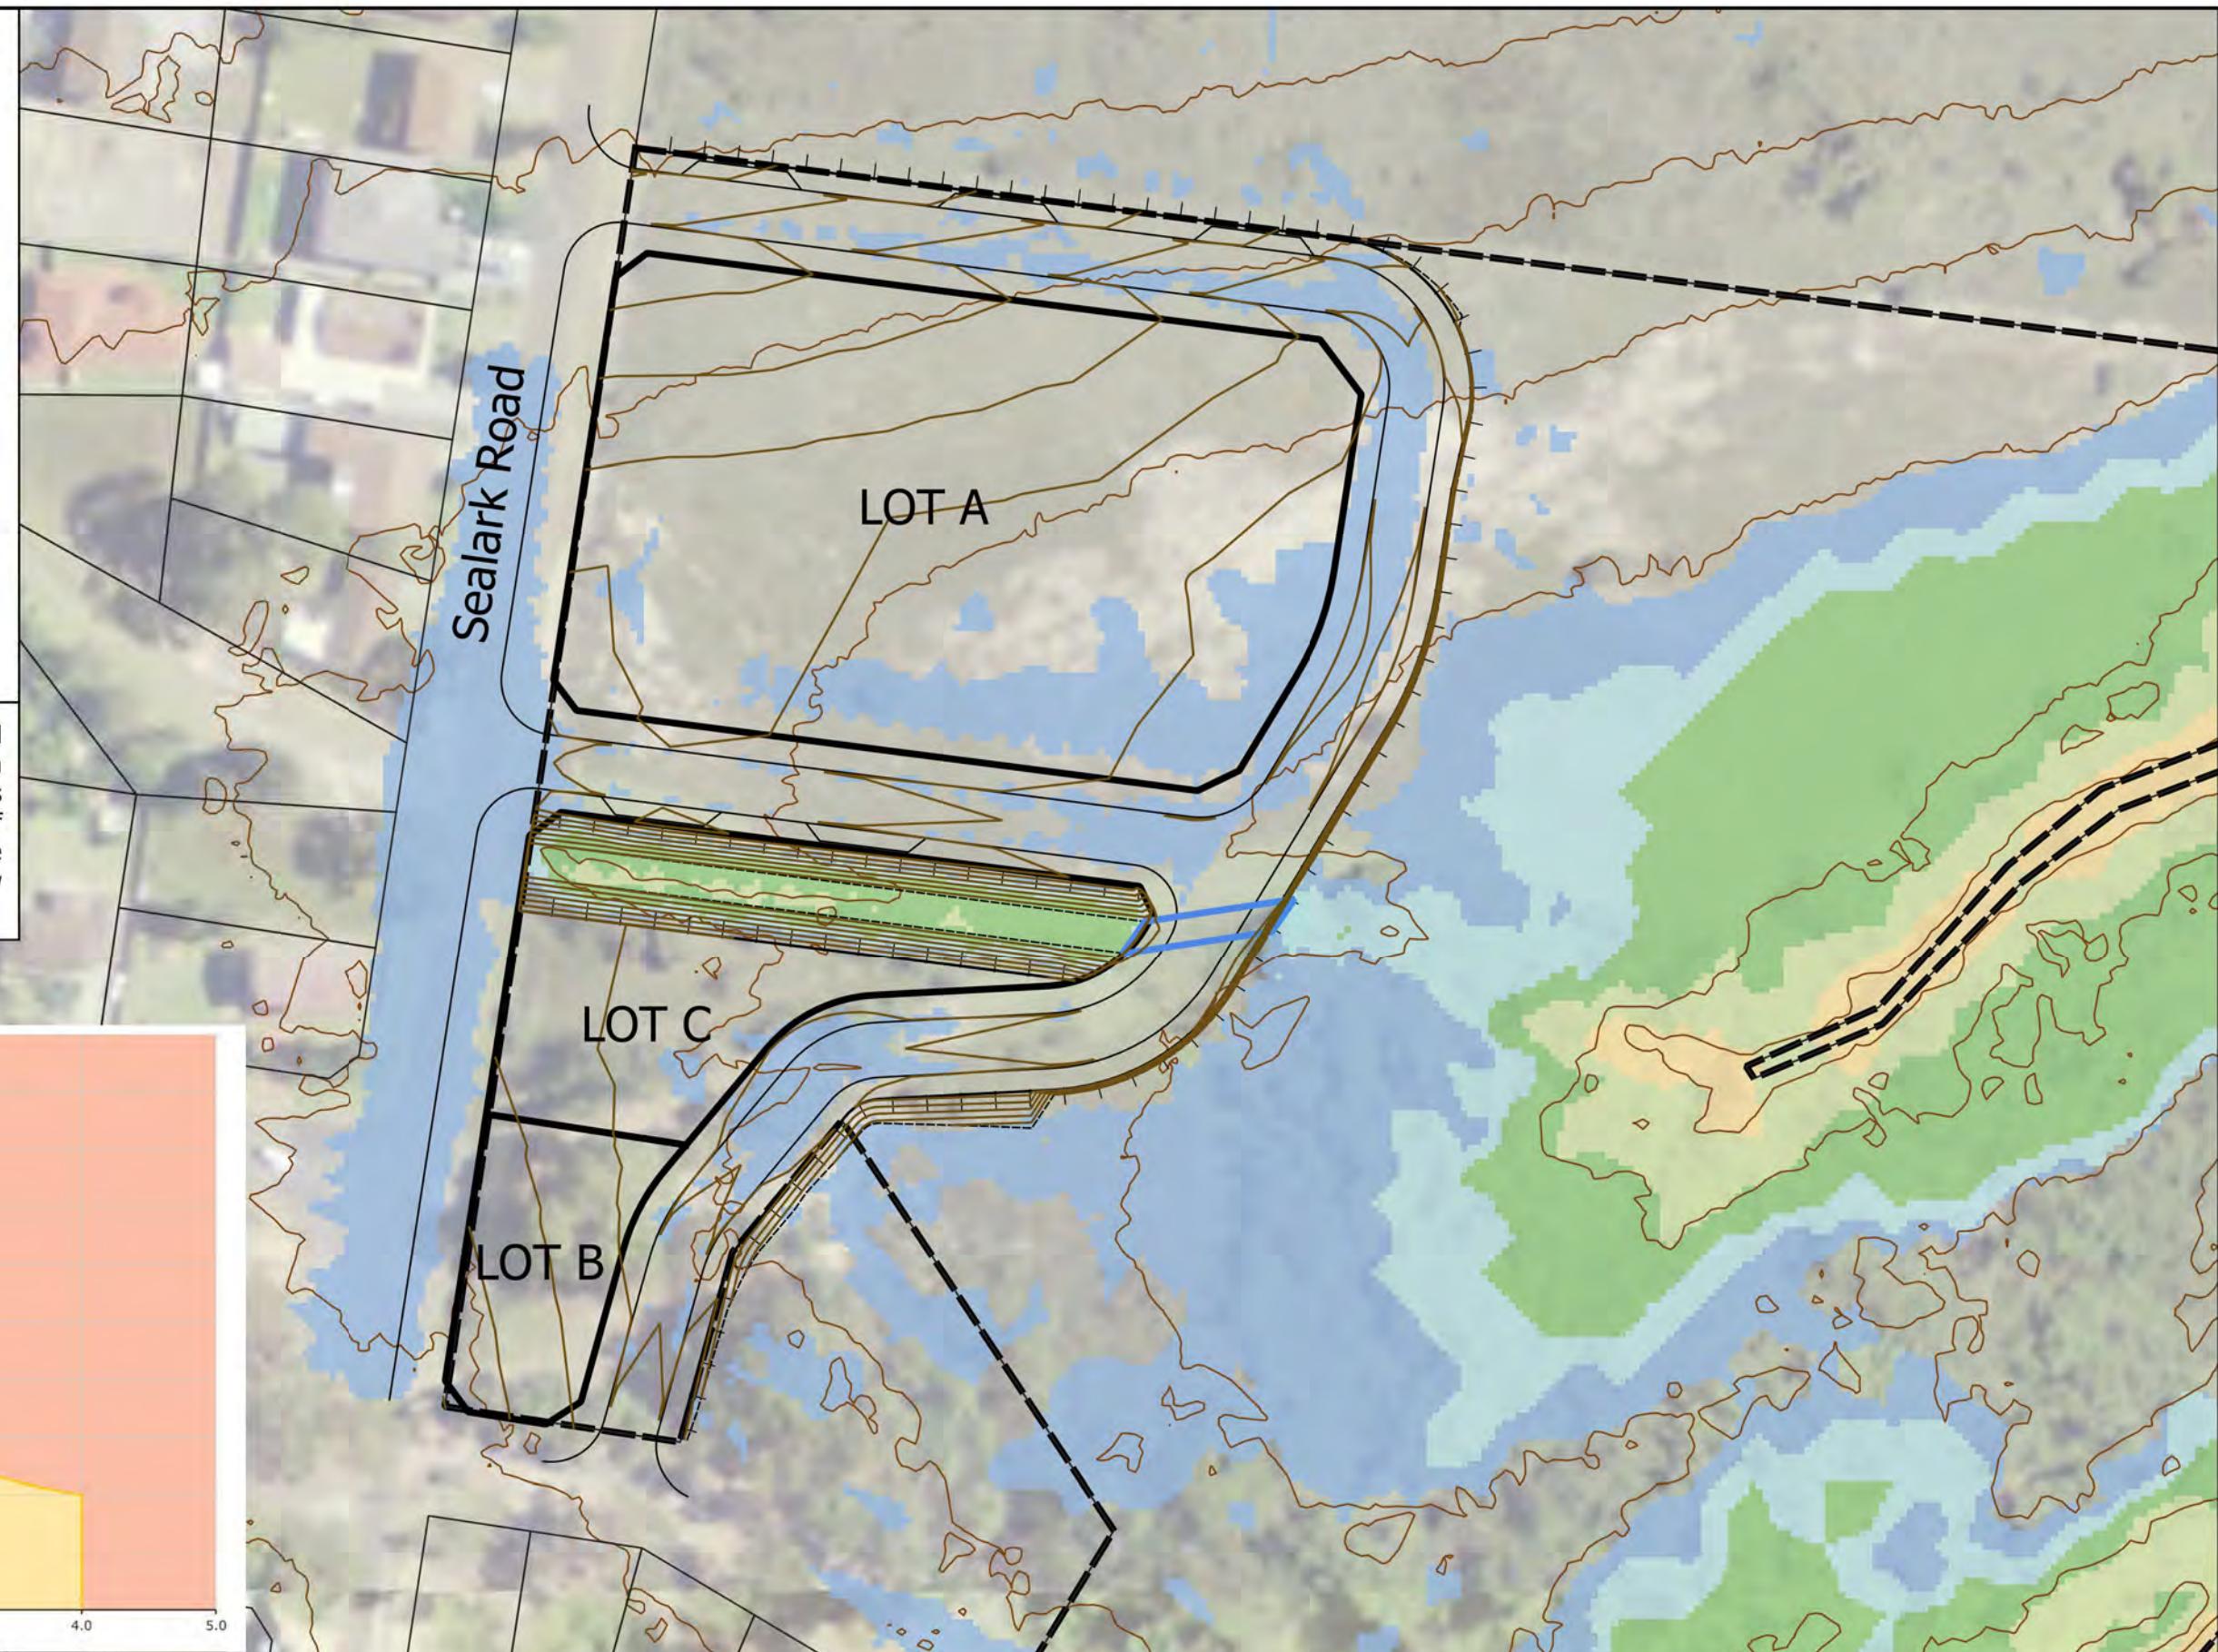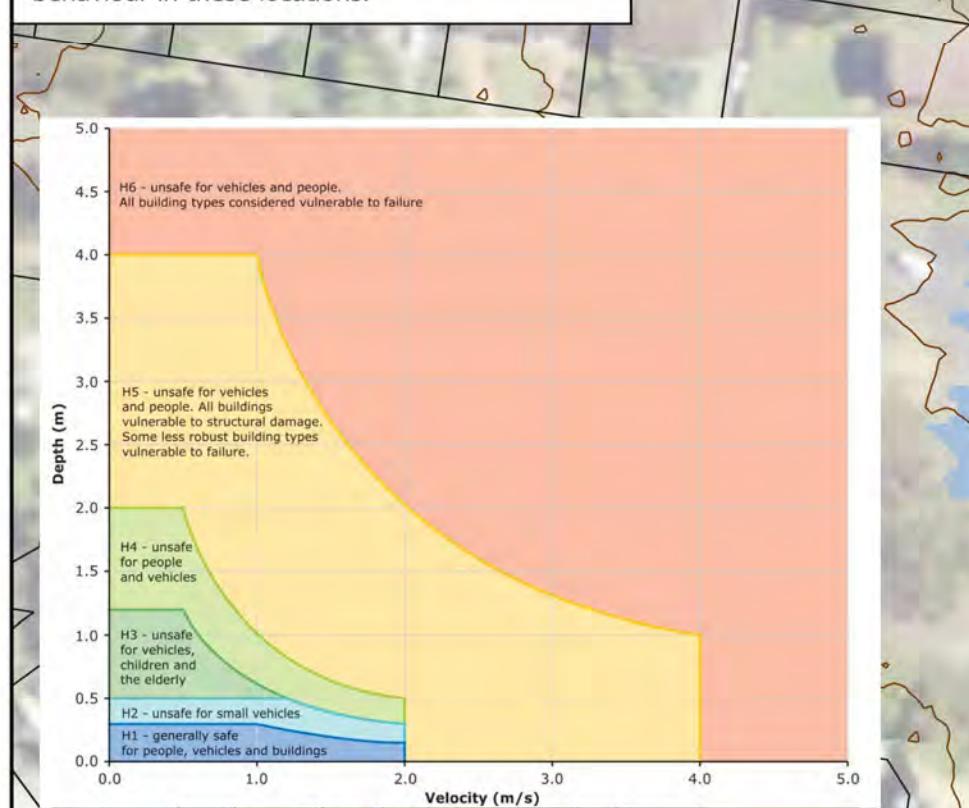

## Legend


- Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Culvert
- Proposed Surface Contours (0.25m)

### Change in Maximum Flood Level

- < -800mm
- 600mm to -800mm
- 400mm to -600mm
- 200mm to -400mm
- 100mm to -200mm
- 50mm to -100mm
- 10mm to -50mm
- 10mm to +10mm
- +10mm to +50mm
- +50mm to +100mm
- +100mm to +200mm
- +200mm to +400mm
- +400mm to +600mm
- +600mm to +800mm
- >800mm
- Was Wet, Now Dry
- Was Dry, Now Wet


### Notes:

- Flooding shown on the proposed roads is as a result of rainfall on grid (direct rainfall) modelling and these flows would be managed locally through a network of pits, pipes and overland flow paths and are therefore not representative of actual flow behaviour in these locations.
- The change in flood level reflected on Lots A, B and C and the proposed roads is primarily as a result of the change in the topography resulting from filling of the land.

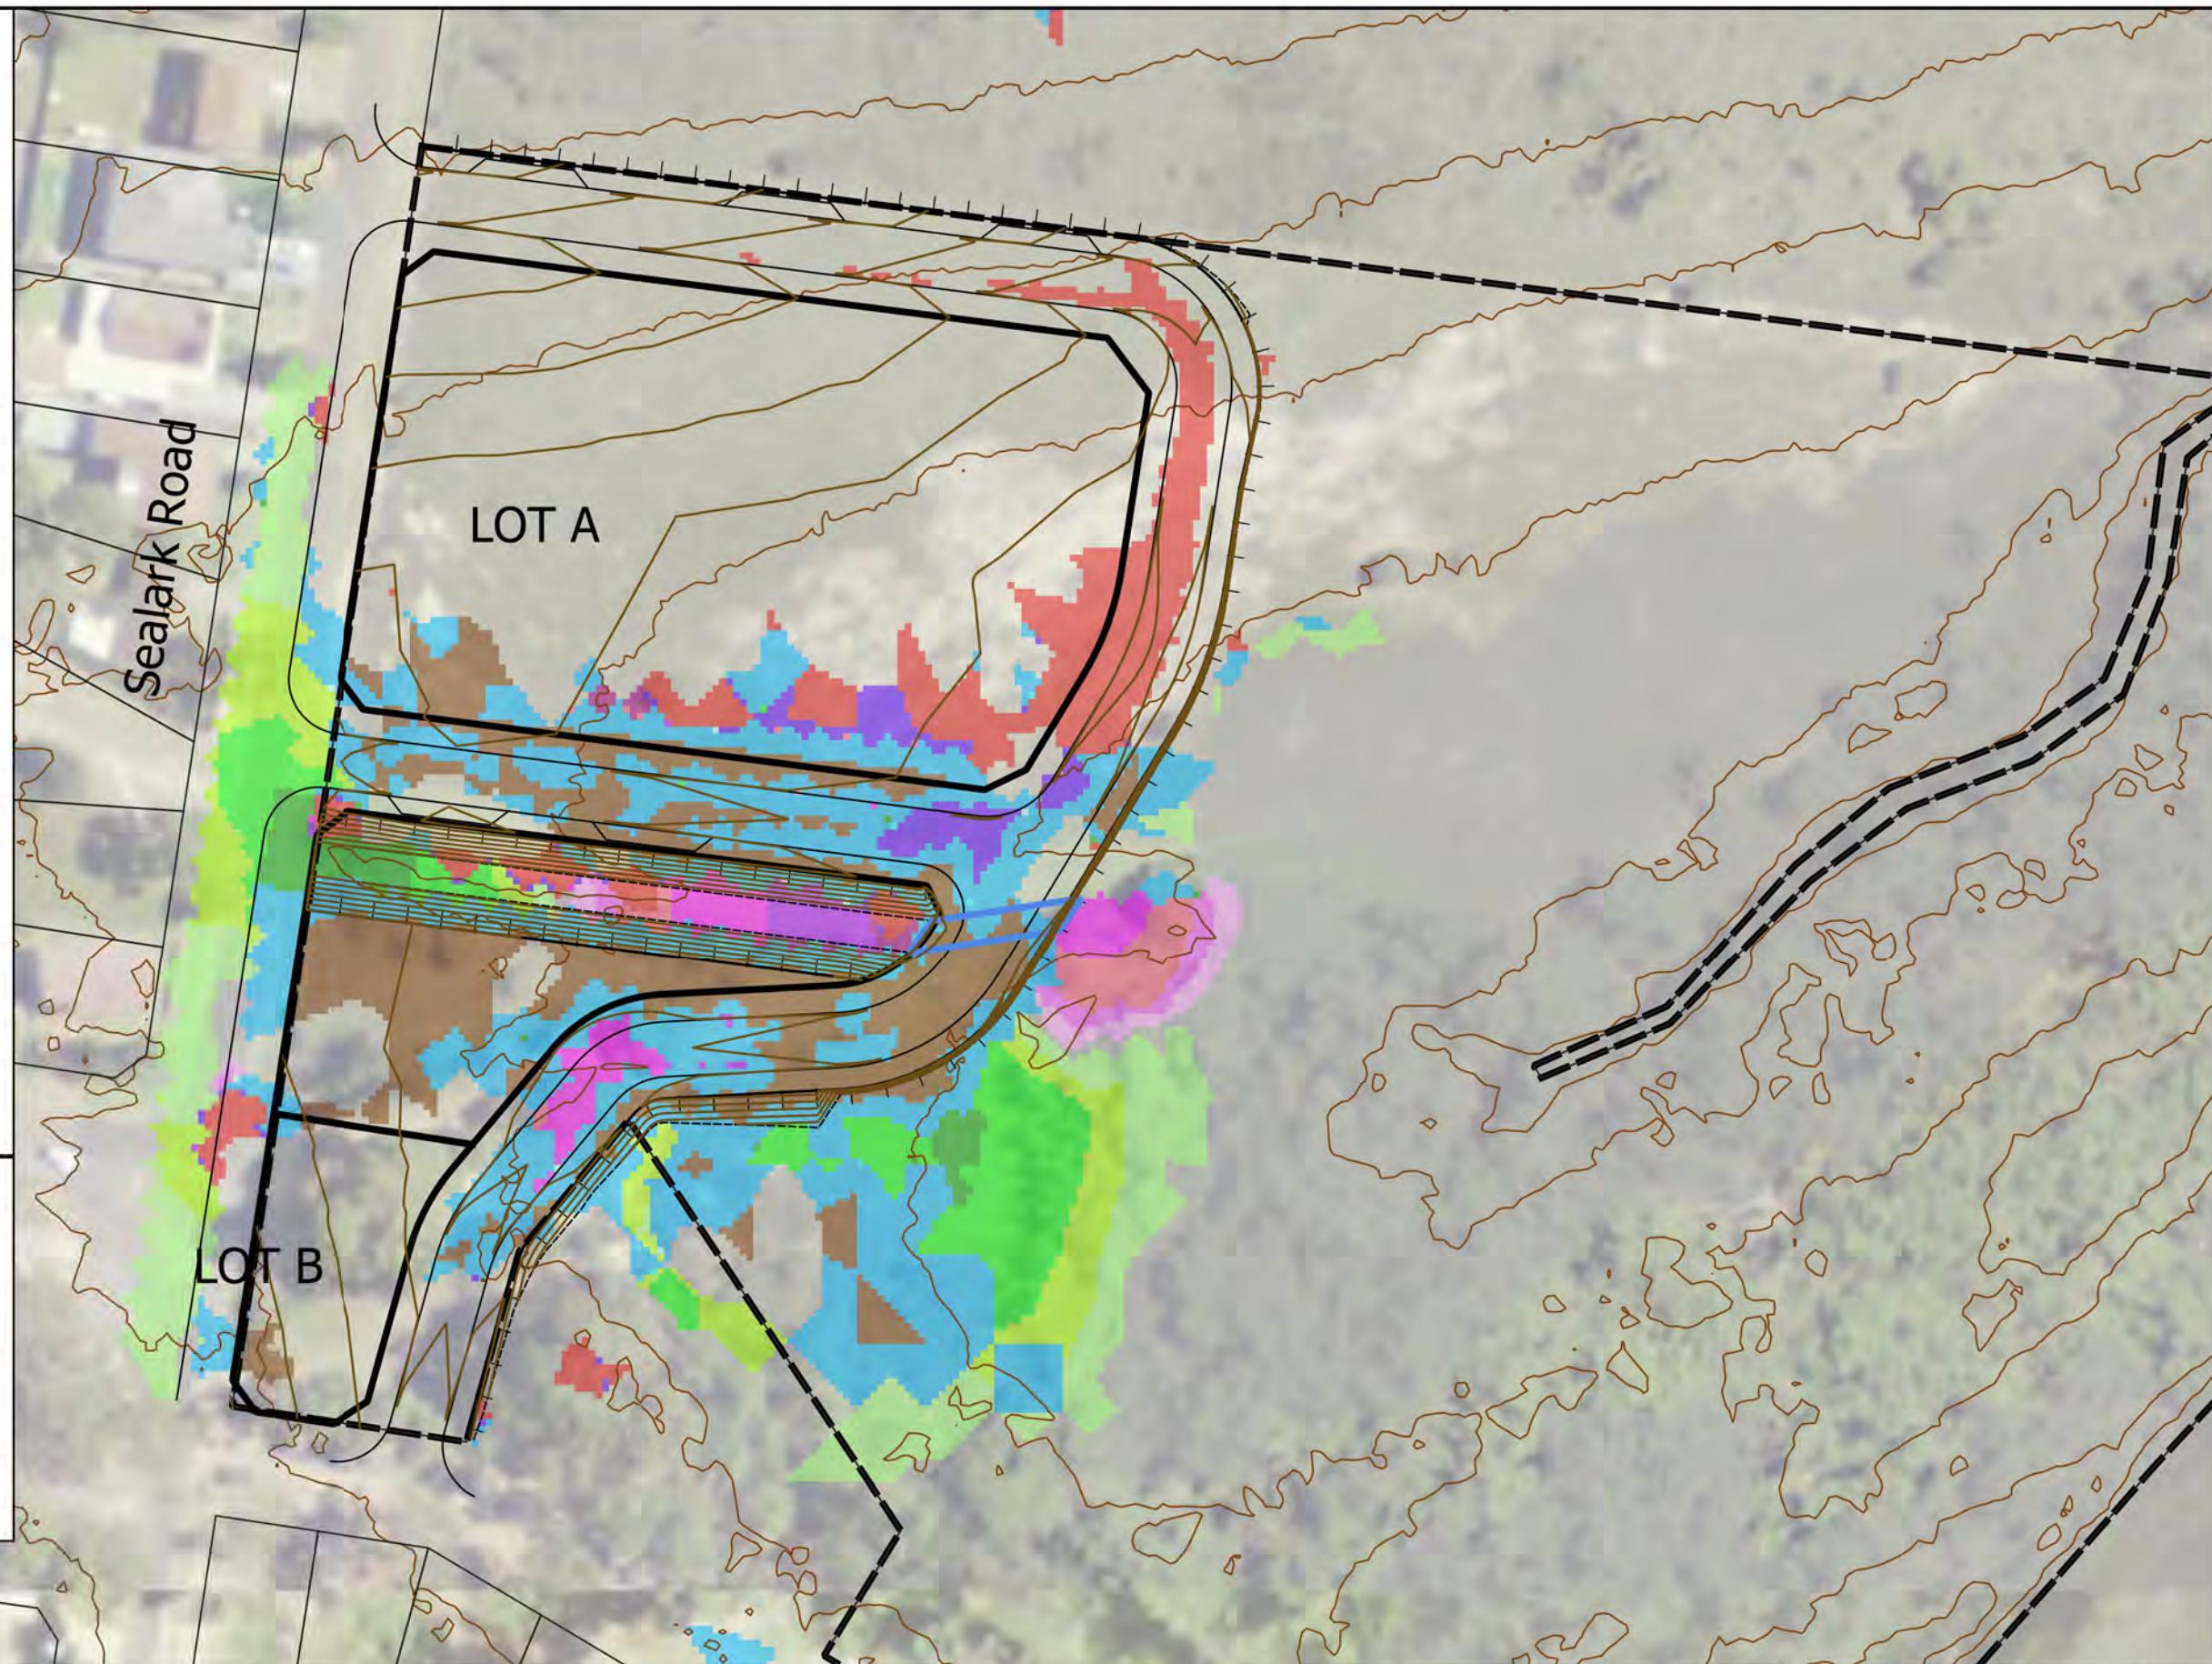

## Legend


- Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Culvert
- Proposed Surface Contours (0.5m)
- 1% AEP + RCP8.5+SLR Flood Extent
- Flood Planning Area  
(1% AEP + RCP8.5 + SLR) + 0.5m Freeboard
- Probable Maximum Flood (PMF) Extent

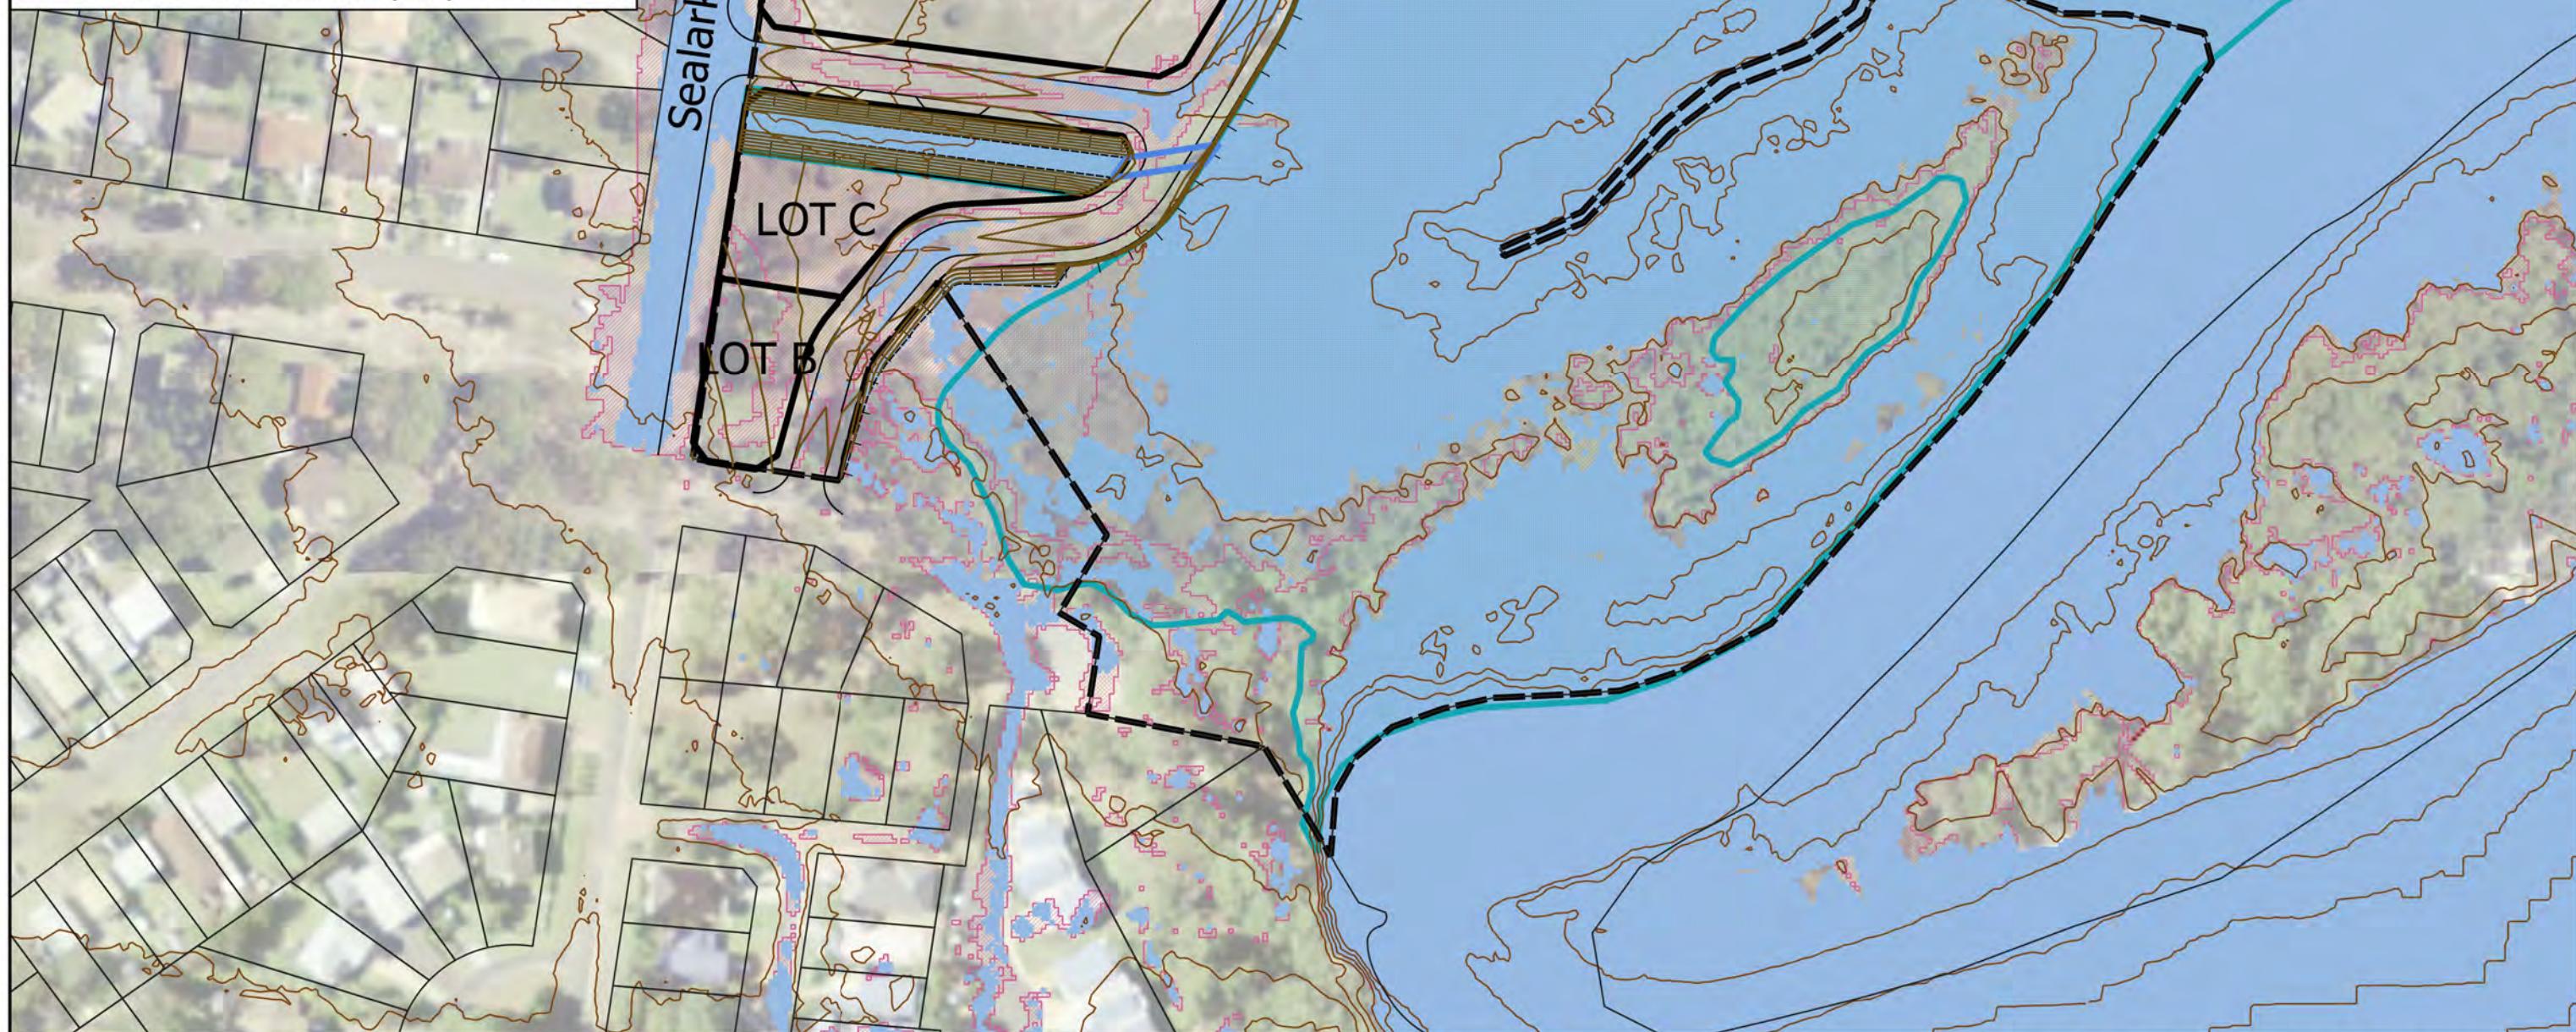

## Legend

- █ Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Culvert
- Proposed Surface Contours (0.25m)
- Maximum Water Surface Contours (0.1m)
- Maximum Flood Depth (m)
- 0.05 to 0.01
- 0.10 to 0.20
- 0.20 to 0.30
- 0.30 to 0.40
- 0.40 to 0.50
- 0.50 to 0.60
- 0.60 to 0.70
- 0.70 to 0.80
- 0.80 to 0.90
- 0.90 to 1.0
- >1.0

Note: Flooding shown on the proposed roads is as a result of rainfall on grid (direct rainfall) modelling and these flows would be managed locally through a network of pits, pipes and overland flow paths and are therefore not representative of actual flow behaviour in these locations.

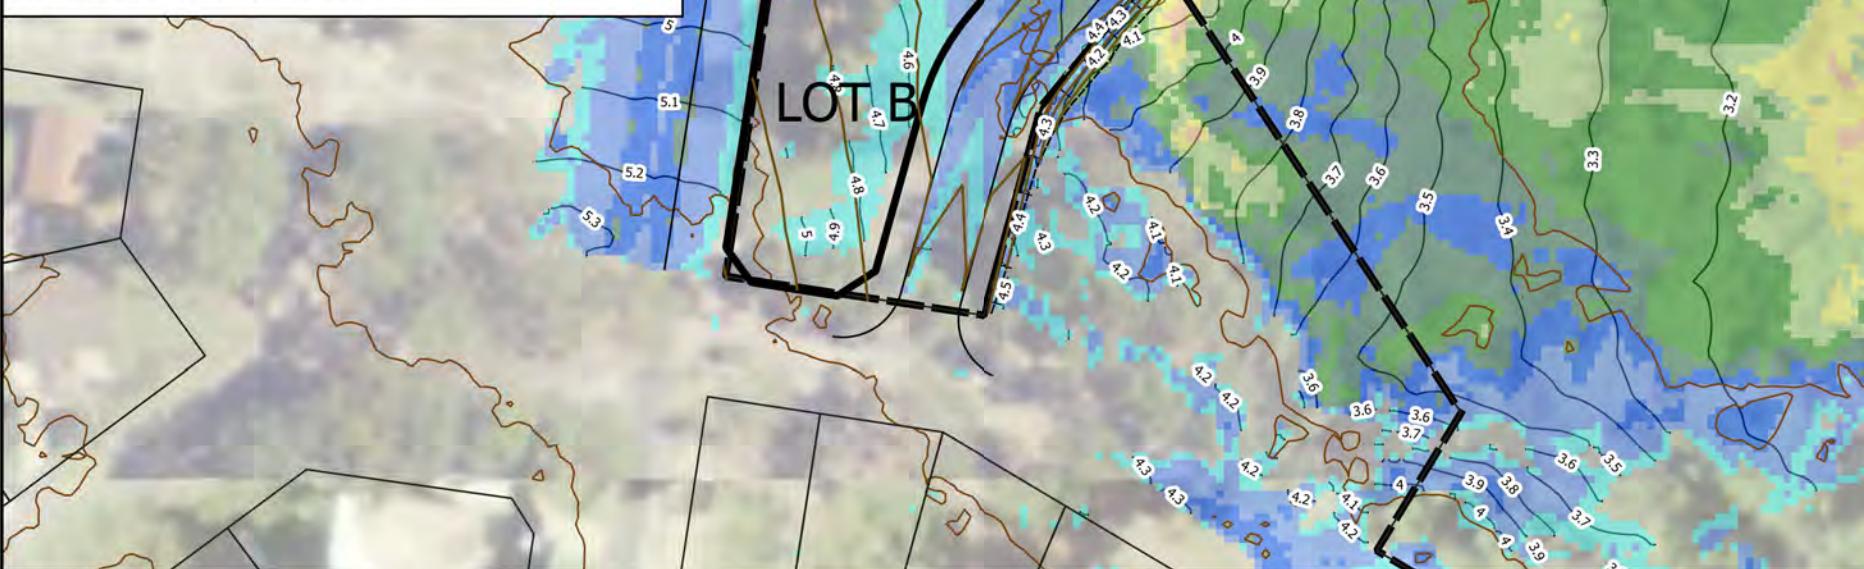



## Legend

- Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Culvert
- Proposed Surface Contours (0.25m)

### Maximum Flood Velocity

- <= 0.00
- 0.00 - 0.50
- 0.50 - 1.00
- 1.00 - 1.50
- 1.50 - 2.00
- 2.00 - 3.00
- >3.0

Note: Flooding shown on the proposed roads is as a result of rainfall on grid (direct rainfall) modelling and these flows would be managed locally through a network of pits, pipes and overland flow paths and are therefore not representative of actual flow behaviour in these locations.

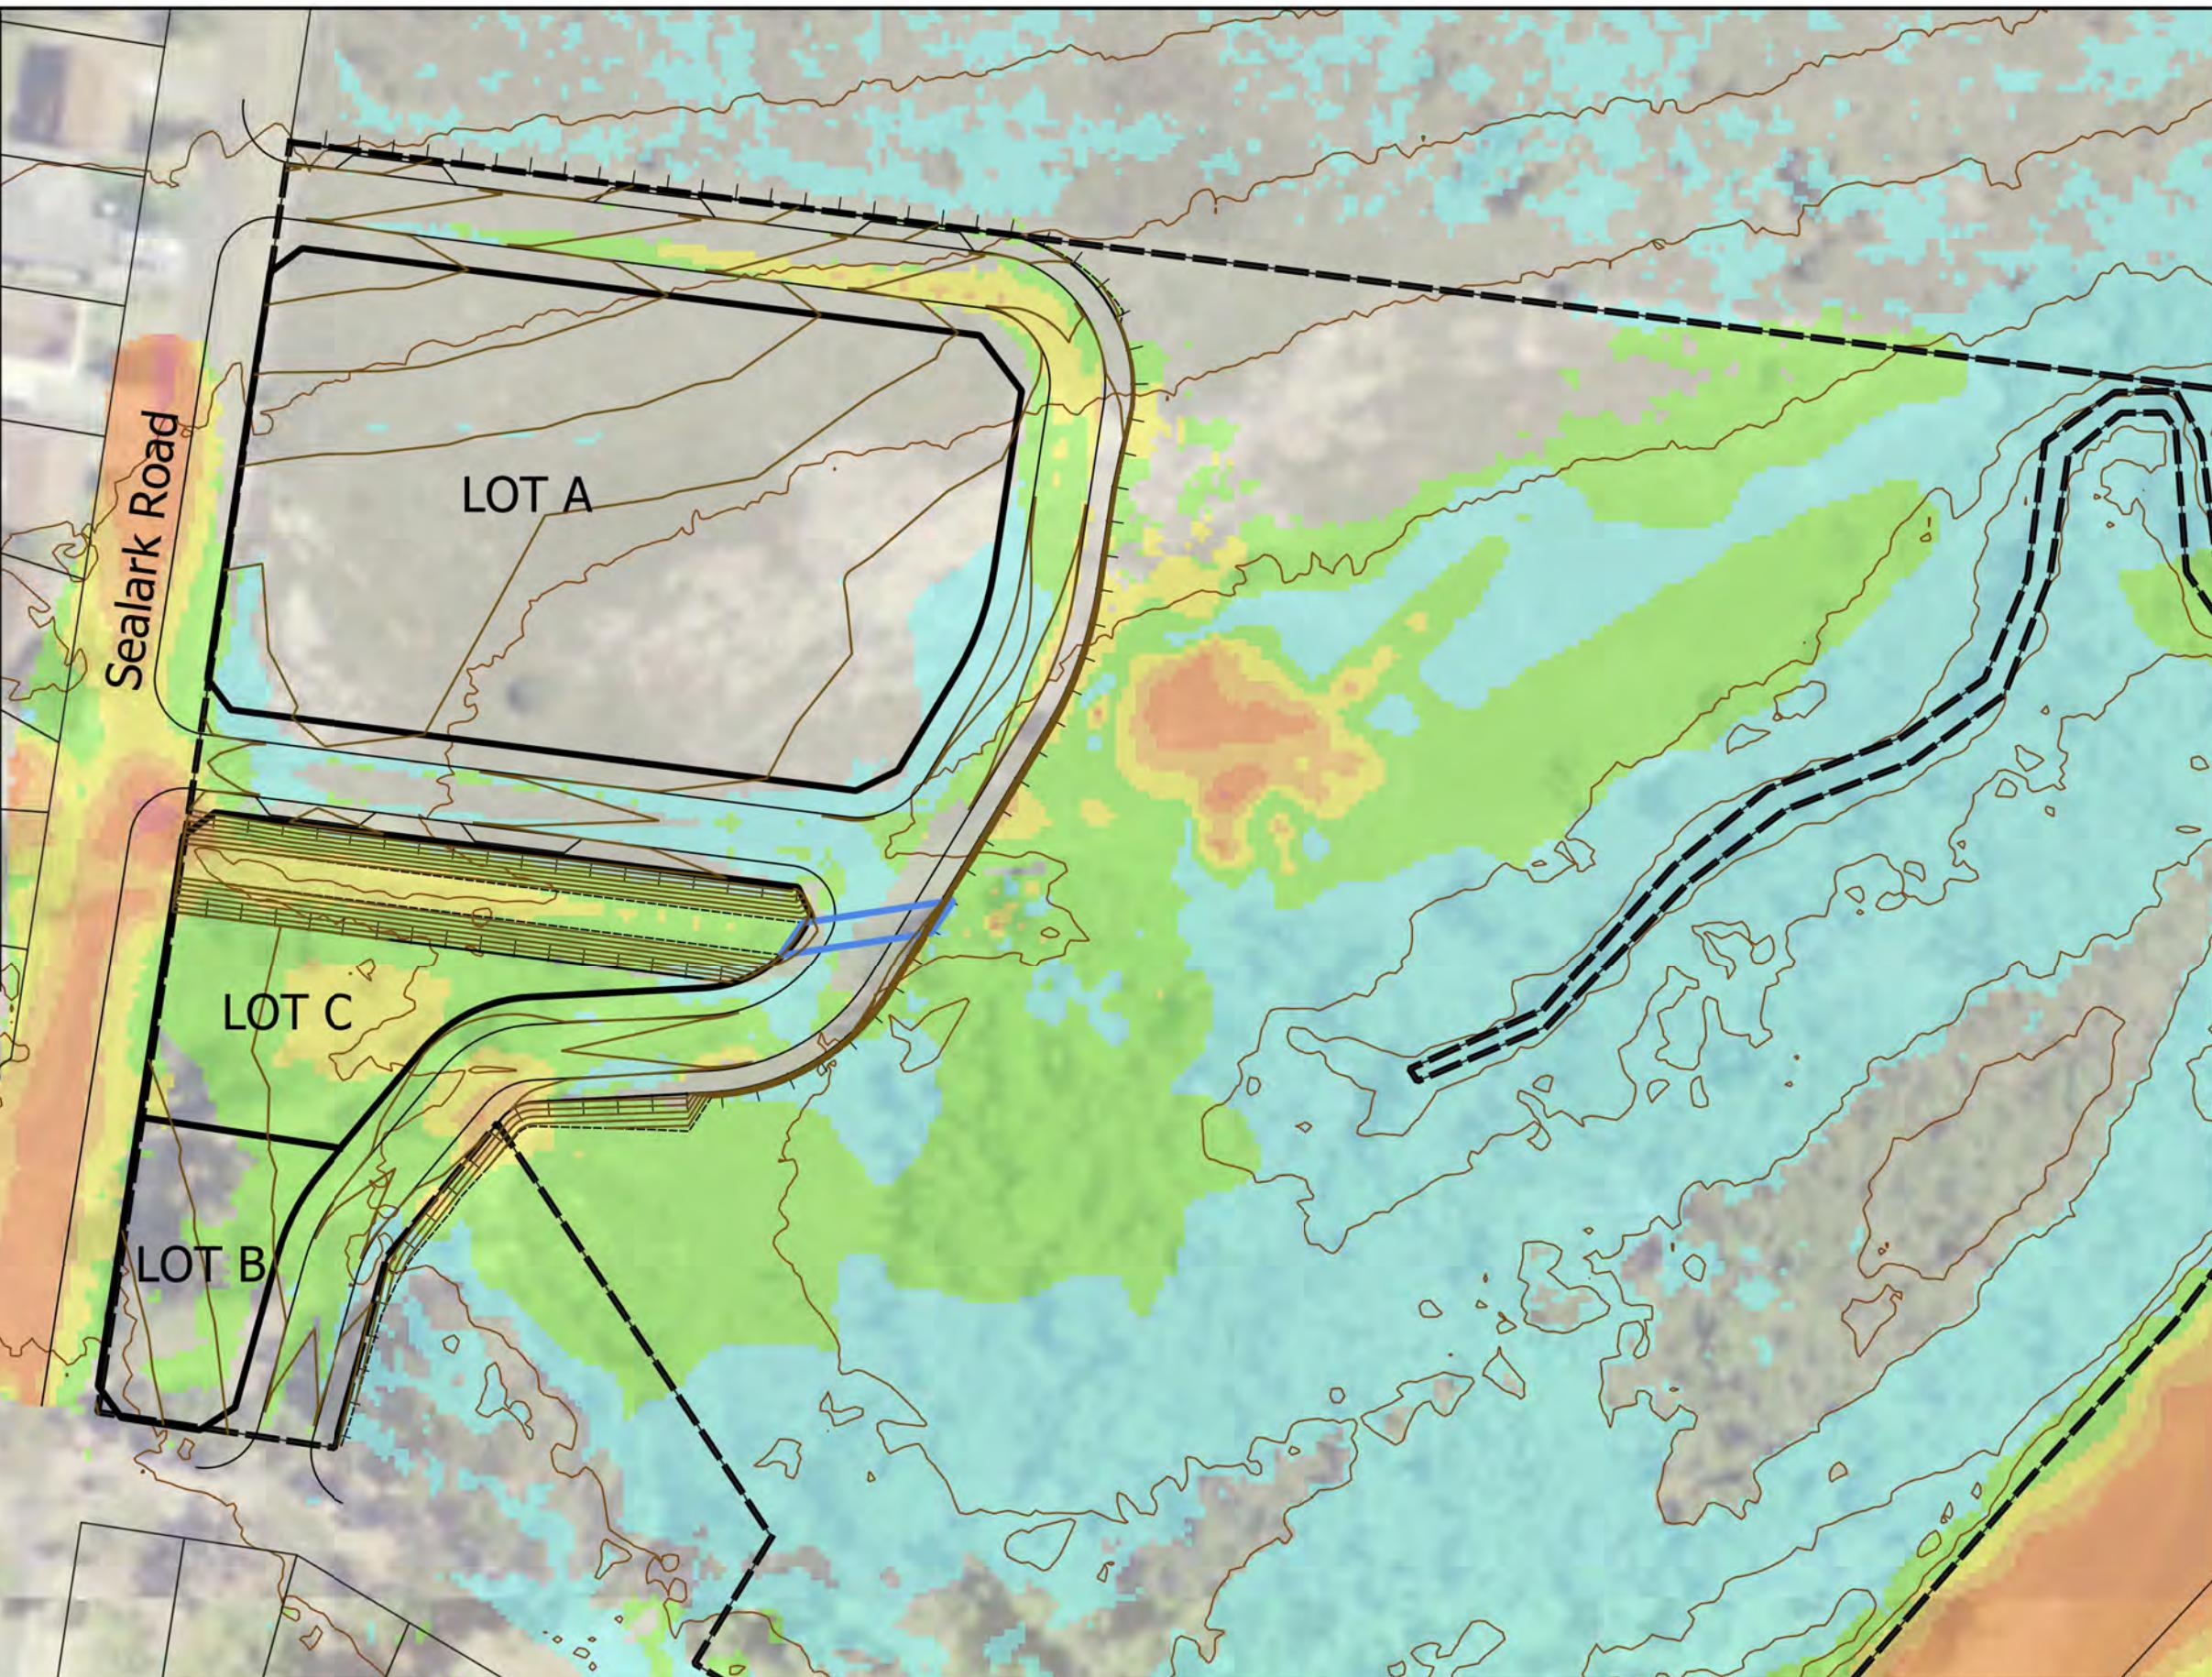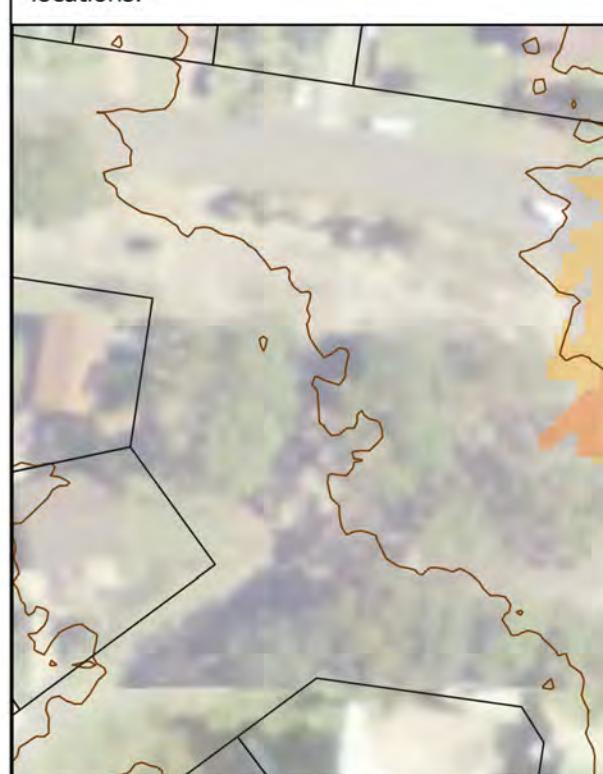



## Legend

- █ Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Culvert
- Proposed Surface Contours (0.25m)

## Maximum Flood Hazard (ARR2019)

- █ H1
- █ H2
- █ H3
- █ H4
- █ H5
- █ H6

Note: Flooding shown on the proposed roads is as a result of rainfall on grid (direct rainfall) modelling and these flows would be managed locally through a network of pits, pipes and overland flow paths and are therefore not representative of actual flow behaviour in these locations.

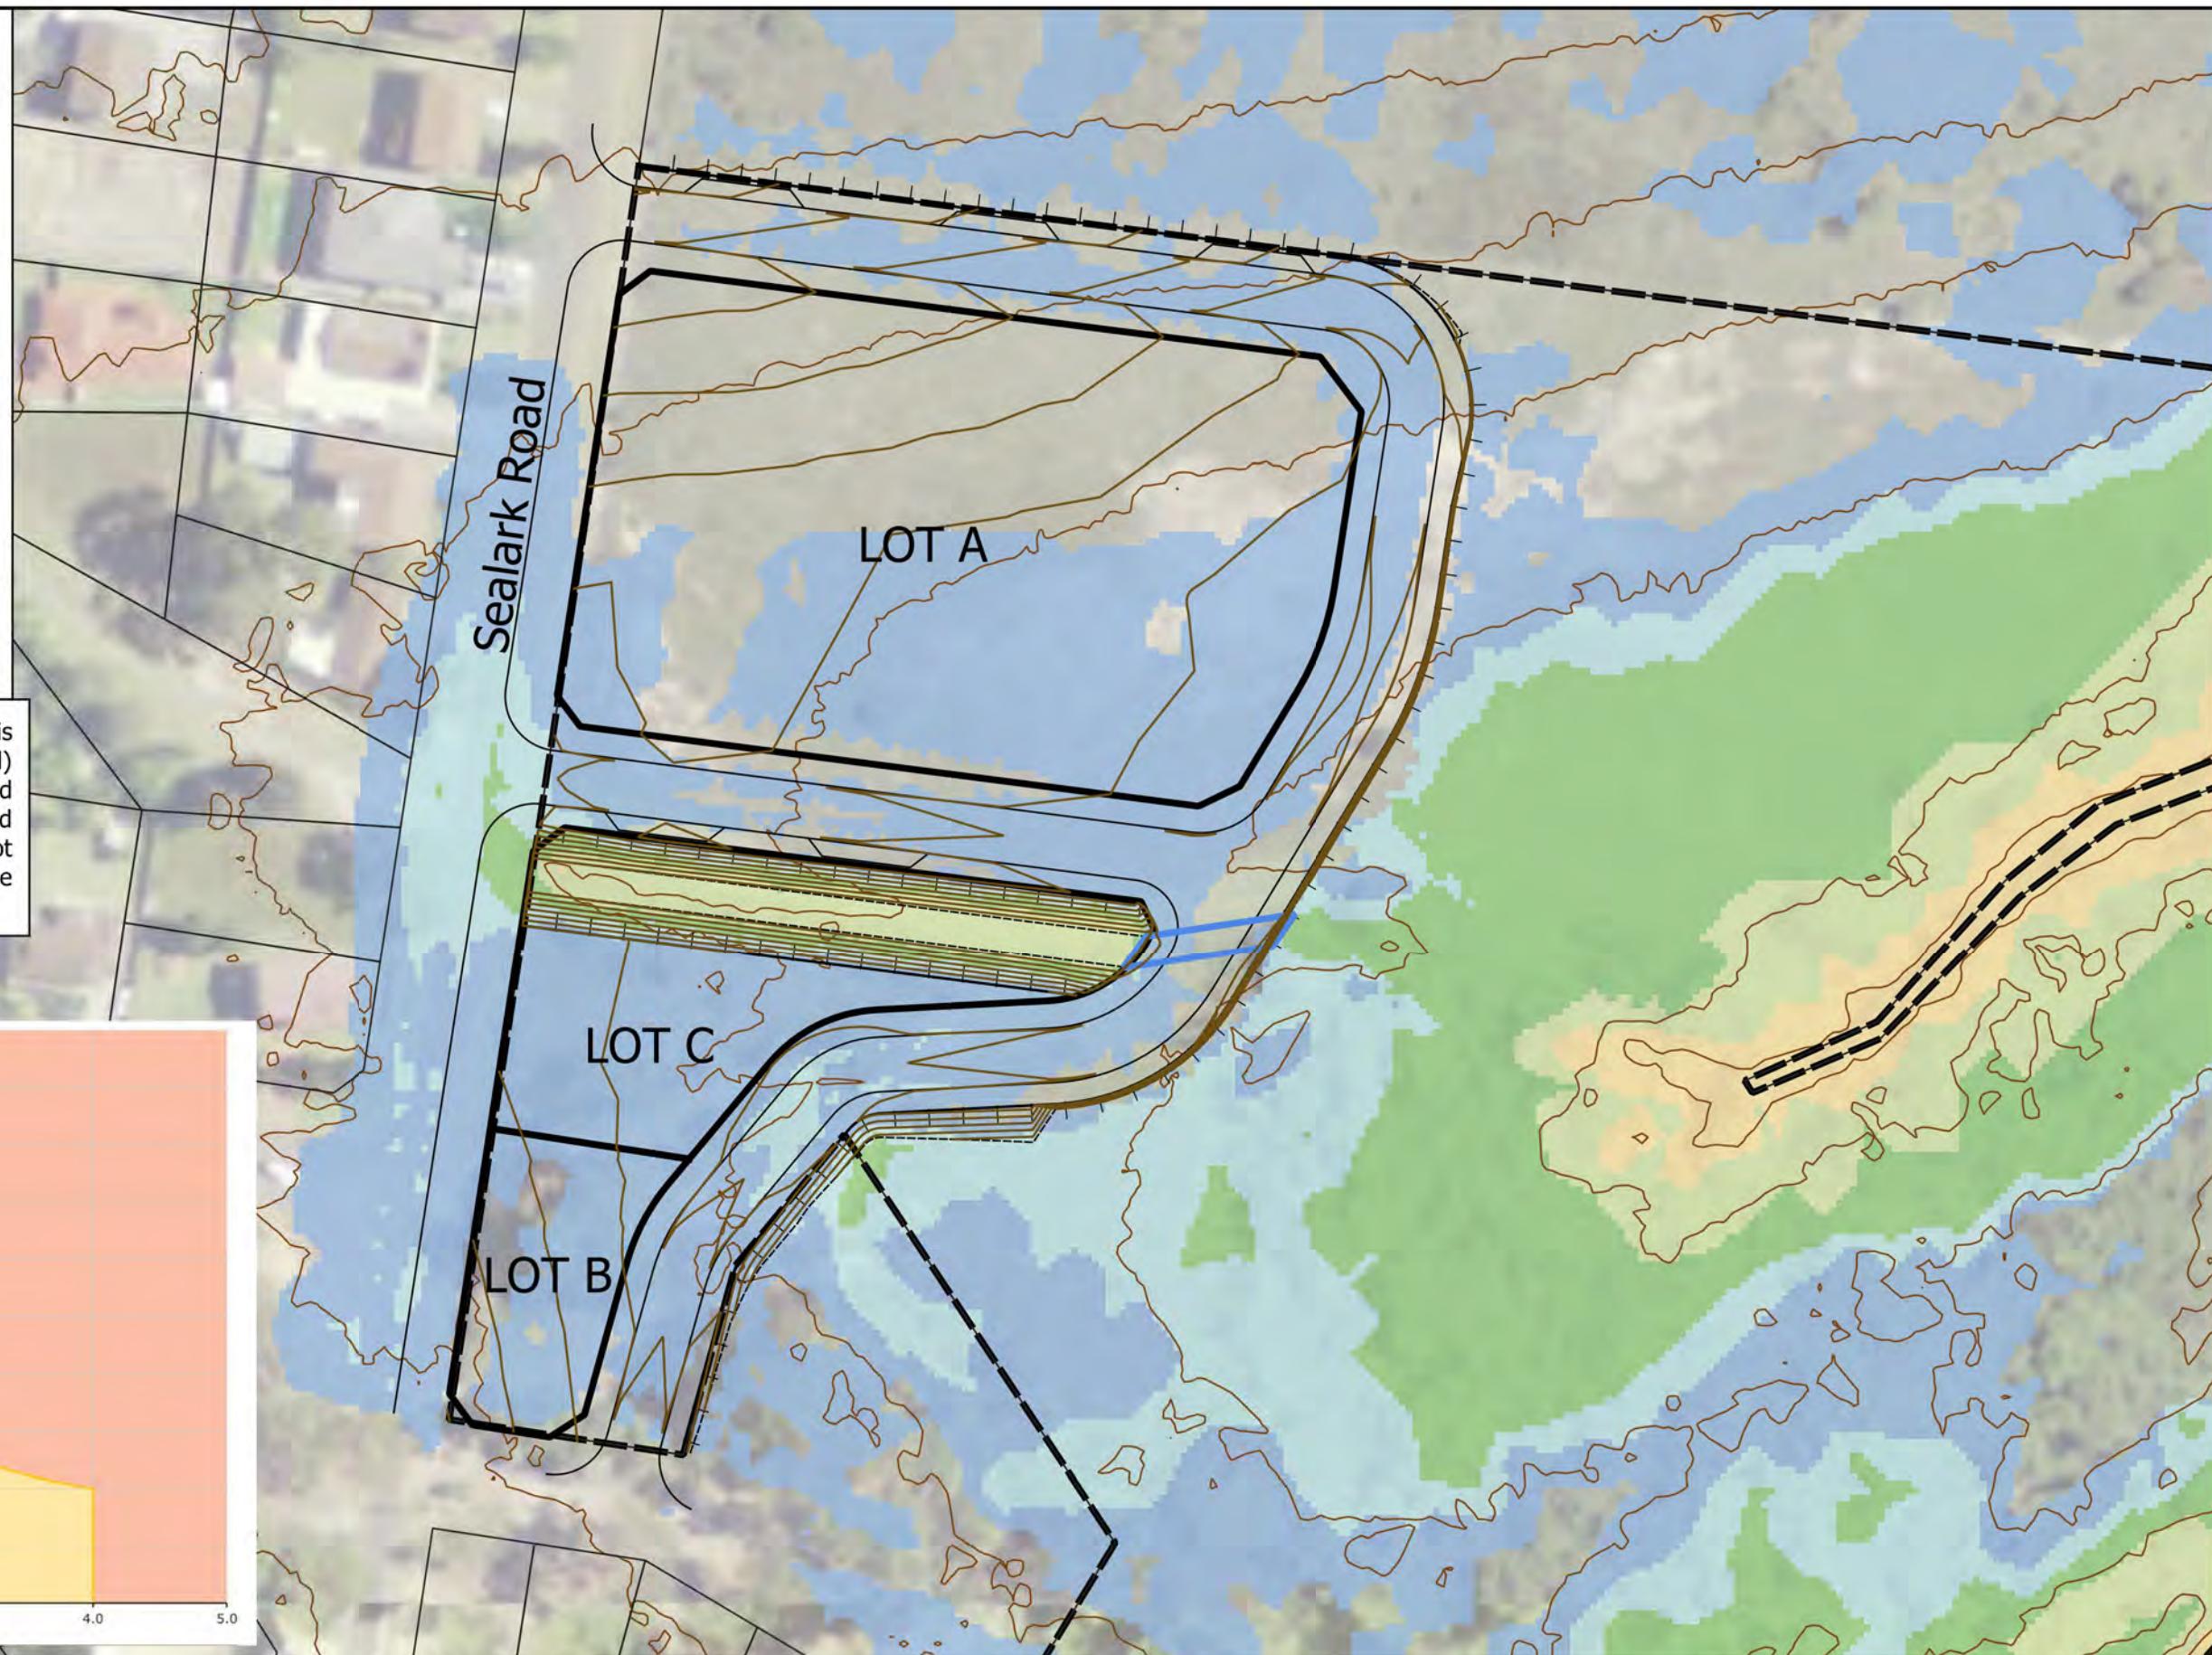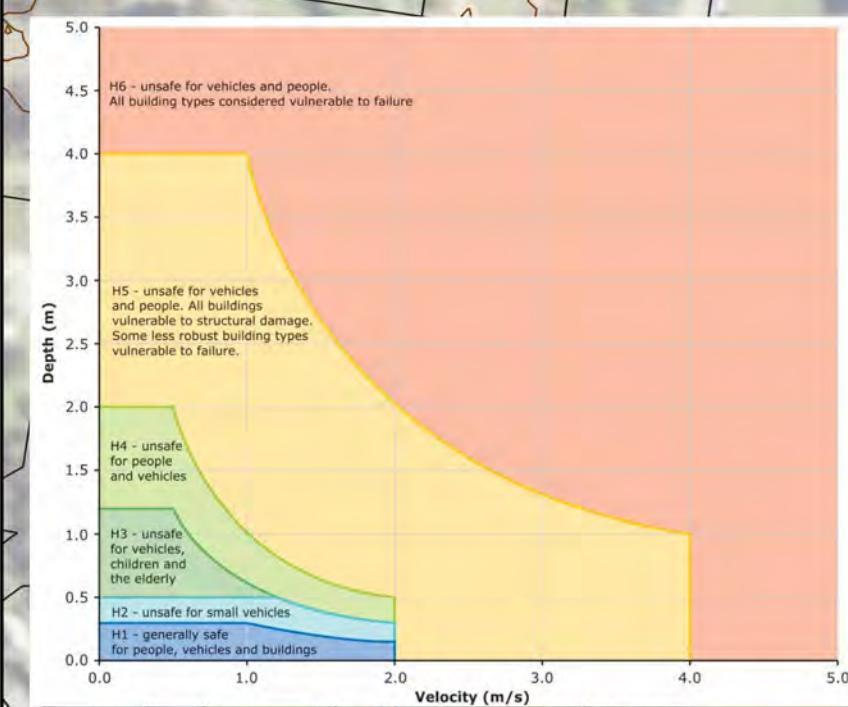

## Legend

- Subject Property
- Existing Surface Contours (1.0m)
- Proposed Boundaries
- Proposed Roads
- Proposed Top of Batter
- Proposed Bottom of Batter
- Proposed Surface Contours (0.25m)
- Proposed Culvert
- Change in Maximum Flood Level
  - < -800mm
  - 600mm to -800mm
  - 400mm to -600mm
  - 200mm to -400mm
  - 100mm to -200mm
  - 50mm to -100mm
  - 10mm to -50mm
  - 10mm to +10mm
  - +10mm to +50mm
  - +50mm to +100mm
  - +100mm to +200mm
  - +200mm to +400mm
  - +400mm to +600mm
  - +600mm to +800mm
  - >800mm
- Was Wet, Now Dry
- Was Dry, Now Wet

## Notes:

1. Flooding shown on the proposed roads is as a result of rainfall on grid (direct rainfall) modelling and these flows would be managed locally through a network of pits, pipes and overland flow paths and are therefore not representative of actual flow behaviour in these locations.
2. The change in flood level reflected on Lots A and B and the proposed road is primarily as a result of the change in the topography resulting from filling of the land.

