

PLANT SCHEDULE



| Symbol | Botanical Name         | Size    |
|--------|------------------------|---------|
| AO     | Agapanthus orientalis  | 150mm   |
| OT     | Cupressus torulosa     | 45litre |
| EM     | Eriostemon myoporoides | 200mm   |
| SR     | Strelitzia reginae     | 200mm   |

TURFED AREA

MURRAYA PANICULATA

MELALUECA STYPHELOIDES

CONCRETE PATHWAY

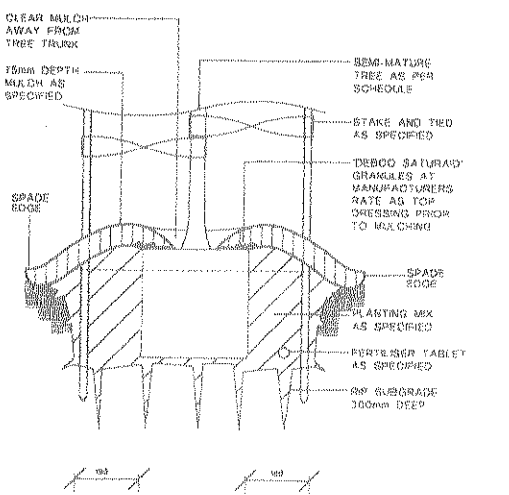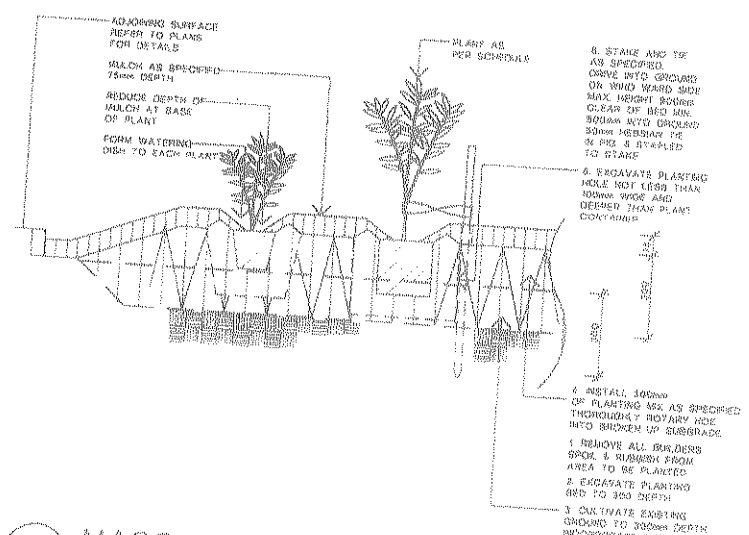

2 TREE PLANTING IN GRASS 1:20

3 MASS PLANTING BED- REFER TO DETAIL 3

Proposed Foundation Footprint  
Underground 6.1m x 6.1m

Proposed Tower Footprint  
3m Eq Triangle Set Out

LANDSCAPE MASTER PLAN

SCALE 1:100

SPECIFICATION NOTES

SERVICES

Before landscape work is commenced, the Landscape Contractor is to establish the position of all service lines and ensure free planting is carried out at least 3m away from these services. Service lines, vents and hydrants shall be left exposed and not covered by any landscape finishes (turfing, paving, garden beds etc.) Finish adjoining surfaces flush with pit lids.

PLANTING MIXTURE

Shall be homogenous blend of soil and additives in the following proportions:  
Imported Topsoil 50%  
Compost 30%  
D/W Sand 20%

MULCH

APPLICATION: Place mulch to the required depth, refer to drawings clear of plant stems, and rake to an even surface finishing 25mm below adjoining levels. Ensure mulch is watered in and tamped down during installation.

MULCH TYPE:

o Pine bark: From mature trees, graded in size from 15mm to 30mm, free from wood slivers. Dark brown in colour and texture.

COMPOST

o Shall be "Mixed Compost" as available from Dapto Sands and Supersols Pty Ltd, Tel: 02 4261 3844 or an approved equal.

PLANT MATERIAL

All plants supplied are to conform with those species listed in the Plant Schedule on the drawings. Generally plants shall be vigorous, well established, hardened off, of good form consistent with species or variety, not soft or forced, free from disease or insect pests with large healthy root systems and no evidence of having been restricted or damaged. Trees shall have a leading shoot, immediately reject dried out, damaged or unhealthy plant material before planting. All stock is to be container grown for a minimum of six (6) months prior to delivery to site.

FERTILISER

MASS PLANTING AREAS: Fertiliser shall be 'Nutricote' or approved equivalent in granule form intended for slow release of plant nutrients over a period of approximately nine months. Thoroughly mix fertiliser with planting mixture at the recommended rate, prior to installing plants.

TURF: Shall be Shirleys No. 17 or approved equal thoroughly mixed into the topsoil prior to placing turf.

TREES IN GRASS AND SUPER ADVANCED TREES: Pellets shall be in the form intended to uniformly release plant food elements for a period of approximately nine months equal to Shirleys Kokoi pellets, analysis 6.3:18:2.9. Kokoi pellets shall be placed at the time of planting to the base of the plant, 50mm minimum from the root ball at a rate of two pellets per 300mm of top growth to a maximum of 8 pellets per tree.

STAKING AND TYING

Stakes shall be straight hardwood, free from knots and twists, pointed at one end and sized according to size of plants to be staked.  
a. 5-15 litre size plant 1x1200x25x25mm  
b. 35-75 litre size plant 2x1500x38x38mm

Ties shall be 50mm wide hessian webbing or approved equivalent nailed or stapled to stake. Drive stakes a minimum one third of their length, avoiding damage to the root system, on the windward side of the plant.

|              |                     |
|--------------|---------------------|
| DRW NO:      | HBRTWR002.Rev1      |
| CREATED BY:  | William Webb        |
| DATE:        | 03/4/2010           |
| DESCRIPTION: | Site Landscape Plan |
| SCALE:       | 1:100               |

ISSUED FOR CONSTRUCTION