

2 EAST ELEVATION SCALE 1:200

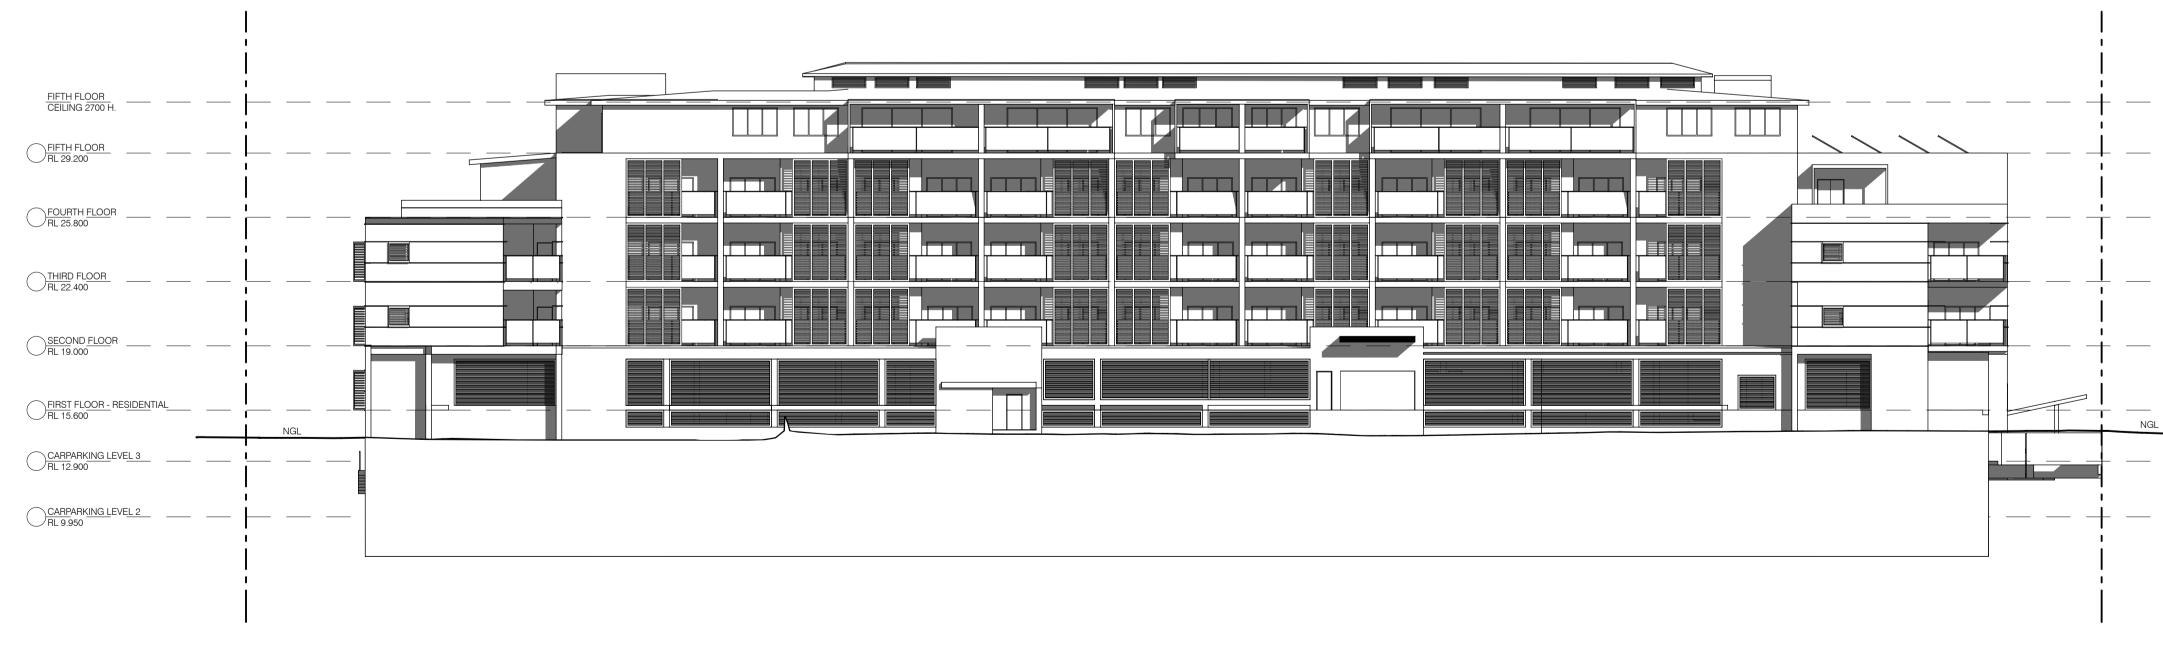

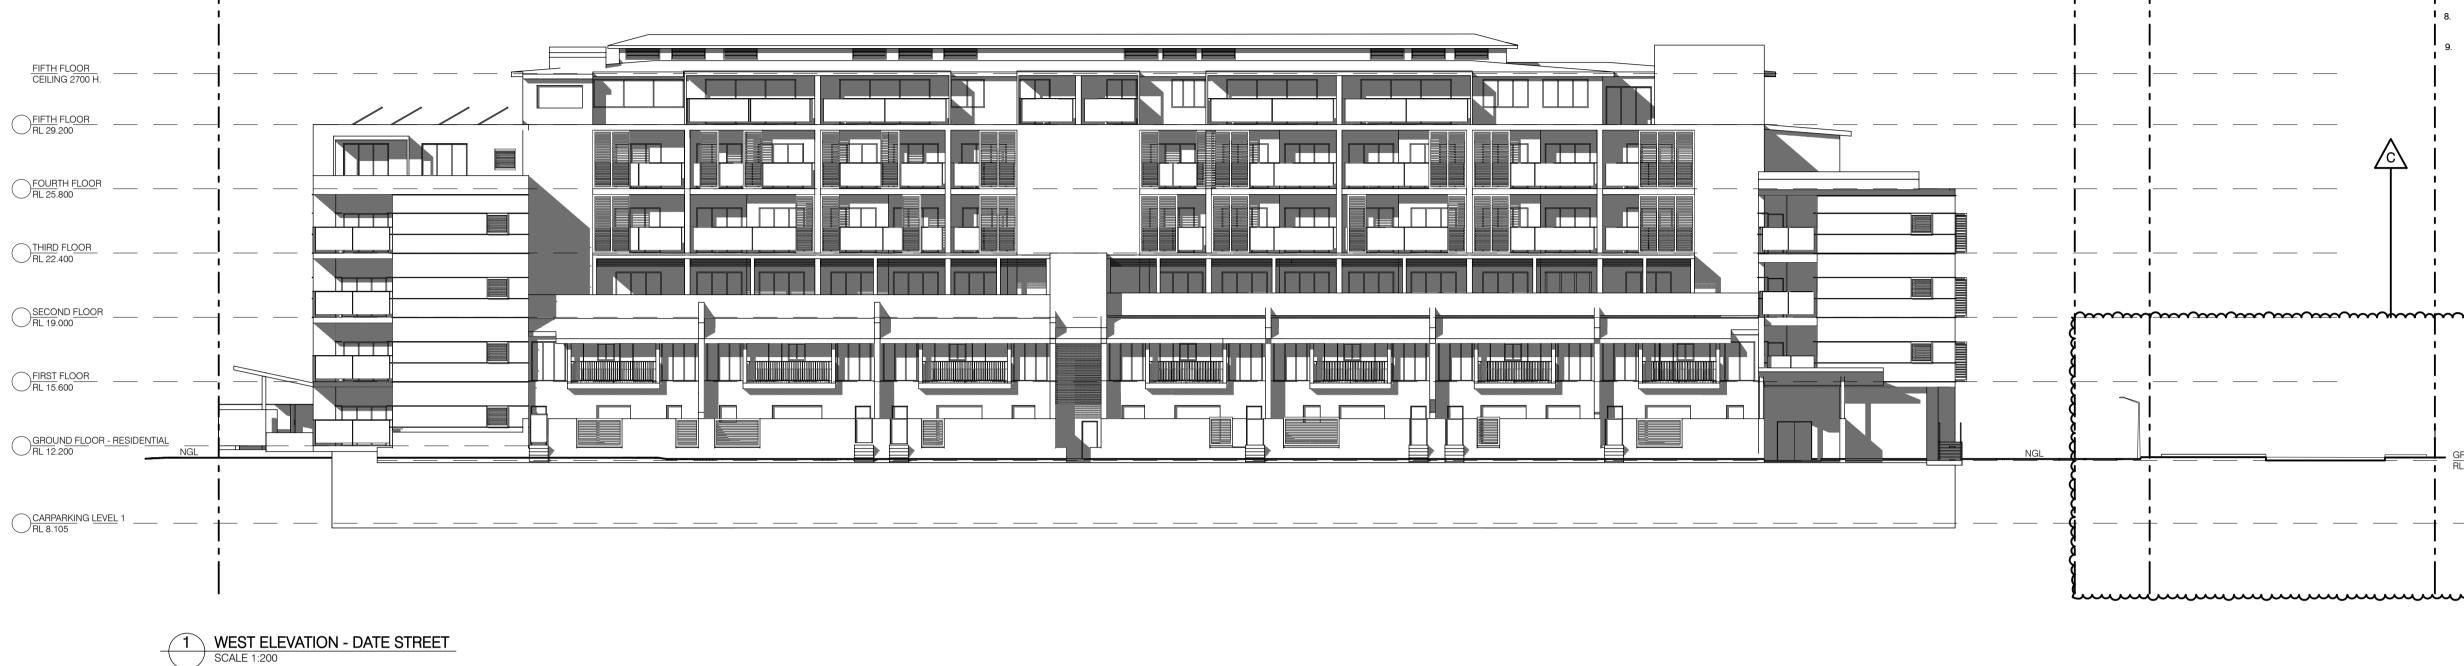

GENERAL NOTES SCHEDULE OF EXTERNAL MATERIALS 1. CHECK & VERIFY ALL DIMENSIONS ON SITE BEFORE COMMENCING WORK. 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH ALL OTHER EXTERNAL WALLS: GENERALLY: PAINTED RENDERED MASONRY CONTRACT DOCUMENTS, INCLUDING THOSE BY OTHER CONSULTANTS/ SUB-CONTRACTORS. FIFTH FLOOR & FIRST FLOOR OF TERRACES: LIGHTWEIGHT 3. ANY DISCREPANCIES AND/OR INCONSISTENCIES WITHIN THE DOCUMENTS CLADDING. COMPOSITE MATERIAL OF TWO PREFINISHED ARE TO BE REPORTED IMMEDIATELY TO THE ARCHITECT PRIOR TO THE ALUMINIUM COVER SHEETS AND POLYTHYLENE CORE. COMMENCEMENT OF WORK. EXPOSED CONCRETE COLUMNS: PAINTED 4. DO NOT SCALE OFF THE DRAWINGS. FIGURED DIMENSIONS ONLY ARE TO BE USED. ALL DIMENSIONS ARE TO BE VERIFIED ON SITE PRIOR TO PREFINISHED ZINCALUME SHEET ROOF COLORBOND FINISH COMMENCEMENT OF ANY WORKS. PREFINISHED ALUMINIUM 5. STAIRS AND RAMPS ARE SHOWN INDICATIVELY. CONTRACTOR IS TO CALCULATE & DETAIL IN ACCORDANCE. PREFINISHED ALUMINIUM FRAMES WITH GLASS INFILL 6. ALL EXIT DOORS AND DOORS IN PATH OF TRAVEL TO EXITS ARE TO BE GENERALLY: PREFINISHED ALUMINIUM LOUVRED SCREEN CAPABLE OF BEING OPERATED AT ALL TIMES FROM THE SIDE FACING A PERSON SEEKING EGRESS FROM THE BUILDING WITH A SINGLE HANDED CARPARK: GALVANIZED MILD STEEL MESH DOWNWARD ACTION OR PUSHING ACTION ON A SINGLE DEVICE WITHOUT THE USE OF A KEY AND LOCATED BETWEEN 900mm AND 1200mm ABOVE THE TERRACES: PREFINISHED SHEET METAL SLATTED SCREENS FLOOR LEVEL, IN ACCORDANCE WITH CLAUSE D2.21 OF THE BUILDING CODE OF AUSTRALIA. 7. MECHANICAL VENTILATION SYSTEM TO COMPLY WITH AS-1668.2 AND AS-3666. EXHAUST AIR OUTLETS NOT TO BE LOCATED CLOSER THAN 6m TO FRESH AIR INLETS. **I** 8. DISABLED SANITARY FACILITY TO COMPLY IN ALL ASPECTS TO AS-1428.1. DISABLED CAR SPACES TO COMPLY IN ALL ASPECTS TO AS-2890.1 & AS-2890.5. ALL GLAZING TO COMPLY WITH AS-1288. /c\ UND FLOOR - CARPARKING LEVEL 3

ROOF: WINDOWS: BALUSTRADES: SCREENS:

С	REVISED CAR PARKING & SIGNAGE	GM	30/07/2012	
В	REVISED LANSCAPE, COMMUNITY ROOM & ROOF	GM	18/06/2012	
А	AMENDED ISSUE FOR DA	GM	11/05/2012	
AMENDMENTS				

DA EDITION

BESIGNPARTNERSHIP

21 JUSFRUTE DRIVE P.O.BOX 6325 WEST GOSFORD NSW 2250 TELEPHONE: 02 43 24 8554

EMAIL: info@thedesignpartnership.com.au

NOMINATED ARCHITECT - STEPHEN MOORE (ARCHITECT REG. No. 3574) © This drawing and the design shown hereon is the property of The Design Partnership and shall not reproduced in part or in whole in any form without the written permission of The Design Partnership at only by the client of The Design Partnership for the project for which it was provided.

Adamstown RSL Development Location

Lots A & B in DP 362716, Lot 7 in DP 668223 & Lot 1 in DP 1002163, Brunker Road, Adamstown NSW, 2289 Client

Adamstown RSL

Drawing

Elevations Sheet 1

Date: 30.07.12	Project No: 11.00	03 Stage:	DA	
Sheet Size: A1	Drawing No: DA20	00 Issue: (C 06	
				SCALE 1:200
]			
0	10	1		20m