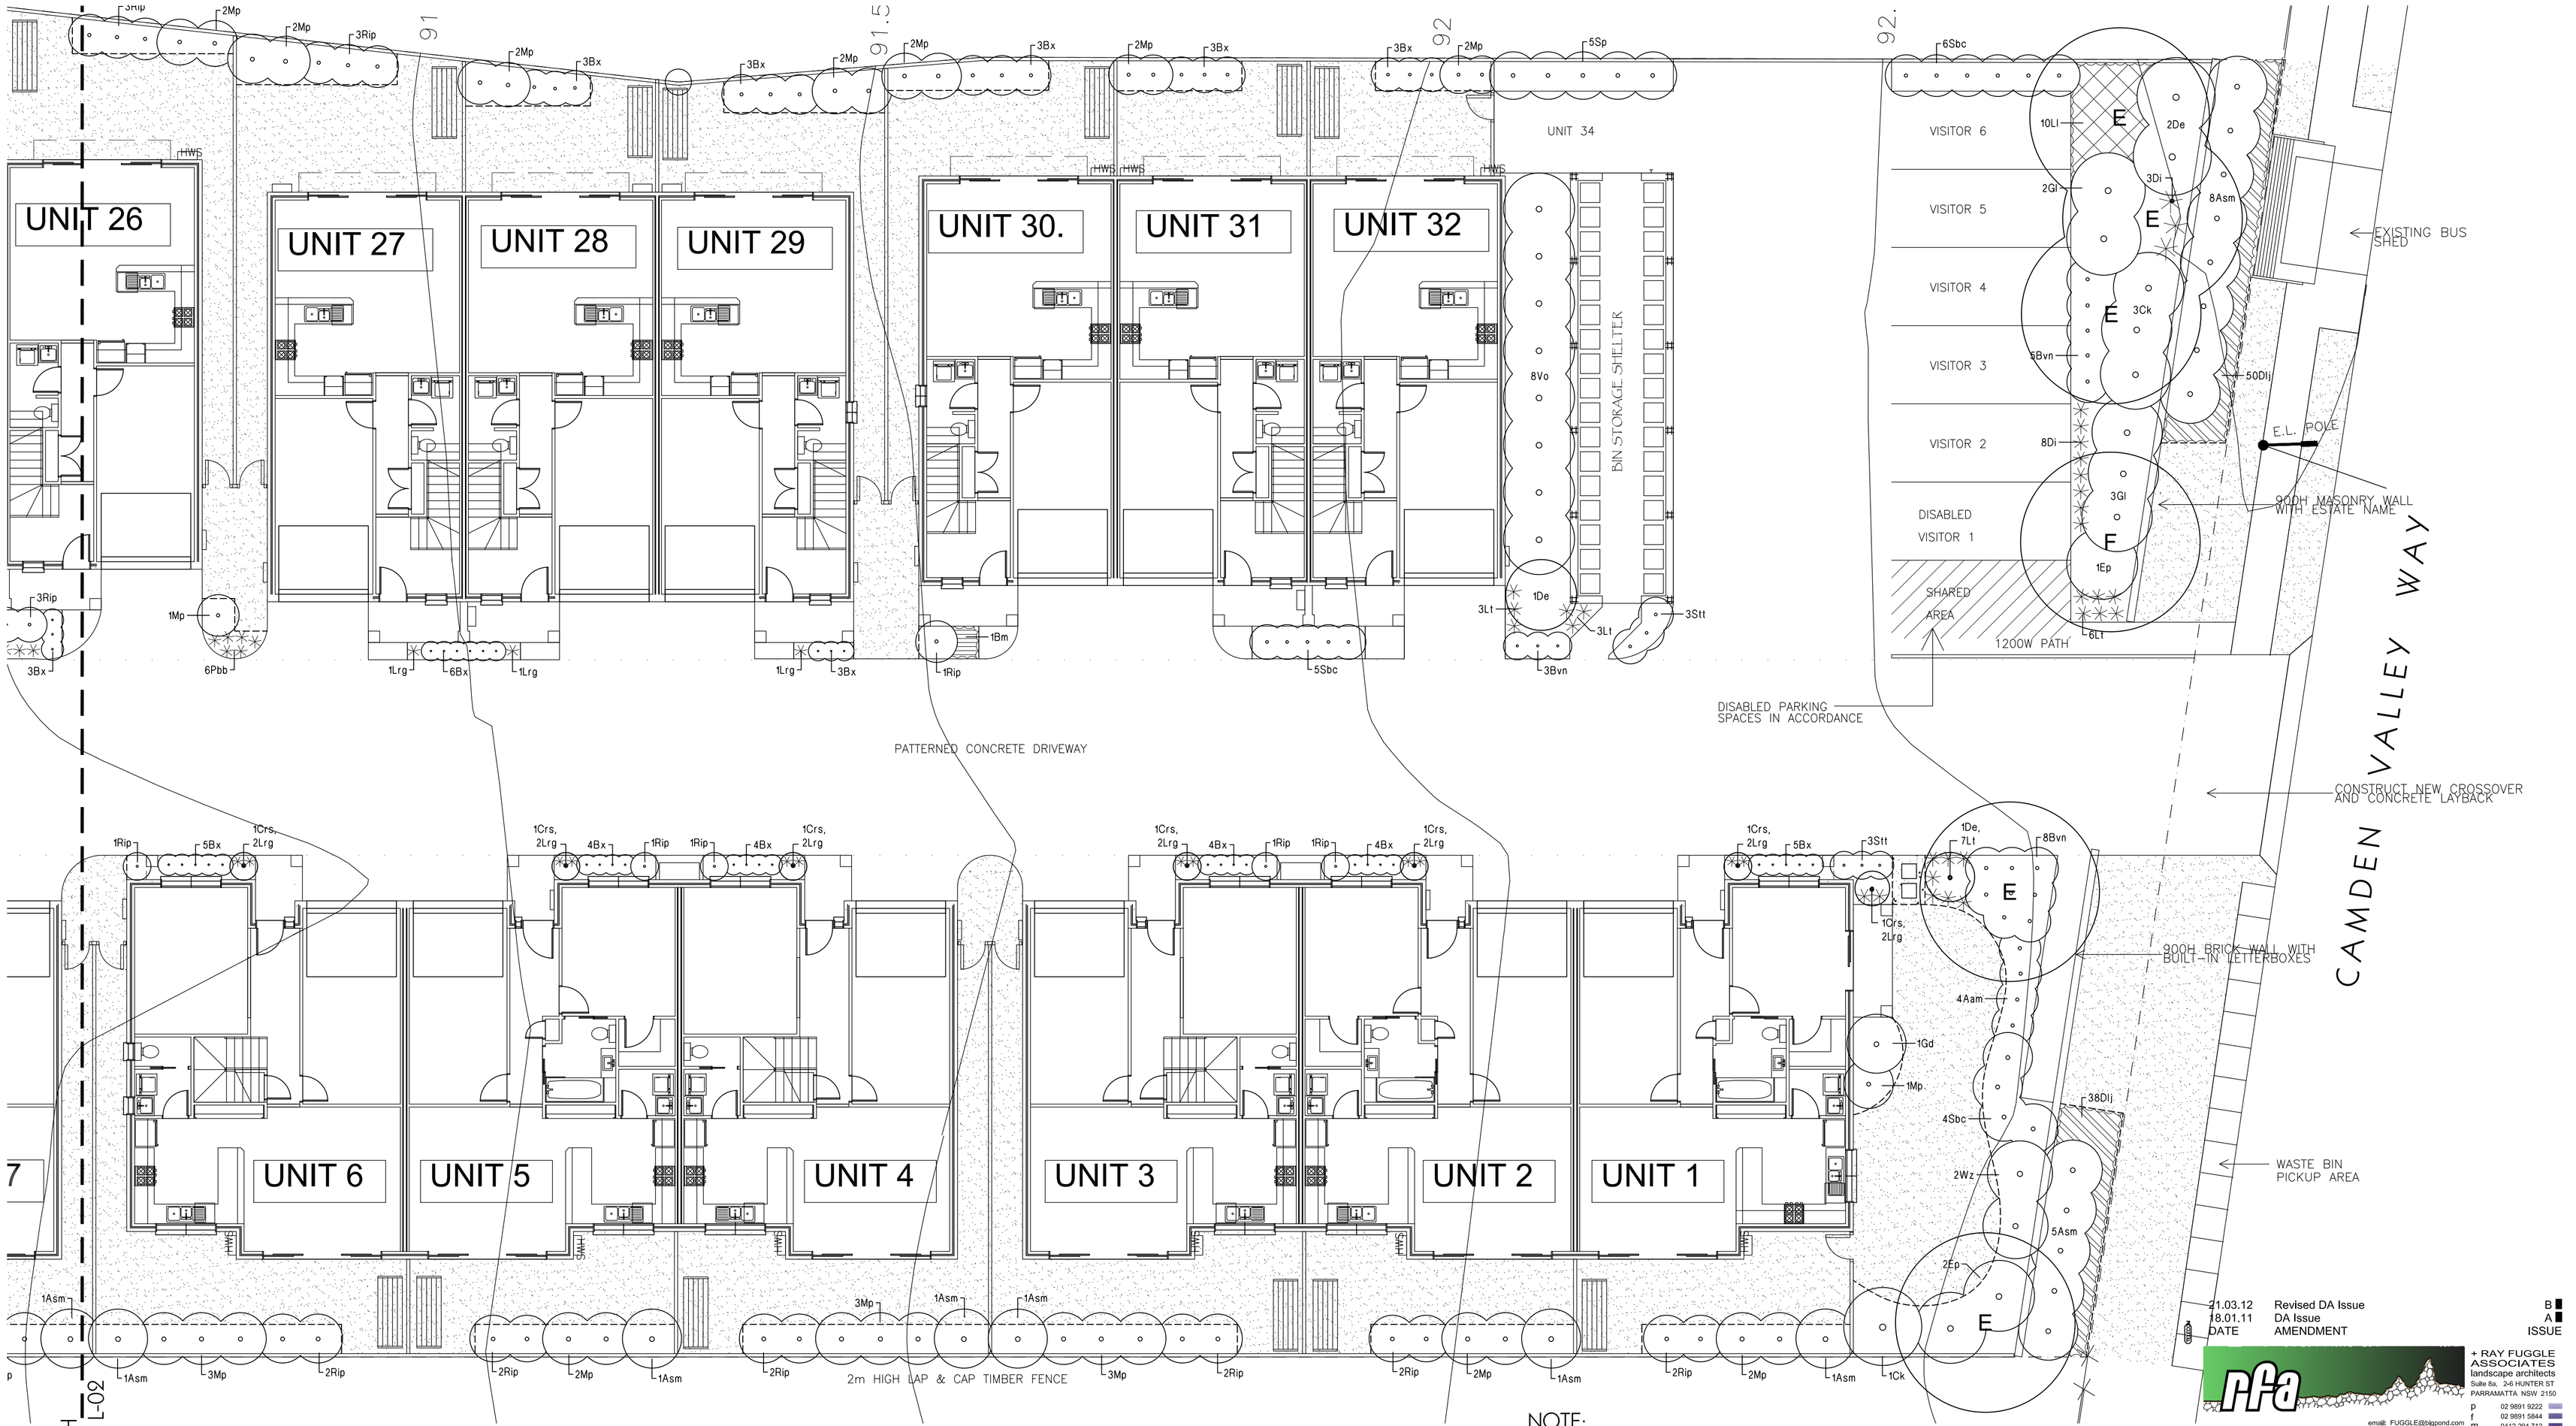

LANDSCAPE PLAN 1 : 100

NOTE:
FOR PLANT SCHEDULE
REFER TO DRAWING NO. L-03,
FOR ALL DETAILS REFER TO
DRAWING NO. L-02 & L-03

LEGEND

turf
Excavate / grade all areas to be turfed to 120mm below required finished levels. Do not excavate within 1500mm of the trunk of any existing tree to be retained. Ensure that all surface water runoff is directed towards inlet pits, kerbs etc.. and away from buildings. Ensure that no ponding will occur. Rip the subgrade to 150mm. Install 100mm depth of imported topsoil. Just prior to spreading the turf, spread "Shirley's No. 17 lawn fertilizer" over the topsoil at the recommended rate. Lay "Kikuyu" turf rolls closely butted. Fill and small gaps with topsoil. Water thoroughly.

paraline
Clothes drying area

brick garden edging
Lay a single coarse of paving bricks in a mortar haunch (200mm wide and 100mm deep). The edges are to be laid in even curves and straight lines as shown on the plan. Where tight curves are shown use half bricks to show a more even curve. The top of the edges to finish flush with the adjacent turf and mulch levels.

fencing
Proposed 1800mm high lapped and capped timber paling fence
(to be selected by owner)



LEGEND

planting areas
Ensure that the mass planting areas have been excavated to 300mm below finished levels. Rip to a further depth of 150mm. Supply and install 300mm soil mix. Soil mix to comprise of one part approved compost to three parts topsoil. Topsoil shall be either imported topsoil or stockpiled site topsoil (if suitable ie: No clay). Install 75mm depth of selected mulch.

maintenance:
All landscape works are to be maintained for a period of three months from the date of practical completion. This includes all watering, weeding, spraying and re-mulching necessary to achieve vigorous growth. Any defects which arise during this period are to be rectified immediately. Any plants or areas of turf which fail during this period are to be replaced at no additional cost.

fencing:
For all fencing types and materials refer to the Architects plans.

DATE	AMENDMENT	ISSUE
21.03.12	Revised DA Issue	B
18.01.11	DA Issue	A

+ RAY FUGGLE ASSOCIATES
landscape architects
Suite 8a, 2-6 HUNTER ST
PARRAMATTA NSW 2150
p 02 9891 9222
f 02 9891 5844
email: FUGGLE@bigpond.com m 0412 294 712
abn 76 003 773 939

Project:
PROPOSED MULTI-UNIT DEVELOPMENT

No. 263 Camden Valley Way,
NARELLAN

Client:
Mr T Fitzpatrick

Drawing Title:
LANDSCAPE PLAN

issue: rev. DA	date: 21/03/12	issue no: B	
file name: c:\		drawing No:	
drawn: HK	scale: 1:100 @ A1		L-01/3
checked: RF	project No: 2895b		