

A. General Conditions

A.1 Conditions

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 (“the *Act*”) and the provisions of the Environmental Planning and Assessment Regulation 2000 (“the *Regulation*”) such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the Act.

A.2 Definitions

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act* 1987 as in force at the date of consent.

Applicant means the applicant for this Consent.

Approved Plans mean the plans referenced by this consent as amended by conditions of this consent.

AS or **AS/NZS** means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

BCA means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

Stormwater Drainage System means all works, facilities and documentation relating to:

- The collection of stormwater,
- The retention of stormwater,
- The reuse of stormwater,
- The detention of stormwater,
- The controlled release of stormwater; and
- Connections to easements and public stormwater systems.

Owner means the owner of the *site* and successors in title to the *site*.

~~**PCA** means the *Principal Certifying Authority* under the *Act*.~~

Principal Contractor has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

Professional Engineer has the same meaning as in the *BCA*.

Public Place has the same meaning as in the *Local Government Act* 1993.

Road has the same meaning as in the *Roads Act* 1993.

Site means the land being developed subject to this consent.

Work for the purposes of this consent means:

- the use of land in connection with development,
- the subdivision of land,
- the erection of a building,
- the carrying out of any work,
- the use of any site crane, machine, article, material, or thing,
- the storage of waste, materials, site crane, machine, article, material, or thing,
- the demolition of a building,
- the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- the delivery to or removal from the *site* of any machine, article, material, or thing, or
- the occupation of the *site* by any person unless authorised by an *occupation certificate*.

Note: Interpretation of Conditions - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.

A.3 Reference to Certain Terms

As this is Crown Development:

- Any reference to a Construction Certificate (CC) in these conditions is a reference to construction documentation;
- Any reference to an Occupation Certificate (OC) in these conditions is a reference to the occupation of the development; and
- Any reference to the Certifying Authority is a reference to an accredited certifier.

A.3A.4 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans to which is affixed a Council stamp “**Approved DA Plans**” and supporting documents listed below as submitted by the Applicant **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
DA1101A, 1102A, 2000B-2004B, 2010B, 2020B, 2030B, 3000B-3002B, 3100B, 3101B & 3102B, 4000A & 4100A	Architectural plans	Group GSA P/L	18/06/2015 (A) 03/07/2015 (B)
DA4000A & 4100A	Internal and external finishes schedules	Group GSA P/L	18/06/2015
L1001B & L1002B	Landscape plans	Group GSA P/L	18/06/2015
HSW 01, 02 & 03 Issue F	Stormwater disposal concept plans	Birzulis Assoc	August 2015
Project 84678.00	Geotechnical report	Douglas Partners	April 2015
Traffic and Transport Assessment	Traffic and Transport Assessment	EMM	16 June 2015
20150392.1/2807A/RO/BW	Construction Noise &	Acoustic Logic	28 July 2015

	Vibration Management Plan		
20150392.1/2503A/RO/BW	Acoustic Report	Acoustic Logic	25/03/2015
Arboricultural Appraisal and Root Investigation	Arboricultural appraisal and root investigation	Naturally Trees	1 September 2015
Arboricultural Impact Assessments	Arboricultural impact assessments	Bluegum tree care and consultancy / ACS Environmental	June 2015/ September 2015

If there are any inconsistencies between the documents referenced in the above table and the stamped approved DA Plans issued by Council, the stamped approved DA Plans prevail.

Note: Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

Note: These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the Act modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)

A.4A.5 Tree Preservation & Approved Landscaping Works

All landscape works shall be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

a) The following trees shall be retained

- Trees on Council Land

Council Ref No.	Species	Location	Dimension (metres)	Tree Value
A	<i>Liquidamber styraciflua</i> (Liquidambar)	Road reserve - Birriga Road - south	15 height x 20 crown spread	\$18,000
C	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)	Road reserve - Birriga Road	20 height x 20 crown spread	\$50,000

Note: The tree/s required to be retained should appear coloured green on the construction certificate plans.

b) The following trees may be removed:

Council Ref No.	Species	Location	Dimension (metres)
A	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)	Road reserve - Birriga Road	20 height x 20 crown spread
1	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)	Road reserve - Birriga Road	20 height x 20 crown spread
2	<i>Liquidamber styraciflua</i> (Liquidambar)	Road reserve - Birriga Road - north	20 height x 20 crown spread
3	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)	Within School - Northern area	20 height x 20 crown spread
4	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)	Within School - Northern area	20 height x 20 crown spread
5	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)	Within School - Northern area	20 height x 20 crown spread
6	<i>Ficus rubiginosa</i> (Port Jackson Fig)	Bellevue Park northern boundary	20 height x 20 crown spread

Note: Tree/s to be removed shall appear coloured red on the construction certificate plans.

Comment [A1]: No longer require removal

A.5A.6 Ancillary Aspect of the Development (s80A(2) of the Act)

The owner must procure the repair, replacement or rebuilding of all infrastructure damaged as a result of this consent. This may include road, pavement, kerb, gutter, footway and footpaths adjoining the site ~~or damaged as a result of work under this consent or as a consequence of work under this consent~~. Such work must be undertaken to Council's satisfaction in accordance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated February 2012 unless expressly provided otherwise by these conditions at the *owner's* expense.

Note: This condition does not affect the *principal contractor's* or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs.

A.6A.7 Ausgrid's requirements

The developer shall make a formal submission to Ausgrid by means of a duly completed Preliminary Enquiry and/ or Connection Application form, to allow Ausgrid to determine the method of electrical supply for the development. In general, works to be considered by Ausgrid include, but are not limited to, the following:

- Changes in electrical load requirements
- Changes to Ausgrid's infrastructure (ie. asset relocations, decommissioning substations etc.)
- Works affecting Ausgrid's easements, leases and/ or right of ways
- Changing the gradients of any roads or paths
- Changing the level of roads or foot paths
- Widening or narrowing of roads
- Closing roads or laneways to vehicles
- In all cases Ausgrid is to have 24 hour access to all its assets

The developer is to ensure that the proposed works do not contravene Ausgrid's technical standards and statutory requirements, in regards to the safe and reliable operation and maintenance of Ausgrid's network.

B. Conditions which must be satisfied prior to the demolition of any building or construction

B.1 Construction Certificate required prior to any demolition

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

Note: See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

B.2 Establishment of Tree Protection Zones (TPZ)

Tree Protection Zones shall be established for all trees to be retained and in accordance with Section 4 of the *Australian Standard Protection of Trees on Development Sites* (AS 4970- 2009). Tree protection zones must also comply with the following requirements;

- a) Trunk protection shall be installed around the trunks of the following trees:

Council Ref No.	Species
A	<i>Liquidamber styraciflua</i> (Liquidambar)
C	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)

Trunk protection shall consist of a padding material such as hessian or thick carpet underlay wrapped around the trunk. Hardwood planks (50mm x100mm or similar) shall be placed over the padding and around the trunk of the tree at 150mm centres. The planks shall be secured with 8 gauge wire at 300mm spacing. Trunk protection shall extend a minimum height of 2 metres or to the maximum possible length permitted by the first branches.

- d) A sign identifying the Tree Protection Zone shall be erected on each side of the protection fence indicating the existence of a TPZ. Signage must be visible from within the development site.
- e) No excavation, construction activity, grade changes, storage of materials, stockpiling, siting of works sheds, preparation of mixes or cleaning of tools is permitted within Tree Protection Zones, unless specified in Condition B.2 of this consent shall be undertaken within 8m of the base of these trees.
- f) All site personnel and contractors must be made aware of all tree protection requirements associated with these conditions of consent.
- g) The project arborist shall provide written certification of compliance with the above condition.

B.3 Demolition and Construction Management Plan

A Demolition and Construction Management Plan in relation to existing trees on/adjacent the subject site must be prepared as part of the Construction Certificate. The plan must consider and make allowance for all construction operations which will be undertaken within the vicinity of trees to be retained. In particular the plan is to include:

- a) Drawings and method statement showing details and the location of hoarding and scaffold and any pruning required to accommodate the hoarding and scaffolding;
- b) The movement and positioning of heavy machinery, lifting cranes, pier drilling gantry etc.;
- c) Site construction access, temporary crossings and movement corridors on the site defined;
- d) Contractors car parking;
- e) Phasing of construction works;

- f) The space needed for all foundation excavations and construction works;
- g) All changes in ground level;
- h) Space for site sheds and other temporary structures such as toilets;
- i) Space for sorting and storing materials (short or long term), spoil and fuel and the mixing of cement and concrete; and
- j) The effects of slope on the movement of potentially harmful liquid spillages towards or into tree protection areas.

B.4 Arborists Documentation and Compliance Checklist

The site arborist shall provide written certification that all tree protection measures and construction techniques relevant to this consent have been complied with. Documentation for each site visit shall include:

- A record of the condition of trees to be retained prior to and throughout development
- Recommended actions to improve site conditions and rectification of non-compliance
- Recommendations for future works which may impact the trees

All compliance certification documents shall be kept on site by the Site Foreman.

As a minimum the following intervals of site inspections must be made:

Stage of arboricultural inspection	Compliance documentation and photos shall be included
Installation of tree protection fencing	Compliance with tree protection measures
Prior to the issue of a Final Occupation Certificate	Supervise the dismantling of tree protection measures

Inspections and compliance documentation shall be made by an arborist with AQF Level 5 qualifications.

Additional site visits shall be made when required by site arborist and/or site foreman for ongoing monitoring/supervisory work.

B.5 Identification of Hazardous Material

In accordance with Australian Standard AS2601- 'The Demolition of Structures' the owner shall identify all hazardous substances located on the site including asbestos, Polychlorinated biphenyls (PCBs), lead paint, underground storage tanks, chemicals, etc. per Clause 1.6.1 of the Standard. In this regard, **prior to the commencement of any work**, Council shall be provided with a written report prepared by a suitably qualified competent person detailing;

- all hazardous materials identified on the site;
- the specific location of all hazardous materials identified;
- whether the hazardous materials are to be removed from the site as part of the works to be undertaken; and
- safety measures to be put in place.

Note: This condition is imposed to protect the health and safety of all persons while works are being undertaken and to ensure all safety measures have been identified and are in place to protect all parties in the immediate vicinity of the site.

B.6 Noise Control Objectives during Demolition Works

To assist in managing noise impacts from demolition work on residences and other sensitive land uses, it is recommended that the *NSW Department of Environment & Climate Change: Construction Noise Guideline* be applied to the site to provide a quantitative and qualitative assessment for evaluating performance and compliance of resultant noise from demolition work. In particular, reference is made to Table 2 of the *NSW Department of Environment & Climate Change: Construction Noise Guideline* which sets out management levels for noise at residences and other sensitive land uses.

B.7 Public Road Assets prior to any work/demolition

To clarify the condition of the existing public infrastructure prior to the commencement of any development (including prior to any demolition), the *Applicant* or *Owner* must submit to Council a full record of the condition of the Public Road infrastructure adjacent to the development site.

The report must be submitted to Council prior to the commencement of any work and include photographs showing current condition and any existing damage fronting and adjoining the site to the:

- road pavement,
- kerb and gutter,
- footway including footpath pavement and driveways,
- retaining walls within the footway or road, and
- drainage structures/pits.

The reports are to be supplied in both paper copy and electronic format in Word. Photographs are to be in colour, digital and date stamped. If the required report is not submitted then Council will assume there was no damage to any infrastructure in the immediate vicinity of the site prior to the commencement of any work under this consent.

Note: If the Applicant or Owner fails to submit the Asset condition report required by this condition and damage is occasioned to public assets adjoining the site, Council will deduct from security any costs associated with remedying, repairing or replacing damaged public infrastructure. Nothing in this condition prevents Council making any claim against security held for this purpose

C. Conditions which must be satisfied prior to the issue of any construction certificate

C.1 Tree Management Plan

The *Construction Certificate* plans and specifications required by clause 139 of the *Regulation* must show the following information:

- a) Trees to be numbered in accordance with these conditions:

- shaded green where required to be retained and protected
 - shaded red where authorised to be removed
 - shaded yellow where required to be transplanted
 - shaded blue where required to be pruned
- b) References to applicable tree management plan, arborists report, transplant method statement or bush regeneration management plan.

This plan shall be kept on site until the issue of the final occupation certificate.

C.2 Acoustic Certification of Mechanical Plant & Equipment

Comment [A2]: Do not have any mechanical plant

~~The Construction Certificate plans and specification required to be submitted pursuant to clause 139 of the Regulation must be accompanied by a certificate from a professional engineer (acoustic engineer) certifying that the noise level measured at any boundary of the site at any time while the proposed mechanical plant and equipment is operating will not exceed the background noise level. Where noise sensitive receivers are located within the site, the noise level is measured from the nearest strata, stratum or community title land and must not exceed background noise level, at any time.~~

~~The background noise level is the underlying level present in the ambient noise, excluding the subject noise source, when extraneous noise is removed. For assessment purposes the background noise level is the L_{A90, 15 minute} level measured by a sound level meter.~~

~~Where sound attenuation is required this must be detailed.~~

~~**Note:** Further information including lists of Acoustic Engineers can be obtained from:~~

- ~~1. Australian Acoustical Society — professional society of noise related professionals (www.acoustics.asn.au/index.php).~~
- ~~2. Association of Australian Acoustical Consultants — professional society of noise related professionals (www.aaac.org.au).~~

C.3C.2 Payment of Long Service Levy, Security, Contributions and Fees

The certifying authority must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees prior to the issue of a *construction certificate, subdivision certificate or occupation certificate*, as will apply.

Description	Amount	Indexed	Council Fee Code
LONG SERVICE LEVY			
under Building and Construction Industry Long Service Payments Act 1986			
Long Service Levy http://www.longservice.nsw.gov.au/bci/levy/other-information/levy-calculator	Contact LSL Corporation or use online calculator	No	
SECURITY			
under section 80A(6) of the Environmental Planning and Assessment Act 1979			
Property Damage Security Deposit -making good any damage caused to any property of the Council	\$295,424	No	T113
Tree Damage Security Deposit – Making good any damage caused to any public tree	\$68,000	No	T600

as a consequence of the doing of anything to which the consent relates.			
DEVELOPMENT LEVY under Woollahra Section 94A Development Contributions Plan 2011 This plan may be inspected at Woollahra Council or downloaded at www.woollahra.nsw.gov.au .			
Development Levy (Section 94A)	\$128,606 + Index Amount	Yes, quarterly	T96
INSPECTION FEES under Section 608 of the Local Government Act 1993			
Public Road/Footpath Infrastructure Inspection Fee	\$430	No	T45
Security Administration Fee	\$185	No	T16
Public Tree Management Inspection Fee	\$180	No	T95
TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES	\$492,825 plus any relevant indexed amounts and long service levy		

Building and Construction Industry Long Service Payment

The Long Service Levy under Section 34 of the *Building and Construction Industry Long Service Payment Act, 1986*, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*. The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or the Long Service Payments Corporation on 13 14 41.

How must the payments be made?

Payments must be made by:

- Cash deposit with Council,
- Credit card payment with Council, or
- Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- The guarantee is by an Australian bank for the amount of the total outstanding contribution;
- The bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first [NOTE: a time limited bank guarantee or a bank guarantee with an expiry date is not acceptable];
- The bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent;
- The bank guarantee is lodged with the Council prior to the issue of the construction certificate; and
- The bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

How will the section 94A levy be indexed?

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2011 sets out the formula and index to be used in adjusting the s.94A levy.

Do you need HELP indexing the levy?

Please contact our customer service officers. Failure to correctly calculate the adjusted development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

Deferred or periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2011

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- The reasons given;
- Whether any prejudice will be caused to the community deriving benefit from the public facilities;
- Whether any prejudice will be caused to the efficacy and operation of the plan; and
- Whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- The guarantee is by an Australian bank for the amount of the total outstanding contribution;
- The bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first [NOTE: a time limited bank guarantee or a bank guarantee with an expiry date is not acceptable];
- The bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent;
- The bank guarantee is lodged with the Council prior to the issue of the construction certificate; and
- The bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or periodic payment of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

~~C.4~~C.3 Soil and Water Management Plan – Submission & Approval

The *principal contractor* or *owner builder* must submit to the *Certifying Authority* a soil and water management plan complying with:

- a) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence. The *Certifying Authority* must be satisfied that the soil and water management plan complies with the publications above prior to issuing any *Construction Certificate*.

Note: This condition has been imposed to eliminate potential water pollution and dust nuisance.

Note: The International Erosion Control Association – Australasia <http://www.austieca.com.au/> lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

Note: The “*Do it Right On Site, Soil and Water Management for the Construction Industry*” publications can be down loaded free of charge from <http://www.woollahra.nsw.gov.au/>

Note: Pursuant to clause 161(1)(a)(5) of the *Regulation* an *Accredited Certifier* may satisfied as to this matter.

C.5C.4 Structural Adequacy of Existing Supporting Structures

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

Note: This condition is imposed to ensure that the existing structure is able to support the additional loads proposed.

C.6C.5 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

Note: This does not affect the right of the developer to seek staged *Construction Certificates*.

C.7C.6 Utility Services Generally

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must demonstrate that all utility services (telecommunications, electricity, gas, water and waste water) will be provided underground. All service ducts, pipes and conduits must be provided within the fabric of the building (excluding stormwater down pipes).

Where telecommunications and electricity are provided from existing poles in the road they must, in accordance with the relevant suppliers' requirements, be carried to the site underground directly to the main switch board within the fabric of the building.

Note: Where adequate provision has not been made for an electrical sub-station within the building, this may necessitate the lodgement of an application to amend this consent under section 96 of the Act to detail the location, landscape/streetscape impacts and compliance with AS2890 as applicable.

The location of service poles and substations required by the relevant suppliers must be shown upon the plans submitted with any *Construction Certificate* application together with a letter from each relevant supplier setting out their requirements.

Proposed water pipes, waste pipes, stack work, duct work, mechanical ventilation plant and the like must be located within the building unless expressly shown upon the approved DA plans. Details confirming compliance with this condition must be shown on the *Construction Certificate* plans and/or detailed within the *Construction Certificate* specifications. Required external vents or vent pipes on the roof or above the eaves must be shown on the *Construction Certificate* plans.

Note: The intent of this condition is that the design quality of the development must not be compromised by cables, pipes, conduits, ducts, plant, equipment, electricity substations or the like placed such that they are visible from any adjoining public place. They must be contained within the building unless shown otherwise by the approved development consent plans.

The Construction Certificate plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation, must detail the replacement of all private sewer pipes between all sanitary fixtures and Sydney Waters sewer main where they are not found by inspection to be UPVC or copper with continuously welded joints.

Note: This condition has been imposed to ensure that where private sewer pipes are old, may leak or may be subject to root invasion (whether from existing or proposed private or public landscaping) that existing cast iron, concrete, earthenware or terracotta pipes be replaced with new UPVC or copper continuously welded pipes between all sanitary fixtures and Sydney Waters sewer main, such that clause 25(1) of WLEP 1995 be satisfied. Further, leaking sewer pipes are a potential source of water pollution, unsafe and unhealthy conditions which must be remedied in the public interest

6.8C.7 Provision for Energy Supplies

The applicant must provide to the *Certifying Authority* a letter from ~~Energy Australia~~Ausgrid setting out ~~Energy Australia's~~Ausgrid's requirements relative to the provision of electricity/gas supply to the development.

Any required substation must be located within the boundaries of the site.

Where an electricity substation is required within the site but no provision has been made to place it within the building and such substation has not been detailed upon the approved development consent plans a section 96 application is required to be submitted to Council. Council will assess the proposed location of the required substation.

The *Construction Certificate* plans and specifications, required to be submitted pursuant to clause 139 of the *Regulation*, must detail provisions to meet the requirements of ~~Energy Australia~~Ausgrid.

Where the substation is required the *Construction Certificate* plans and specifications must provide:

- a) A set back not less than 3m from the road boundary and dense landscaping of *local native plants* to screen the substation from view within the streetscape,
- b) A set back not less than 3m from any other site boundary (fire source feature) and not within the areas required to be kept clear of obstructions to vehicle visibility pursuant to clause 3.2.4 of AS2890.1-1993(See: Figures 3.2 and 3.3),
- c) A set back to and not within the drip line of any existing tree required to be retained,
- d) A setback not less than the 10m from any NSW Fire Brigade booster connection as prescribed by clause 5.6.3(d)(iii) of AS 2419.1-1994 or be separated from any booster connections by a construction with a fire resistance rating of not less than FRL 90/90/90 for a distance of not less than 2 m each side of and 3 m above the upper hose connections in the booster assembly pursuant to clause 5.6.3(c)(ii) of AS 2419.1-1994, and

- e) The owner shall dedicate to the appropriate energy authority, free of cost, an area of land adjoining the street alignment to enable an electricity substation to be established, if required. The size and location of the electricity substation is to be in accordance with the requirements of the appropriate energy authority and Council. The opening of any access doors are not to intrude onto the public road reserve.

Note: If the substation is not located within the building its location, screening vegetation, all screen walls or fire separating walls must have been approved by the grant of development consent or amended development consent prior to the issue of any *Construction Certificate* for those works. Documentary evidence of compliance, including correspondence from the energy authority is to be provided to the *Certifying Authority* prior to issue of the *Construction Certificate*. The *Certifying Authority* must be satisfied that the requirements of energy authority have been met prior to issue of the *Construction Certificate*.

Note: This condition has been imposed because the application fails to provide sufficient detail (either by plans or by the Statement of Environmental Effects) demonstrating that provision has been made to [Energy Australia's Ausgrid's](#) satisfaction for the provision of electricity supply to the building. Nevertheless, Council has no reason to believe that provision cannot be reasonably made for electricity to service the development.

Note: Where it is proposed to shield any booster connection or any building from any substation pursuant to clause 5.6.3(c)(ii) of AS 2419.1-1994 or by fire resisting construction under the BCA respectively and this construction has not been detailed upon the approved development consent plans such works should be considered inconsistent with consent pursuant to clause 145 of the *Regulation*. The Applicant must lodge with Council details for any such construction pursuant to section 96 of the *Act* to allow assessment under section 79C of the *Act*.

Note: Substations must not be located within the minimum sight distance at driveway entrances under Australian Standard AS/NZS 2890 (Set)-2004 Parking Facilities Set whether such driveways service the site or any adjoining land.

C.9C.8 Parking Facilities (RMS imposed)

The layout of the proposed car parking areas associated with the subject development (including, driveways, grades, turn paths, sight distance requirements, aisle widths, aisle lengths, and parking bay dimensions) should be in accordance with AS 2890.1- 2004 and AS 2890.2 - 2002 for heavy vehicle usage.

C.10C.9 Water and waste water - Section 73 Developers Certificate and Upgrading of existing system

A Section 73 Compliance Certificate under the Sydney Water Act 1994 must be obtained from Sydney Water Corporation. The effect of this certificate is that adequate provision has been made or is available for the provision of potable water to and the removal of waste water from the development.

In this regard, Sydney Water has provided the following advice in relation to the proposal:

Water

The drinking water main available for connection is the 150mm main on the western side of Victoria Road. Detailing drinking water requirements will be provided at the Section 73 application phase.

Wastewater

The wastewater main available for connection is the 225mm main constructed within the property boundaries. Where proposed works are in close proximity to a Sydney Water asset, the developer may be required to carry out additional works to facilitate there development and protect the wastewater main. Subject to the scope of development, servicing options may involve adjustment/deviation and or compliance with the Guidelines for building over/adjacent to Sydney Water assets. Detailed wastewater requirements will be provided at the Section 73 application phase.

Note: Following application to Sydney Water, a 'Notice of Requirements' will detail water and sewer extensions to be built and charges to be paid. Please make early contact with Sydney Water's authorised Coordinator, since building of water/sewer extensions can be time consuming and may impact on other services and building, driveway or landscape design.

Note: Applications must be made through an authorised Water Servicing Coordinator. For help either visit <http://www.sydneywater.com.au/BuildingDeveloping/DevelopingYourLand/WaterServicingCoordinators.cfm> or telephone 13 20 92.

The Construction Certificate plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation, must detail the replacement of all private sewer pipes between all sanitary fixtures and Sydney Waters sewer main where they are not found by inspection to be Sewer grade UPVC or copper with continuously welded joints.

Note: This condition has been imposed to ensure that where private sewer pipes are old, may leak or may be subject to root invasion (whether from existing or proposed private or public landscaping) that existing cast iron, concrete, earthenware or terracotta systems are replaced with new UPVC or copper continuously welded pipes between all sanitary fixtures and Sydney Waters sewer main as part of the development, such that clause 25(1) of WLEP 1995 be satisfied. Further, leaking sewer pipes are a potential source of water pollution, unsafe and unhealthy conditions which must be remedied in the public interest. See: <http://www.sydneywater.com.au/Publications/Factsheets/SewerfixLookingAfterYourSewerPipes.pdf>

6.14C.10 Light & Ventilation

The *Construction Certificate* plans and specifications, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail all a lighting, mechanical ventilation or air-conditioning systems complying with Part F.4 of the BCA or clause 3.8.4 and 3.8.5 of the BCA Housing Provisions, inclusive of [AS 1668.1](#), [AS 1668.2](#) and [AS/NZS 3666.1](#). If an alternate solution is proposed then the *Construction Certificate* application must include a statement as to how the performance requirements of the BCA are to be complied with and support the performance based solution by expert *evidence of suitability*. This condition does not set aside the mandatory requirements of the *Public Health (Microbial Control) Regulation 2000* in relation to *regulated systems*. This condition does not set aside the effect of the *Protection of the Environment Operations Act 1997* in relation to offensive noise or odour.

Note: Clause 98 of the Regulation requires compliance with the BCA. Clause 145 of the *Regulation* prevents the issue of a *Construction Certificate* unless the *Accredited Certifier/Council* is satisfied that compliance has been achieved. Schedule 1, Part 3 of the *Regulation* details what information must be submitted with any *Construction Certificate*. It is the Applicant's responsibility to demonstrate compliance through the Construction Certificate application process. Applicants must also consider possible noise and odour nuisances that may arise. The provisions of the *Protection of the Environment Operations Act 1997* have overriding effect if offensive noise or odour arises from the use. Applicant's must pay attention to the location of air intakes and air exhausts relative to sources of potentially contaminated air and neighbouring windows and air intakes respectively, see section 2 and 3 of [AS 1668.2](#).

C.12C.11 Construction Traffic Management Plan (RMS)

A Construction Traffic Management Plan (CTMP) detailing construction vehicle routes, number of trucks, hours of operation, access arrangements and traffic control should be submitted to Council and RMS prior to the issue of a construction certificate. The following items should be included in the CTMP:

- o Delays to school bus services should be minimised. (Delays may occur if school traffic is permitted to exit onto Victoria Road via the 'No Entry' point).
- o Currently, 'No Entry - Buses Excepted' signage is installed to the exit onto Victoria Road. The CTMP should include the number and types of vehicles proposed to exit onto Victoria Road and the duration of this arrangement. The CTMP should include proposed sign changes required and should also include plans.
- o Demonstrate how illegal turning manoeuvres (ie.-right turns and u-turns) into Bellevue Road or Victoria Road north will be discouraged/prevented (i.e. with temporary signs and barricades), to ensure safety for motorists and pedestrians.

C.13 Building upgrade (Clause 94 of the Regulation)

~~Council considers pursuant to clause 94 of the Regulation that it is appropriate to require the existing building to be brought into total or partial conformity with the BCA.~~

~~The Construction Certificate plans and specification required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation must detail building upgrade works required by this condition.~~

~~The Certifying Authority must be satisfied that such work, to be implemented as part of the development, will upgrade the building to bring it into compliance with the following provisions of the BCA as in force at the date of the Construction Certificate application:~~

- ~~a) That the exit doors shall swing in the direction of egress complying with the requirements of D2.20 of the BCA. The doors shall be operable by single handed downward action or pushing action in accordance with the requirements of D2.21 of the BCA and shall not encroach the street alignment.~~
- ~~b) That a suitable balustrade and handrails shall be provided to all fire exit stairs in accordance with the requirements of Clauses D2.16 & D2.17 of the BCA. All proposed building details shall be submitted to Principal Certifying Authority for approval prior to any building work commencing.~~
- ~~c) That all treads and landings of the existing stairways shall be provided with a non slip finish or an adequate non skid strip near the edge of the nosings/landings.~~
- ~~d) That opening's in the external walls of adjoining buildings within six (6) metres of each other on the same allotment shall be protected in accordance with the requirements of Clause C3.4 of the BCA or an alternative solution shall be proposed by an accredited C10 fire engineer meeting verification method CV2 and performance requirements CP2, CP7 & CP8 of the BCA.~~

Comment [A3]: We request this condition be removed as we consider this requirement of upgrading the existing buildings to total or partial conformity to be unreasonable.

- ~~e) That a system of emergency lighting shall be installed throughout the buildings on the premises to provide sufficient light in an emergency in accordance with the requirements of Part E4 of the BCA.~~
- ~~f) That exit signs shall be installed above all required exit doors. Signs shall be illuminated at all times and generally be of sufficient number that direction of travel to all exits is clearly visible from any part of the major egress routes. Exit signs shall be installed to the standard expressed in Clauses E4.5, E4.6 and E4.8 of the BCA.~~
- ~~g) That an Automatic Fire Detection and Alarm System shall be installed throughout the buildings on the premises complying in all respects with the requirements of Specification E2.2a Clause 4 of the BCA & Australian Standard AS1670.1-2005.~~
- ~~h) That hose reels shall be installed throughout the buildings on the premises to the standard expressed in Clause E1.4 of the BCA.
Hose reels shall not be located within rooms but rather in common areas such as passageways, lobbies or foyers, so that their location is obvious and always available to all occupants.
If it is desired to enclose the hose reels, the cabinets shall be of a size with sufficient clearance between reel and cabinet to allow the hose to be drawn off in any direction and rewound without difficulty.
Cabinets enclosing hose reels shall have a conspicuously displayed sign fitted to the door, with lettering at least 50mm in height reading "Fire Hose Reel".
All cabinets shall comply with the relevant requirements of AS1221 and AS 2441.~~
- ~~i) That portable fire extinguishers shall be provided throughout the buildings on the premises to the requirements of Clause E1.6 of the BCA and the relevant requirements of AS 2444.~~
- ~~j) That hydrants shall be installed throughout the buildings on the premises in accordance with the requirements of Clause E1.3 of the BCA, or if street hydrants are intended to be used instead of required internal hydrants a certificate shall be provided to the Principal Certifying Authority certifying that the location and coverage comply with AS 2419.1-2005 and the flows and pressures (evidenced by a Water Authority enquiry form) comply with AS 2419.1-2005.~~

~~**Note:** The Certifying Authority issuing the Construction Certificate has no power to remove the requirement to upgrade the existing building as required by this condition. Where this condition specifies compliance with performance requirements of the BCA the Certifying Authority, subject to their level of accreditation, may be satisfied as to such matters. Where this condition specifies compliance with prescriptive (deemed to satisfy) provisions of the BCA these prescriptive requirements must be satisfied and cannot be varied unless this condition is reviewed under section 82A or amended under section 96 of the Act.~~

~~**Note:** This condition does not set aside the Certifying Authorities responsibility to ensure compliance with clause 143 of the Regulation in relation to Fire Protection and Structural Adequacy.~~

~~**Note:** AS 4655 Guidelines for fire safety audits for buildings (or any succeeding AS) should form the basis of any fire upgrade report.~~

C.14C.12 Food Premises – Construction Certificate Plans & Specifications

The person with the benefit of this consent must submit to Council details for the construction and fit out of food premises. Such details must demonstrate compliance with the *Food Act 2003*, *Food Regulation 2004*; the *Food Standards Code* as

published by Food Standards Australia and New Zealand and Australian Standard AS 4674-2004: *Construction and fit out of food premises*.

No *Construction Certificate* relating to the construction or fitout of food premises must be issued until Council's Environmental Health Officers' have advised in writing that the plans and specification are considered satisfactory.

The details for the construction and fit out of food premises, as considered satisfactory by Council's Environmental Health Officers' must form part of any *Construction Certificate*.

Note: The assessment of food premises fitout plans and specifications is subject to an adopted fee. The construction and fitout of food premises is not listed under clause 161 of the *Environmental Planning & Assessment Regulation 2000* as a matter that a *Certifying Authority* may be satisfied as to. Hence, the detailed plans & specifications must be referred to Council and be to Council's satisfaction prior to the issue of any *Construction Certificate* for such works.

C.15 Road and Public Domain Works

~~A separate application under Section 138 of the Roads Act 1993 is to be made to, and be approved by, Council for the following infrastructure works prior to the issuing of any Construction Certificate. The infrastructure works must be carried out at the applicant's expense:~~

- ~~a) Should the existing vehicular crossing be relocated due to the proposed new vehicle gate a full width vehicular crossings on Bellevue Hill Park Road having a width of 3.5m in accordance with Council's standard driveway drawing RF2A shall be reconstructed.~~
- ~~b) A design longitudinal surface profile for the proposed driveway must be submitted for assessment.~~
- ~~c) Removal of all driveway crossings and kerb laybacks which will be no longer required.~~
- ~~d) Reinstatement of footpath, kerb and gutter to match existing.~~
- ~~e) Where a grass verge exists, the balance of the area between the footpath and the kerb over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of Couch turf.~~
- ~~f) That the developer pay to introduce/upgrade cycling infrastructure surrounding the School to better encourage cycling as an attractive transport mode for both students and staff, ensuring where reasonable that direct and safe paths of travel are provided together with end of trip facilities (i.e. showers, parking, etc), to the satisfaction of the Council's Engineering Services Department.~~
- ~~g) That the developer pay to introduce/upgrade pedestrian facilities surrounding the School to improve pedestrian safety and access, to the satisfaction of the Council's Engineering Services Department, including a reconstruction of the existing pedestrian refuge located on Birriga Road, opposite No. 6-8, in accordance with Austroads Guide to Traffic Management Part 6, Australian Standard 1742.10 and RMS Australian Standard Supplements.~~
- ~~h) The applicant is to upgrade the existing street lighting levels to ensure that the area of roadway and footpaths adjacent to the site and bounded by the next street light pole to the east in Birriga Road and the next street light pole to the south in Victoria Road is in accordance with AS/NZS 1158. The applicant~~

Comment [A4]: We request this condition be removed as DEC provides educational infrastructure only, and does not provide pedestrian, cycling and lighting infrastructure.

~~must engage an Ausgrid accredited street lighting design consultant and submit the design to Council's Engineering Services for approval prior to engaging Ausgrid or an accredited constructor to undertake the upgrade works. Ausgrid has requirements concerning access to services that it provides. All costs associated with the street light upgrades must be borne by the applicant.~~

~~**Note:** To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.~~

~~**Note:** Road has the same meaning as in the Roads Act 1993.~~

~~**Note:** The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any Construction Certificate. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under Roads Act 1993 approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.~~

~~**Note:** The 'Road Application to Carry out Works in a Public Road' form can be found at: http://www.woollahra.nsw.gov.au/council/forms_and_publications/forms_and_checklists~~

~~**Note:** See advising titled Roads Act Application.~~

C.16C.13 Geotechnical and Hydrogeological Design, Certification & Monitoring

The *Construction Certificate* plans and specification required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation* must be accompanied by a *Geotechnical / Hydrogeological Monitoring Program* together with civil and structural engineering details for foundation retaining walls, footings, basement tanking, and subsoil drainage systems, as applicable, prepared by a *professional engineer*, who is suitably qualified and experienced in geotechnical and hydrogeological engineering. These details must be certified by the *professional engineer* to:

- a) Provide appropriate support and retention to ensure there will be no ground settlement or movement, during excavation or after construction, sufficient to cause an adverse impact on adjoining property or public infrastructure.
- b) Provide appropriate support and retention to ensure there will be no adverse impact on surrounding property or infrastructure as a result of changes in local hydrogeology (behaviour of groundwater).
- c) Provide foundation tanking prior to excavation such that any temporary changes to the groundwater level, during construction, will be kept within the historical range of natural groundwater fluctuations. Where the historical range of natural groundwater fluctuations is unknown, the design must demonstrate that changes in the level of the natural water table, due to construction, will not exceed 0.3m at any time.
- d) Provide tanking of all below ground structures to prevent the entry of all ground water such that they are fully tanked and no on-going dewatering of the site is required.
- e) Provide a Geotechnical and Hydrogeological Monitoring Program that:
 - Will detect any settlement associated with temporary and permanent works and structures;
 - Will detect deflection or movement of temporary and permanent retaining structures (foundation walls, shoring bracing or the like);
 - Will detect vibration in accordance with AS 2187.2-1993 Appendix J including acceptable velocity of vibration (peak particle velocity);

- Will detect groundwater changes calibrated against natural groundwater variations;
- Details the location and type of monitoring systems to be utilised;
- Details the preset acceptable limits for peak particle velocity and ground water fluctuations;
- Details recommended hold points to allow for the inspection and certification of geotechnical and hydro-geological measures by the professional engineer; and;
- Details a contingency plan.

C.17C.14 Ground Anchors

This development consent does NOT give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

The use of permanent ground anchors under Council land is not permitted.

Temporary ground anchors may be permitted, in accordance with Council's "Rock Anchor Policy", where alternative methods of stabilisation would not be practicable or viable, and where there would be benefits in terms of reduced community impact due to a shorter construction period, reduced disruption to pedestrian and vehicular traffic on adjacent public roads, and a safer working environment.

If temporary ground anchors under Council land are proposed, a separate application, including payment of fees, must be made to Council under Section 138 of the *Roads Act 1993*. Application forms and Council's "Rock Anchor Policy" are available from Council's web-site <http://www.woollahra.nsw.gov.au>. Approval may be granted subject to conditions of consent. Four weeks should be allowed for assessment.

Note: To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

Note: *Road* has the same meaning as in the *Roads Act 1993*.

Note: Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: "**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road." Separate approval is required under the *Roads Act 1993* for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

C.18C.15 Car and Commercial Parking Details

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications for all bicycle, car and commercial vehicle parking in compliance with AS2890.3:1993 *Parking Facilities - Bicycle Parking Facilities*, AS/NZS 2890.1:2004 : *Parking Facilities - Off-Street Car Parking* and AS 2890.2:2002 – *Off-Street Parking: Commercial Vehicle Facilities* respectively.

Access levels and grades must comply with access levels and grade required by Council under the *Roads Act 1993*.

The *Certifying Authority* has no discretion to reduce or increase the number or area of car parking or commercial parking spaces required to be provided and maintained by this consent.

C.16 Stormwater management plan (Site greater than 500m²)

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must include a *Stormwater Management Plan* for the site. The *Stormwater Management Plan* must detail:

- General design in accordance with the Council's Woollahra DCP 2015 Chapter E2 – Stormwater and Flood Risk Management The discharge of stormwater, by direct connection, to Victoria Road and Bellvue Hill Park Road.
- Compliance the objectives and performance requirements of the BCA;
- Any rainwater tank (See Note below) required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*, and
- General compliance with the Council's Woollahra DCP 2015 Chapter E2 – Stormwater and Flood Risk Management, and
- On-site stormwater detention ("OSD").

OSD Requirements

The minimum (OSD) Site Storage Requirements ("SSR") and the Peak Site Discharge ("PSD") from the site must be in accordance with the following minimum storage/discharge relationships based upon a 1000m² site area:

Average Recurrence Interval	PSD (L/s)	Minimum Site Storage Requirement (SSR) m ³
2 year	23.5 L/s	4m ³
100 year	34 L/s	29m ³ – Other Development

Note: All values based on per 1000m² site area (interpolate to site area).

Where a rainwater tank is proposed in conjunction with OSD, the volume of the rainwater tank may contribute to the SSR as follows:

- Where the rainwater tank is used for external uses only, 40% of the rainwater tank volume to a maximum of 4m³, or
- Where the rainwater tank is used for external and internal uses, 75% of the rainwater tank volume to a maximum of 7.5m³.

Example: The Site Storage Requirements may be 25,000 litres and a 10,000 litre rainwater tank is to be used for garden irrigation. Therefore, the rainwater tank contributes 4,000 litres toward SSR. Therefore, the OSD tank needs to be 21,000 litres (25,000 litres less the 4,000 litres allowance). Note: 1m³ = 1,000 litres.

~~The Stormwater Management Plan must also include the following specific requirements:~~

C.17 Stormwater

Comment [A5]: Is this correct? Council's DCP mentions 20?

Comment [A6]: ?

Comment [A7]: Willing to consider any conditions in relation to concerns with Stormwater

D. Conditions which must be satisfied prior to the commencement of any development work

D.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a) that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b) in the case of residential building work for which *the [Home Building Act 1989](#)* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a) to the extent to which an exemption is in force under *the Home Building Regulation 2004*,
- b) to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

Note: This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.

Note: All new guttering is to comply with the provisions of Part 3.5.2 of the Building Code of Australia.

D.2 Terms of occupation of Bellevue Park (demountables)

The Applicant must, in accordance with Section 46 of the Local Government Act 1993, enter into a Licence agreement with Council for the occupation of Bellevue Park by the demountables. Please contact Council's Senior Property Officer on 9391-7019 in regards to the Licence. Council also reserves its right not to grant a licence for the occupation. The Licence agreement must contain Council's standard terms and conditions, including but not limited to the following:

- An assessed rental charge and security bond are payable to Council under the licence agreement. The hire fee which forms part of the license agreement for the hire of Bellevue Park for the duration of the construction of the Bellevue Hill Public School paid to Council at least three (3) weeks prior to the installation of the demountables. A bond of \$30,000 shall be paid to Council, at least three (3) weeks prior to the installation of the demountables, as security for the restoration of the park at the conclusion of the event. Council will assess Bellevue Park and may use all or part of the bond to carry out rectification works if necessary.

- The Applicant must provide Insurance Certificates of Currency for Public Liability of minimum value \$20 Million noting Woollahra Council as an interested party; and Workers compensation.
- Prior to occupation by the demountables a dilapidation report must be prepared by the Applicant to document the site condition. The applicant must meet with Council's Coordinator of Assets and Open Space for the assessment of Bellevue Park in regards to the dilapidation report signoff by Council staff.
- The Park will be inspected after the demountables and associated infrastructure have been removed to assess any damage caused, such as damage to trees, the turf surface, Bellevue Park Road gateway and presence of litter. Any damage must be restored to the satisfaction of Council within an agreed timeframe.
- The Applicant is liable for any consequential damage to Bellevue Park. The applicant is liable for repair or the cost of making good any damage to Bellevue Park and Council's infrastructure, as a consequence of the activities associated with their occupation.
- The applicant is responsible for the security, safety of users, and maintenance of the site at all times. The applicant is responsible for all onsite waste collection and disposal. The demountable site must be kept clean and tidy at all times including an area of 20m surrounding the site.
- The hours of operation of the demountable site in Bellevue Park is limited to regular school hours Monday to Friday during school terms.
- The applicant must provide Council with a contact person that can be contactable after hours.
- All occupants within the demountables must respect the general amenity of park users and surrounding residents including all noise related activities.
- The boardwalk that connects the demountables to the existing bitumen pathway is the responsibility of the applicant.

D.3 Dilapidation Report of Bellevue Park

The applicant shall prepare a Dilapidation Report of the park to be signed off by Council staff before being granted access.

The applicant must repair or meet the cost of making good any damage to Bellevue Park and Council's infrastructure, as a consequence of the activities associated with this consent.

The Park will be inspected after the demountables and associated infrastructure have been removed to assess any damage caused, such as damage to trees, the turf surface, Bellevue Park Road gateway and presence of litter. Any damage must be restored to the satisfaction of Council's Manager Open Space and Trees at the cost to the applicant and within a timeframe as agreed between the applicant and Manager Open Space and Trees. In assessing any damage consideration will be given to normal wear and tear as a consequence of the use of the site. Payment of cost for damage


repairs undertaken by Council must be paid within 30 days from issue of Council's invoice.

D.4 Notification of Surrounding Residents


- The applicant shall advise all residents of Bellevue Park Road, Victoria Road (no. 182-196), Birriga Road (no. 2A-22), Victoria Road (no. 182-196), Banksia Street (no. 1-9) and Old South Head Road (no. 174-192) of the construction of the demountable site and the activities by way of letter box drop a minimum of two weeks prior to the event.
- Notification signage in regards to the demountables in Bellevue Park needs to be clearly displayed at Park Entries 2 weeks prior to the bump in of the demountables.
- Notification sign must be placed on the demountable site fence for the entirety of the occupation including the after hours contact and a description of the works.

D.5 Security Fencing, Hoarding and Overhead Protection

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.



Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8 m adjacent to the thoroughfare.




Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an *overhead protective structure* and the facing facade protected by heavy-duty scaffolding, unless either:

- a) The vertical height above footpath level of the structure being demolished is less than 4.0 m; or

- b) The least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must:

- Extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary;
- Have a clear height above the footpath of not less than 2.1 m;
- Terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5 m above the platform surface; and
- Together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

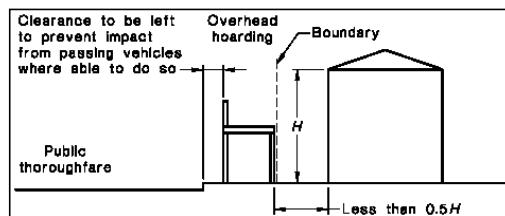

The *principal contractor* or *owner builder* must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

The *principal contractor* or *owner builder* must ensure that Overhead Protective Structures are installed and maintained in accordance with WorkCover NSW Code of Practice - Overhead Protective Structures, gazetted 16 December 1994, as commenced 20 March 1995. This can be downloaded from: <http://www.workcover.nsw.gov.au/Publications/LawAndPolicy/CodesofPractice/oheadprotstructs.htm>

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

Note: The *principal contractor* or *owner* must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act* 1993 will be subject to its own conditions and fees.

D.6 Site Signs

The *Principal Contractor* or *owner builder* must ensure that the sign/s required by clauses 98A and 227A of the *Regulation* is/are erected and maintained at all times.

Clause 98A of the *Regulation* provides:

Erection of signs

- For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
- A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:

- a. showing the name, address and telephone number of the principal certifying authority for the work, and
- b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
- c. stating that unauthorised entry to the work site is prohibited.
- Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
- This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
- This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws."

Clause 227A of the Regulation provides:

Signs on development sites

If there is a person who is the PCA or the principal contractor for any building work, subdivision work or demolition work authorised to be carried out on a site by a development consent or complying development certificate:

- Each such person MUST ensure that a rigid and durable sign showing the person's identifying particulars so that they can be read easily by anyone in any public road or other public place adjacent to the site is erected in a prominent position on the site before the commencement of work, and is maintained on the site at all times while this clause applies until the work has been carried out.

Note: Clause 227A imposes a penalty exceeding \$1,000 if these requirements are not complied with.

Note: If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A and Clause 227A of the *Regulation*.

D.7 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

~~Each toilet provided:~~

- ~~a) — must be a standard flushing toilet, and~~
- ~~b) — must be connected to a public sewer, or~~
- ~~c) — if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the council, or~~
- ~~d) — if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the council.~~

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

~~In this condition:~~

~~**accredited sewage management facility** means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a~~

Comment [A8]: It is envisaged that portable toilets will be provided during construction.

Formatted: Indent: Left: 1 cm, First line: 0 cm

~~design or plan the subject of a certificate of accreditation referred to in clause 95B of the Local Government (Approvals) Regulation 1993.~~

~~approved by the council means the subject of an approval in force under Division 1 of Part 3 of the Local Government (Approvals) Regulation 1993.~~

~~public sewer has the same meaning as it has in the Local Government (Approvals) Regulation 1993.~~

~~sewage management facility has the same meaning as it has in the Local Government (Approvals) Regulation 1993.~~

Note: This condition does not set aside the requirement to comply with Workcover NSW requirements.

D.8 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The *Soil and Water Management Plan* if required under this consent;
- b) “Do it Right On Site, Soil and Water Management for the Construction Industry” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “Managing Urban Stormwater - Soils and Construction” published by the NSW Department of Housing 4th Edition” (“The Blue Book”).

Where there is any conflict The Blue Book takes precedence.

Note: The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

Note: The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be down loaded free of charge from www.woollahra.nsw.gov.au.

Note: A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

Note: Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”

Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.

D.9 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)

The erection of the building in accordance with this development consent must not be commenced until:

- a) A construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b) The person having the benefit of the development consent has:
 - Appointed a principal certifying authority for the building work, and
 - Notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- c) the principal certifying authority has, no later than 2 days before the building work commences:
 - Notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
 - Notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- d) The person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
 - Appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
 - Notified the principal certifying authority of any such appointment, and
 - Unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
 - Given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

Note: *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

Note: *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

Note: The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

Note: *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website www.woollahra.nsw.gov.au.

Note: It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the *Act*.

D.10 Establishment of boundary location, building location and datum

Prior to the commencement of any work the principal contractor or owner builder must ensure that a surveyor registered under the *Surveying Act* 2002 sets out:

- a) the boundaries of the *site* by permanent marks (including permanent recovery points);
- b) the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum ("AHD") in compliance with the approved plans;

- c) establishes a permanent datum point (bench mark) within the boundaries of the *site* relative to AHD; and
- d) provides a copy of a survey report by the registered surveyor detailing, the title boundaries, pegs/profiles, recovery points and bench mark locations as established pursuant to this condition to the PCA.

Note: Where the *principal contractor* or *owner builder* notes any discrepancy between the approved development consent and the *Construction Certificate*, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the *principal contractor* or *owner builder* should not proceed until satisfied that the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent.

Note: On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks should be considered by the registered surveyor.

D.11 Public Liability

The applicant must provide a copy of a Certificate of Currency prior to construction on Bellevue Park showing Public Liability Insurance to the value of \$10,000,000 nominating Woollahra Council as interested parties.

D.12 Public Indemnity

The applicant is to indemnify Council from and against all actions, claims, costs, losses, expenses and damages (including the costs of defending or settling any action or claim) in respect of:

- loss of, loss of use of, or damage to property of Council; or
 - personal injury (including death) or illness to any person or loss of, loss of use of, or damage to any property;
- resulting from or by reason of anything done or omitted to be done by the applicant arising out of your activities undertaken at or near Council's facility.

The applicants liability to indemnify Council is reduced proportionally to the extent that a negligent act or omission of Council or its employees has contributed to the injury, damage or loss.

D.13 Access through Public Open Space

Access to Bellevue Hill Public School from the adjoining Bellevue Park for works beyond those pertaining to the demountable site will not be permitted unless prior written approval has been obtained by Council's Open Space & Tree Department. An application must be submitted for assessment with a minimum of four weeks prior notice to the commencement of works. It must be approved by Council before any construction access is granted.

D.14 Dilapidation Reports for Public Infrastructure

To clarify the existing state of public infrastructure prior to the commencement of any development (including prior to any demolition), the *Principal Contractor* must submit a dilapidation report, prepared by a *professional engineer*, on Council's infrastructure within and near the development site.

The dilapidation report must be submitted to Council prior to the commencement of any work and include:

- a) Photographs showing any existing damage to the road pavement fronting the site,
- b) Photographs showing any existing damage to the kerb and gutter fronting the site,
- c) Photographs showing any existing damage to the footway including footpath pavement fronting the site,
- d) Photographs showing any existing damage to retaining walls within the footway or road, and
- e) Closed circuit television/video inspection (in DVD format) of public stormwater drainage systems fronting, adjoining or within the site and
- f) The full name and signature of the professional engineer.

The reports are to be supplied in both paper copy and electronic format in Word. Photographs are to be in colour, digital and date stamped.

The dilapidation report must specify (with supporting photographic/DVD evidence) the exact location and extent of any damaged or defective public infrastructure prior to the commencement of any work. If the required report is not submitted then Council will assume there was no damage to any infrastructure in the immediate vicinity of the site prior to the commencement of any work under this consent.

Note: If the Principal Contractor fails to submit the dilapidation report required by this condition and damage is occasioned to public assets adjoining the site Council will deduct from security any costs associated with remedying, repairing or replacing damaged public infrastructure. Nothing in this condition prevents Council making any claim against security held for this purpose.

Standard Condition: D5

D.15 Construction Management Plan

As a result of the site constraints, limited space and access a Construction Management Plan (CMP) is to be submitted to Council. Also, due to lack of on-street parking a Work Zone may be required during construction.

The principal contractor or owner must submit an application for approval of the Construction Management Plan by Council's Traffic Engineer and pay all fees associated with the application. The plan must be submitted as a self-contained document that outlines the nature of the construction project and as applicable, include the following information:-

- a) Detail the scope of the works to be completed including details of the various stages, e.g. Demolition, Excavation, Construction etc. and the duration of each stage.
- b) Identify local traffic routes to be used by construction vehicles.
- c) Identify ways to manage construction works to address impacts on local traffic routes.
- d) Detail how construction workers will travel to and from the site and parking arrangements for those that drive.
- e) Identify any proposed road closures, temporary traffic routes, loss of pedestrian or cyclist access or reversing manoeuvres onto a public road and provide Traffic Control Plans (TCPs) prepared by an accredited RMS Red or Orange card holder to manage these temporary changes.

- f) Detail the size (including dimensions), numbers and frequency of arrival of the construction vehicles that will service the site for each stage of works.
- g) Provide for the standing of vehicles during construction.
- h) If construction vehicles are to be accommodated on the site, provide a scaled drawing showing where these vehicles will stand and the vehicle swept path to show that these vehicles can access and egress the site in a forward direction (including dimensions and all adjacent traffic control devices, such as parking restrictions, pedestrian facilities, kerb extensions, etc.).
- i) If trucks are to be accommodated on Council property, provide a scaled drawing showing the location of any proposed Works Zone (including dimensions and all adjacent traffic control devices, such as parking restrictions, pedestrian facilities, kerb extensions, etc.).
- j) Show the location of any site sheds and any anticipated use of cranes and concrete pumps and identify the relevant permits that will be required.
- k) If a crane/s are to be accommodated on site, detail how the crane/s will be erected and removed, including the location, number and size of vehicles involved in the erection/removal of the crane/s, the duration of the operation and the proposed day and times, any full or partial road closures required to erect or remove the crane/s and appropriate Traffic Control Plans (TCPs) prepared by an approved RMS Red or Orange Card holder.
- l) Make provision for all materials, plant, etc. to be stored within the development site at all times during construction.
- m) State that any oversized vehicles proposed to operate on Council property (including Council approved Works Zones) will attain a Permit to Stand Plant on each occasion? (Note: Oversized vehicles are vehicles longer than 7.5m or heavier than 4.5T.
- n) Show the location of any proposed excavation and estimated volumes.
- o) When excavation works are to be undertaken on school days, all vehicular movements associated with this work shall only be undertaken between the hours of 9.30am and 2.30pm, in order to minimise disruption to the traffic network during school pick up and drop off times.
- p) Show the location of all Tree Protection (Exclusion) zones (Note: storage of building materials or access through Reserve will not be permitted without prior approval by Council).

Note: A minimum of eight weeks will be required for assessment. Work must not commence until the Construction Management Plan is approved. Failure to comply with this condition may result in fines and proceedings to stop work.

D.16 Adjoining buildings founded on loose foundation materials

The *principal contractor* must ensure that a *professional engineer* determines the possibility of any adjoining buildings founded on loose foundation materials being affected by piling, piers or excavation. The *professional engineer* (geotechnical consultant) must assess the requirements for underpinning any adjoining or adjacent buildings founded on such soil on a case by case basis and the *principal contractor* must comply with any reasonable direction of the *professional engineer*.

Note: A failure by contractors to adequately assess and seek professional engineering (geotechnical) advice to ensure that appropriate underpinning and support to adjoining land is maintained prior to commencement may result in damage to adjoining land and buildings. Such contractors are likely to be held responsible for any damages arising from the removal of any support to supported land as defined by section 177 of the *Conveyancing Act 1919*.

D.17 Works (Construction) Zone – Approval & Implementation

A works zone is required for this development. The *principal contractor* or *owner* must apply for a works zone. If the works zone is approved the *principal contractor* or *owner* must pay all fees for and implement the required works zone before commencement of any work.

The *principal contractor* must pay all fees associated with the application and occupation and use of the road as a works zone. All works zone signs must have been erected by Council to permit enforcement of the works zone by Rangers and Police before commencement of any work. Signs are not erected until full payment of works zone fees.

Note: The *principal contractor* or *owner* must allow not less than four to six weeks (for routine applications) from the date of making an application to the Traffic Committee (Woollahra Local Traffic Committee) constituted under the Clause 22 of the *Transport Administration (General) Regulation* 2000 to exercise those functions delegated by the Roads and Traffic Authority under Section 50 of the *Transport Administration Act* 1988.

Note: The enforcement of the works zone is at the discretion of Council's Rangers and the NSW Police Service. The principal contractor must report any breach of the works zone to either Council or the NSW Police Service.

E. Conditions which must be satisfied during any development work

E.1 Compliance with Building Code of Australia

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a) That the work must be carried out in accordance with the requirements of the Building Code of Australia,

This condition does not apply:

- a) To the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b) To the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Note: All new guttering is to comply with the provisions of Part 3.5.2 of the Building Code of Australia.

E.2 Activities to be undertaken in the Bellevue Park demountable site

- The demountable site proposed in Bellevue Park is only to be used as a location for school classrooms.
- The hours of operation of the demountable site in Bellevue Park is limited to regular school hours Monday – Friday during school terms

- The applicant is responsible for the security, safety of users, maintenance and asbestos management of the site at all times.
- Prior to the bump in of the demountables, the applicant must meet with Council's Coordinator of Assets and Open Space for the assessment of Bellevue Park in regards to the dilapidation report
- The applicant is responsible for all onsite waste collection and disposal. The demountable site must be kept clean and tidy at all times including an area of 20m surrounding the site.
- The applicant must provide Council with a contact person that can be contactable after hours.
- Notification sign must be placed on the demountable site fence for the entirety of the occupation including the after hours contact and a description of the works.
- All occupants within the park must respect general park users and surrounding residents including all noise related activities.
- The boardwalk that connects the demountables to the existing bitumen pathway is the responsibility of the applicant.

E.3 Vehicle Access

- Vehicle access into Bellevue Park is restricted to the bump in and bump out of the demountables.
- Vehicles access into Bellevue Park restricted to the Bellevue Rd entry. Only vehicles that can fit through the park entry gate at Bellevue Rd are permitted to enter the park and the gate way is not to be altered.
- Cranes associated with transporting demountables into and out of Bellevue Park are to remain on the land pertaining to Bellevue Hill Public School.

E.4 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—2001: The Demolition of Structures, published by Standards Australia, and as in force at 13 September 2001.

E.5 Tree Preservation

All persons must comply with Council's Development Control Plan (DCP) 2015, Tree Management Chapter E3 other than where varied by this consent. The DCP applies to any tree with a height greater than 5 metres or a diameter spread of branches greater than 3 metres.

General Protection Requirements

- a) There shall be no excavation or work within a Tree Protection Zone (TPZ). The TPZ must be maintained during all development work unless otherwise specified within these conditions of consent.
- b) Excavation must cease where tree roots with a diameter exceeding 30mm are exposed. The *principal contractor* must procure an inspection of the exposed tree roots by an arborist with a minimum AQF Level 5 qualification. Excavation must only recommence with the implementation of the recommendations of the arborist.

- c) Where there is damage to any part of a tree the *principal contractor* must procure an inspection of the tree by a qualified arborist immediately. The *principal contractor* must immediately implement treatment as directed by the arborist. The arborist is to supply a detailed report to the appointed certifier.

Note: Trees must be pruned in accordance with *Australian Standard AS 4373 "Pruning of Amenity Trees"* and *WorkCover NSW Code of Practice Amenity Tree Industry*.

E.6 Replacement/Supplementary trees which must be planted

Any replacement or supplementary tree shall be grown in accordance with NATSPEC Specifying Trees. The replacement tree shall be maintained in a healthy and vigorous condition. If the replacement tree is found to be faulty, damaged, dying or dead before it attains a size whereby it is protected by Council's Development Control Plan (DCP) 2015, Tree Management Chapter E3, it must be replaced with another of the same species which complies with the criteria outlined below. All trees installed within the road reserve shall comply with the guidelines set out in the Street Tree Master Plan (2014).

Species/Type	Planting/Location	Container Size/Size of Tree (at planting)
4 2 x <i>Lophostemon confertus</i> (Brush Box)	Bellevue Park – as directed by Council arborist	400 litre
1 x <i>Araucaria cunninghamii</i> (Hoop pine)	Bellevue Park – as directed by Council arborist	400 litre
3 2 x <i>Lophostemon confertus</i> (Brush Box)	Birriga Road (road reserve) slipway	100 litre

Comment [A9]: Only 5 trees are being removed now. The amount of tree to be replanted should as a result be reduced.

The project arborist shall document compliance with the above condition.

E.7 Level changes in the vicinity of trees

No level changes shall occur within the specified radius from the trunks of the following trees.

Council Ref No.	Species	Radius from Trunk (metres)
A	<i>Liquidamber styraciflua</i> (Liquidambar)	6
C	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)	6

The project arborist shall document compliance with the above condition.

E.8 Hand excavation within tree root zones

Excavation undertaken within the specified radius from the trunks of the following trees shall be hand dug.

Council Ref No.	Species	Radius from Trunk (metres)
A	<i>Liquidamber styraciflua</i>	6

	(Liquidambar)	
C	<i>Ficus microcarpa</i> var. 'Hillii' (Hills Weeping Fig)	6

Small hand tools such as mattocks or using compressed air or water jetting only shall be used. Roots with a diameter equal to or in excess of 30mm shall not be severed or damaged unless approved in writing by the project arborist.

Mechanical excavation is permitted beyond this radius when root pruning by hand along the perimeter line is completed. Exposed roots to be retained shall be covered with mulch or a geotextile fabric and kept in a moist condition and prevented from drying out.

All root pruning must be undertaken in accordance with the Australian Standard 4373 "Pruning of Amenity Trees" and carried out by a qualified Arborist (minimum qualification of Australian Qualification Framework Level 4 or recognised equivalent).

The project arborist shall document compliance with the above condition.

E.9 Food Premises – Construction & Fitout

The *principal contractor* or *owner builder* must ensure that all construction and fitout of the food premises complies with the details for the food premises submitted to and considered satisfactory by Council's Environmental Health Officers but no less compliant than with the *Food Act 2003*, *Food Regulation 2004*; the *Food Standards Code* as published by Food Standards Australia and New Zealand and AS 4674-2004: *Construction and fit out of food premises*.

This condition has been imposed to protect public health and ensure that food premises are easily maintained in a clean condition fit for food preparation and consumption.

E.10 Requirement to notify about new evidence

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifying Authority.

E.11 Critical Stage Inspections

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*.

critical stage inspections means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the PCA and any PCA Service Agreement.

Note: The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

Note: The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.

E.12 Hours of Work –Amenity of the neighbourhood

- a) No *work* must take place on any Sunday or public holiday,
- b) No *work* must take place before 7am or after 5pm any weekday,
- c) No *work* must take place before 7am or after 1pm any Saturday,
- d) The following *work* **must not** take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday;
 - i) Piling;
 - ii) Piering;
 - iii) Rock or concrete cutting, boring or drilling;
 - iv) Rock breaking;
 - v) Rock sawing;
 - vi) Jack hammering; or
 - vii) Machine excavation,
- e) No loading or unloading of material or equipment associated with the activities listed in part d) above must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday.
- f) No operation of any equipment associated with the activities listed in part d) above must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday
- g) No rock excavation being cutting, boring, drilling, breaking, sawing , jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

Note: The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

Note: Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

Note: The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

Note: Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

Note: EPA Guidelines can be down loaded from <http://www.epa.nsw.gov.au/noise/nglg.htm> .

Note: see http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf

E.13 Compliance with Construction Management Plan

All development activities and traffic movements must be carried out in accordance with the approved construction management plan. All controls in the Plan must be maintained at all times. A copy of the Plan must be kept on-site at all times and made available to the *PCA* or *Council* on request.

Note: Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.

E.14 Public Footpaths – Safety, Access and Maintenance

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a) Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b) Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c) Not use the road or footway for any *work*.
- d) Keep the road and footway in good repair free of any trip hazard or obstruction.
- e) Not stand any plant and equipment upon the road or footway.
- f) Provide a clear safe pedestrian route a minimum of 1.5m wide.
- g) Protect street name inlays in the footpath which are not to be removed or damaged during development.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the Road Transport (Safety and Traffic Management) Act 1999, section 138 of the Roads Act 1993 or section 94 of the Local Government Act 1993 except that at all time compliance is required with:

- a) Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b) Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

Note: Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

Note: Section 138 of the *Roads Act 1993* provides that a person must not:

- erect a structure or carry out a work in, on or over a public road, or
- dig up or disturb the surface of a public road, or
- remove or interfere with a structure, work or tree on a public road, or
- pump water into a public road from any land adjoining the road, or
- connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

Note: Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

- Part C Management of Waste:
 - a. For fee or reward, transport waste over or under a public place
 - b. Place waste in a public place
 - c. Place a waste storage container in a public place.”
- Part E Public roads:
 - a. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway

- b. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”
- c. Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.

E.15 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls,
- b) Dust controls,
- c) Dewatering discharges,
- d) Noise controls;
- e) Vibration monitoring and controls;
- f) Ablutions.

Note: See http://www.epa.nsw.gov.au/small_business/builders.htm for additional information.

E.16 Support of adjoining land and buildings

A person must not to do anything on or in relation to the *site* (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

Note: This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the *principal contractor* or *owner builder* must obtain:

- a. the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b. an access order under the Access to Neighbouring Land Act 2000, or
- c. an easement under section 88K of the *Conveyancing Act 1919*, or
- d. an easement under section 40 of the *Land & Environment Court Act 1979* as appropriate.

Note: Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

Note: Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: “**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road.” Separate approval is required under the Roads Act 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

Note: The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, crown land under Council’s care control or management, or any community or operational land as defined by the *Local Government Act 1993*.

E.17 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.

Note: A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.

Note: Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”.

Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.

E.18 Disposal of site water during construction

The principal contractor or owner builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system that approval is obtained from *Council* under section 138(1)(d) of the *Roads Act* 1993;
- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act* 1997, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water;
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

Note: This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.

E.19 Compliance with Council’s Specification for Roadworks, Drainage and Miscellaneous Works Road works and work within the Road and Footway

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council’s *Specification for Roadworks, Drainage and Miscellaneous Works* dated February 2012.

The *owner*, *principal contractor* or *owner builder* must meet all costs associated with such works.

This condition does not set aside the need to obtain relevant approvals under the *Roads Act 1993* or *Local Government Act 1993* for works within Roads and other public places.

Note: A copy of Council's "Specification for Roadworks, Drainage and Miscellaneous Works" can be down loaded free of charge from Council's website www.woollahra.nsw.gov.au

E.20 Compliance with Geotechnical / Hydrogeological Monitoring Program

Excavation must be undertaken in accordance with the recommendations of the *Geotechnical / Hydrogeological Monitoring Program* and any oral or written direction of the supervising *professional engineer*.

The *principal contractor* and any sub-contractor must strictly follow the *Geotechnical / Hydrogeological Monitoring Program* for the development including, but not limited to;

- a) the location and type of monitoring systems to be utilised;
- b) recommended hold points to allow for inspection and certification of geotechnical and hydrogeological measures by the *professional engineer*; and
- c) the contingency plan.

Note: The consent authority cannot require that the author of the geotechnical/hydrogeological report submitted with the Development Application to be appointed as the *professional engineer* supervising the work however, it is the Council's recommendation that the author of the report be retained during the construction stage.

E.21 Vibration Monitoring

Vibration monitoring equipment must be installed and maintained, under the supervision of a *professional engineer* with expertise and experience in geotechnical engineering, between any potential source of vibration and any *building* identified by the *professional engineer* as being potentially at risk of movement or damage from settlement and/or vibration during the excavation and during the removal of any excavated material from the land being developed.

If vibration monitoring equipment detects any vibration at the level of the footings of any adjacent building exceeding the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity an audible alarm must activate such that the *principal contractor* and any sub-contractor are easily alerted to the event.

Where any such alarm triggers all excavation works must cease immediately. Prior to the vibration monitoring equipment being reset by the *professional engineer* and any further work recommencing the event must be recorded and the cause of the event identified and documented by the *professional engineer*. Where the event requires, in the opinion of the *professional engineer*, any change in work practices to ensure that vibration at the level of the footings of any adjacent building does not exceed the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity these changes in work practices must be documented and a written direction given by the *professional*

engineer to the *principal contractor* and any sub-contractor clearly setting out required work practice.

The *principal contractor* and any sub-contractor must comply with all work directions, verbal or written, given by the *professional engineer*.

A copy of any written direction required by this condition must be provided to the *Principal Certifying Authority* within 24 hours of any event.

Where there is any movement in foundations such that damaged is occasioned to any adjoining *building* or such that there is any removal of support to *supported land* the *professional engineer*, *principal contractor* and any sub-contractor responsible for such work must immediately cease all work, inform the owner of that *supported land* and take immediate action under the direction of the *professional engineer* to prevent any further damage and restore support to the *supported land*.

Note: *Professional engineer* has the same mean as in Clause A1.1 of the BCA.

Note: *Building* has the same meaning as in section 4 of the Act i.e. “*building* includes part of a building and any structure or part of a structure”.

Note: *Supported land* has the same meaning as in section 88K of the Conveyancing Act 1919.

E.22 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act* 1993 to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation* 1999.

Note: Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.

E.23 Prohibition of burning

There must be no burning of any waste or other materials. The burning of CCA (copper chrome arsenate) or PCP (pentachlorophenol) treated timber is prohibited in all parts of NSW. All burning is prohibited in the Woollahra local government area.

Note: Pursuant to the *Protection of the Environment Operations (Control of Burning) Regulation* 2000 all burning (including burning of vegetation and domestic waste) is prohibited except with approval. No approval is granted under this consent for any burning.

E.24 Dust Mitigation

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils. This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

Note: “Dust Control - Do it right on site” can be down loaded free of charge from Council’s web site www.woollahra.nsw.gov.au or obtained from Council’s office.

Note: Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from www.workcover.nsw.gov.au and www.epa.nsw.gov.au. Other specific condition and advice may apply.

Note: Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.

E.25 Site waste minimisation and management – Demolition

In order to maximise resource recovery and minimise residual waste from demolition activities:

- a) An area is to be allocated for the storage of materials for use, recycling and disposal (giving consideration to slope, drainage, location of waterways, stormwater outlets, vegetation and access and handling requirements)
- b) Provide separate collection bins and/or areas for the storage of residual waste
- c) Clearly ‘signpost’ the purpose and content of the bins and/or storage areas
- d) Implement measures to prevent damage by the elements, odour, health risks and windborne litter
- e) Minimise site disturbance, limiting unnecessary excavation

The applicant must ensure:

- a) Footpaths, public reserves and street gutters are not used as places to store demolition waste or materials of any kind without Council approval
- b) Any material moved offsite is transported in accordance with the requirements of the *Protection of the Environment Operations Act (1997)*
- c) Waste is only transported to a place that can lawfully be used as a waste facility
- d) Generation, storage, treatment and disposal of hazardous waste and special waste (including asbestos) is conducted in accordance with relevant waste legislation administered by the EPA and relevant Occupational Health and Safety legislation administered by Workcover NSW
- e) Evidence such as weighbridge dockets and invoices for waste disposal or recycling services are retained

Note: Materials that have an existing reuse or recycling market should not be disposed of in a landfill. Reuse and recycling opportunities are decreased when asbestos is not carefully removed and segregated from other waste streams.

E.26 Site waste minimisation and management – Construction

In order to maximise resource recovery and minimise residual waste from construction activities:

- a) Arrange for the delivery of materials so that materials are delivered 'as needed' to prevent the degradation of materials through weathering and moisture damage
- b) Consider organising to return excess materials to the supplier or manufacturer
- c) Allocate an area for the storage of materials for use, recycling and disposal (considering slope, drainage, location of waterways, stormwater outlets and vegetation)
- d) Clearly 'signpost' the purpose and content of the storage areas
- e) Arrange contractors for the transport, processing and disposal of waste and recycling. Ensure that all contractors are aware of the legal requirements for disposing of waste.
- f) Promote separate collection bins or areas for the storage of residual waste
- g) implement measures to prevent damage by the elements, odour and health risks, and windborne litter
- h) Minimise site disturbance and limit unnecessary excavation
- i) Ensure that all waste is transported to a place that can lawfully be used as a waste facility
- j) Retain all records demonstrating lawful disposal of waste and keep them readily accessible for inspection by regulatory authorities such as council, Department of Environment and Climate Change (DECC) or WorkCover NSW

E.27 Classification of Hazardous Waste

Prior to the exportation of hazardous waste (including hazardous fill or soil) from the site, the waste materials must be classified in accordance with the provision of the *Protection of the Environment Operations Act 1997* and the NSW DECC *Waste Classification Guidelines, Part1: Classifying Waste* (April 2008).

Note: This condition is imposed to ensure that where hazardous waste will be removed from a site an Asbestos Licensed contractor can definitively determine where the waste may be legally taken for disposal.

E.28 Disposal of Asbestos and Hazardous Waste

Asbestos and hazardous waste, once classified in accordance with the condition above must only be transported to waste facilities licensed to accept asbestos and appropriate classifications of hazardous waste.

Note: This condition is imposed to ensure that asbestos and other Hazardous waste is disposed of lawfully under the Protection of the Environment Operations Act 1997 and relevant EPA requirements.

E.29 Asbestos Removal Signage

Standard commercially manufactured signs containing the words "DANGER ASBESTOS REMOVAL IN PROGRESS" measuring not less than 400mm x 300mm are to be erected in prominent visible positions on the site when asbestos is being removed.

Note: This condition is imposed to ensure awareness of any hazard to the health and safety of persons working on the site and public.

E.30 Notification of Asbestos Removal

All adjoining properties and those opposite the development site must be notified in writing of the dates and times when asbestos removal is to be conducted. The notification is to identify the licensed asbestos removal contractor and include a contact person for the site together with telephone and facsimile numbers and email addresses.

Note: This condition has been imposed to ensure that local residents are informed and have adequate communication facilitated for incidents of asbestos removal.

E.31 Check Surveys - boundary location, building location, building height, stormwater drainage system and flood protection measures relative to Australian Height Datum

The *Principal Contractor* or *Owner Builder* must ensure that a surveyor registered under the *Surveying Act 2002* carries out check surveys and provides survey certificates confirming the location of the building(s), ancillary works, flood protection works and the stormwater drainage system relative to the boundaries of the site and that the height of buildings, ancillary works, flood protection works and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The *Principal Contractor* or *Owner Builder* must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the PCA's satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level;
- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey;
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof;
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structure, flood protection work, swimming pool or spa pool or the like;
- e) Upon the completion of formwork and steel fixing prior to pouring of any concrete for driveways showing transitions and crest thresholds confirming that driveway levels match Council approved driveway crossing levels and minimum flood levels.;
- f) Stormwater Drainage Systems prior to back filling over pipes confirming location, height and capacity of works.
- g) Flood protection measures are in place confirming location, height and capacity.

Note: This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent. This is critical to ensure that buildings are constructed to minimum heights for flood protection and maximum heights to protect views and the amenity of neighbours.

E.32 Site Cranes

Site Crane(s) and hoist(s) may be erected within the boundary of the land being developed subject to compliance with Australian Standards AS 1418, AS 2549 and AS 2550 and all relevant parts to these standards. Cranes must not swing or hoist over any public place unless the *principal contractor* or *owner builder* have the relevant approval under the *Local Government Act 1993*, *Crown Lands Act 1989* or *Roads Act 1993*. The crane must not be illuminated outside approved working hours other than in relation to safety beacons required by the Civil Aviation Safety Authority under the *Civil Aviation Act 1988 (Cth)*. No illuminated sign(s) must be erected upon or displayed upon any site crane.

Note: Where it is proposed to swing a crane over a public place the *principal contractor* or *owner builder* must make a separate application to Council under section 68 of the *Local Government Act 1993* and obtain activity approval from Council prior to swinging or hoisting over the public place.

Note: Where it is proposed to swing a crane over private land the consent of the owner of that private land is required. Alternatively, the *principal contractor* or *owner builder* must obtain an access order under the *Access to Neighbouring Land Act 2000* or easement under section 88K of the *Conveyancing Act 1919* or section 40 of the *Land & Environment Court Act 1979* as appropriate. The encroachment of cranes or the like is a civil matter of trespass and encroachment. Council does not adjudicate or regulate such trespasses or encroachments.

E.33 Acoustics – Construction Noise & Vibration Management Plan

That all acoustic strategies and procedures for all processes detailed in the *Acoustic Report prepared by Acoustic Logic titled ‘City East 1, Bellevue Hill School – Construction Noise & Vibration Management Plan’*. Document Ref. 20150392.1/2807A/RO/BW dated 28/7/2015, during the construction phases of the proposed development are to be implemented upon commencement of all construction works to minimise noise and vibration emissions that may adversely impact upon nearby residential receivers.

E.34 Wet Weather

In the event of excessive rain either before or during bump in and out, the Director of Technical Services, or the Director’s nominated representative, is authorised to direct that all or part of the park not be used, if in the opinion of the Director of Technical Services or his authorised representative, excessive damage to the park will result.

E.35 Directions of Council Officers

Any direction of the Council is to be complied with. In this regard, it should be noted that Council reserves the right to refuse or limit any activity if in its opinion, the activity is likely to cause damage, danger, nuisance or it is not in the Municipalities interest.

E.36 Protection of Parkland

An appropriate Erosion and Sediment Control Plan must be implemented during construction to ensure that material does not migrate off-site into Bellevue Park.

E.37 Storage of building material in Public Open Space

Building, excavation or demolition material and plant must not be stored on Council's public open space (Bellevue Park) unless prior written approval has been obtained by Council's Open Space & Trees Department.

E.38 Protection of Vegetation

- Equipment is not to be stored or set-up within 2 metres of any tree trunk, shrub or garden bed.
- No vehicle is to drive or stand within 2 metres of any tree trunk, shrub or garden bed.
- Speakers, lights or the like are not to be attached to or placed within any tree, shrub or garden bed.
- Shrubs, trees or other vegetation are not to be moved, lopped or damaged.

E.39 Generators, Cabling and services

The applicant has confirmed there will be no trenching for the provision of power. The applicant is responsible for ensuring all power cables and services do not affect pedestrian movement or present risks to the safety of pedestrians.

E.40 Heritage

In the unlikely event that historical archaeological remains or deposits are exposed during the works, all work should cease while an evaluation of their potential significance is undertaken by an archaeologist.

Formatted: Indent: Left: 1.25 cm,
No bullets or numbering

F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)

F.1 ~~Occupation Certificate (section 109M of the Act)~~

~~A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the Act) unless an occupation certificate has been issued in relation to the building or part.~~

~~**Note:** New building includes an altered portion of, or an extension to, an existing building.~~

Formatted: Indent: Left: 1.25 cm,
No bullets or numbering

Comment [A10]: Not required under s109M(d) of the Act

F.2F.1 Commissioning and Certification of Systems and Works

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed ("WAE") plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the BCA confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed ("WAE") plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the BCA must include but may not be limited to:

- a) Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b) All flood protection measures.
- c) All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d) All stormwater drainage and storage systems.
- e) All mechanical ventilation systems.
- f) All hydraulic systems.
- g) All structural work.
- h) All acoustic attenuation work.
- i) All waterproofing.
- j) Such further matters as the Principal Certifying Authority may require.

Note: This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the BCA, comply with this consent and so that a public record of works as executed is maintained.

Note: The PCA may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, Development Standards, BCA, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

Note: The PCA must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the BCA upon which the PCA has relied in issuing any *Occupation Certificate*.

F.3F.2 Commissioning and Certification of Public Infrastructure Works

The *principal contractor* or *owner builder* must submit, to the satisfaction of Woollahra Municipal Council, certification from a *professional engineer* that all public infrastructure works have been executed in compliance with this consent and with Council’s *Specification for Roadworks, Drainage and Miscellaneous Works* dated February 2012.

The certification must be supported by closed circuit television / video inspection provided on DVD of all stormwater drainage together with Works As Executed engineering plans and a survey report detailing all finished reduced levels.

F.4F.3 Compliance Certificate from Sydney Water

All work must be completed in accordance with the Compliance Certificate under the Sydney Water Act 1994 and the “Notice of Requirements”.

Note: Please refer to “Your Business” section of Sydney Water’s web site at www.sydneywater.com.au then the “e-developer” icon or telephone 13 20 92.

F.5F.4 Fire Safety Certificates

In the case of a *final occupation certificate* to authorise a person:

- a) to commence occupation or use of a *new building*, or
- b) to commence a change of building use for an existing building,

a *certifying authority* must be satisfied that a final fire safety certificate has been issued for the building.

In the case of an *interim occupation certificate* to authorise a person:

- a) to commence occupation or use of a partially completed *new building*, or
- b) to commence a change of building use for part of an existing building,

a *certifying authority* must be satisfied that a final fire safety certificate or an interim fire safety certificate has been issued for the relevant part of the building.

Note: This condition does not apply to a class 1a or class 10 building within the meaning of clause 167 of the Regulation.

Note: In this condition:

interim fire safety certificate has the same meaning as it has in Part 9 of the Regulation.

final fire safety certificate has the same meaning as it has in Part 9 of the Regulation.

new building has the same meaning as it has in section 109H of the Act.

F.6F.5 Food Premises - Inspection and Registration

Prior to the issue of any *Occupation Certificate* or occupation or use of any food premises:

- a) The *Principal Contractor* or *owner* must arrange an inspection of the fit out of the Food Premises by Council's Environmental Health Officer;
- b) A satisfactory final inspection must have been undertaken by Council's Environmental Health Officer; and
- c) The *owner* or *occupier* must have registered the Food Premises (Notification of conduct under section 100 of the *Food Act* 2003).

Note: Notification can be done on-line at www.foodnotify.nsw.gov.au

Note: Inspections are subject to payment of the adopted inspection fee.

Note: Section 100 of the *Food Act* 2003 requires:

"100 Notification of conduct of food businesses

(1) The proprietor of a food business must not conduct the food business unless the proprietor has given written notice, in the approved form, of the information specified in the Food Safety Standards that is to be notified to the appropriate enforcement agency before the business is conducted. Maximum penalty: 500 penalty units in the case of an individual and 2,500 penalty units in the case of a corporation."

Note: *Accredited Certifiers* are unable to issue *Compliance Certificates* in relation to compliance with the *Food Act* 2003, *Food Regulation* 2004; the Food Standards Code and the Australian Standard AS 4674-2004: *Construction and fit out of food premises*; since these are not matters which an *Accredited Certifier* can be satisfied in relation to under Clause 161 of the *Regulation*. This condition can only be satisfied following an inspection and sign off from Council's Environmental Health Officers.

F.7F.6 Amenity Landscaping

The *owner* or *principal contractor* must install all approved amenity landscaping (screen planting, soil stabilisation planting, etc.) prior to any occupation or use of the site.

Note: This condition has been imposed to ensure that the environmental impacts of the development are mitigated by approved landscaping prior to any occupation of the development.

~~F.8 Traffic Management Plan~~

~~An operational management plan be formulated and implemented by the school to provide efficient and safe environment for pick up and drop off. The operational plan is requested to be submitted to Council's Engineering Services Department. A Green Travel Plan be developed and implemented by the School.~~

F.7 Green Travel Plan

A Green Travel Plan will be adopted, promoted and implemented by the Bellevue Hill Public School prior to the occupation of the new school building.

This plan will encourage alternative modes of transportation for students, guardians, visitors and staff members, with an overall aim of decreasing dependency on private vehicles by 15%. This will include walking, cycling, carpooling and public transportation options such as buses and trains.

F.8 Operational Plan of Management

Prior to the occupation of the new school building, a detailed operational plan of management will be prepared and will be adopted and enforced by Bellevue Hill Public School. This will detail key operations of the school's drop off and pick up areas including, but not limited to:

- The operation of the drop off/pick up areas i.e. how students, guardians and private vehicles will be directed to ensure an efficient flow of traffic;
- Accompanying safety procedures, number of staff members to be present and their roles;
- The number of school staff to be present in the off-site drop off and pick up areas in order to enforce time limited parking;
- The number of school staff to be present at pedestrian crossings to ensure the safety and efficiency of school students crossing the road.
- Implementation of new smart phone applications to improve the school's pick up period;
- Analyse and implement where practical potential alternative pick up locations for different year groups; and
- Analyse and implement where practical the potential to stagger the dismissal time for different year groups.

F.9 End of Journey Facilities

In order to assist in encouraging staff members to cycle or walk to work, additional end of journey facilities such as lockers, bicycle racks and showers will be provided on site.

F.10 Time Limited Parking

Prior to occupation, the applicant is to will liaise with Council with a view to lodging an application to introduce '5 minute' time limited parking along the surrounding street to facilitate the drop off and pick up of students.

Comment [A11]: Replaced with the below

Formatted: Indent: Left: 1.25 cm, No bullets or numbering

G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate

Nil.

H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))

H.1 Removal of Ancillary Works and Structures

The *principal contractor* or *owner* must remove from the land and any adjoining public place:

- a) The site sign;
- b) Ablutions;
- c) Hoarding;
- d) Scaffolding; and
- e) Waste materials, matter, article or thing.

Note: This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the *Final Occupation Certificate*.

H.2 Landscaping

The *principal contractor* or *owner* must provide to *PCA* a works-as-executed landscape plan and certification from a qualified landscape architect/designer, horticulturist and/or arborist as applicable to the effect that the works comply with this consent.

Note: This condition has been imposed to ensure that all Landscaping work is completed prior to the issue of the *Final Occupation Certificate*.

H.3 Gateway Access to Bellevue Park

The gate access proposed from Bellevue Hill Public School and the demountable site to Bellevue Park must be inward opening (towards the property), lockable and not encroach.

H.4 Removal of all existing structures on Council land

Upon conclusion of the construction of Bellevue Hill Public School, all structures and equipment are to be removed from Bellevue Park.

As per the email from the applicant dated 19 August 2015, removal will be undertaken by a 60tonne crane located on the School rear play area which will exit back through the front entrance to Birriga Road.

It should be noted that all proposed works to this development should be made wholly within the private property and not encroach beyond the School or demountable site onto Bellevue Park.

H.5 Road Works (including footpaths)

The following works must be completed to the satisfaction of Council, in compliance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated February 2012 unless expressly provided otherwise by these conditions at the *principal contractor's* or *owner's* expense:

- a) Stormwater pipes, pits and connections to public stormwater systems within the *road*;
- b) Driveways and vehicular crossings within the *road*;
- c) Removal of redundant driveways and vehicular crossings;
- d) New footpaths within the *road*;
- e) Relocation of existing power/light pole
- f) relocation/provision of street signs
- g) New or replacement street trees;
- h) New footway verges, where a grass verge exists, the balance of the area between the footpath and the kerb or site boundary over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of turf predominant within the street.
- i) New or reinstated kerb and guttering within the *road*; and
- j) New or reinstated road surface pavement within the *road*.

Note: Security held by Council pursuant to section 80A(6) of the Act will not be release by Council until compliance has been achieved with this condition. An application for refund of security must be submitted with the *Final Occupation Certificate* to Council. This form can be downloaded from Council's website www.woollahra.nsw.gov.au or obtained from Council's customer service centre.

H.6 Dilapidation Report for public infrastructure works

The *Principal Contractor* must submit a follow up dilapidation report, prepared by a *professional engineer*, on Council's infrastructure within and near the development site to Council upon completion of the work.

The Final Occupation Certificate must not be issued until Council's Civil Works Engineer is satisfied that the works have been satisfactorily completed and the PCA has been provided with correspondence from Council to this effect.

The dilapidation report must include:

- a) Photographs showing any existing damage to the road pavement fronting the site,
- b) Photographs showing any existing damage to the kerb and gutter fronting the site,
- c) Photographs showing any existing damage to the footway including footpath pavement fronting the site,
- d) Photographs showing any existing damage to retaining walls within the footway or road, and
- e) Closed circuit television/video inspection (in DVD format) of public stormwater drainage systems fronting, adjoining or within the site, and
- f) The full name and signature of the professional engineer.

The reports are to be supplied in both paper copy and electronic format in Word. Photographs are to be in colour, digital and date stamped.

The dilapidation report must specify (with supporting photographic/DVD evidence) the exact location and extent of any damaged or defective public infrastructure. If the required report is not submitted then Council will assume any damage to any

infrastructure in the immediate vicinity of the site was caused by the principle contractor and owner carrying out work under this consent.

Note: If the Principal Contractor fails to submit the dilapidation report required by this condition and damage is occasioned to public assets adjoining the site Council will deduct from security any costs associated with remedying, repairing or replacing damaged public infrastructure. Nothing in this condition prevents Council making any claim against security held for this purpose.

H.7 Positive Covenant & Works-As-Executed certification of stormwater systems

On completion of construction work, stormwater drainage works are to be certified by a *professional engineer* with Works-As-Executed drawings supplied to the PCA detailing:

- a) Compliance with conditions of development consent relating to stormwater;
- b) The structural adequacy of the On-Site Detention system (OSD);
- c) That the works have been constructed in accordance with the approved design and will provide the detention storage volume and attenuation in accordance with the submitted calculations;
- d) Pipe invert levels and surface levels to Australian Height Datum;
- e) Contours indicating the direction in which water will flow over land should the capacity of the pit be exceeded in a storm event exceeding design limits.
- f) A positive covenant pursuant to Section 88E of the *Conveyancing Act 1919* must be created on the title of the subject property, providing for the indemnification of Council from any claims or actions and for the on-going maintenance of the on-site-detention system and/or absorption trenches, including any pumps and sumps incorporated in the development. The wording of the Instrument must be in accordance with Council's standard format and the Instrument must be registered at the Land Titles Office.

Note: The required wording of the Instrument can be downloaded from Council's web site www.woollahra.nsw.gov.au. The PCA must supply a copy of the WAE Plans to Council together with the *Final Occupation Certificate*. The *Final Occupation Certificate* must not be issued until this condition has been satisfied.

I. Conditions which must be satisfied during the ongoing use of the development

I.1 Noise from mechanical plant and equipment

The noise level measured at any boundary of the site at any time while the mechanical plant and equipment is operating must not exceed the *background noise level*. Where noise sensitive receivers are located within the site, the noise level is measured from the nearest strata, stratum or community title land and must not exceed *background noise level* at any time. The *background noise level* is the underlying level present in the ambient noise, excluding the subject noise source, when extraneous noise is removed. For assessment purposes the background noise level is the $L_{A90, 15 \text{ minute}}$ level measured by a sound level meter.

This condition has been imposed to protect the amenity of the neighbourhood.

Note: Words in this condition have the same meaning as in the:
NSW Industrial Noise Policy
(http://www.environment.nsw.gov.au/resources/ind_noise.pdf)

ISBN 0 7313 2715 2, dated January 2000, and
Noise Guide for Local Government
(<http://www.environment.nsw.gov.au/noise/nglg.htm>)
ISBN 1741370671, dated December 2004.

I.2 Noise Control

The use of the premises must not give rise to the transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*.

This condition has been imposed to protect the amenity of the neighbourhood.

Note: Council will generally enforce this condition in accordance with the *Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nglg.htm>) and the *Industrial Noise Guidelines* (<http://www.environment.nsw.gov.au/noise/industrial.htm>) published by the Department of Environment and Conservation. Other state government authorities also regulate the *Protection of the Environment Operations Act 1997*.

Useful links:

Community Justice Centres—free mediation service provided by the NSW Government (www.cjc.nsw.gov.au).

Department of Environment and Conservation NSW, Noise Policy Section web page (www.environment.nsw.gov.au/noise).

New South Wales Government Legislation home page for access to all NSW legislation, including the *Protection of the Environment Operations Act 1997* and the *Protection of the Environment Noise Control Regulation 2000* (www.legislation.nsw.gov.au).

Australian Acoustical Society—professional society of noise-related professionals (www.acoustics.asn.au/index.php).

Association of Australian Acoustical Consultants—professional society of noise related professionals (www.aaac.org.au).

Department of Gaming and Racing - (www.dgr.nsw.gov.au).

I.3 On-going maintenance of the on-site-detention system

The Owner(s) must in accordance with this condition and any positive covenant:

- a) Permit stormwater to be temporarily detained by the system;
- b) Keep the system clean and free of silt rubbish and debris;
- c) If the car park is used as a detention basin, a weather resistant sign must be maintained in a prominent position in the car park warning residents that periodic inundation of the car park may occur during heavy rain;
- d) Maintain renew and repair as reasonably required from time to time the whole or part of the system so that it functions in a safe and efficient manner and in doing so complete the same within the time and in the manner reasonably specified in written notice issued by the Council;
- e) Carry out the matters referred to in paragraphs (b) and (c) at the Owners expense;
- f) Not make any alterations to the system or elements thereof without prior consent in writing of the Council and not interfere with the system or by its act or omission cause it to be interfered with so that it does not function or operate properly;
- g) Permit the Council or its authorised agents from time to time upon giving reasonable notice (but at anytime and without notice in the case of an

- emergency) to enter and inspect the land with regard to compliance with the requirements of this covenant;
- h) Comply with the terms of any written notice issued by Council in respect to the requirements of this clause within the time reasonably stated in the notice;
 - i) Where the Owner fails to comply with the Owner's obligations under this covenant, permit the Council or its agents at all times and on reasonable notice at the Owner's cost to enter the land with equipment, machinery or otherwise to carry out the works required by those obligations;
 - j) Indemnify the Council against all claims or actions and costs arising from those claims or actions which Council may suffer or incur in respect of the system and caused by an act or omission by the Owners in respect of the Owner's obligations under this condition.

This condition has been imposed to ensure that owners are aware of require maintenance requirements for their stormwater systems.

Note: This condition is supplementary to the owner(s) obligations and Council's rights under any positive covenant.

I.4 Waste Management - Commercial

All waste must be presented for collection in a receptacle. Waste receptacles must be presented no earlier than the close of business on the day before collection. Waste and recycling bins/crates must be removed from the road or footpath within 1 hour of collection or otherwise is accordance with the approved SWMMP.

Receptacles are not to be stored in any public place at anytime. Waste and recycling receptacles must be stored at all times within the boundaries of the site.

This condition does not apply to the extent that Activity Approval exists under the Local Government Act 1993 or the Roads Act 1993 and subject that all conditions of such approval(s) are complied with.

This condition has been imposed to ensure that the provisions of the approved SWMMP and of Council's Site Waste Minimisation and Management Development Control Plan 2010 are complied with during the ongoing operations of the development.

Note: No waste will be collected by Council that isn't presented properly. The waste must be presented with lid closed to reduce littering.

I.5 Annual Fire Safety Statements (Class 1b to 9c buildings inclusive)

Each year, the owner of a building to which an *essential fire safety measure* is applicable must provide an *annual fire safety statement* to Council and the Commissioner of the NSW Fire Brigades. The *annual fire safety statement* must be prominently displayed in the building.

Note: *Essential fire safety measure* has the same meaning as in clause 165 of the *Regulation*. *Annual fire safety statement* has the same meaning as in clause 175 of the *Regulation*. Part 9 Division 5 of the *Regulation* applies in addition to this condition at the date of this consent. Visit Council's web site for additional information in relation to fire safety
www.woollahra.nsw.gov.au.

I.6 Asbestos Management

Bellevue Park is a location of contaminated soils, including asbestos. Council undertake regular inspections of the park for the presence of asbestos. As the demountable site will become the responsibility of the applicant, the applicant will need to undertake these inspections in the demountable area. In the event asbestos is found, the applicant will need an asbestos management plan for the site for these instances.

I.7 Food Premises - Maintenance of Food Premises

The food premises must be maintained in accordance with the *Food Act* 2003, *Food Regulation* 2004; the Food Standards Code as published by Food Standards Australia and New Zealand and Australian Standard AS 4674-2004: *Construction and fit out of food premises*.

This condition has been imposed to protect public health.

Note: The provisions of the Food Act 2003 may change over time and irrespective of this condition compliance with this Act, regulations, food standards and other standards adopted under the Food Act (as amended) are mandatory. The *Food Act* and applicable regulations can be accessed free of charge at www.legislation.nsw.gov.au.

I.8 Grey Water

Toilets and Waste Water – the management of and disposal of waste water from the site would need to be controlled appropriately and in accordance with relevant environment guidelines. If waste water from demountables is to be disposed of directly to the sewer system, the applicant is required to provide a waste agreement from Sydney Water. No waste water is to be disposed of into Council's stormwater systems/drains.

I.9 Park Management and Maintenance

To avoid damage as a result of the demountables in Bellevue Park and ensure preservation of the parklands:

- No marquees or structures are permitted other than those specified in this consent.
- Erection of temporary structures made permissible by this consent must not interfere quality of the turf surfaces.
- No signage can be hung between park trees or from park furniture including light poles.
- No existing park signage is to be obstructed or interfered with.

I.10 Power

The applicant is required to meet their own power needs.

I.11 Water

The applicant is required to meet their own water needs.

I.12 Hours of Operation

The hours of operation of the demountable site in Bellevue Park is limited to regular school hours Monday – Friday during school terms.

I.13 Residential Amenity

All activities are to be carried out and conducted in such a manner so as to not interfere with the amenity of the surround residents or those within the locality, particularly by way of noise emission and rubbish.

J. Advisings

J.1 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws is also a criminal offence.

Where there is any breach Council may without any further warning:

- a) Issue Penalty Infringement Notices (On-the-spot fines);
- b) Issue notices and orders;
- c) Prosecute any person breaching this consent; and/or
- d) Seek injunctions/orders before the courts to restrain and remedy any breach.

Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

Note: The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of the *Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites: <http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's www.agd.nsw.gov.au.

J.2 Dial before you dig

The *principal contractor, owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or

cable networks. Minimise your risk and Dial 1100 Before You Dig or visit www.dialbeforeyoudig.com.au.

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

J.3 Builders Licences and Owner Builders Permits

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder): <http://www.dft.nsw.gov.au/building.html> .

The Owner(s) must appoint the PCA. The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

J.4 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

Note: Further information can be obtained from Workcover NSW's website: <http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office: Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250
Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.

J.5 Lead Paint

It is beyond the scope of this consent to provide detailed information about dealing with lead paint. Painters working in an area containing lead-based paint should refer to Australian Standard AS 4361.1–1995, Guide to Lead Paint Management—Industrial Applications, or AS 4361.2–1998, Guide to Lead Paint Management—Residential and Commercial Buildings.

Industrial paints, may contain lead. Lead is used in some specialised sign-writing and artist paints, and road marking paints, and anti-corrosive paints. Lead was a major ingredient in commercial and residential paints from the late 1800s to 1970. Most Australian commercial buildings and residential homes built before 1970 contain lead paint. These paints were used both inside and outside buildings.

Lead hazards - Lead particles are released when old lead paint flakes and peels and collects as dust in ceiling, wall and floor voids. If dust is generated it must be contained. If runoff contains lead particles it must be contained. Lead is extremely

hazardous, and stripping of lead-based paint and the disposal of contaminated waste must be carried out with all care. Lead is a cumulative poison and even small levels in the body can have severe effects.

J.6 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

Note: The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>

J.7 Roads Act Application

Works or structures over, on or under public roads or footpaths are subject to Sections 138, 139 and 218 of the *Roads Act* 1993 and specifically:

- Construction of driveways and/or new or alterations to footpath paving
- Alteration and/or extension to Council drainage infrastructure
- Alteration and/or addition of retaining walls
- Pumping of water to Council's roadway
- Installation of soil/rock anchors under the roadway

An "Application to carry out works in a Public Road" form must be completed and lodged, with the Application fee, at Council's Customer Services counter. Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage etc) within existing roads, must be attached, submitted to and approved by *Council* under Section 138 of the *Roads Act* 1993, before the issue of any *Construction Certificate*.

Detailed engineering plans and specifications of the works required by this Condition must accompany the Application form. The plans must clearly show the following:

- Engineering drawings (plan, sections and elevation views) and specifications of the footpath, driveways, kerb & gutter, new gully pit showing clearly the connection point of site outlet pipe(s). Note, the connection drainage lines must be as direct as possible and generally run perpendicular to the kerb alignment.
- Engineering drawings of the new drainage line to be constructed joining the new and existing drainage pits including services.

All driveways must include a design longitudinal surface profile for the proposed driveway for assessment. The driveway profile is to start from the road centreline and be along the worst case edge of the proposed driveway. Gradients and transitions must be in accordance with Clause 2.5.3, 2.6 of AS 2890.1 – 2004, Part 1 – Off-street car parking. The driveway profile submitted to Council must be to (1:25) scale (for template checking purposes) and contain all relevant details: reduced levels, proposed grades and distances.

The existing footpath level and grade at the street alignment of the property must be maintained unless otherwise specified by *Council*. Your driveway levels are to comply with AS2890.1 and Council's Standard Drawings. There may be occasions where these requirements conflict with your development and you are required to carefully check the driveway/garage slab and footpath levels for any variations.

Note: any adjustments required from the garage slab and the street levels are to be carried out internally on private property

Drainage design works must comply with the Council's draft Development Control Plan Stormwater Drainage Management (Draft Version 1.1, Public Exhibition Copy dated 14 December 2006) and temporary ground anchors may be permitted, in accordance with Council's "*Rock Anchor Policy*".

Services Prior to any excavation works, the location and depth of all public utility services (telephone, cable TV, electricity, gas, water, sewer, drainage, etc.) must be ascertained.

The applicant shall be responsible for all public utility adjustment/relocation works, necessitated by the development work and as required by the various public utility authorities and/or their agents.

All public domain works must comply with the latest version of Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" unless expressly provided otherwise by these conditions. This specification and the application form can be downloaded from www.woollahra.nsw.gov.au.

Note: To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

Note: When a large *Roads Act* is required, then four (4) weeks is to be allowed for assessment.

Note: *Road* has the same meaning as in the *Roads Act* 1993.

Note: The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act* 1993 approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

J.8 Pruning or Removing a Tree Growing on Private Property

Woollahra Municipal Council's *Tree Preservation Order* 2006 (TPO) may require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the TPO from Council's website www.woollahra.nsw.gov.au or you may contact Council on 9391-7000 for further advice.

J.9 Additional Bus Service

The applicant is to liaise with State Transit to determine the viability of adding a new service to the school should demand warrant this as student numbers approach their maximum under this consent.

J.10 Closed Tram Lane

The applicant is to liaise with Council's Traffic Committee and State Transit/RMS with a view to confirming the viability of reopening of the closed tram way opposite the school site.

J.11 Review of 90 degree angle parking

The applicant is to liaise with Council's Traffic committee to confirm the viability of introducing time limited parking within the 90 degree angle parking zone opposite the school for additional drop off and pick up facilities.

J.12 Further Consultation with Council and RMS

The applicant is to liaise with Council and the RMS to discuss the viability of restoring the 2 lanes uphill to the section of Birriga Road between Banksia Street and the School Access Road.

Formatted: No bullets or numbering

Formatted: Condition Heading 2

Formatted: Indent: Left: 1 cm,
Hanging: 0.5 cm

Formatted: No bullets or numbering

Formatted: No bullets or numbering

Formatted: Indent: Left: 1 cm,
Hanging: 0.5 cm