



WASTE MANAGEMENT PLAN

PREPARED FOR
Deicorp

ON BEHALF OF
Turner

Mixed Use Development
LOT 4
158-164 Hawkesbury Road & 2A Darcy Road
Westmead NSW 2145

15/12/2016

EDDY SAIDI
Ph: 1800 025 073


The information contained in this document produced by Elephants Foot Recycling Solutions is solely for the use of the client identified on the cover sheet for the purpose for which it has been prepared for. Elephants Foot Recycling Solutions undertakes no duty, nor accepts any responsibility to any third party who may rely upon this document. This document may not be copied or reproduced without written permission from Elephants Foot Recycling Solutions.

ELEPHANTS FOOT WASTE COMPACTORS PTY LTD ABN 70 001 378 294
Sydney Head Office 44-46 Gibson Ave Padstow NSW 2211 | PH: +612 9780 3500 | Fax: +612 9707 2588
Website: www.elephantsfoot.com.au | Email: info@elephantsfoot.com.au
Offices in Victoria & Queensland – Toll Free: 1800 025 073

REVISIONS

Revision	Date	Prepared by	Reviewed by	Approved by	Remarks
A	14/10/2016	A Armstrong	N Beattie	E Saidi	DRAFT
B	15/12/2016	A Armstrong	N Beattie	E Saidi	FINAL

Authorised By:



Eddy Saidi

Date:

15/12/2016

DISTRIBUTION LIST

Recipient Name	Company	Revision
Eddy Saidi	Elephants Foot Recycling Solutions	A
Adhara Ferra	Turner Studio	A
Claire Krelle	Turner Studio	A

EXECUTIVE SUMMARY

This waste management plan covers the ongoing management of waste generated by the residential development located at, 158-164 Hawkesbury Road & 2A Darcy Road (Lot 4), Westmead NSW.

Waste audit and management strategies are recommended for new developments to provide support for the building design and promote strong sustainability outcomes for the building. All recommended waste management plans will comply with council codes and any statutory requirements. The waste management plan has three key objectives:

- i. ***Ensure waste is managed to reduce the amount of waste and recyclables to land fill*** by assisting residents to segregate appropriate materials that can be recycled; displaying signage to remind and encourage recycling practices; and through placement of recycling and waste bins in the retail precinct to reinforce these messages.
- ii. ***Recover, reuse and recycle*** generated waste wherever possible.
- iii. ***Compliance*** with all relevant codes and policies.

To assist in providing clean and well-segregated waste material, it is essential that this waste management plan is integral to the overall management of the building and clearly communicated to residents and tenants.

TABLE OF CONTENTS

REVISIONS.....	2
DISTRIBUTION LIST	2
EXECUTIVE SUMMARY	3
GLOSSARY OF TERMS	6
LIST OF FIGURES	7
LIST OF TABLES.....	7
INTRODUCTION	8
PARRAMATTA CITY COUNCIL.....	9
OBJECTIVES.....	9
REQUIREMENTS	9
GENERATED WASTE VOLUMES.....	11
CONSTRUCTION AND DEVELOPMENT WASTE	11
BUILDING MANAGER/WASTE CARETAKER	11
REPORTING.....	12
EDUCATION	12
RESIDENTIAL WASTE PLAN.....	13
BIN SUMMARY.....	13
WASTE MANAGEMENT	14
WASTE HANDLING.....	14
WASTE	14
RECYCLING	14
TEMPORARY STORAGE OF BULKY GOODS.....	15
OTHER WASTE STREAMS	15
COMPOSTING	15
COMMON AREAS	15
WASHROOM FACILITIES.....	15
GREEN WASTE	15
WASTE CHUTES	16
EQUIPMENT SUMMARY.....	16
WASTE ROOM AREAS.....	17
COLLECTION OF WASTE.....	17
COLLECTION AREA.....	17
GARBAGE ROOMS.....	19

ELEPHANTS FOOT WASTE COMPACTORS PTY LTD ABN 70 001 378 294
Sydney Head Office 44-46 Gibson Ave Padstow NSW 2211 | **PH:** +612 9780 3500 | **Fax:** +612 9707 2588
Website: www.elephantsfoot.com.au | **Email:** info@elephantsfoot.com.au
Offices in Victoria & Queensland – Toll Free: 1800 025 073

GLOSSARY OF TERMS

TERM	DESCRIPTION
<i>Baler</i>	A device that compresses waste into a mould to form bales which may be self-supporting or retained in shape by wire ties and strapping
<i>Chute</i>	A ventilated, essentially vertical pipe passing from floor to floor of a building with openings as required to connect with hoppers and normally terminating at its lower end at the roof of the central waste room(s)
<i>Collection Area/Point</i>	The position or area where waste or recyclables are actually loaded onto the collection vehicle
<i>Compactor</i>	A Machine for compressing waste into disposable or reusable containers
<i>Composter</i>	A container/machine used for composting specific food scraps
<i>Crate</i>	A plastic box used for the collection of recyclable materials
<i>Garbage</i>	All domestic waste (Except recyclables and green waste)
<i>Hopper</i>	A fitting into which waste is placed and from which it passes into a chute or directly into a waste container. It consists of a fixed frame and hood unit (the frame) and a hinged or pivoted combined door and receiving unit
<i>Recycling</i>	Glass bottles and jars – PET, HDPE and PVC plastics; aluminium aerosol and steel cans; milk and juice cartons; soft drink, milk and shampoo containers; paper, cardboard, junk mail, newspapers and magazines
<i>Green</i>	Garden organics such as small branches, leaves and grass clippings, tree and shrub pruning, plants and flowers, and weeds
<i>L</i>	Litre(s)
<i>Liquid Waste</i>	Non-hazardous liquid waste generated by commercial premises that is supposed to be connected to sewer or collected for treatment and disposal by a liquid waste contractor (including grease trap waste)
<i>Mobile Garbage Bin(s) (MGB)</i>	A waste container generally constructed of plastic with wheels with a capacity in litres of 120, 240, 660, 1000 or 1100, 1500 or 2000

LIST OF FIGURES

No table of figures entries found.

LIST OF TABLES

Table 1: Residential Unit Breakdown Matrix	8
Table 2: Calculated Waste Generation – Residential	13
Table 3: Bin Summary – Residential	13
Table 4: Equipment Summary	16
Table 5: Waste Room Areas	17

INTRODUCTION

The following waste management plan pertains to the residential development located at , 158-164 Hawkesbury Road & 2A Darcy Road (Lot 4), Westmead NSW. This waste management plan is an operational waste management plan and will address the phases of the completed development.

For the purpose of this report the proposed development will consist of:

- Three, multi-level buildings (**Building D, E & F**) with 4 all-encompassing basement levels.
 - **Building D** has 2 separate building cores and **202** residential units in total (see Table. 1 for Unit Breakdown Matrix).
 - **Core 1** has 20 levels and **178** residential units; and
 - **Core 2** has 6 levels **24** residential units.
 - **Building E** has 8 levels, 2 separate building cores and **63** residential units in total
 - **Core 1** has **39** residential units; and
 - **Core 2** has **59** residential units.
 - **Building F** has 7 levels and **55** residential units in total

Table 1: Residential Unit Breakdown Matrix

Building	D		E		F		TOTAL	
	# Units	% Mix	# Units	% Mix	# Units	% Mix	# Units	% Mix
1 Bed	109	50.99	69	69.39	22	50.91	200	56.34
2 Bed	81	34.65	26	33.67	25	45.45	132	37.18
3 Bed	9	6.44	3	3.06	1	1.82	13	3.66
Studio	3	1.49	0	0.00	7	12.73	10	2.82
Total	202		98		55		355	

All figures and calculations are based on area schedules as advised by our client and shown on architectural drawings.

PARRAMATTA CITY COUNCIL

The assessment of waste volumes is an estimate only and will be influenced by the development's management and occupant's attitude to waste disposal and recycling.

The residential waste and recycling will be guided by the services and acceptance criteria of the Parramatta City Council. The residential waste and recycling will be collected by a private waste contractor.

All waste facilities and equipment are to be designed and constructed to be in compliance with Parramatta City Council's *Development Control Plan 2011* and *Waste Avoidance and Resource Recovery Plan 2007*, NSW Office of Environment and Heritage's *Model Waste Not Development Control Plan Chapter 2008*, Australian Standards and statutory requirements.

OBJECTIVES

- Reduce the quantity of waste and encourage the recycling of waste generated by demolition and the construction of new developments
- encourage building design that will minimise waste generation over the lifetime of the building
- ensure that the disposal of waste generated by a building's occupants over its lifetime is managed appropriately and efficiently
- ensure that waste storage facilities are located appropriately and do not impact negatively on the streetscape
- ensure that waste can be effectively collected and managed
- assist in achieving Federal and State Government waste minimisation targets.

REQUIREMENTS

WARR Principle 1: Council believes that the priority for waste management is to reduce consumption in the first place. In adopting this position, Council recognises that products and services will be consumed. As a result the second priority will be on managing the waste generated as a resource.

WARR Principle 2: Council believes that source separation is essential for any waste collection or treatment approach. In adopting this position, Council recognises that there is no one single solution to waste treatment and that a suite of techniques is required.

WARR Principle 3: Council believes that the disposal of waste is the direct responsibility of the individual or business that produced it. In adopting this position, Council recognises that currently it is difficult for individuals to reduce their waste. Council therefore will assist residents in managing their waste. Council also recognises that business, government and the community will need to work together to bring about continuous improvement in managing our waste.

WARR Principle 4: Council will work towards the concept of zero waste. In doing so it will develop short term targets and continually review and improve its actions as technology changes. In adopting this position, Council recognises that this is a long term goal and that Council only has a limited influence in total waste management.

WARR Principle 5: Council believes that it is important to prioritise different products and sectors in order to efficiently work towards zero waste. In adopting this position, Council recognises that some products or sectors may achieve this more readily than others.

GENERATED WASTE VOLUMES

The assessment of projected waste volumes is a calculated estimate only and will be influenced by the development's management and occupant's waste disposal and recycling practices.

CONSTRUCTION AND DEVELOPMENT WASTE

The head contractor will be responsible for removing all construction-related waste offsite in a manner that meets all authority requirements. Please refer to the separate waste management plan submitted for construction waste as part of the Development Application.

BUILDING MANAGER/WASTE CARETAKER

All waste equipment movements are to be managed by the building manager/cleaners at all times. No tenants or residents will be allowed to transport waste or recyclables from the waste room; tenants and residents will only transport their waste to the allocated bin room.

The building manager/cleaner duties include, but are not limited to, the following:

- general maintenance and cleaning of the chute doors on each level (Frequency dependent on waste generation and will be determined based upon building operation);
- organising, maintaining and cleaning the general and recycled waste holding areas (Frequency will depend on waste generation and will be determined based upon building operation);
- transporting of bins as required;
- organising both garbage and recycled waste pick-ups as required;
- cleaning and exchanging all bins;
- ensure site safety for residents, children, visitors, staff and contractors;
- abide by all relevant OH&S legislation, regulations, and guidelines;
- assess any manual handling risks and prepare a manual handling control plan for waste and bin transfers; and
- provide to staff/contractors equipment manuals, training, health and safety procedures, risk assessments, and PPE to control hazards associated with all waste management activities

NOTE: It is the responsibility of the building manager to monitor the number of bins required for the development. As waste volumes may change according to the development's management and occupants' attitudes to waste disposal and recycling, bin numbers and sizes may need to be altered to suit the building operation.

REPORTING

It is recommended that building management ensure that all waste service providers submit monthly reports on all equipment movements and weights of any waste and recycling products removed from the development. Regular reviews of servicing should take place to ensure operational and economic best practise and to assist with sustainability reporting.

EDUCATION

Building management is responsible for creating and managing the waste management education process.

Educational material encouraging correct separation of garbage and recycling items must be provided to each resident to ensure correct use of the waste and recycling chute. This should include the correct disposal process for bulky goods (old furniture, large discarded items, etc.) It is recommended that information is provided in multiple languages to support correct practises and minimise the possibility of chute blockages as well as contamination in the collective waste bins.

It is also recommended that the owners' corporation website contain information for residents to refer to regarding use of the chute. Information should include:

- directions on using the chute doors;
- recycling and garbage descriptions (Council provides comprehensive information);
- how to dispose of bulky goods and any other items that are not garbage or recycling;
- residents' obligations to WHS and building management; and
- how to prevent damage or blockages to the chute (example below).

To prevent damage or blockage to rubbish chute DO NOT dispose of any newspapers, umbrellas, bedding, cigarettes, cartons, coat hangers, brooms, mops, large plastic wrappings from furniture, white goods, any sharp objects, hot liquid or ashes, oil, unwrapped vacuum dust, syringes, paint and solvents, car parts, bike parts, chemicals, corrosive and flammable items, soil, timber, bricks or other building materials, furniture, etc. down the chute.

RESIDENTIAL WASTE PLAN

Council references the NSW Office of Environment and Heritage, *Model Waste Not Development Control Plan Chapter 2008* for waste generation rates. Using these rates, the total waste generated by the development can be calculated as follows:

Table 2: Calculated Waste Generation – Residential

Building/ Core	# Units	Waste Calculation (L/unit/week)	Generated Waste (L/week)	Recycling Calculation (L/unit/week)	Generated Recycling (L/week)
D:1	178	80	14240	40	7120
D:2	24	80	1920	40	960
E:1	39	80	3120	40	1560
E:2	59	80	4720	40	2360
F	55	80	4400	40	2200
TOTAL	355		28400		14200

BIN SUMMARY

The following assumptions have been taken into consideration:

- garbage is not compacted at the base of each chute;
- recycling is not compacted at the base of each chute;
- garbage and recycling is collected 2 x weekly; and
- the number of bins have been rounded up for best operational with outcome.

Using the assumptions stated, the required capacity and quantity of garbage and recycling bins have been calculated and tabulated respectively in the following table:

Table 3: Bin Summary – Residential

Building/Waste Rooms	Garbage			Recycling		
	Bin Capacity (L)	Quantity	Collection Rate (times/week)	Bin Capacity (L)	Quantity	Collection Rate (times/week)
Building D:1	1100	7	2	1100	4	2
Building D:2	1100	1	2	1100	1	2
Building E:1	1100	2	2	1100	1	2
Building E:2	1100	3	2	1100	2	2
Building F	1100	2	2	1100	1	2
Total	1100	15	2	1100	9	2

NOTE: Subject to the stakeholders preference/capability (and as built constraints), bin sizes and quantities may be changed. As waste volumes may change according to the development's type, bin numbers and collection frequencies may be altered to suit the building operation.

WASTE MANAGEMENT

5 waste chutes will be supplied by Elephants Foot and installed. Breakdown is as follows:

Building D:1: dual chute - one garbage; one recycling
Building D:2: dual chute - one garbage; one recycling
Building E:1: dual chute - one garbage; one recycling
Building E:2: dual chute - one garbage; one recycling
Building F: dual chute - one garbage; one recycling

Garbage discharges into 1100L MGBs not compacted, and recycling (comingle) into 1100L MGBs which is not compacted. The discharge is located in the waste discharge rooms for each building/building core.

Full bins will be transferred to the collection area on the lower ground floor for servicing by a private waste contractor.

WASTE HANDLING

WASTE

All residents of each building will be supplied with a collection area in each unit (generally in the kitchen, under bench or similar alternate area) to deposit garbage and collect recyclable material suitable for one days storage. Residents should wrap or bag their waste. Bagged waste should not exceed 3kg in weight or 35cm x 35cm x 35cm in dimension.

The caretaker/cleaner will be required to check the 1100L MGB collecting waste from each chute, rotate full bins to the storage and collection area, and replace empty 1100L MGB under each chute operation.

RECYCLING

Cardboard furniture boxes or large cardboard containers should not be included in the waste chute – a cardboard collection bin will be made available to residents to deposit flattened cardboard and will be managed by the waste caretaker. Bins will be located in the garbage and bulky goods area,

Recycling must not be bagged. It is recommended that residents use a crate or dedicated bin for collecting recyclables within the allocated residential space provided to ensure correct separation.

The caretaker/cleaner will be required to check the 1100L MGB collecting waste from each chute, rotate full bins to the storage and collection area, and replace empty 1100L MGB under each chute operation.

TEMPORARY STORAGE OF BULKY GOODS

A room or caged area must be allocated for the storage of discarded bulky items and recyclable electronic goods and sign marked appropriately. The allocated space must be a minimum of 8m³. Recyclable electronic goods include batteries, equipment containing printed circuit boards, computers, televisions, fluorescent tubes and smoke detectors.

It is recommended that donations to charitable organisations be encouraged. Clean, sound furniture and household goods etc. are highly sought after to provide for the disadvantaged. Donations will be arranged with the assistance of the building manager/caretaker.

OTHER WASTE STREAMS

Disposal or recycling of electronic, liquid waste and home detox (paint/chemicals etc.) will be organised with the assistance of the building caretaker. These items must not be placed in waste or recycling bins due to safety and environmental factors.

Residents should be directed to Council's comprehensive website for further information.

COMPOSTING

A space for composting and worm farming is recommended to be available for all residents in a communal facility or in small private courtyards (see *APPENDIX C.4 for Typical Worm Farm Specifications*). Residents may also choose to purchase and install apartment style compost bin where practical and self-manage these systems (see *APPENDIX C.5 and APPENDIX C.6 for Typical Compost Bins*). Two systems have been included for consideration however there are a variety of compost systems available at hardware stores.

COMMON AREAS

The lobbies, retail amenities and circulation areas will be supplied with suitably branded waste and recycling bins, where considered appropriate. Building management will monitor use and ensure bins are exchanged and cleaned. These areas generate negligible waste however garbage and recycling receptacles should be placed in convenient locations.

WASHROOM FACILITIES

Washroom facilities in retail and staff areas should be supplied with collection bins for paper towels (if used). Sanitary bins for female restroom facilities must also be arranged with an appropriate contractor.

Building management will monitor use and ensure waste bins are exchanged and cleaned.

GREEN WASTE

There will be green waste generated by the buildings landscaped areas. Any green waste will be collected and removed from site by the maintenance contractor during scheduled or arranged servicing of these areas.

WASTE CHUTES

Waste chutes for each level of the residential building are supplied per the following specifications:

- either 510mm galvanised steel or 510mm recycled LLDPE polyethylene plastic;
- galvanised steel chute hoppers are wrapped with 50mm poly-wool R1.3 noise insulation foil to assist in noise reduction;
- penetrations on each building level at vertically perpendicular points with minimum penetration dimensions of 600mm x 600mm (square or round) are required to accommodate the chute installation;
- a wash down system and vent should also be included as part of the chute system;
- council and supplier require that all chutes are installed without offsets to achieve best practise operationally for the building; and
- two hour fire-rated (AS1530.4-2005) stainless steel refuse chute doors at each service level. All doors are to be fitted with a self-closing mechanism to meet BSA fire standards.

NOTE: Chute doors are installed after walls rendered, painted or when required. Information stickers will be placed on each chute door at each residential level.

EQUIPMENT SUMMARY

Table 4: Equipment Summary

Component	Part	Quantity	Notes
Chutes	Galvanised Steel / LLDPE Polyethylene Plastic	10	Chute Diameter (See APPENDIX C.1 for Typical Chute Section)
Equipment A	<i>Garbage</i> Linear Tracks for 1100L MGB with not compacted (D1 & E2)	2	(See APPENDIX C.2 for Typical Linear System)
	<i>Recycling</i> Linear Tracks for 1100L MGB with not compacted (D1)	1	(See APPENDIX C.2 for Typical Linear System)
Equipment B	Suitable Bin Moving Equipment	Optional	Optional (See APPENDIX C.3 for Typical Bin Mover)

WASTE ROOM AREAS

Each waste discharge room (not including D:2 & E:1) will hold a minimum of 2 x 1100L garbage MGBs and 2 x 1100L recycling MGBs. All additional MGBs will be stored in the bin holding room and will replace full bins within each waste discharge room when required. The waste discharge rooms must also accommodate the relevant equipment, as displayed in Table.4.

The bin holding room must hold all the garbage and recycling MGBs generated weekly, and allow enough room to clean and safely manoeuvre bins. A bin wash down area is provided in this area.

The areas allocated for residential waste rooms, bulky goods and collection areas are detailed in Table. 5 below. The areas provided are considered suitable for purpose.

Table 5: Waste Room Areas

Location	Waste Room Type	Bin Quantity	Allocated Area (m ²)
LG – D:1	Waste Discharge Room	4 x 1100L MGBs	24.13
LG – D:2	Waste Discharge Room	2 x 1100L MGBs	23.21
LG – E:1	Waste Discharge Room	3 x 1100L MGBs	28.15
LG – E:2	Waste Discharge Room	4 x 1100L MGBs	35.24
LG – F	Waste Discharge Room	3 x 1100L MGBs	17.85
LG (Collection Area)	Bin Holding Room	24 x 1100L MGBs	56.58
LG (Collection Area)	Bulky Goods Storage		11.43

COLLECTION OF WASTE

On collection days, the building caretaker will transfer all MGBs from each waste discharge room to the central bin holding room for collection.

A private waste contractor will be engaged to collect all garbage and recycling MGBs to the agreed collection schedule. The collection vehicle will pull up in the designated vehicle loading bay and will service all MGBs directly from the bin holding room via a wheel-in/wheel-out arrangement.

Once serviced, the building caretaker will return all MGBs back to their allocated waste discharge rooms.

COLLECTION AREA

All access and egress details including a swept path analysis for all vehicle movements on site will be provided by the traffic consultant's report.

Should a private waste collection vehicle be required to enter a property, access driveways and internal roads must be designed to provide adequate clearance and manoeuvring space to allow the waste collection vehicle to enter and exit in a forward direction without impeding upon general access to, from or within the site.

Where bulk bins are proposed, access is to be provided from the street level without the need for manual handling with sufficient space for the collection vehicle to drive to the collection point,

empty the bin safely and exit without traffic interference or any height restrictions. This service is generally not provided by Council's waste contractor and arrangements will need to be made for private collections.

GARBAGE ROOMS

CONSTRUCTION REQUIREMENTS

The garbage room will be required to contain the following facilities to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area:

- waste room floor to be sealed with a two pack epoxy;
- waste room walls and floor surface is flat and even;
- all corners coved and sealed 100mm up, this is to eliminate build-up of dirt;
- for residential: a hot and cold water facility with mixing facility and hose cock must be provided for washing the bins;
- for retail/commercial: a cold water facility with hose cock must be provided for washing the bins;
- any waste water discharge from bin washing must be drained to sewer in accordance with the relevant water board. (Sydney Water);
- tap height of 1.6m;
- storm water access preventatives (grate);
- all walls painted with light colour and washable paint;
- equipment electric outlets to be installed 1700mm above floor levels;
- the room must be mechanically ventilated;
- light switch installed at height of 1.6m;
- waste rooms must be well lit (sensor lighting recommended);
- optional automatic odour and pest control system installed to eliminate all pest types and assist with odour reduction – this process generally takes place at building handover – building management make the decision to install;
- all personnel doors are hinged and self-closing;
- waste collection area must hold all bins – bin movements should be with ease of access;
- conform to the Building Code of Australia, Australian Standards and local laws; and
- childproofing and public/operator safety shall be assessed and ensured

SIGNAGE

The building manager/caretaker is responsible for waste room signage including safety signage (see *APPENDIX B.2*). Appropriate signage must be prominently displayed on walls and above all bins, clearly stating what type of waste or recyclables is to be placed in the bin underneath.

All chute doors on all residential levels will be labelled with signs directing chute operations and use of chute door.

VENTILATION

Waste and recycling rooms must have their own exhaust ventilation system either;

- Mechanically - exhausting at a rate of 5L/m² floor area, with a minimum rate of 100L/s minimum; or
- Naturally - permanent, unobstructed, and opening direct to the external air, not less than one-twentieth (1/20) of the floor area

Mechanical exhaust systems shall comply with AS1668 and not cause any inconvenience, noise or odour problem.

STORM WATER PREVENTION & LITTER REDUCTION

Building management shall be responsible for the following to minimise dispersion of site litter and prevent stormwater pollution to avoid impact to the environment and local amenity:

- promote adequate waste disposal into the bins;
- secure all bin rooms (whilst affording access to staff/contractors);
- prevent overfilling of bins, keep all bin lids closed and bungs leak-free;
- take action to prevent dumping or unauthorised use of waste areas; and
- ensure collection contractors clean-up any spillage that may occur when clearing bins

ADDITIONAL INFORMATION

Transfer of waste and all bin movements require minimal manual handling therefore the operator must assess manual handling risks and provide any relevant documentation to building management. If required, a bin-tug, trailer or tractor consultant should be contacted to provide equipment recommendations. Hitches may require installation to move multiple bins to the collection area. Council must be informed of any hitch attachments required to be installed on bins.

LIMITATIONS

The purpose of this report is to document a Waste Management Plan as part of a development application and is supplied with the following conditions:

- Drawings, estimates and information contained in this waste management plan have been prepared by analysing the information, plans and documents supplied by you and third parties including Council and government information. The assumptions based on the information contained in the WMP is outside the control of EFRS;
- the figures presented in the report are an estimate only – the actual amount of waste generated will be dependent on the occupancy rate of the building/s and waste generation intensity as well as the building managements approach to educating residents and tenants regarding waste management operations and responsibilities;
- the building manager will make adjustments as required based on actual waste volumes (if waste is greater than estimated) and increase the number of bins and collections accordingly;
- the report will not be used to determine or forecast operational costs or prepare any feasibility study or to document any safety or operational procedures;
- the report has been prepared with all due care however no assurance or representation is made that the WMP reflects the actual outcome and EFRS will not be liable to you for plans or outcomes that are not suitable for your purpose, whether as a result of incorrect or unsuitable information or otherwise;
- EFRS offer no warranty or representation of accuracy or reliability of the WMP unless specifically stated;
- any manual handling equipment recommended should be provided at the recommendation of the appropriate equipment provider who will assess the correct equipment for supply;
- Design of waste management chute equipment and systems must be approved by the supplier.

USEFUL CONTACTS

Elephants Foot Recycling Solutions does not warrant or make representation for goods or services provided by suppliers.

Parramatta City Council Customer Service

Phone: 02 9265 9333

Email: council@parracity.nsw.gov.au

SULO MGB (MGB, Public Place Bins, Tugs and Bin Hitches)

Phone: 1300 364 388

CLOSED LOOP (Organic Dehydrator)

Phone: 02 9339 9801

ELECTRODRIVE (Bin Mover)

Phone: 1800 333 002

Email: sales@electrodrive.com.au

RUD (Public Place Bins, Recycling Bins)

Phone: 07 3712 8000

Email: info@rud.com.au

CAPITAL CITY WASTE SERVICES

Phone: 02 9359 9999

REMONDIS (Private Waste Services Provider)

Phone: 13 73 73

SITA ENVIRONMENTAL (Private Waste Services Provider)

Phone: 13 13 35

NATIONAL ASSOCIATION OF CHARITABLE RECYCLING ORGANISATIONS INC. (NACRO)

Phone: 03 9429 9884

Email: information@nacro.org.au

PURIFYING SOLUTIONS (Odour Control)

Phone: 1300 636 877

Email: sales@purifyingsolutions.com.au

Elephants Foot Recycling Solutions (Chutes, Compactors and eDiverter Systems)

44 – 46 Gibson Avenue

Padstow NSW 2211

Free call: 1800 025 073

Email: natalie@elephantsfoot.com.au

APPENDICES

APPENDIX A DRAWING EXERPTS


APPENDIX A.1 LOWER GROUND LEVEL DISPLAYING WASTE DISCHARGE ROOMS



Excerpt: Turner, Drawing # DA-110-001 Rev S – Lower Ground Floor

ELEPHANTS FOOT WASTE COMPACTORS PTY LTD ABN 70 001 378 294
Sydney Head Office 44-46 Gibson Ave Padstow NSW 2211 | PH: +612 9780 3500 | Fax: +612 9707 2588
Website: www.elephantsfoot.com.au | Email: info@elephantsfoot.com.au
Offices in Victoria & Queensland – Toll Free: 1800 025 073

APPENDIX A.2 LOWER GROUND LEVEL DISPLAYING COLLECTION AREA

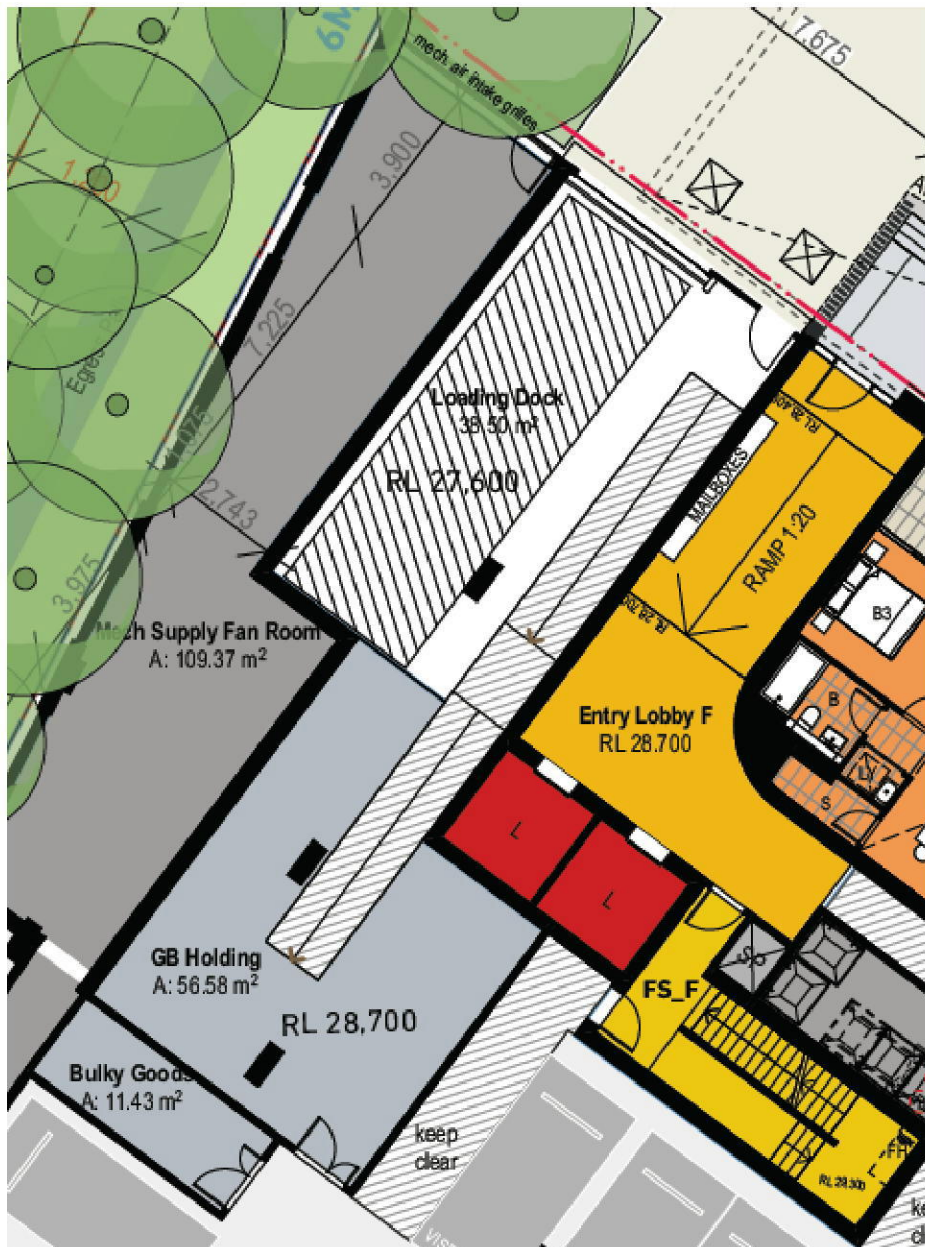

Excerpt: Turner, Drawing # DA-110-001 Rev S – Lower Ground Floor

ELEPHANTS FOOT WASTE COMPACTORS PTY LTD ABN 70 001 378 294
Sydney Head Office 44-46 Gibson Ave Padstow NSW 2211 | PH: +612 9780 3500 | Fax: +612 9707 2588
Website: www.elephantsfoot.com.au | **Email:** info@elephantsfoot.com.au
Offices in Victoria & Queensland – Toll Free: 1800 025 073

APPENDIX A.3 TYPICAL LEVEL DISPLAYING CHUTE DISPOSAL LOCATIONS



Excerpt: Turner, Drawing # DA-110-001 Rev S – Lower Ground Floor

ELEPHANTS FOOT WASTE COMPACTORS PTY LTD ABN 70 001 378 294
Sydney Head Office 44-46 Gibson Ave Padstow NSW 2211 | PH: +612 9780 3500 | Fax: +612 9707 2588
Website: www.elephantsfoot.com.au | Email: info@elephantsfoot.com.au
Offices in Victoria & Queensland – Toll Free: 1800 025 073

APPENDIX B PARRAMATTA CITY COUNCIL EQUIPMENT SPECIFICATIONS

APPENDIX B.1 BIN DIMENSIONS AND SPECIFICATIONS

Mobile containers with a capacity from 500L to 1700L with four wheels



Dome or flat lid containers

Bin Type	660 Litre MGB	770 Litre MGB	1100 Litre MGB	1300 Litre MGB	1700 Litre MGB
Height	1250	1425	1470	1480	1470
Depth	850	1100	1245	1250	1250
Width	1370	1370	1370	1770	1770

APPENDIX B.2 SIGNAGE FOR WASTE & RECYCLING BINS


WASTE SIGNS

Signs for garbage, recycling and organics bins should comply with the standard signs promoted by the Department of Environment and Heritage.

Example wall posters



Example bin lid stickers



SAFETY SIGNS

The design and use of safety signs for waste rooms and enclosures should comply with AS1319 Safety Signs for Occupational Environment. Safety signs should be used to regulate and control safety behaviour, warn of hazards and provide emergency information, including fire protection information. Below are some examples. Each development will need to decide which signs are relevant for its set of circumstances and service provided.

Examples of Australian Standards:



Australian Standards are available from the SAI Global Limited website (www.saiglobal.com).

Source: *Better Practice Guide to Waste Management in Multi-Unit Dwellings*, 2008, DEC

ELEPHANTS FOOT WASTE COMPACTORS PTY LTD ABN 70 001 378 294
Sydney Head Office 44-46 Gibson Ave Padstow NSW 2211 | PH: +612 9780 3500 | Fax: +612 9707 2588
Website: www.elephantsfoot.com.au | Email: info@elephantsfoot.com.au
Offices in Victoria & Queensland – Toll Free: 1800 025 073


APPENDIX B.3 TYPICAL COLLECTION VEHICLE INFORMATION

Collection vehicles

Waste collection vehicles may be side loading, rear-end loading, front-end loading or crane trucks. The size of vehicle varies according to the collection service. Thus it is impossible to specify what constitutes the definitive garbage vehicle. Developers should consult the local council and/or relevant contractors regarding the type of vehicle used in that area.

The following characteristics represent the typical collection vehicle, however, these are only for guidance.

It may be possible to engage a collection service provider to use smaller collection vehicles to service developments with narrow roadways and laneways, or for on-site collections. However, as the availability of smaller vehicles to make services varies between councils and private contractors, wherever possible the development should be designed to accommodate vehicles of a similar size to that reported below.

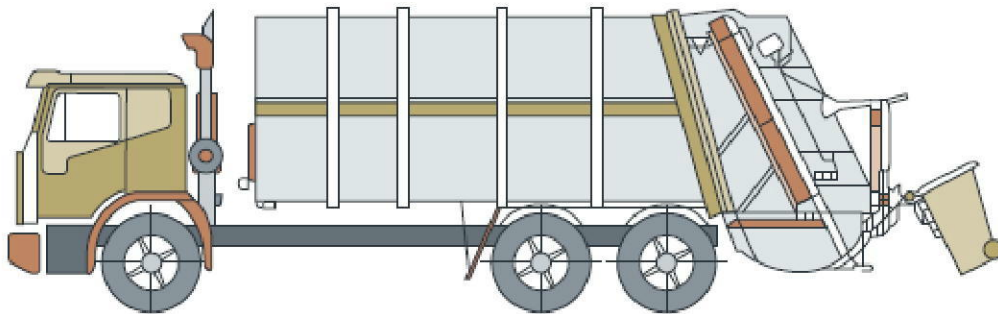


Rear loading collection vehicle

Rear loading collection vehicle	
Length overall	10.24m
Width overall	2.5m
Operational height	3.5m
Travel height	3.5m
Weight (vehicle only)	12.4 tonnes
Weight (payload)	9.5 tonnes
Turning circle	18.0m

This is commonly used for domestic garbage and recycling collections from MUDs. It can be used to collect waste stored in MGBs or bulk bins, particularly where bins are not presented on the kerbside.

APPENDIX C WASTE MANAGEMENT EQUIPMENT SPECIFICATIONS

APPENDIX C.1 TYPICAL CHUTE PLAN

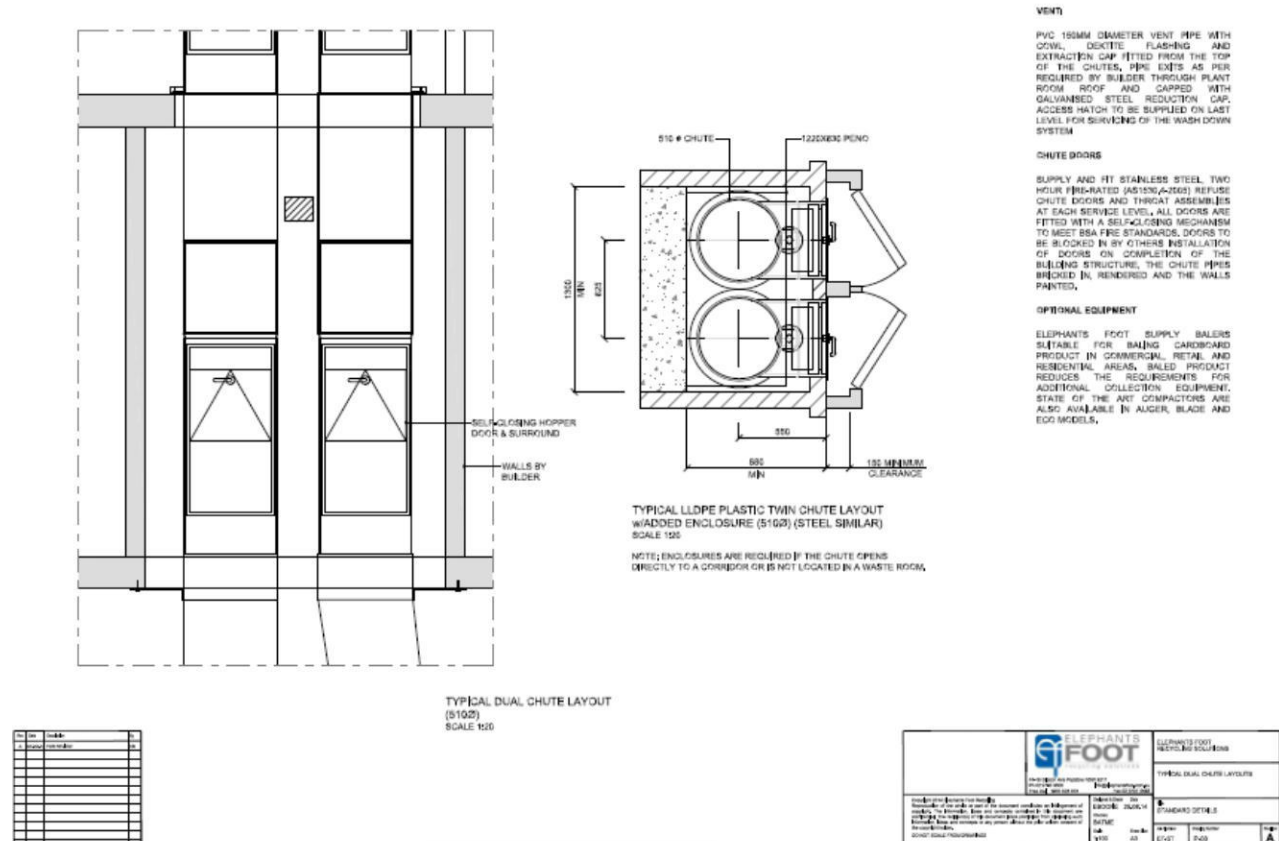

APPENDIX C.3 TYPICAL BIN MOVER



Typical applications:

- Move trolleys, waste bin trailers and 660litre/1100 litre bins up and down a ramp incline. Ideal for Apartment Buildings (to move waste bins located at a basement level to road level).
- Quiet, smooth operation with zero emissions and simple to use, no driver's licence required

Features:


- Up to 1 Tonne on a ramp surface (depending on ballast and incline)
- Anti-rollback system on slopes
- Foot print: 1548L x 795W x 1104H (handle in the drive position)
- Pin Hitch is standard however alternate hitching options may be available to suit your specific application (e.g. tow ball)

Safety Features:

- Intuitive paddle lever control
- Stops and repels the unit if activated when reversing.
- Site assessment recommended to assess ramp incline steepness (*See Useful Contacts*)

APPENDIX C.4 TYPICAL WORM FARM SPECIFICATIONS

Worm farms

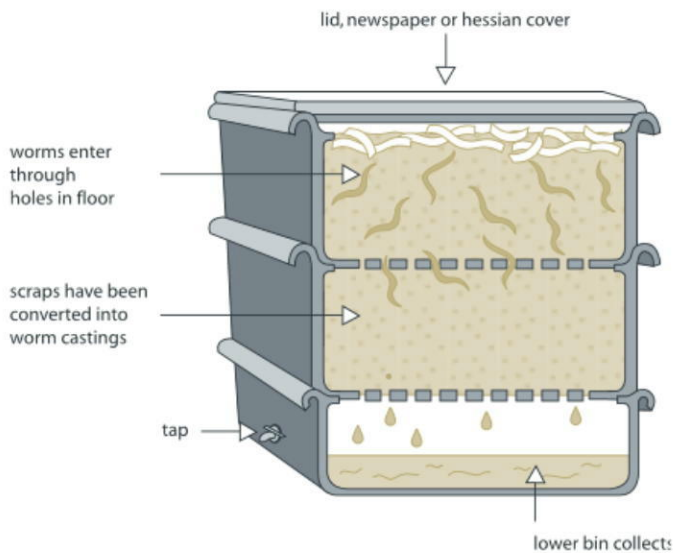

Space requirements for a typical worm farm for an average household:

Height – 300mm per level

Width – 600mm

Length – 900mm

There are many worm farm arrangements.
The above dimensions are indicative only.

SOURCE: *Department of Environment and Climate Change NSW 2008, Better Practice Guide for Waste Management in Multi-Unit Dwellings*

APPENDIX C.5 TYPICAL APARTMENT STYLE COMPOST BINS



Apartment Style Compost bin – available from hardware stores

Suitable for:

- Vegetables
- Coffee grounds and filters
- Tea and tea bags
- Crushed eggshells (but not eggs)
- Nutshells
- Houseplants
- Leaves
- Cardboard rolls, cereal
- Boxes, brown paper bags
- Clean paper
- Shredded newspaper
- Fireplace ashes
- Wood chips, sawdust,
- Toothpicks, burnt matches
- Cotton and wool rags
- Dryer and vacuum cleaner lint
- Hair and fur
- Hay and straw

APPENDIX C.6 ELECTRIC ORGANIC COMPOST BIN



Product Specifications

Decomposition Method	Fermentation by microorganisms
Decomposition Capacity	2 metric tonnes per year* (4 kg per day*)
Rating	220–240 V 50/60 Hz – 1.1 A
Decomposition Time	24 hrs
Operating Temperature	0C and 40C.**
Deodorisation Method	Nano-Filter system
Maximum Power	210 W
Power Usage	Average 1 kwh per day
Weight	21 kgs
External Dimensions	w 400 mm d 400 mm h 780 mm

* Food Waste Handling Capacity – based on an optimal operating environment.

** Ambient temperature range of area where unit may be installed.

SOURCE: Closed Loop Domestic Composter – See Useful Contacts

ELEPHANTS FOOT WASTE COMPACTORS PTY LTD ABN 70 001 378 294
Sydney Head Office 44-46 Gibson Ave Padstow NSW 2211 | **PH:** +612 9780 3500 | **Fax:** +612 9707 2588
Website: www.elephantsfoot.com.au | **Email:** info@elephantsfoot.com.au
Offices in Victoria & Queensland – Toll Free: 1800 025 073

APPENDIX C.7 TYPICAL PUBLIC PLACE WASTE BINS



** Products and specifications may change according to manufacturer.*

SOURCE: *SULO Environmental Technology*