

1

2

3

4

5

6

7

A

B

C

D

E

F

G

STORMWATER MANAGEMENT PLAN

PROPOSED CHILDCARE CENTRE

No.4B & 8 CHARLTON AVENUE, TURRAMURRA

GENERAL NOTES:

- THESE PLANS REMAIN THE PROPERTY OF NY CIVIL ENGINEERING PTY LTD AND ARE SUBJECT TO COPYRIGHT
- ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. ALL REDUCED LEVELS (SURFACE LEVELS, INVERT LEVELS) AND CHAINAGES ARE IN METERS UNLESS OTHERWISE STATED. DO NOT SCALE OFF THE DRAWINGS, SCALES ARE AS SHOWN, USE FIGURED DIMENSIONS.
- THIS PLAN IS TO BE READ IN JUNCTION WITH LATEST ARCHITECTURAL, STRUCTURAL, UTILITY AND LANDSCAPE PLANS IN ADDITION TO ANY RELEVANT GEOTECHNICAL, SOIL CLASSIFICATION OR REF/ENVIRONMENTAL REPORTS. ENGINEER IS TO BE NOTIFIED OF ANY DISCREPANCIES QUOTED ON THIS PLAN.
- ALL WORKS SHALL BE CARRIED OUT TO LOCAL COUNCIL'S DEVELOPMENT CONTROL PLAN AND SPECIFICATIONS, AS/NZS 3500.3 AND B.C.A.
- ALL LEVELS SHALL RELATE TO THE ESTABLISHED BM, PM AND/OR LM. ALL EXISTING SERVICES ARE TO BE VERIFIED FOR LOCATION AND DEPTH PRIOR TO COMMENCEMENT OF ANY WORK. CONTRACTOR TO NOIFY DESIGNER OF ANY DISCREPANCIES OF SERVICE LEVELS QUOTED ON THIS PLAN. ALL SURVEY INFORMATION, BUILDING AND FINISHED SURFACE LEVELS SHOWN IN THESE DRAWINGS ARE BASED ON LEVELS OBTAINED FROM DRAWINGS BY OTHERS.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN ANY PRIOR APPROVAL REQUIRED FROM COUNCIL WITH RESPECT TO POTENTIAL IMPACT ON TREES FOR ANY WORKS SHOWN ON THIS DRAWING PRIOR TO THE COMMENCEMENT OF WORKS. NO TREES SHALL BE REMOVED WITHOUT THE WRITTEN PERMISSION OF COUNCIL.
- THE CONTRACTOR SHALL TAKE ALL DUE CARE TO USE THE ABSOLUTE MINIMUM AREA FOR CONSTRUCTION AND THAT NO UNDUE DAMAGE IS DONE TO THE EXISTING VEGETATION.
- THE CONTRACTOR SHALL COMPLY WITH CONDITIONS, AND SPECIFICATION OF COUNCIL AND ALL ACTS OF THE NSW EPA.
- THE CONTRACTOR SHALL TAKE ALL REASONABLE CARE TO PROTECT EXISTING SERVICES. DAMAGED SERVICES SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.
- ALL NEW WORK IS TO MAKE A SMOOTH JUNCTION WITH EXISTING WORK.
- SUITABLE WARNING SIGNS AND BARRICADES ARE TO BE PROVIDED IN ACCORDANCE WITH THE AUSTRALIAN STANDARDS AND AS DIRECTED BY THE RELEVANT AUTHORITY.
- SERVICES SHOWN ARE INDICATIVE ONLY FROM AVAILABLE INFORMATION AND THE TIME OF SITE INVESTIGATION (IF ANY). THE BUILDER IS TO NOTIFY ENGINEER OF ANY DISCREPANCIES QUOTED ON THIS PLAN.
- RESTORE ALL TRAFFIC AREAS TO PRE EXISTING CONDITION. FOR ALL SURFACES OTHER THAN IN TRAFFIC AREAS RESTORE DISTURBED SURFACES TO PRE-EXISTING CONDITION AND COMPACT AS SPECIFIED.
- RESTORE ALL AUTHORITY OWNED AREAS TO COUNCIL AND/OR AUTHORITY STANDARD AND SPECIFICATION.
- THE WORK AS CONSTRUCTED WORKS SHALL BE INSPECTED BY THE ENGINEER, MINIMUM 48 HOURS NOTICE SHALL BE PROVIDED FOR ALL INSPECTION REQUESTS.
- THE DESIGN PLANS HEREIN ARE SUBJECT TO COUNCIL APPROVAL PRIOR TO CONSTRUCTION.
- WORK AS CONSTRUCTED DRAWINGS TO BE REQUESTED AND RECEIVED IN CAD/DWG FILE TYPE AND HARD COPY 'RED LINE' MARKUP FROM CONSTRUCTOR FOR VERIFICATION AND CERTIFICATION.

STORMWATER DRAINAGE NOTES:

PIPE SIZE:

- THE MINIMUM PIPE SIZE SHALL BE:
 - DN90 FOR ALL DOWNPIPES;
 - DN100 WHERE THE LINE ONLY RECEIVES ROOF STORMWATER RUNOFF, OR;
 - DN100 WHERE THE LINE RECEIVES RUNOFF FROM PAVED OR UNPAVED AREAS.

PIPE GRADE:

- THE MINIMUM PIPE GRADE SHALL BE:
 - FOR DN100 - DN150 - 1.00%
 - FOR DN225 - 0.50%
 - FOR DN300 - 0.45%
 - FOR DN375 - 0.35%

STANDARD COVER:

- MINIMUM PIPE COVER FOR PVC PIPES SHALL BE AS PER AS 3500.3 TABLE 6.2.5:
 - NOT SUBJECT TO VEHICULAR LOADING:
 - WITHOUT PAVEMENT SINGLE DWELLINGS - 100mm
 - WITHOUT PAVEMENT OTHER THAN SINGLE DWELLINGS - 300mm
 - WITH PAVEMENT (BRICK/PAVERS) AND/OR UNREINFORCED CONCRETE - 100mm
 - SUBJECT TO VEHICULAR LOADING:
 - ROADS (SEALED) - 600mm
 - ROADS (UNSEALED) - 750mm
 - OTHER THAN ROADS (WITH PAVEMENT) - 100mm
 - OTHER THAN ROADS (WITHOUT PAVEMENT) - 450mm

PIPE INSTALLATION

- PIPES AND FITTINGS FOR STORMWATER DRAINAGE SHALL BE AS FOLLOWS:
 - FOR PIPE SIZES UP TO DN225 - PVC WITH SOLVENT WELDED JOINTS (IN GROUND).
 - FOR PIPE SIZES GREATER THAN DN225 - RCP WITH RUBBER RING JOINTS.
 - FOR LARGER PIPE DEPTHS AS SPECIFIED IN AS 3500.3 - RCP WITH RUBBER RING JOINTS.
 - FOR PIPES AND FITTINGS FOR SUBSOIL DRAINAGE SHALL BE SLOTTED PVS WITH SOLVENT WELDED JOINTS MINIMUM DN150.
- FOR GRATED DRAINS SHALL BE MINIMUM DN150 IN NON-TRAFFICABLE ZONES AND DN225 IN TRAFFICABLE ZONES.
- LAY AND JOINT ALL PIPES IN ACCORDANCE WITH THE MANUFACTURING RECOMMENDATIONS AND:
 - AS 3725-1989 - LOADS ON BURIED CONCRETE PIPES
 - AS 2566 - 1988 - BURIED FLEXIBLE PIPELINES
 - AS 1597.2 - 1996 - PRECAST REINFORCED CONCRETE BOX CULVERTS
 - AS 3500 - 1990 NATIONAL PLUMBING AND DRAINAGE CODE - PART 2 SANITARY PLUMBING AND SANITARY DRAINAGE - SYDNEY WATER REQUIREMENTS.
- ALLOW TO TEST ALL PIPES AND PITS TO MANUFACTURERS REQUIREMENTS.

CONNECTIONS TO STORMWATER SYSTEMS UNDER BUILDINGS:

IN ACCORDANCE WITH AS 3500.3 SECTION 9.2

CONNECTIONS TO COUNCIL STORMWATER SYSTEMS:

CONNECTION TO COUNCIL STORMWATER SYSTEM TO BE IN ACCORDANCE TO LOCAL COUNCIL DCP AND STANDARDS. NO CONNECTIONS TO BE MADE UNTIL PROPER PERMIT/APPROVALS ARE OBTAINED FROM LOCAL COUNCIL IN WRITING.

WARNING:

EXISTING SERVICES SHOWN ON THESE PLANS ARE NOT GUARANTEED COMPLETE OR CORRECT AND FURTHER INFORMATION IS REQUIRED FROM THE RELEVANT AUTHORITY AND FIELD INVESTIGATION AND ARE TO BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION.

LEGEND

SURFACE INLET PIT		GRATED TRENCH DRAIN	
SURFACE INLET PIT (WITH ENVIROPOD 200 MICRON)		ABSORPTION TRENCH	
ACCESS GRATE (WITH GROSS POLLUTANT TRAP)		PROPOSED ROOF GUTTER FALL	
450 SQUARE INTERVAL	450 X 450	PROPOSED DOWNPIPE SPREADER	
GRATE LEVEL = 75.50	SL 75.50	STORMWATER PIPE 100mm DIA. MIN. UNO	
INVERT LEVEL = RL 75.20	IL 75.20	SUBSOIL PIPE	
PROPOSED DOWNPIPE 90mm DIA. OR 100mm x 50mm MIN.		EXISTING STORMWATER PIPE	
NATURAL GROUND FINISHED DESIGN LEVEL	× 10.00	INSPECTION RISER	
		RAINWATER HEAD	

STORMWATER PIT/STRUCTURES NOTES:

PIT SIZES AND DEPTHS:

- PIT SIZES WILL BE AS FOLLOWS:

DEPTH (mm)	MIN. PIT SIZE (mm)
UP TO 450	350x350
450 ~ 600	450x450
600 ~ 900	600x600
900 ~ 1200	600x900
1200+	900x900 (WITH STEP IRONS)

PIT DESIGNS:

- TRENCH DRAINS: CONTINUOUS TRENCH DRAINS ARE TO BE MIN. DN150 AND MIN. 100mm DEPTH. THE BARS OF THE GRATE ARE TO BE PARALLEL TO THE DIRECTION OF SURFACE FLOW.
- STEP IRONS: PITS BETWEEN 1.2m AND 6m ARE TO HAVE STEP IRONS IN ACCORDANCE WITH AS 1657. FOR PITS GREATER THAN 6m OTHER MEANS OF ACCESS MUST BE PROVIDED.
- PLASTIC/PVC PITS: PVC PITS WILL ONLY BE PERMITTED IF THEY ARE MAX. 450x450 AND MAX. 450mm DEPTH AS WELL AS BEING HEAVY DUTY.
- IN-SITU PITS: IN-SITU PITS ARE TO BE CONSTRUCTED ON A CONCRETE BED OF AT LEAST 150mm THICK. THE WALLS ARE TO BE DESIGNED TO MEET THE MINIMUM REQUIREMENTS OF CLAUSE 4.6.3 OF AS 3500.4. PITS DEEPER THAN 1.8m SHALL BE CONSTRUCTED WITH REINFORCED CONCRETE.
- GRATES: GRATES ARE TO BE GALVANIZED STEEL GRID TYPE. GRATES ARE TO BE OF HEAVY-DUTY TYPE IN AREAS WHERE THEY MAY BE SUBJECT TO VEHICLE LOADING.

INSTALLATION NOTES:

- ALL PIPES INTO PITS TO BE CUT FLUSH WITH PIT WALL.
- ALL PITS THAT ARE INSTALLED AT GREATER THAN 600mm DEEP TO BE MIN. 600x600 PIT.
- GRATED COVERS ON PITS GREATER THAN 600mm TO BE HINGED.
- BASE OF PIT TO BE SAME LEVEL OF INVERT OF OUTLET.
- OUTLET PIPE FROM ANY PIT TO BE 20mm LOWER THAN INLET PIPE/S

	APPROVED BY		REVISION	DRAWN	DESCRIPTION	DATE	DRAWING TITLE		SHEET SIZEA1	JOB REFERENCE E240371
	NADER ZAKI MIEAust CPEng NER		A	MR	ISSUED FOR DA	29.10.2024	DETAILS, NOTES & LEGEND		DESIGNED MR	
			B	YR	ARCHITECTURAL AMENDMENTS	16.09.2025			CHECKED NZ	DRAWING No. D1
	☎ 0413 942 613						PROJECT TITLE PROPOSED CHILDCARE CENTRE No.4B & 8 CHARLTON AVENUE TURRAMURRA		ISSUE B	No. IN SET 6
	✉ admin@nycivilengineering.com.au								SCALE AS NOTED	
	🌐 www.nycivilengineering.com.au									


A

B
C

E

E

G

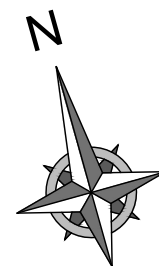

BELOW GROUND OSD/RWT/WSUD TANK			
	OSD	RWT	WSUD
SURFACE LEVEL	RL 154.65 - 155.30	RL 155.30 - 155.50	RL 155.30 - 155.50
SOFFIT LEVEL	RL 154.45 - 155.10	RL 155.10 - 155.30	RL 155.10 - 155.30
T.W.L	RL 154.65	RL 154.95	RL 153.80
CENTRELINE LEVEL	RL 153.05		
INVERT LEVEL	RL 153.00	RL 153.15	RL 153.15
SURFACE AREA	50.6m ²	11.2m ²	8.0m ²
AVERAGE DEPTH	1.50m	1.80m	
VOLUME (m ³)	75.9m ³	20.2m ³	


APPROVED BY	REVISION	DRAWN	DESCRIPTION	DATE	DRAWING TITLE	SHEET SIZEA1	JOB REFERENCE
NADER ZAKI MIEAust CPEng NER  ☎ 0413 942 613 ✉ admin@nycivilengineering.com.au 🌐 www.nycivilengineering.com.au	A	MR	ISSUED FOR DA	29.10.2024	STORMWATER MANAGEMENT BASEMENT PLAN	DESIGNED MR	E240371
	B	YR	ARCHITECTURAL AMENDMENTS	16.09.2025			
					PROJECT TITLE	CHECKED NZ	DRAWING No. D2
					PROPOSED CHILDCARE CENTRE No.4B & 8 CHARLTON AVENUE TURRAMURRA	ISSUE B	No. IN SET
						SCALE 1:200	6


NIL

Globe

NEI


Y
ERI

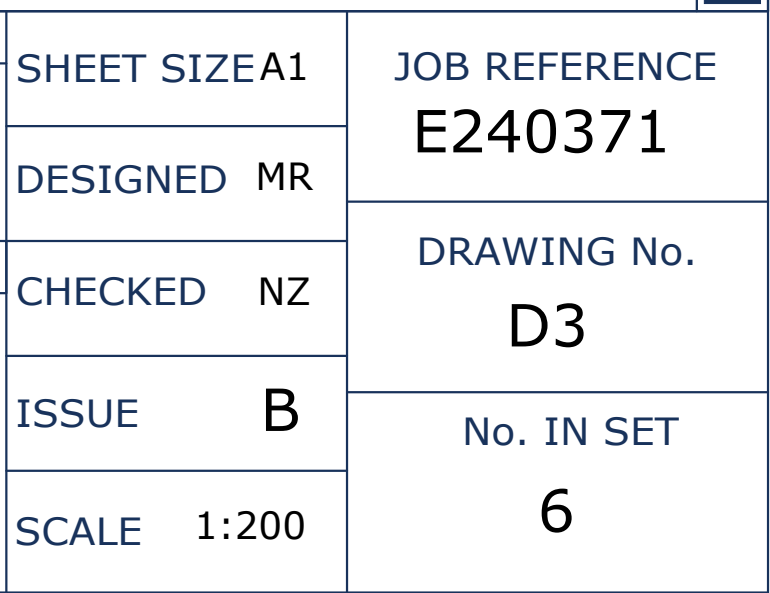

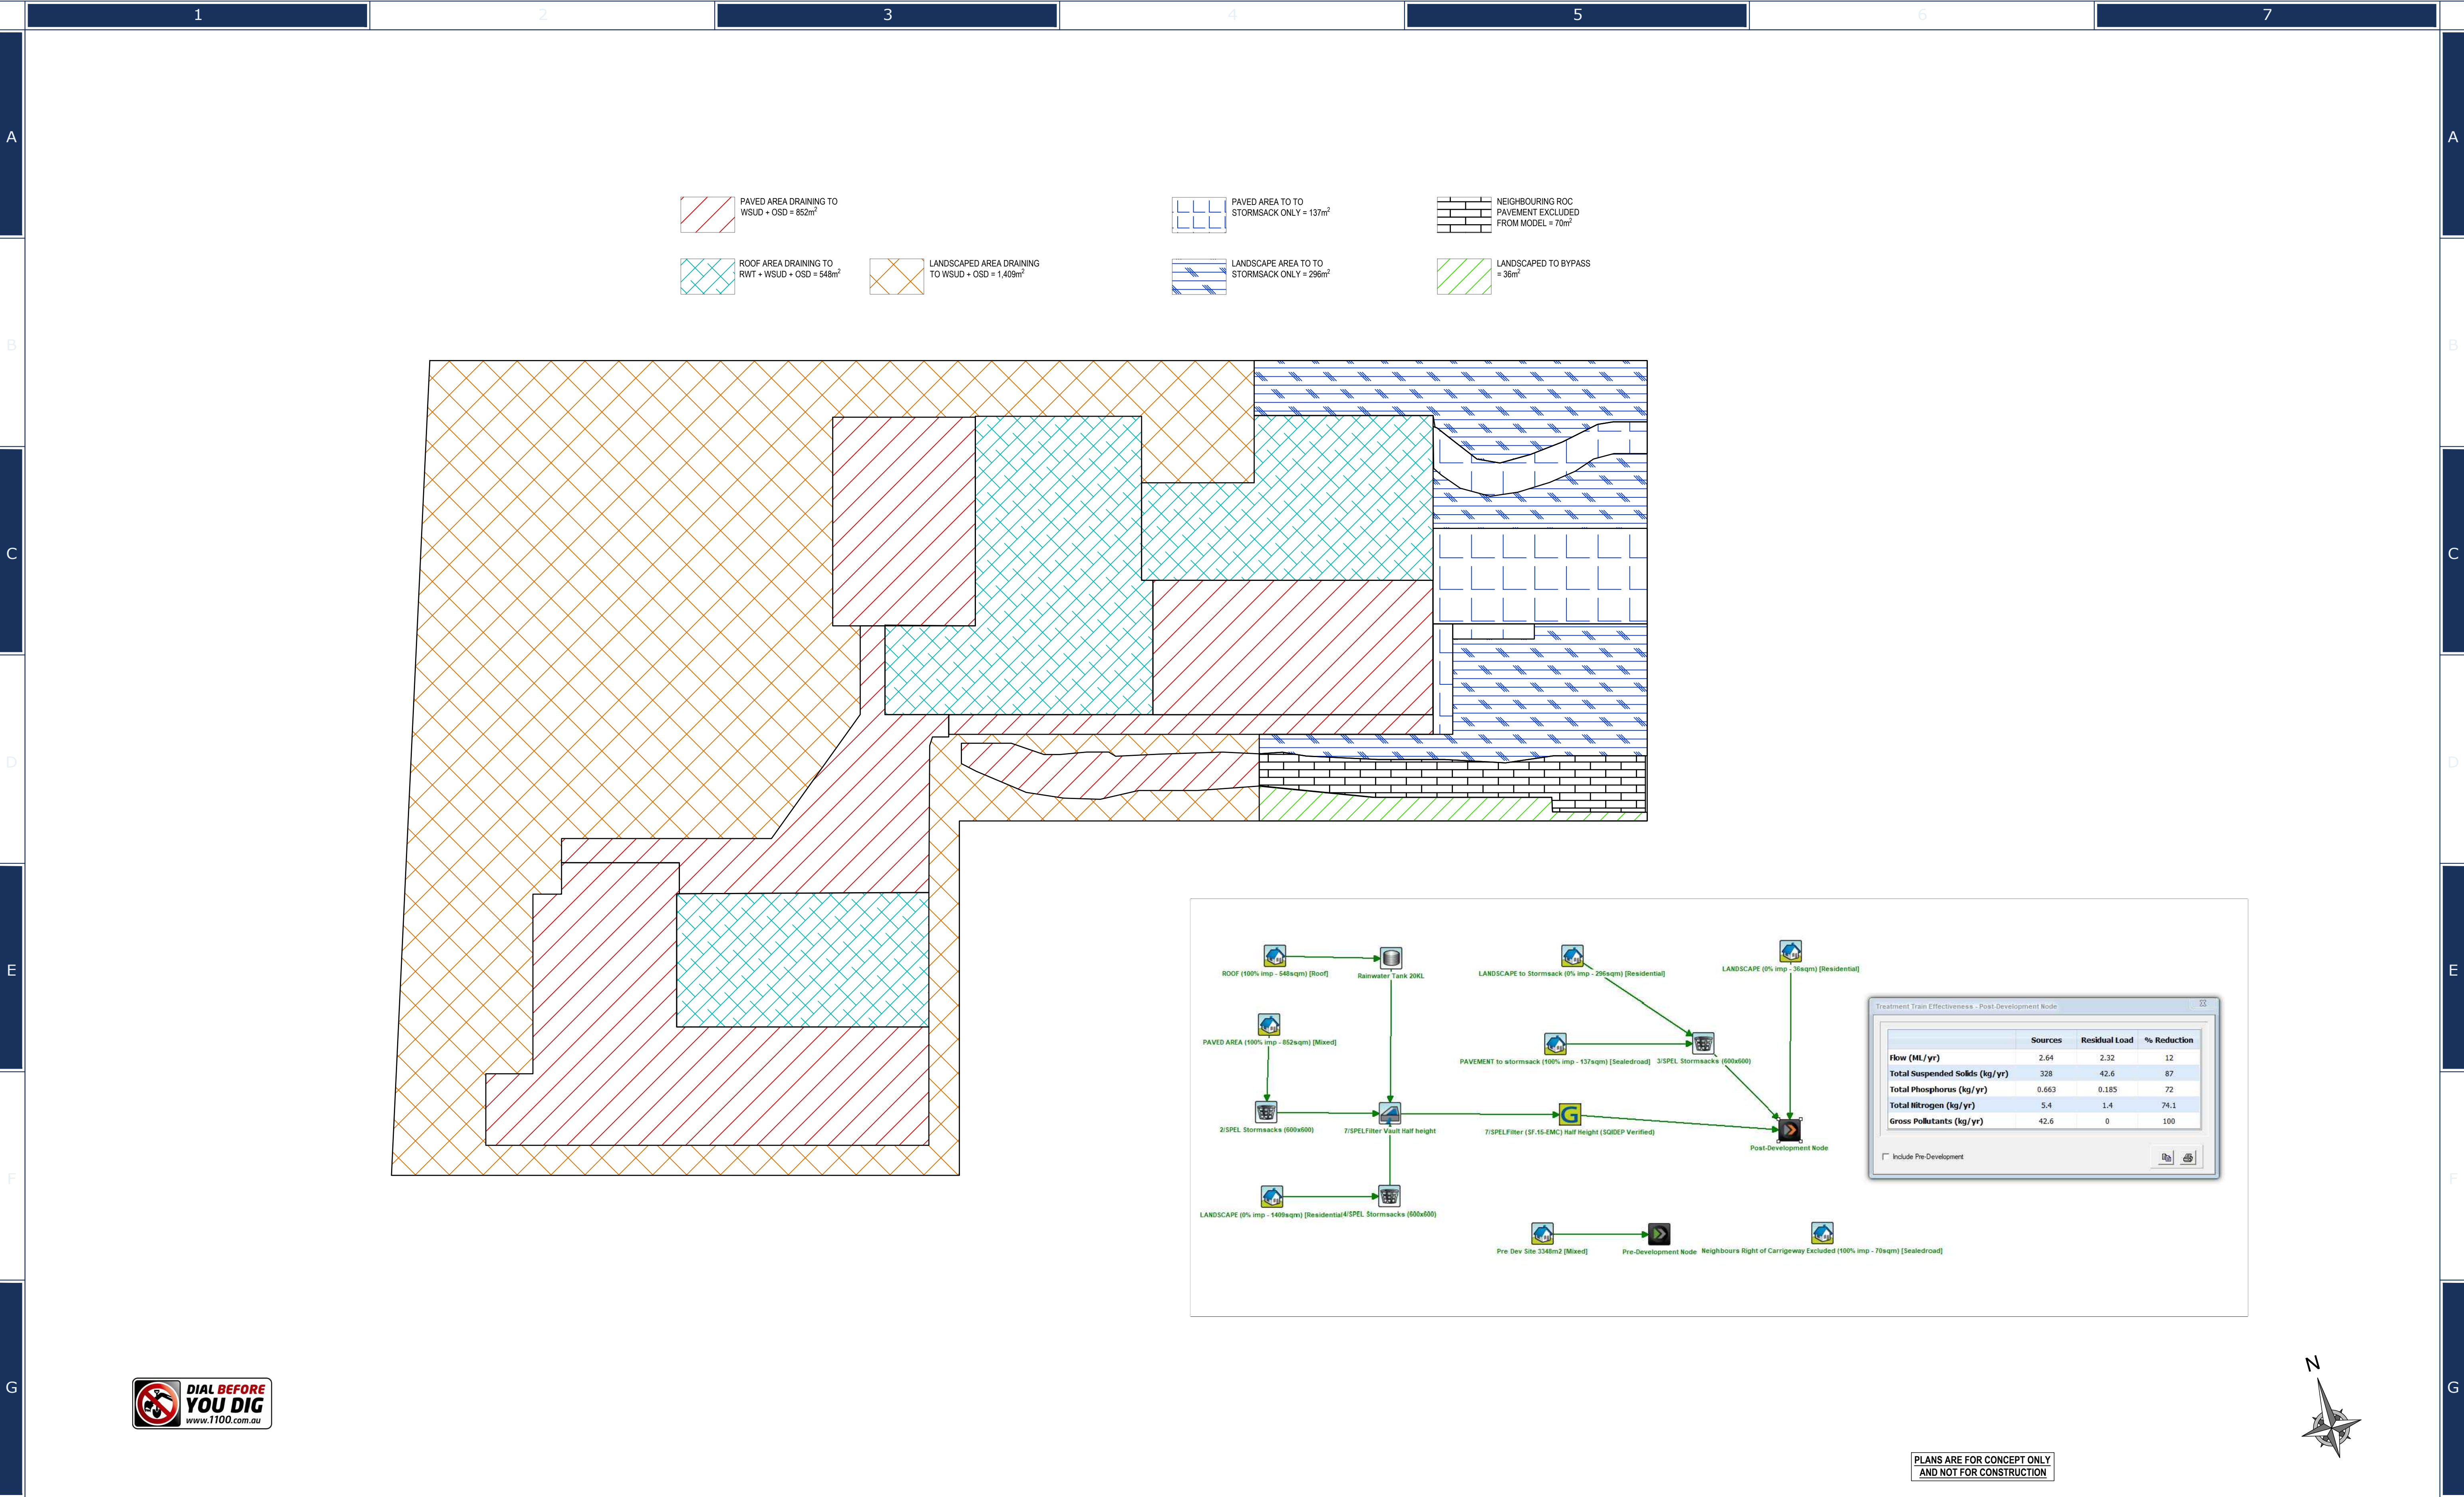

PLANS ARE FOR CONCEPT ONLY
AND NOT FOR CONSTRUCTION

	APPROVED BY		REVISION	DRAWN	DESCRIPTION	DATE	DRAWING TITLE		SHEET SIZEA1	JOB REFERENCE	
	NADER ZAKI		A	MR	ISSUED FOR DA	29.10.2024	CATCHMENT PLAN		DESIGNED MR	E240371	
	MIEAust CPEng NER		B	YR	ARCHITECTURAL AMENDMENTS	16.09.2025			CHECKED NZ	DRAWING No. D4	
							PROJECT TITLE		ISSUE B	No. IN SET	
	0413 942 613								SCALE AS NOTED	6	
	admin@nycivilengineering.com.au										
www.nycivilengineering.com.au							PROPOSED CHILDCARE CENTRE No.4B & 8 CHARLTON AVENUE TURRAMURRA				

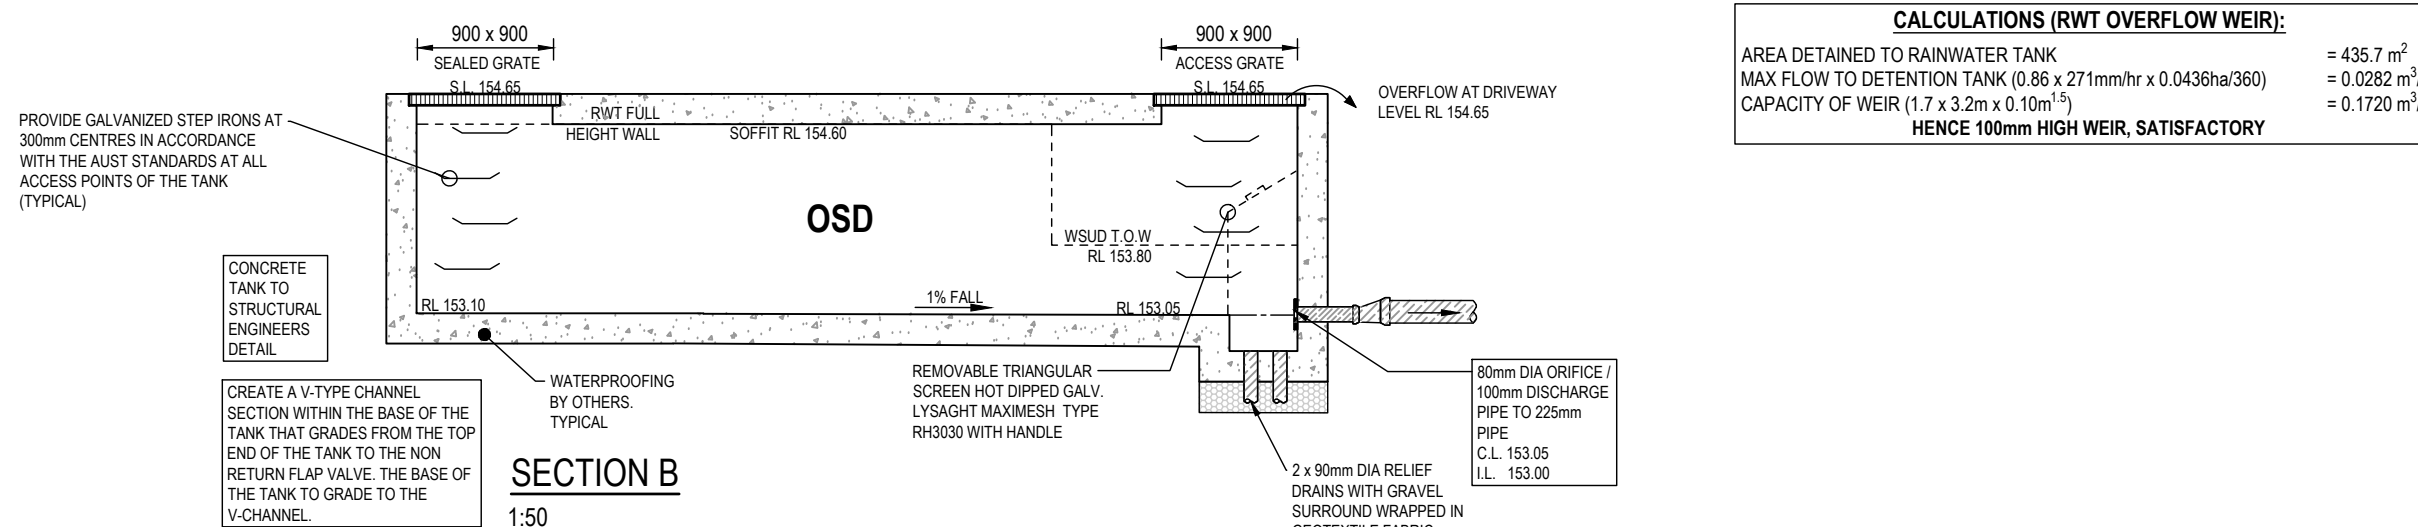

MINIMUM 010mm STAINLESS STEEL DYNALLOY OR EQUIVALENT

MINIMUM 5mm THICK STAINLESS STEEL PLATE

ORIFICE PLATE 200mm

ORIFICE PLATE 200mm


OUTLET PIPE

SHARP EDGED WEDGE CUT HOLE TO REQUIRE DIAMETER

EPOXY RESIN GROUT PLATE TO TANK WALL AND PROVIDE SILICON SEALANT AROUND THE EDGES OF THE PLATE.


ORIFICE PLATE DETAIL

NTS

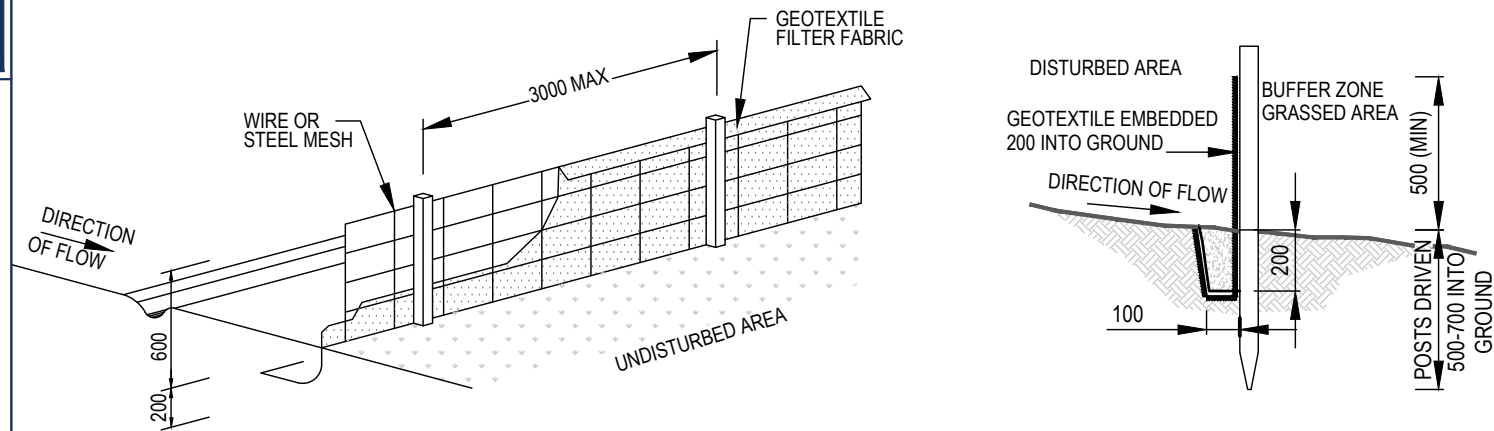


SEDIMENT FENCE DETAIL
NTS

- CONSTRUCTION NOTES:**
- CONSTRUCT SEDIMENT FENCES AS CLOSE AS POSSIBLE TO BEING PARALLEL TO THE CONTOURS OF THE SITE, BUT WITH SMALL RETURNS AS SHOWN IN THE DRAWING TO LIMIT THE CATCHMENTS AREA OF ANY ONE SECTION. THE CATCHMENTS AREA SHOULD BE SMALL ENOUGH TO LIMIT WATER FLOW IF CONCENTRATED AT ONE POINT TO 50 LITRES PER SECOND IN THE DESIGN STORM EVENT, USUALLY THE 10 YEAR EVENT.
 - CUT A 150mm DEEP TRENCH ALONG THE UPSLOPE LINE OF THE FENCE FOR THE BOTTOM OF THE FABRIC TO BE ENTRENCHED.
 - DRIVE 1.5m LONG STAR PICKETS INTO GROUND AT 2.5m INTERVALS (MAX) AT THE DOWNSLOPE EDGE OF THE TRENCH. ENSURE ANY STAR PICKETS ARE FITTED WITH SAFETY CAPS.
 - FIX SELF-SUPPORTING GEOTEXTILE TO THE UPSLOPE SIDE OF THE POSTS ENSURING IT GOES TO THE BASE OF THE TRENCH. FIX THE GEOTEXTILE WITH WIRE TIES OR AS RECOMMENDED BY THE MANUFACTURER. ONLY USE GEOTEXTILE SPECIFICALLY PRODUCED FOR SEDIMENT FENCING. THE USE OF SHADE CLOTH FOR THIS PURPOSE IS NOT SATISFACTORY.
 - JOIN SECTIONS OF FABRIC AT A SUPPORT POST WITH 150mm OVERLAP. BACKFILL THE TRENCH OVER THE BASE OF THE FABRIC AND COMPACT IT THOROUGHLY OVER THE GEOTEXTILE.

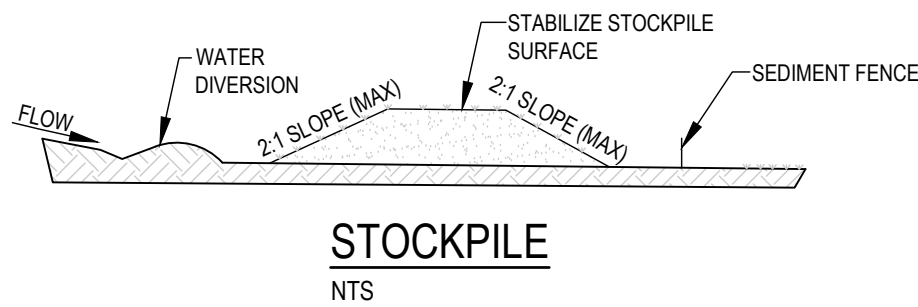

STOCKPILE
NTS

- NOTE:**
- PLACE STOCKPILES MORE THAN 2 (PREFERABLY 5) METRES FROM EXISTING VEGETATION, CONCENTRATED WATER FLOW, ROADS AND HAZARD AREAS.
 - CONSTRUCT ON THE CONTOUR AS LOW, FLAT, ELONGATED MOUNDS.
 - WHERE THERE IS SUFFICIENT AREA, TOPSOIL STOCKPILES SHALL BE LESS THAN 2 METRES IN HEIGHT.
 - WHERE THEY ARE TO BE IN PLACE FOR MORE THAN 10 DAYS, STABILIZE FOLLOWING THE APPROVED ESCP OR SWAMP TO REDUCE THE C-FACTOR TO LESS THAN 0.10.
 - CONSTRUCT EARTH BANKS (LOW FLOW) ON THE UPSLOPE SIDE TO DIVERT WATER AROUND STOCKPILES AND SEDIMENT FENCES 1 TO 2 METRES ON THE DOWNSLOPE.


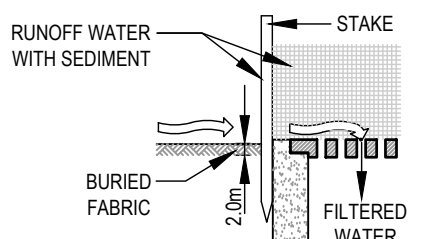


SEDIMENT BARRIER AROUND PIT
NTS

- CONSTRUCTION NOTES:**
- FABRICATE A SEDIMENT BARRIER MADE FROM GEOTEXTILE OR STRAW BALES.
 - FOLLOW STRAW FILTER AND SEDIMENT FENCE FOR INSTALLATION PROCEDURES FOR THE STRAW BALES OR GEOTEXTILE. REDUCE THE PICKET SPACING TO 1 METRE CENTRES.
 - IN WATERWAYS, ARTIFICIAL SAG POINTS CAN BE CREATED WITH SANDBAGS OR EARTH BANKS AS SHOWN IN THE DRAWING.
 - DO NOT COVER THE INLET WITH GEOTEXTILE UNLESS THE DESIGN IS ADEQUATE TO ALLOW FOR ALL WATERS TO BYPASS IT.



- DUST CONTROL:**
- NOTE: DURING EXCAVATION, DEMOLITION AND CONSTRUCTION, ADEQUATE MEASURES SHALL BE TAKEN TO PREVENT DUST FROM AFFECTING THE AMENITY OF THE NEIGHBORHOOD.
- THE FOLLOWING MEASURES MUST BE ADOPTED:
- PHYSICAL BARRIERS SHALL BE ERECTED AT RIGHT ANGLES TO PREVENT WIND DIRECTION OR SHALL BE PLACED AROUND OR OVER DUST SOURCES TO PREVENT WIND OR ACTIVITY FROM GENERATING DUST.
 - EARTHWORKS AND SCHEDULING ACTIVITIES SHALL BE MANAGED TO COINCIDE WITH THE NEXT STAGE OF DEVELOPMENT TO MINIMISE THE AMOUNT OF TIME THE SITE IS LEFT TO CUT OR EXPOSED.
 - ALL MATERIALS SHALL BE STORED OR STOCKPILED AT THE BEST LOCATIONS.
 - THE GROUND SURFACE SHOULD BE DAMPENED SLIGHTLY TO PREVENT DUST FROM BECOMING AIRBORNE BUT SHOULD NOT BE WET TO THE EXTENT THAT RUN-OFF OCCURS.
 - ALL VEHICLES CARRYING SOIL OR RUBBLE TO OR FROM THE SITE SHALL AT ALL TIMES BE COVERED TO PREVENT THE ESCAPE OF DUST.
 - ALL EQUIPMENT WHEELS SHALL BE WASHED BEFORE EXISTING THE SITE USING MANUAL OR AUTOMATED SPRAYERS AND DRIVE-THROUGH WASHING BAYS.
 - GATES SHALL BE CLOSED BETWEEN VEHICLE MOVEMENTS SHALL BE FITTED WITH SHADE CLOTH.
 - CLEANING OF FOOTPATHS AND ROADWAYS SHALL CARRIED OUT DAILY.
 - ALL BUILDERS REFUSE, SPILL AND/OR MATERIAL UNSUITABLE FOR USE IN LANDSCAPE AREAS SHALL BE REMOVED FROM SITE ON COMPLETION OF THE BUILDING WORKS.

- NOTES:**
- ALL EROSION AND SEDIMENT CONTROL MEASURES TO BE INSPECTED AND MAINTAINED DAILY BY SITE MANAGER IN ACCORDANCE WITH COUNCIL REQUIREMENTS.
 - ALL STOCKPILES TO BE CLEAR FROM DRAINS, GUTTERS AND FOOTPATHS.
 - DRAINAGE IS TO BE CONNECTED TO STORMWATER SYSTEM AS SOON AS POSSIBLE.
 - ROADS AND FOOTPATH TO BE SWEEPED DAILY AS REQUIRED BY COUNCIL.
 - IF YOU DO NOT COMPLY WITH COUNCIL REQUIREMENTS & DOCUMENTATION, YOU MAY BE LIABLE TO PROSECUTION FROM GOVERNMENT AUTHORITIES.

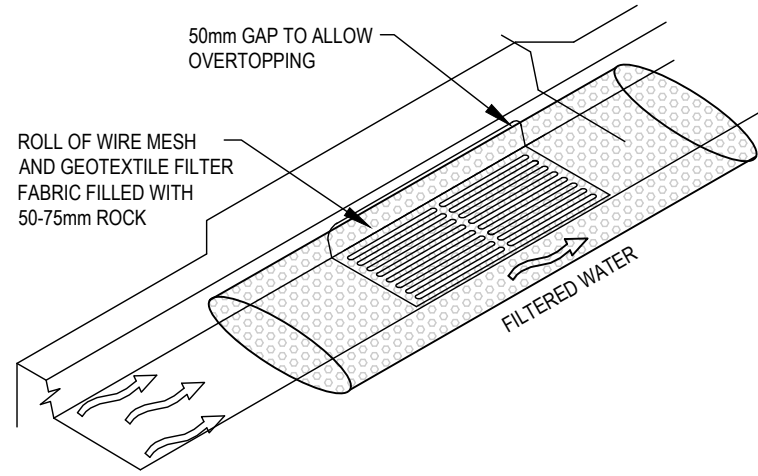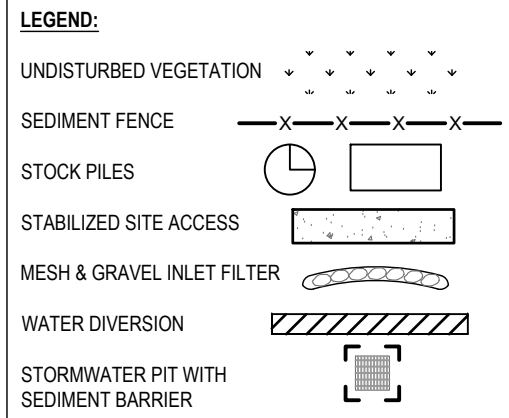

MESH AND GRAVEL INLET FILTER
NTS

- CONSTRUCTION NOTES:**
- INSTALL FILTERS TO KERB INLETS ONLY AT SAG POINTS
 - FABRICATE A SLEEVE MADE FROM GEOTEXTILE OR WIRE MESH LONGER THAN THE LENGTH OF THE INLET PIT AND FILL IT WITH 25mm TO 50mm GRAVEL
 - FORM AN ELLIPTICAL CROSS-SECTION ABOUT 150mm(h) x 400mm(w).
 - PLACE THE FILTER AT THE OPENING LEAVING AT LEAST 100mm SPACE BETWEEN IT AND THE KERB INLET. MAINTAIN THE OPENING WITH SPACER BLOCKS.
 - FORM A SEAL WITH THE KERB TO PREVENT SEDIMENT BYPASSING THE FILTER.
 - SANDBAGS FILLED WITH GRAVEL CAN SUBSTITUTE FOR THE MESH OR GEOTEXTILE PROVIDING THEY ARE PLACED SO THAT THEY FIRMLY ABUT EACH OTHER AND SEDIMENT-LOADED WATERS CANNOT PASS BETWEEN.

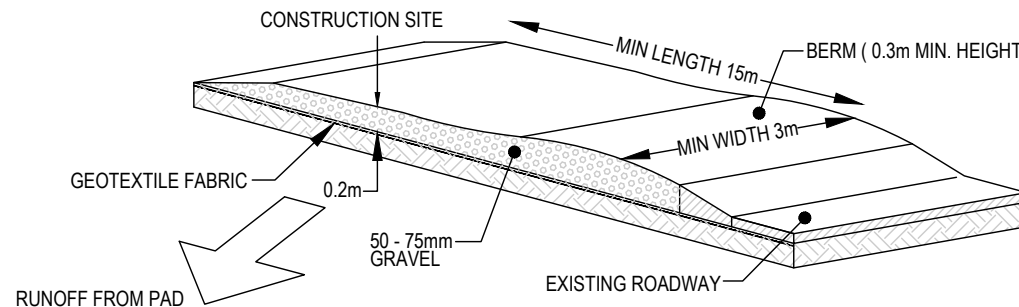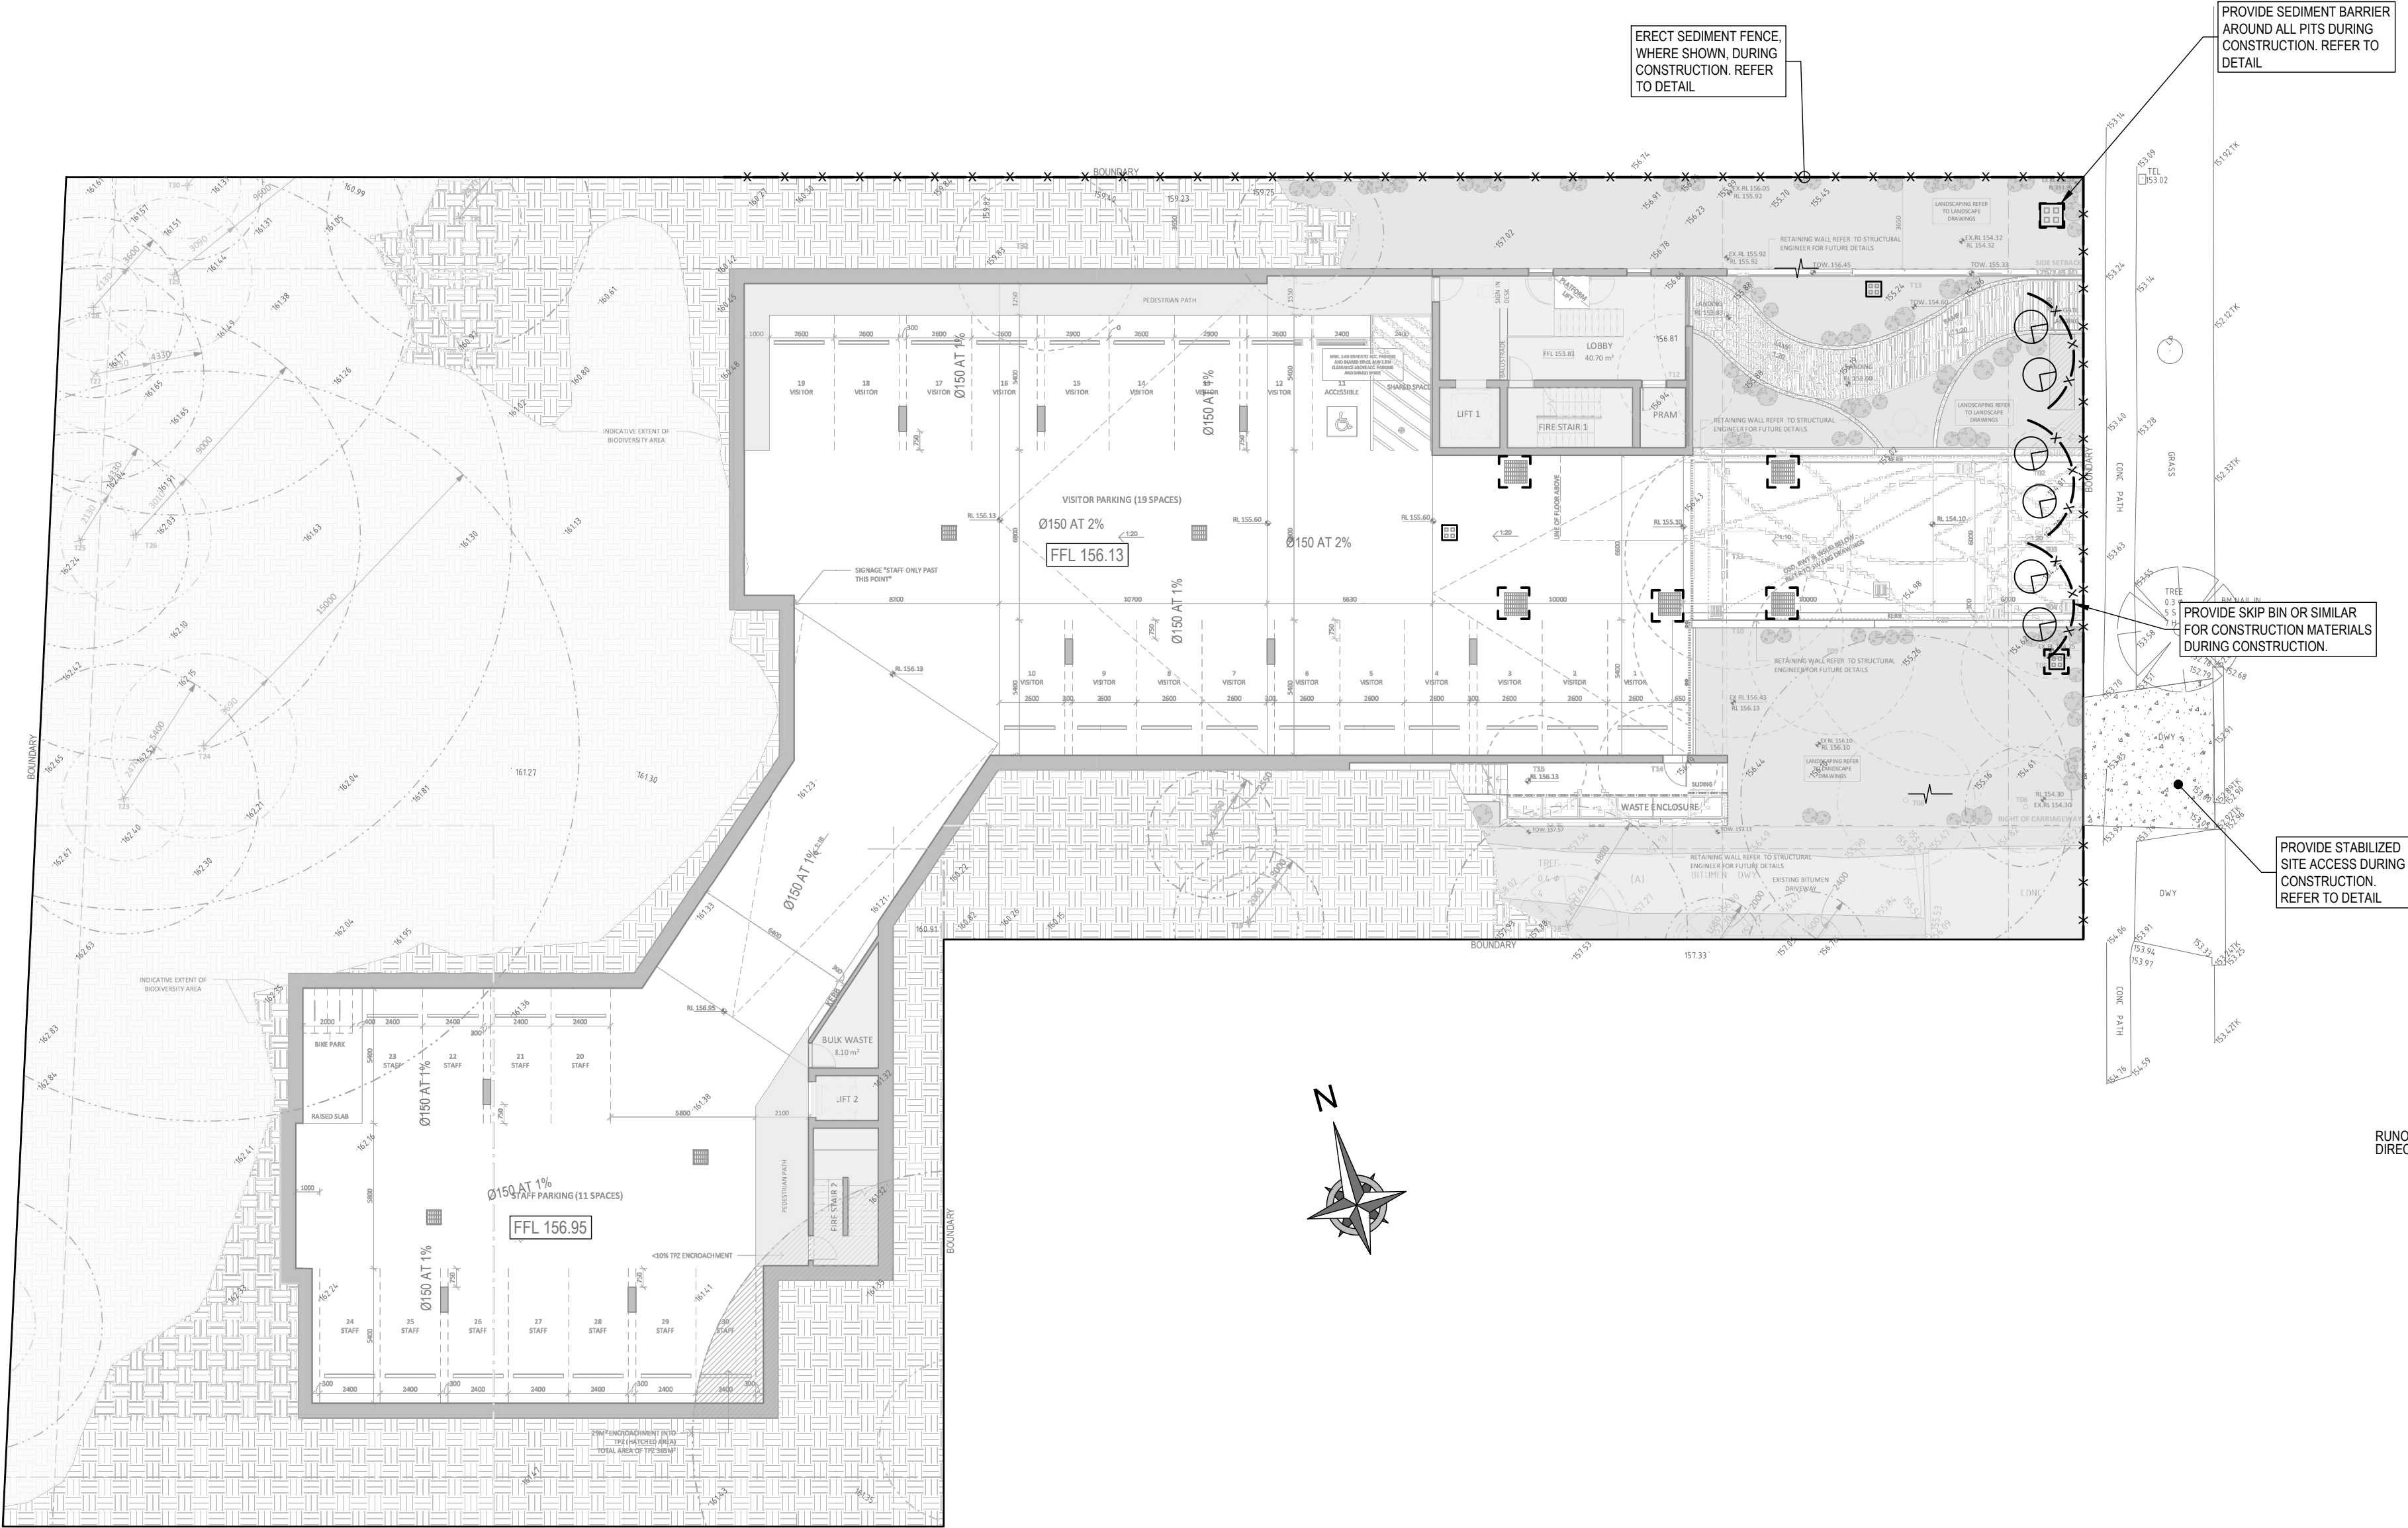

STABILIZED SITE ACCESS
NTS

- CONSTRUCTION NOTES:**
- STRIP THE TOPSOIL, LEVEL THE SITE AND COMPACT THE SUBGRADE
 - COVER THE AREA WITH NEEDLE-PUNCHED GEOTEXTILE
 - CONSTRUCT A 200mm THICK PAD OVER THE GEOTEXTILE USING ROAD BASED OR 30mm AGGREGATE
 - ENSURE THE STRUCTURE IS AT LEAST 15m LONG OR TO BUILD ALIGNMENT AND AT LEAST 3 METRES WIDE
 - WHERE A SEDIMENT FENCE JOINS ONTO THE STABILIZED ACCESS, CONSTRUCT A HUMP IN THE STABILIZED ACCESS TO DIVERT WATER TO THE SEDIMENT FENCE.

REVISION	DRAWN	DESCRIPTION	DATE
A	MR	ISSUED FOR DA	29.10.2024
B	YR	ARCHITECTURAL AMENDMENTS	16.09.2025

DRAWING TITLE
SEDIMENT CONTROL PLAN AND DETAILS
PROJECT TITLE
PROPOSED CHILDCARE CENTRE No.4B & 8 CHARLTON AVENUE TURRAMURRA

SHEET SIZE	A1	JOB REFERENCE	E240371
DESIGNED	MR	DRAWING No.	D6
CHECKED	NZ	No. IN SET	6
ISSUE	B		
SCALE	1:200		