



Consulting.TM
an Elephants Foot Company

Lot 80, Newleaf Parade, Bonnyrigg NSW
Residential Development

OPERATIONAL WASTE MANAGEMENT PLAN

11/09/2024
Report No. 4834
Revision E

Client

Bonnyrigg Greens Unit Trust

Suite 27.04, 1 Farrer Pl, Sydney NSW 2000

T 0400 770 970 • E frank.x@tradersinpurple.com

Architect

AJH+ Architectures and Interiors Pty Ltd

100 Harris St, Sydney NSW 2010

<https://www.ajh-a.com.au/>

T 0466 535 162 • E reception@ajh-a.com.au





REVISION REFERENCE

Revision	Date	Prepared by	Description
A	19/6/23	S. Lee	Draft
B	30/6/23	S. Lee	Draft
C	19/7/23	S. Lee	Final
D	23/5/24	S. Lee	Amendment
E	11/9/24	S. Lee	Amendment

The information contained in this document produced by Elephants Foot Consulting (EFC) is solely for the use of the client identified on the cover sheet for the purpose for which it has been prepared for. EFC undertakes no duty, nor accepts any responsibility for any third party who may rely upon this document. Reproduction, publication or distribution of this document without written permission from EFC is strictly prohibited.

TABLE OF CONTENTS

TABLE OF FIGURES	iv
LIST OF TABLES.....	iv
GLOSSARY OF ABBREVIATIONS AND TERMS	i
1 ACKNOWLEDGEMENT OF COUNTRY	2
2 INTRODUCTION	2
2.1 SCOPE OF REPORT	2
2.2 REPORT CONDITIONS	3
3 LEGISLATION & GUIDANCE	4
4 DEVELOPMENT OVERVIEW.....	5
4.1 SITE LOCATION.....	5
5 RESIDENTIAL WASTE MANAGEMENT	6
5.1 WASTE GENERATION ESTIMATES.....	6
5.2 BIN SUMMARY	6
5.3 WASTE DISPOSAL PROCEDURES.....	7
5.3.1 COMMON AREAS.....	7
5.4 WASTE COLLECTION PROCEDURES.....	7
5.5 BULKY WASTE PROCEDURES.....	7
6 STAKEHOLDER ROLES & RESPONSIBILITIES	8
7 SOURCE SEPARATION	9
8 EDUCATION	10
8.1 SIGNAGE.....	10
8.2 POLLUTION PREVENTION.....	10
9 WASTE ROOMS	11
10 BIN WASHING.....	12
11 BIN MOVING PATHS	12
12 CONSTRUCTION REQUIREMENTS.....	13
11.1 ADDITIONAL CONSIDERATIONS	13
13 USEFUL CONTACTS.....	14
APPENDIX A: ARCHITECTURAL PLANS.....	15
APPENDIX: A.1 GROUND FLOOR PLAN.....	16
APPENDIX B: PRIMARY WASTE MANAGEMENT PROVISIONS.....	17
APPENDIX: B.1 TYPICAL BIN SPECIFICATIONS	18
APPENDIX: B.2 SIGNAGE FOR WASTE AND RECYCLING BINS.....	19
APPENDIX: B.3 TYPICAL COLLECTION VEHICLE INFORMATION.....	21
APPENDIX: B.4 TYPICAL BIN MOVERS	23
APPENDIX: B.5 TYPICAL SEATED BIN MOVERS.....	24
APPENDIX C: SECONDARY WASTE MANAGEMENT PROVISIONS.....	26

APPENDIX: C.1	TYPICAL WORM FARM SPECIFICATIONS	27
APPENDIX: C.2	EXAMPLE APARTMENT STYLE COMPOST BIN	28
APPENDIX: C.3	TYPICAL SOURCE SEPARATION BINS	29

TABLE OF FIGURES

Figure 1. Site Location.....	5
------------------------------	---

LIST OF TABLES

Table 1: Estimated Waste and Recycling Volumes – Residential.....	6
Table 2: Stakeholder Roles and Responsibilities	8
Table 3: Operational Waste Streams.....	9
Table 4: Waste Room Areas.....	11
Table 5: Waste Room Requirements.....	11

GLOSSARY OF ABBREVIATIONS AND TERMS

TERM	DESCRIPTION
<i>Bin-carting Route</i>	Travel route for transferring bins from the storage area to a nominated collection point
<i>Collection Area/Point</i>	The identified position or area where general waste or recyclables are loaded onto the collection vehicle
<i>Compactor</i>	A machine for compressing waste into disposable or reusable containers
<i>Composter</i>	A container/machine used for composting specific food scraps
<i>Crate</i>	A plastic box used for the collection of recyclable materials
<i>DA</i>	Development Application
<i>DCP</i>	Development Control Plan
<i>EPA</i>	Environmental Protection Authority
<i>HRV</i>	Heavy Rigid Vehicle described by AS 2890.2-2002 Parking facilities – Off-street commercial vehicle facilities
<i>L</i>	Litre(s)
<i>LEP</i>	Local Environmental Plans guide planning decisions for local government areas
<i>MUD</i>	Multi-Unit Dwellings comprise of a development with more than one dwelling. This ranges from dual occupancies and attached dwellings to high-rise residential developments
<i>Mobile Garbage Bin(s) (MGB)</i>	A waste container generally constructed of plastic with wheels with a capacity in litres of 120, 240, 360, 660, 1000 or 1100
<i>MRV</i>	Medium Rigid Vehicle described by AS 2890.2-2002 Parking facilities – Off-street commercial vehicle facilities
<i>Onsite Collection</i>	When the collection vehicle enters the property and services the development within the property boundary from a designated loading area
<i>Owners Corporation</i>	An organisation or group of persons that is identified by a particular name and acts, or may act, as an entity
<i>Service Bins</i>	Bin set aside to be placed under a chute while the remainder of the bins are being collected
<i>SRV</i>	Small Rigid Vehicle described by AS 2890.2-2002 Parking facilities – Off-street commercial vehicle facilities
<i>WHS</i>	Workplace Health and Safety
<i>Wheel-in wheel-out service</i>	A type of waste collection service offered by local councils where the council waste collection personnel enter the premises to collect the bins and returns them to the property

1 ACKNOWLEDGEMENT OF COUNTRY

We acknowledge Australia's First Nations People as the Traditional Custodians of this land. We pay respect to ancestors and Elders, past and present. We honour Aboriginal and Torres Strait Islander people and their connection to land, waters and seas, and their vital contribution to the vibrant nation that we share, Australia.

2 INTRODUCTION

Elephants Foot Consulting (EFC) has been engaged to prepare the following waste management plan for the operational management of waste generated by the residential development located at Lot 80, Newleaf Parade, Bonnyrigg NSW.

Waste management strategies and audits are required for new developments in order to support the design and sustainable performance of the building. It is EFC's belief that a successful waste management strategy contains three key objectives:

- i. **Promote responsible source separation** to reduce the amount of waste that goes to landfill by implementing convenient and efficient waste management systems.
- ii. **Ensure adequate waste provisions and robust procedures** that will cater for potential changes during the operational phase of the development.
- iii. **Comply** with all relevant council codes, policies, and guidelines.

To achieve these objectives, this operational waste management plan (OWMP) identifies the different waste streams likely to be generated during the operational phase of the development, as well as how the waste will be handled and disposed, details of bin sizes/quantities and waste rooms, descriptions of the proposed waste management equipment used, and information on waste collection points and frequencies.

It is essential that this OWMP is integrated into the overall management of the building and is clearly communicated to all relevant stakeholders.

2.1 SCOPE OF REPORT

This operational waste management plan (OWMP) only applies to the **operational** phase of the proposed development; therefore, the requirements outlined in this OWMP must be implemented during the operational phase of the site and may be subject to review upon further expansion of, and/or changes to the development.

The waste management of the **construction** and **demolition** phases of the development are not addressed in this report. A construction and demolition WMP will need to be provided separately. EFC can supply this if required.

2.2 REPORT CONDITIONS

The purpose of this report is to document an OWMP as part of a development application, which is supplied by EFC with the following limitations:

- Drawings, estimates and information contained in this OWMP have been prepared by analysing the information, plans and documents supplied by the client and third parties including Council and other government agencies. The assumptions based on the information contained in the OWMP is outside the control of EFC,
- The figures presented in the report are an estimate only – the actual amount of waste generated will be dependent on the occupancy rate of the building/s and waste generation intensity as well as the building management's approach to educating residents and tenants regarding waste management operations and responsibilities,
- The building manager will adjust waste management operations as required based on actual waste volumes (e.g. if waste is greater than estimated) and increase the number of bins and collections accordingly,
- The report will not be used to determine or forecast operational costs or prepare any feasibility study or to document any safety or operational procedures,
- The report has been prepared with all due care; however no assurance is made that the OWMP reflects the actual outcome of the proposed waste facilities, services, and operations, and EFC will not be liable for plans or results that are not suitable for purpose due to incorrect or unsuitable information or otherwise,
- EFC offer no warranty or representation of accuracy or reliability of the OWMP unless specifically stated,
- Any manual handling equipment recommended in this OWMP should be provided at the recommendation of the appropriate equipment provider who will assess the correct equipment for supply,
- Design of waste management equipment and systems must be approved by the supplier,
- EFC cannot be held accountable for late changes to the design after the OWMP has been submitted to Council,
- EFC will provide specifications and recommendations on bin access and travel paths within the OWMP, however it is the architect's responsibility to ensure the architectural drawings meet these provisions,
- EFC are not required to provide information on collection vehicle swept paths, head heights, internal manoeuvring or loading requirements. It is assumed this information will be provided by a traffic consultant,
- Council are subject to changing waste and recycling policies and requirements at their own discretion.

This OWMP is only finalised once the draft watermark has been removed. If the draft watermark is present, the information in the OWMP is not confirmed.

3 LEGISLATION & GUIDANCE

Waste management and resource recovery regulation in Australia is administered by the Australian Constitution, Commonwealth laws, and international agreements. State and territory governments maintain primary responsibility for controlling development and regulating waste. The following legislation has been enacted in New South Wales, and provides the lawful underpinnings of this OWMP.

- NSW Environmental Planning & Assessment Act 1979
- NSW Protection of the Environment Operations Act 1997
- NSW Waste Avoidance & Resource Recovery Act 2001

At the local level, councils or Local Government Areas (LGAs) require OWMPs to be included in new development applications. This OWMP is specifically required by:

- Fairfield Citywide Development Control Plan 2013
- Fairfield Local Environmental Plan 2013

The primary purpose of a development control plan (DCP) is to guide development according to the aims of the corresponding local environmental plan (LEP). The DCP must be read in conjunction with the provisions of the relevant LEP.

Information provided in this OWMP comes from a wide range of waste management guidance at the local, state, and federal levels. The primary sources of guidance include:

- Fairfield Citywide Development Control Plan 2013
- NSW Better Practice Guidelines for Waste Management and Recycling in Commercial and Industrial Facilities 2012
- NSW Better practice guide for resource recovery in residential developments 2019
- NSW Waste Avoidance and Resource Recovery (WARR) Strategy 2014-2021
- NSW Waste Classification Guidelines 2014
- Australia's National Waste Policy 2018

4 DEVELOPMENT OVERVIEW

The proposed development falls under the LGA of Fairfield City Council, and consists of:

- 1 building with 4 levels
 - 25 residential units in total

All figures and calculations are based on area schedules as advised by our client and shown on architectural drawings.

4.1 SITE LOCATION

The site is located at Lot 80, Newleaf Parade, Bonnyrigg NSW, as shown in Figure.1 (boundaries are indicative only). The site has frontages to Newleaf Parade and a future new road, with vehicle access via Newleaf Parade.

Figure 1. Site Location



Source: MapQuest 2023

5 RESIDENTIAL WASTE MANAGEMENT

The following section outlines best practice waste management for the residential component of the development, including waste generation estimates and waste disposal and collection procedures.

5.1 WASTE GENERATION ESTIMATES

The NSW EPA's Fairfield Citywide Development Control Plan 2013 has been referenced to calculate the total number of bins required for the residential units. Calculations are based on generic waste generation rates. Actual volumes of waste and recycling in operation may differ according to the residents' actual waste management practice.

The following table shows the estimated volume (L) of general waste and recyclables generated by the residential component of the development.

Table 1: Estimated Waste and Recycling Volumes – Residential

Building	# Units	General Waste Generation Rate (L/unit/week)	Generated General Waste (L/week)	Recycling Generation Rate (L/unit/week)	Generated Recycling (L/week)	FOGO Generation Rate (L/unit/week)	Generated FOGO (L/week)
Apartments	25	120	3000	40	1000	40	1000
TOTAL	25		3000		1000		1000
Bins and Collections		Bin Size (L)	240	Bin Size (L)	240	Bin Size (L)	240
		Bins per Week	13	Bins per Week	4.2	Bins per Week	4.2
		Collections per Week	1	Collections per Week	fortnight	Collections per Week	1
		Total General Waste Bins Required for Collection	<u>13</u>	Total Recycling Bins Required for Collection	<u>9</u>	Total FOGO Bins Required for Collection	<u>5</u>

5.2 BIN SUMMARY

Based on the estimated waste generated by the residential component of this development, the recommended bin quantities and collection frequencies are as follows:

General Waste: 13 x 240L MGBs collected **1 x weekly**

Recycling: 9 x 240L MGBs collected **fortnightly**

FOGO: 5 x 240L MGBs collected **1 x weekly**

During operation, it is the responsibility of the building manager to monitor the number of bins required for the residential component. Waste and recycling volumes may change according to residents' attitudes to waste disposal and recycling, building occupancy levels or development's management. Any requirements for adjusting the capacity of the waste facilities can be achieved by changing the number of bins, the bin sizes or collection frequencies. Building management will be required to negotiate any changes to bins or collections with the collection service provider.

5.3 WASTE DISPOSAL PROCEDURES

The residents will be provided with a communal waste room on the ground floor containing 240L MGBs for waste, recycling, and FOGO. The residents will be responsible for walking their waste, recycling and FOGO to the Communal Waste Room and using the appropriate bins.

5.3.1 COMMON AREAS

Residential common areas such as lobbies, amenities and circulation areas will be supplied with suitably branded waste and recycling bins where considered appropriate. These areas generate minimal waste, however general waste and recycling receptacles should be placed in convenient locations.

5.4 WASTE COLLECTION PROCEDURES

On the nominated waste collection day, the building caretaker will be responsible for transporting the 240L MGBs from the waste room to the kerbside with the aid of a bin mover.

To service the bins, a Council collection vehicle will park along Newleaf Parade. Once the bins are serviced, the collection vehicle will continue along Newleaf Parade in a forward direction. When waste collection is complete, the building caretaker will return the bins to resume operational use.

Quantities, sizes, and servicing of bins may be modified according to actual waste generation rates by residents.

Building management will remind residents that parking in front of the bin collection area (kerbside) during bin collection times is prohibited.

5.5 BULKY WASTE PROCEDURES

An area will be made available for the storage of discarded residential bulky items (e.g. whitegoods, furniture, etc.). This room should be located within close proximity of the garbage and recycling bin collection room and must have a minimum doorway width of 1.6m to allow for easy movement of large waste items in and out of the room.

Residents will need to liaise with building management regarding the transportation of bulky items and the availability of the bulky waste storage room on ground level (see APPENDIX A.1). It is the caretaker's responsibility to arrange collection dates with Council and then coordinate with the residents.

On the day before bulky waste collection, the building manager will ensure that all bulky waste is transferred to the kerbside; alternatively, council could also decide to collect the bulky waste directly from the bulky waste room. On the day of bulky waste collection, a Council collection vehicle will park along Newleaf Parade. Once bulky items have been loaded, the collection vehicle will continue along Newleaf Parade in a forward direction. Refer to Council's website for acceptable items and other information regarding bulky waste collection.

6 STAKEHOLDER ROLES & RESPONSIBILITIES

The following table demonstrates the primary roles and responsibilities of the respective stakeholders:

Table 2: Stakeholder Roles and Responsibilities

Roles	Responsibilities
Strata/Owners Corporation or Management	<ul style="list-style-type: none"> • Ensure all waste service providers submit monthly reports on all equipment movements and waste quantities/weights; • Organise internal waste audits/visual assessments on a regular basis • Purchase any on-going waste management equipment or maintenance of equipment once building is operational; and • Manage any non-compliances/complaints reported through waste audits.
Building Manager or Waste Caretaker	<ul style="list-style-type: none"> • Coordinate general waste and recycling collections; • Clean and transport bins as required; • Organise replacement or maintenance requirements for bins; • Organise, maintain and clean the waste holding area; • Organise bulky goods collection when required • Investigate and ensure prompt clean-up of illegally dumped waste materials. • Prevent storm water pollution by taking necessary precautions (securing bin rooms, preventing overfilling of bins) • Abide by all relevant WH&S legislation, regulations, and guidelines; • Provide staff/contractors with equipment manuals, training, health and safety procedures, risk assessments, and PPE to control hazards associated with all waste management; • Assess any manual handling risks and prepare a manual handling control plan for waste and bin transfers; • Ensure site safety for residents, children, visitors, staff and contractors; and • Ensure effective signage, communication and education is provided to occupants, tenants, maintenance staff, and cleaning contractors.
Residents	<ul style="list-style-type: none"> • Dispose of all general waste and recycling in the allocated MGBs provided; • Ensure adequate separation of general waste and recycling; and • Comply with the provisions of Council and the OWMP.
Waste Collection Contractor	<ul style="list-style-type: none"> • Provide a reliable and appropriate waste collection service; • Provide feedback to building managers/residents regarding contamination of recyclables; and • Work with building managers to customise waste systems where possible.
Gardening/Landscaping Contractor	<ul style="list-style-type: none"> • Remove all garden organic waste generated during gardening maintenance activities for recycling at an offsite location.
Developer	<ul style="list-style-type: none"> • Purchase all equipment required to implement this OWMP prior to the occupation of the building to be provided to the strata/ owners corporation.

7 SOURCE SEPARATION

Better practice waste management includes the avoidance, reuse, and recovery of unwanted items, which can be achieved through source separation. The table below outlines what is typically included in various waste streams and how they can be managed. Refer to your local council for a list of accepted materials. Planet Ark can be accessed online to find other facilities that recover unwanted items.

Table 3: Operational Waste Streams

Waste Stream	Description	Typical Destination	Waste Stream Management
General Waste	The remaining portion of the waste stream that is not recovered for re-use, processing, or recycling. May include soft plastics, food scraps, polystyrene, etc.	Landfill	Waste should be bagged before placing in the designated waste bins.
Recycling	A mixture of items that are commonly recycled usually segregated through a MRF. Typically include food and beverage containers (e.g. aluminium, glass, steel, hard plastics, cartons). Also included cardboard and paper products.	Resource Recovery Centre	Recycling must not be bagged, and instead should be placed loosely in the designated recycling bins. Cardboard should be flattened before placing in the designated cardboard bin.
Green Waste	Green waste consists of unwanted organic materials that are easily biodegradable and/or compostable (e.g. lawn clippings, branches)	Resource Recovery Centre	Landscape Maintenance Contractors will remove the green waste from site during scheduled maintenance.
Food Waste	Food waste consists of unwanted or uneaten kitchen scraps that are easily compostable/biodegradable (e.g. vegetable peels, fruit rinds, coffee grounds).	Composting facility or Landfill	Food waste can be composted on-site, off-site, or else included in the general waste stream.
Electronic Waste	Discarded e-waste, electronic components and materials such as computers, mobile phones, keyboards, etc.	Resource Recovery Centre	Building manager arranges collection for e-waste recycling as needed by residents.
Bulky Items	Items that are too large to place into general rubbish collection. This includes disused and/or broken furniture, mattresses, white goods, etc.	Resource Recovery Centre or Landfill	Residents liaise with building manager to store in Bulky Goods Room. Building manager arranges with Council for removal.
Other	Other recyclable items that require special recovery may include ink cartridges, batteries, chemical waste, fluorescent tubes, etc.	Resource Recovery Facility	Building manager arranges collection by appropriate recycling services when required.

8 EDUCATION

Educational materials encouraging correct separation of general waste and recyclables must be provided to each resident. This should include the correct disposal process for bulky waste such as old furniture, large discarded items, and other materials including electronic and chemical wastes. It is recommended that the building caretaker provides information in multiple languages to support correct behaviours, and to minimise the possibility of contamination in communal waste bins.

8.1 SIGNAGE

Signage and education are essential components to support best practice waste management including resource recovery, source separation, and diversion of waste from landfill.

Signage should include:

- Clear and correctly labelled waste and recycling bins,
- Instructions for separating and disposing of waste items. Different languages should be considered,
- Locations of, and directions to, the waste storage areas with directional signs, arrows, or lines,
- The identification of all hazards or potential dangers associated with the waste facilities, and
- Emergency contact information should there be issues with the waste systems or services in the building.

The building manager is responsible for waste room signage including safety signage. Appropriate signage must be prominently displayed on doors, walls and above all bins, clearly stating what type of waste or recyclables is to be placed in each bin.

All signage should conform to the relevant Australian Standards.

8.2 POLLUTION PREVENTION

Building management shall be responsible for the following to minimise dispersion of site litter and prevent stormwater pollution to avoid impact to the environment and local amenity:

- Promoting adequate waste disposal into the bins
- Securing all bin rooms (whilst affording access to staff/contractors)
- Prevent overfilling of bins, keep all bin lids closed and bungs leak-free
- Taking action to prevent dumping or unauthorised use of waste areas
- Require collection contractor/s to clean up any spillage when clearing bins

9 WASTE ROOMS

The areas allocated for waste storage and collection areas are detailed in the table below, and are estimates only. Final areas will depend on room and bin layouts.

Table 4: Waste Room Areas

Level	Waste Room Type	Equipment and MGBs	Estimated Area Required (m ²)
Ground Floor	Communal Waste Room	13 x 240L MGBs for General Waste 9 x 240L MGBs for Recycling 5 x 240L MGBs for FOGO Waste	20
Basement 1	Bulky Goods Waste Storage Room		10

EFC recommends bins sizes, collection frequencies and/or equipment for best practice waste management at this site, however EFC also acknowledges there are a range of other suitable options that may alter waste room requirements (e.g. floor area, accessibility, head height, etc.)

The waste room areas have been calculated based on equipment requirements and/or bin dimensions with an additional 80% of bin GFA factored in for manoeuvrability.

In addition, all doorways and passageways facilitating the movement of bins and/or bulky waste items must be at least 1600mm wide per Council's DCP. The following table provides further waste room requirements.

Table 5: Waste Room Requirements

Waste Room Type	Waste Room Requirements
Communal Waste Room	<ul style="list-style-type: none"> Bins should be arranged so that all bins are accessible. Bins are not to be placed in front another or in such a way as to restrict access to the other bins for use. Bin room should be safe for residents to access
Bulky Goods Waste Storage Room	<ul style="list-style-type: none"> May be a dedicated room or screened area within another waste room Must be in close proximity to the collection area. Area must also be allocated for the segregation of e-waste, gas bottles, cardboard, etc. Doorway should be a minimum of 1500mm wide.

10 BIN WASHING

The bins will be cleaned by the building manager periodically to ensure hygiene and minimise odour.

Bin washing can occur within the bin rooms, using the room clean down facilities (i.e tap connection and drain). Alternatively, a specialist bin washing contractor can be engaged to clean the bins to an agreed schedule. The specialist bin contractor would collect the bins from the bin holding area and clean the bins with their specialised vehicle.

11 BIN MOVING PATHS

The building caretaker is responsible for the transportation of bins as required from the designated waste room to the kerbside and returning them once emptied to resume operational use.

Transfer of bins should minimise manual handling where possible, as bins become heavy when full. The building manager must assess manual handling risks and provide any relevant documentation to key personnel.

The routes along the bin moving path should;

- Allow for a continuous route that is wholly within the property boundary.
- Be free from obstruction and obstacles such as steps and kerbs.
- Be constructed of solid materials with a non-slip surface
- Be a minimum of 300mm wider than the largest bin used onsite.
- If bins are moved manually, the route must not exceed a grade of 1:14.
- If a bin moving device is used, the route cannot exceed the maximum operating grade of the device. This is typically a grade of 1:4, however this will vary depending on the model of bin moving device acquired for the site.

If the distance of the bin moving paths exceeds 10m, a bin moving device is recommended to aid the movement of full bins. The developer is responsible for supplying all equipment required for moving bins this includes any bin lifters, bin moving devices and waste transfer bins. This equipment must be new and appropriate for the site. The developer should contact a bin-tug, trailer or tractor consultant to provide equipment recommendations.

Once the site is operational (and the developers is no longer involved) the building proprietors/strata/ owners corporation will be responsible for maintaining, repairing and replacing waste management equipment.

Bins may have to be fitted with hitches to enable the simultaneous transportation of multiple bins to the collection area. Council must be informed of any hitch attachments required to be installed on bins.

12 CONSTRUCTION REQUIREMENTS

Waste room construction must comply with the minimum standards as outlined in the Fairfield Citywide Development Control Plan 2013, in order to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area.

The *NSW Better Practice Guide for Resource Recovery in Residential Developments (2019)* also states that better practice bin storage areas should achieve more than the minimum compliance requirements, which are as follows:

- Ensuring BCA compliance, including ventilation. Where required, ventilation system must comply with AS1668.4-2012 The use of ventilation and air conditioning in buildings.
- Ensuring storage areas are well lit (sensor lighting preferred) and have lighting available 24 hours a day.
- Provision of bin washing facilities, including taps for hot and cold water provided through a centralised mixing valve. The taps must be protected from bins and be located where they can be easily accessed even when the area is at bin capacity.
- Floor constructed of concrete at least 75mm thick.
- Floor graded so that any water is directed to a sewer authority approved drainage connection to ensure washing bins and/or waste storage areas do not discharge flow into the stormwater drain.
- Provision of smooth, cleanable and durable floor and wall surfaces that extend up the wall to a height equivalent to any bins held in the area.
- Ensuring ceilings are finished with a smooth-faced non-absorbent material capable of being cleaned.
- All surfaces (walls, ceiling and floors) finished in a light colour.

11.1 ADDITIONAL CONSIDERATIONS

- Waste room floor to be sealed with a two-pack epoxy;
- All corners coved and sealed 100mm up, this is to eliminate build-up of dirt;
- Tap height and light switch height of 1.6m;
- Storm water access preventatives (grate);
- All walls painted with light colour and washable paint;
- Equipment electric outlets to be installed 1700mm above finished floor level;
- Optional automatic odour and pest control system installed
- If 660L or 1100L bins are utilised, 2 x 820mm (minimum) double-doors must be used;
- All personnel doors are hinged, lockable and self-closing;
- Conform to the Building Code of Australia, Australian standards and local laws; and
- Childproofing and public/operator safety shall be assessed and ensured
- Waste and recycling rooms must have their own exhaust ventilation system either;
 - Mechanically - exhausting at a rate of 5L/m² floor area, with a minimum rate of 100L/s minimum; Mechanical exhaust systems shall comply with AS1668.4.2012 and not cause any inconvenience, noise or odour problem or
 - Naturally - permanent, unobstructed, and opening direct to the external air, not less than one-twentieth (1/20) of the floor area.

13 USEFUL CONTACTS

EFC does not warrant or make representation for goods or services provided by suppliers.

LOCAL COUNCIL

Fairfield City Council Customer Service	Ph: (02) 9725 0222	E: mail@fairfieldcity.nsw.gov.au
--	--------------------	---

PRIVATE WASTE COLLECTION PROVIDER

Capital City Waste Services	Ph: 02 9599 9999	E: service@ccws.net.au
Remondis	Ph: 02 9032 7100	
Suez Environmental	Ph: 13 13 35	
Wastewise NSW	Ph: 1300 550 408	E: admin@wastewise.com.au

BIN MOVING DEVICE SUPPLIERS

Electrodrive	Ph: 1800 333 002	E: sales@electrodrive.com.au
Sitecraft	Ph: 1300 363 152	E: sales@sitecraft.com.au
Spacepac	Ph: 1300 763 444	

ORGANIC DIGESTERS AND DEHYDRATORS

Closed Loop	Ph: 1300 762 166	
Orca		E: contact.australia@feedtheorca.com
Soil Food	Ph: 1300 556 628	
Waste Master	Ph: 1800 614 272	E: hello@wastemasterpacific.com.au

COOKING OIL CONTAINERS AND DISPOSAL

Auscol	Ph: 1800 629 476	E: sales@auscol.com
--------	------------------	---

ODOUR CONTROL

EF Neutralizer	Ph: 1300 435 374	E: info@elephantsfoot.com.au
----------------	------------------	---

SOURCE SPERATION BINS

Source Separation Systems	Ph: 1300 739 913	E: info@sourceseparationsystems.com.au
---------------------------	------------------	---

MOBILE GARBAGE BINS, BULK BINS AND BIN EQUIPMENT


SULO	Ph: 1300 364 388	E: sales@sulo.com.au
OTTO Australia	Ph: 02 9153 6999	

CHUTES, COMPACTORS AND EDIVERTER SYSTEMS

Elephants Foot	Ph: 1800 025 073	E: info@elephantsfoot.com.au
----------------	------------------	---

APPENDIX A: ARCHITECTURAL PLANS

APPENDIX: A.1 GROUND FLOOR PLAN

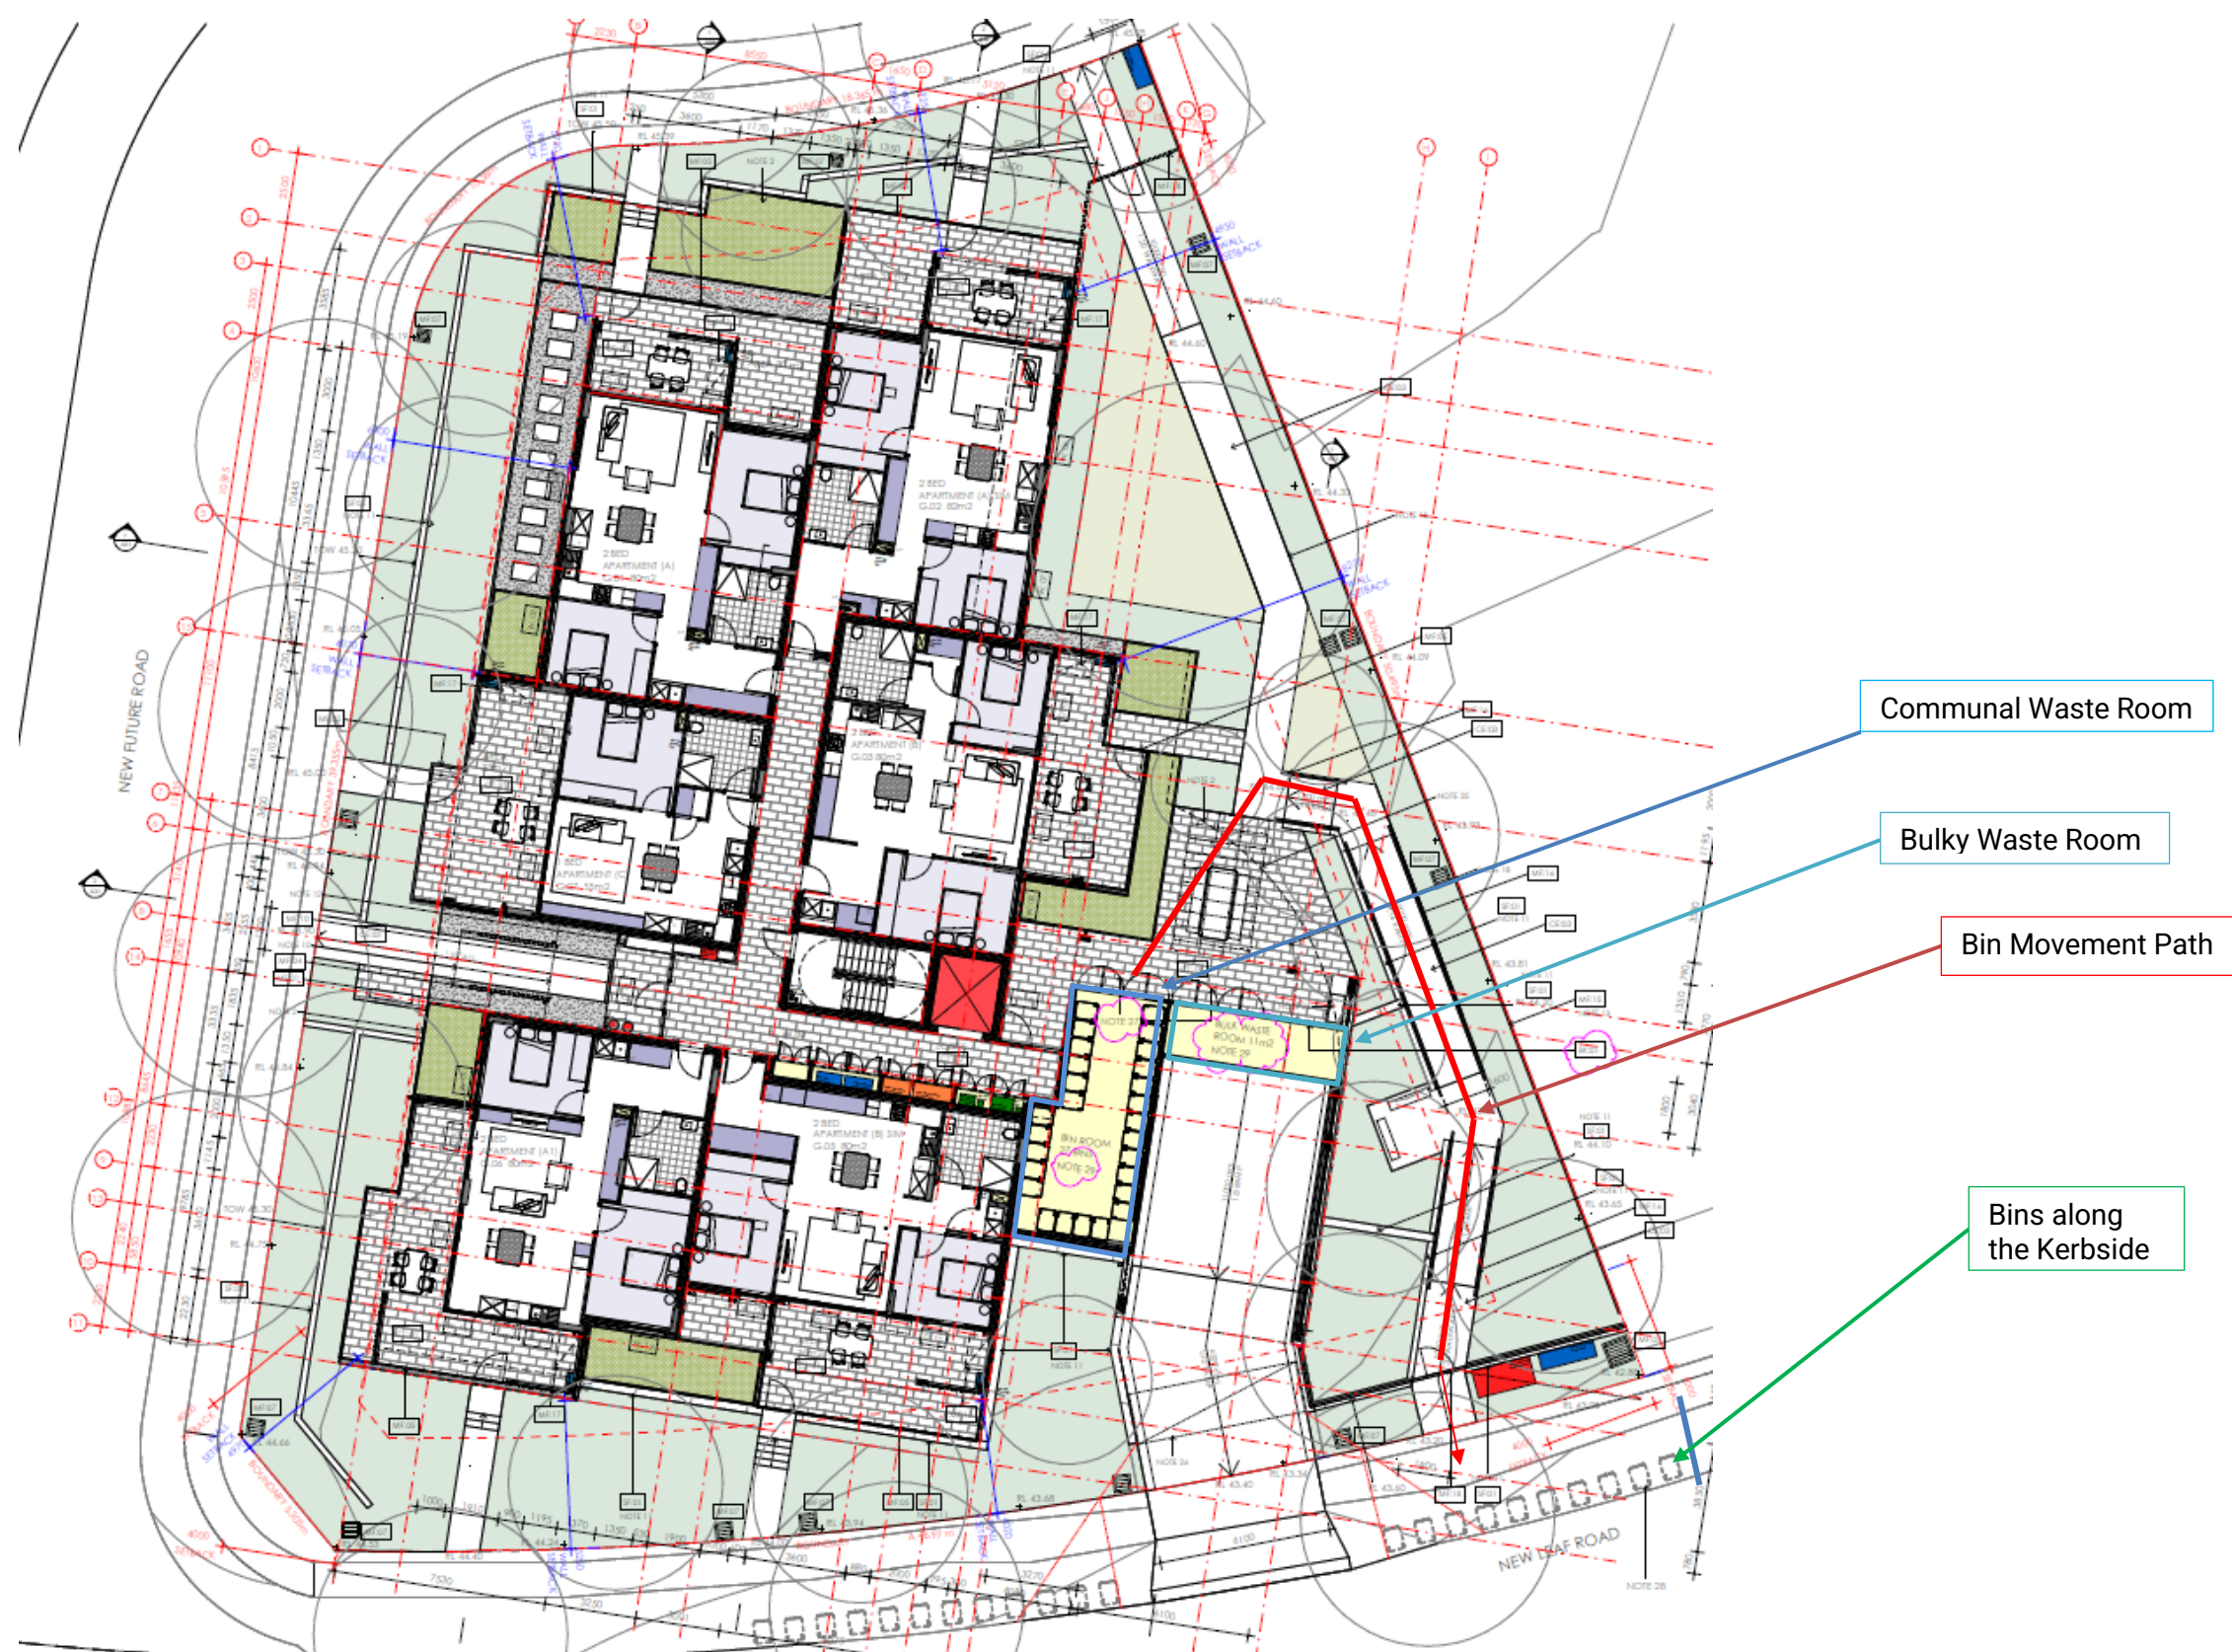

Source: AJH+, Drawing No. A10, Rev 6, 6/9/24 – Ground Floor Plan

APPENDIX B: PRIMARY WASTE MANAGEMENT PROVISIONS

APPENDIX: B.1 TYPICAL BIN SPECIFICATIONS


Mobile bins

Mobile bins come in a variety of sizes and are designed for lifting and emptying by purpose-built equipment.

Mobile bins with capacities of up to 1700L must comply with *AS4123.6-2006 Mobile waste containers* which specifies standard sizes and sets out the colour designations for the bodies and lids of mobile waste containers indicating the type of materials they are used to collect.

The most common bin sizes are provided below, although not all sizes are shown. The dimensions are a guide only and differ slightly between manufacturers. Some bins have flat or domed lids and are used with different lifting devices. Refer to *AS4123.6-2006* for further details.

Table G1.1: Average dimension ranges for two-wheel mobile bins




Bin capacity	80L	120L	140L	240L	360L
Height (mm)	870	940	1065	1080	1100
Depth (mm)	530	530	540	735	820
Width (mm)	450	485	500	580	600
Approximate footprint (m ²)	0.24	0.26–0.33	0.27–0.33	0.41–0.43	0.49
Approximate weight (kg)	8.5	9.5	10.4	15.5	23
Approximate maximum load (kg)	32	48	56	96	Not known

Wheelie bin

Sources include Sulo, Single Waste, Cleanaway, SUEZ, just wheelie bins and Perth Waste for two-wheel mobile bins

Table G1.2: Average dimension ranges for four-wheel bulk bins



Bin capacity	660L	770L	1100L	1300L	1700L
Height (mm)	1250	1425	1470	1480	1470
Depth (mm)	850	1100	1245	1250	1250
Width (mm)	1370	1370	1370	1770	1770
Approx footprint (m ²)	0.86–1.16	1.51	1.33–1.74	2.21	2.21
Approx weight (kg)	45	Not known	65	Not known	Not known
Approx maximum load (kg)	310	Not known	440	Not known	Not known

Dome or flat lid container

Sources include Sulo, Signal Waste, Cleanaway, SUEZ, Just Wheelie Bins and Perth Waste

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: B.2 SIGNAGE FOR WASTE AND RECYCLING BINS

Waste signs

Signs and educational materials perform several functions including:

- informing residents why it is important to recover resources and protect the environment
- providing clear instructions on how to use the bins and services provided
- alerting people to any dangers or hazards within the bin storage areas.

All waste, recycling and organic bins should be Australian Standard colours and clearly and correctly labelled, such as by a sticker on the lid and/or the body of the bin.

Communal bin storage areas should be clearly signposted with signs outlining how to correctly separate waste into the bins provided. The local council responsible for waste services may be a good source of signs and posters and can advise on what signs are suitable.

Information on who to contact to find out more about the recycling and/or other resource recovery services in the building should also be displayed in communal areas, such as on a noticeboard.

The Planet Ark website also has resources available free of charge for use by businesses and councils. These signs can be found at businessrecycling.com.au/research/signage.cfm

Figure I1.1: Examples of waste wall posters (EPA supplied)



Figure I1.2: Examples of bin lid stickers (EPA supplied)



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Problem waste signs

The EPA has also produced a range of images and signs that can be used for problem wastes, such as fluoro globes and tubes, household and car batteries, e-waste and smoke detectors. To access these resources, contact the NSW EPA. Some examples are shown below.

Figure I2.1: Problem waste signs



Safety signs

The use of safety signs for waste resource recovery rooms must comply with *AS1319 Safety signs for occupational environments*. Safety signs must be used to regulate and control safety related to behaviour, warn of hazards and provide emergency information, including fire protection information. Suitable signs should be decided for each development as required.

Figure I3.1: Example safety signs



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: B.3 TYPICAL COLLECTION VEHICLE INFORMATION

General

Appropriate heavy rigid vehicle standards should be incorporated into the road and street designs in new developments where onsite collections are proposed. Road and street designs must comply with relevant Acts, regulations, guidelines, and codes administered by Austroads, Standards Australia, NSW Roads and Maritime Services, WorkSafe NSW and any local council traffic requirements.

Applicants and building designers should consult with councils and other relevant authorities before designing new roads or streets and access points for waste collection vehicles to establish specific design requirements.

Table H4.1: Australian Standards for turning circles for medium and heavy rigid class vehicles

Vehicle class	Overall length (m)	Design width (m)	Design turning radius (m)	Swept circle (m)	Clearance (travel) height (m)
Medium rigid vehicle	8.80	2.5	10.0	21.6	4.5
Heavy rigid vehicle	12.5	2.5	12.5	27.8	4.5

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Large collection vehicles

Waste collection vehicles may be side-loading, rear-loading, front-lift-loading, hook or crane lift trucks. Vehicle dimensions vary by collection service, manufacturer, make and model. It is not possible to provide definitive dimensions, so architects and developers should consult with the local council and/or contractors.

The following characteristics represent typical collection vehicles and are provided for guidance only. Reference to *AS2890.2 Parking facilities: off-street commercial vehicle facilities* for detailed requirements, including vehicle dimensions, is recommended.

Table B2.1: Collection vehicle dimensions


Vehicle type	Rear-loading	Side-loading*	Front-lift-loading	Hook truck	Crane truck
Length overall (m)	10.5	9.6	11.8	10.0	10.0
Width overall (m)	2.5	2.5	2.5	3.0	2.5
Travel height (m)	3.9	3.6	4.8	4.7	3.8
Operational height for loading (m)	3.9	4.2	6.5	3.0	8.75
Vehicle tare weight (t)	13.1	11.8	16.7	13.0	13.0
Maximum payload (t)	10.0	10.8	11.0	14.5	9.5
Turning circle (m)	25.0	21.4	25.0	25.0	18

* The maximum reach of a side arm is 3 m.

Sources: JJ Richards, SUEZ, MacDonald Johnson, Cleanaway, Garwood, Ros Roca, Bingo and Edbro. Figures shown represent the maximum dimensions for each vehicle type.

Rear-loading collection vehicles


These vehicles are commonly used for domestic waste collections from MUDs and RFBs and sometimes for recycling. They can be used to collect waste stored in mobile bins or bulk bins, particularly where bins are not presented at the kerbside. They are also used for collecting bulky waste.

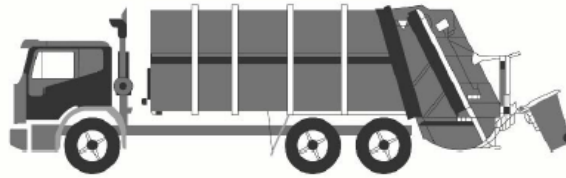

Rear-loading waste collection vehicle

Side-loading collection vehicles

This is the most commonly used vehicle for domestic waste, recycling and organics collections. It is only suitable for collecting mobile bins up to 360L in capacity.

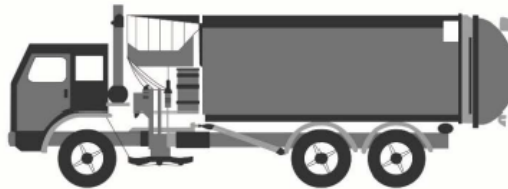

Side-loading waste collection vehicle

Front-lift-loading collection vehicles

These vehicles are commonly used for collecting commercial and industrial waste. They can only collect specially designed front-lift bulk bins and not mobile bins.



Front-lift-loading waste collection vehicle

Small collection vehicles

Typically, councils and their contractors operate with large collection vehicles (heavy rigid class vehicles) because they carry greater payloads and allow for more cost-effective collection services. Some councils, or their contractors, may have smaller collection vehicles in their fleet. Early discussion with the council is important to confirm this, but it should not be assumed that the council will have access to small collection vehicles.

The waste management systems and the location of the collection point should always be designed so that the council can provide the standard domestic waste service.

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: B.4 TYPICAL BIN MOVERS

Battery powered tug with a 1 or 2 tonne tow capacity



Features at a glance

One tonne (Evo 1T) or two tonne (Evo 2T) tow capacity

Auto latching hitch

Three speed motor with emergency stop

Typical applications

The Tug Evo is suitable for airports, factories, warehouses, apartment buildings or large facilities. This powered tug is also suitable for transporting medical carts around hospitals or moving heavy specialist equipment.

Features:

- 1 or 2 tonne tow capacity of inclines up to 6 degrees
- 500kg tow capacity if inclines up to 14 degrees
- CE Compliant
- 5 km/h max speed
- 2 x 12V 42Ah MK-gel batteries with 24V smart charger.
- Powerful transaxle

Safety Features:

- Intuitive control with standard automatic safety brake, forward and reverse drive.
- Emergency stop button.
- Emergency back-off button

Source: <http://www.electrodrive.com.au/products/tugs/tug-evo.aspx>

APPENDIX: B.5 TYPICAL SEATED BIN MOVERS

SITECRAFT

MATERIALS HANDLING EQUIPMENT




17 Macquarie Drive, Thomastown, VIC 3074

Phone: 1300 363 152 Fax: 1300 722 383


E: sales@sitecraft.com.au ABN: 36 423 328 526

SITECRAFT HEAVY DUTY ELECTRIC TOW TRACTOR

- > Towing capacities from 2000 kg to 6,000 kg
- > **Full AC electric system** has a brake-releasing function, making the unit easy and effortless to operate; The maintenance-free motor completely solves the issues of DC motor carbon brush.
- > Batteries located in the lowest part of frame ensures excellent stability
- > Quick open back service cover for easy maintenance and part replacement
- > CANbus technology reduces wiring complexity and increases reliability
- > H type axle design provides excellent stability.
- > New high-range steering design; light steering and easy to maintain.
- > New large-screen instrument display provides information clearly and directly to the operator.

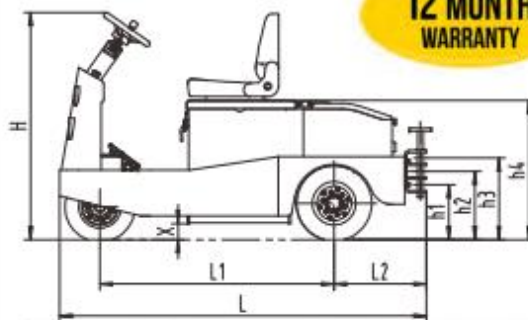

**12 MONTH
WARRANTY**

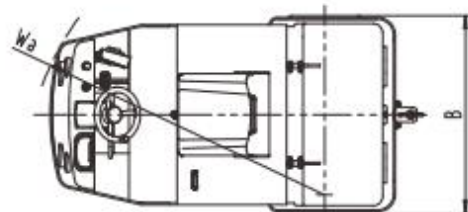

Model		ST-2000AC	ST-3000AC	ST-5000AC	ST-6000AC
Towing Capacity	Kg	2000	3000	5000	6000
Drawbar Centre Height	h1/h2/h3 mm	280/350/420	280/350/420	280/350/420	280/350/420
Motor	Kw / V	3Kw / 36V	3Kw / 36V	5Kw / 48V	5Kw / 48V
Total Size	L x B x H mm	1720 x 968 x 1270	1720 x 968 x 1270	1975 x 1100 x 1270	1975 x 1100 x 1270
Total Weight (With Batteries)	Kg	740	780	1240	1280
Wheel Size	Solid Rubber	15*4-8	15*4-8	15*4-8	15*4-8
Wheelbase	L1 mm	1055	1055	1280	1280
Rear Hanging Distance	L2 mm	382	382	500	500
Seat Height	h4 mm	910	910	910	910
Ground Clearance	X mm	90	90	90	90
Turning Radius	Wa mm	1500	1500	1650	1650
Maximum Speed	Km/h	10	8	14	12
Battery	V/Ah	36/200	36/250	48/360	48/400
Battery Weight	Kg	200	250	610	650
Charger	On-board V/Ah	36/30	36/30	48/50	48/50

SITECRAFT
MATERIALS HANDLING EQUIPMENT



17 Macquarie Drive, Thomastown, VIC 3074
Phone: 1300 363 152 Fax: 1300 722 383
E: sales@sitecraft.com.au ABN: 36 423 328 526

SITECRAFT HEAVY DUTY ELECTRIC TOW TRACTOR



Sitecraft ST3000-AC tow tug moving 660 & 1100 litre bins



Sitecraft ST3000-AC tow tug moving 660 & 1100 litre bins



ST3000-AC tow tug complete with 6 x 250AH heavy duty batteries



Optional steel / aluminium trailers for moving waste bins, linen trolleys, food trolleys, delivery boxes, etc ...

Source: <https://www.sitecraft.net.au/materials-handling/tow-tugs-powered-vehicles/electric-tow-vehicles/>

APPENDIX C: SECONDARY WASTE MANAGEMENT PROVISIONS

APPENDIX: C.1 TYPICAL WORM FARM SPECIFICATIONS

Worm farms



Worm farms or vermiculture systems transform food and other organic material into vermicast (worm compost) and vermi-liquid (liquid extraction from a worm farm). Seafood, seafood shells, meat or bones, and dairy products are not an acceptable part of the worms' diet and should not be applied to these systems. Worm farms can occupy a small footprint and be located on balconies or in gardens. The worm farm should be placed in a sheltered position to avoid getting too hot in summer.

Worm farms come in different sizes and designs and are sold through hardware stores and often at local government offices. Medium and large-scale worm farms can service many households and commercial activities. These larger systems need a management process to ensure they are properly maintained.

Onsite composting



Compost tumblers and bins and compost bays transform food and other organic material into useful soil enhancer (compost). They are more versatile than worm farms as they can generally process a wider range of materials, including woody garden organics and can be placed in the sun. A variety of compost bins and tumblers are available from hardware stores or some local councils. There are also various online resources on how to construct them using recycling materials such as timber pallets. The footprint area requirement for a typical single household compost bin is about 1m x 1m x 1m.

Before setting up an onsite composter or worm-farm system, check with council for any local requirements such as setback distances from property boundaries.

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: C.2 EXAMPLE APARTMENT STYLE COMPOST BIN



Apartment Style Compost bin – available from hardware stores

Suitable for:

- Vegetables
- Coffee grounds and filters
- Tea and tea bags
- Crushed eggshells (but not eggs)
- Nutshells
- Houseplants
- Leaves
- Cardboard rolls, cereal
- Boxes, brown paper bags
- Clean paper
- Shredded newspaper
- Fireplace ashes
- Wood chips, sawdust,
- Toothpicks, burnt matches
- Cotton and wool rags
- Dryer and vacuum cleaner lint
- Hair and fur
- Hay and straw

APPENDIX: C.3 TYPICAL SOURCE SEPARATION BINS



Source: <https://www.sourceseparationsystems.com.au/>