



Consulting.TM
an Elephants Foot Company

46 Court Road, Fairfield NSW 2165
Mixed Use Development

OPERATIONAL WASTE MANAGEMENT PLAN

17/01/2025
Report No. 5660
Revision J

Client

Fairfield Developments No. 1 Pty Ltd.

30A Eva Street, Riverwood NSW 2210

T (02) 8199 1144 • E Devaccounts@level33.com.au

Architect

The Hadd Group Pty Ltd

T (02) 8199 1144 • E Jean@level33.com.au





REVISION REFERENCE

| Revision | Date | Prepared by | Description |
|----------|------------|--------------|------------------------------------|
| A | Dec-14 | N. Beattie | Draft |
| B | Mar-15 | A Armstrong | Amendment |
| C | Sept-19 | A Armstrong | Amendment |
| D | 25-01-2024 | T. McPherson | Amendment |
| E | 31-01-2024 | T. McPherson | Updated Plans |
| F | 26-02-2024 | T. McPherson | Amendment |
| G | 09-05-2024 | T. McPherson | Amendment (Council RFI Submission) |
| H | 17-06-2024 | T. McPherson | Amendment (Council RFI Submission) |
| I | 21-10-2024 | T. McPherson | Amendment |
| J | 17-01-2025 | T. McPherson | Updated Plans |

The information contained in this document produced by Elephants Foot Consulting (EFC) is solely for the use of the client identified on the cover sheet for the purpose for which it has been prepared for. EFC undertakes no duty, nor accepts any responsibility for any third party who may rely upon this document. Reproduction, publication or distribution of this document without written permission from EFC is strictly prohibited.

This revision of the OWMP has been amended to accommodate the comments provided from the Fairfield City Council (revision C) based on the '*Notice of Determination Development Application No. 687.1/2014*', which has been approved.

TABLE OF CONTENTS

| | |
|--|----|
| TABLE OF FIGURES..... | iv |
| LIST OF TABLES..... | iv |
| GLOSSARY OF ABBREVIATIONS AND TERMS | i |
| 1.0 ACKNOWLEDGEMENT OF COUNTRY | ii |
| 2.0 INTRODUCTION..... | ii |
| 2.1 SCOPE OF REPORT | 3 |
| 2.2 REPORT CONDITIONS | 4 |
| 3.0 LEGISLATION & GUIDANCE | 5 |
| 3.1 FAIRFIELD CITY COUNCIL OBJECTIVES | 5 |
| 4.0 DEVELOPMENT OVERVIEW..... | 6 |
| 4.1 SITE LOCATION | 6 |
| 5.0 RESIDENTIAL WASTE MANAGEMENT | 7 |
| 5.1 WASTE GENERATION ESTIMATES | 7 |
| 5.2 BIN SUMMARY | 8 |
| 5.3 WASTE DISPOSAL PROCEDURES | 8 |
| 5.3.1 COMMON AREAS..... | 9 |
| 5.4 WASTE COLLECTION PROCEDURES | 10 |
| 5.5 BULKY WASTE PROCEDURES | 10 |
| 6.0 RETAIL WASTE MANAGEMENT | 11 |
| 6.1 WASTE GENERATION ESTIMATES | 11 |
| 6.2 BIN SUMMARY | 11 |
| 6.3 WASTE DISPOSAL PROCEDURES | 12 |
| 6.4 WASTE COLLECTION PROCEDURES | 12 |
| 6.5 OTHER WASTE MANAGEMENT CONSIDERATIONS | 12 |
| 6.5.1 KITCHEN, OFFICE TEA ROOMS AND FOOD PREPARATION AREAS | 12 |
| 6.5.2 BATHROOMS | 12 |
| 6.5.3 LIQUID WASTE | 12 |
| 6.5.4 PROBLEM WASTE..... | 12 |
| 7.0 STAKEHOLDER ROLES & RESPONSIBILITIES | 13 |
| 8.0 SOURCE SEPARATION..... | 14 |
| 9.0 EDUCATION | 15 |
| 9.1 SIGNAGE | 15 |
| 9.2 POLLUTION PREVENTION..... | 16 |
| 10.0 SYSTEMS SUMMARY | 17 |
| 11.0 WASTE ROOMS | 18 |
| 12.0 BIN MOVING PATHS..... | 19 |
| 13.0 CONSTRUCTION REQUIREMENTS..... | 20 |

| | | |
|---------------|---|----|
| 12.1 | ADDITIONAL CONSIDERATIONS..... | 20 |
| 13.0 | USEFUL CONTACTS..... | 21 |
| APPENDIX A: | ARCHITECTURAL PLANS..... | 22 |
| APPENDIX: A.1 | GROUND FLOOR PLAN..... | 23 |
| APPENDIX B: | INSTALLATION EQUIPMENT | 24 |
| APPENDIX: B.1 | TYPICAL SINGLE CHUTE SHAFT & PENETRATION LAYOUT | 25 |
| APPENDIX: B.2 | EXAMPLE RESIDENTIAL LEVEL RECYCLING BIN LAYOUT | 26 |
| APPENDIX: B.3 | TYPICAL LINEAR TRACK SYSTEM FOR 660L MGBS | 27 |
| APPENDIX: B.4 | TYPICAL CAROUSEL SYSTEM FOR 660L MGBS | 29 |
| APPENDIX C: | PRIMARY WASTE MANAGEMENT PROVISIONS..... | 31 |
| APPENDIX: C.1 | TYPICAL BIN SPECIFICATIONS..... | 32 |
| APPENDIX: C.2 | SIGNAGE FOR WASTE AND RECYCLING BINS..... | 33 |
| APPENDIX: C.3 | TYPICAL COLLECTION VEHICLE INFORMATION..... | 35 |
| APPENDIX: C.4 | TYPICAL BIN MOVERS | 37 |
| APPENDIX D: | SECONDARY WASTE MANAGEMENT PROVISIONS..... | 38 |
| APPENDIX: D.1 | EXAMPLE APARTMENT STYLE COMPOST BIN..... | 39 |
| APPENDIX: D.2 | TYPICAL COOKING OIL CONTAINERS | 40 |

TABLE OF FIGURES

| | | |
|-----------|--------------------|---|
| Figure 1: | Site Location..... | 6 |
|-----------|--------------------|---|

LIST OF TABLES

| | | |
|----------|--|----|
| Table 1: | Estimated Waste and Recycling Volumes – Residential Flat Building..... | 7 |
| Table 2: | Estimated Waste and Recycling Volumes – Ground Floor Residents..... | 8 |
| Table 3: | Estimated Waste and Recycling Volumes – Commercial and Retail | 11 |
| Table 4: | Stakeholder Roles and Responsibilities | 13 |
| Table 5: | Operational Waste Streams..... | 14 |
| Table 6: | Systems Summary | 17 |
| Table 7: | Waste Room Areas..... | 18 |
| Table 8: | Waste Room Requirements..... | 19 |

GLOSSARY OF ABBREVIATIONS AND TERMS

| TERM | DESCRIPTION |
|------------------------------------|--|
| <i>Bin-carting Route</i> | Travel route for transferring bins from the storage area to a nominated collection point |
| <i>Chute</i> | A ventilated, vertical pipe passing from floor to floor of a building with openings as required to connect with hoppers and normally terminating at its lower end at the roof of the central waste room(s) |
| <i>Chute Discharge</i> | The point at which refuse exits from the refuse chute |
| <i>Chute Discharge Room</i> | A secure, enclosed area or room housing the discharge and associated equipment for the refuse chute |
| <i>Bin Holding Room</i> | The identified room where general waste or recyclables are loaded onto the collection vehicle directly from the main bin storage room. |
| <i>Composter</i> | A container/machine used for composting specific food scraps |
| <i>Crate</i> | A plastic box used for the collection of recyclable materials |
| <i>DA</i> | Development Application |
| <i>DCP</i> | Development Control Plan |
| <i>EPA</i> | Environmental Protection Authority |
| <i>HRV</i> | Heavy Rigid Vehicle described by AS 2890.2-2002 Parking facilities – Off-street commercial vehicle facilities |
| <i>L</i> | Litre(s) |
| <i>LEP</i> | Local Environmental Plans guide planning decisions for local government areas |
| <i>Liquid Waste</i> | Non-hazardous liquid waste generated by commercial premises that must be connected to sewer or collected for treatment and disposal by a liquid waste contractor (including grease trap waste) |
| <i>Mixed Use Development</i> | A development comprised of two or more different uses |
| <i>Mobile Garbage Bin(s) (MGB)</i> | A waste container generally constructed of plastic with wheels with a capacity in litres of 120, 240, 360, 660, 1000 or 1100 |
| <i>Onsite Collection</i> | When the collection vehicle enters the property and services the development within the property boundary from a designated loading area |
| <i>Owners Corporation</i> | An organisation or group of persons that is identified by a particular name and acts, or may act, as an entity |
| <i>Service Bins</i> | Bin set aside to be placed under a chute while the remainder of the bins are being collected |
| <i>SRV</i> | Small Rigid Vehicle described by AS 2890.2-2002 Parking facilities – Off-street commercial vehicle facilities |

1.0 ACKNOWLEDGEMENT OF COUNTRY

We acknowledge Australia's First Nations People as the Traditional Custodians of this land. We pay respect to ancestors and Elders, past and present. We honour Aboriginal and Torres Strait Islander people and their connection to land, waters and seas, and their vital contribution to the vibrant nation that we share, Australia.

2.0 INTRODUCTION

Elephants Foot Consulting (EFC) has been engaged to prepare the following waste management plan for the operational management of waste generated by the mixed use development located at 46 Court Road, Fairfield NSW. Below shows the conditions met with the Fairfield City Council, based on the previous OWMP provided by Elephants Foot (revision C) and the 'Notice of Determination Development Application No. 687.1/2014', which has been approved.

"The requirements of Elephants Foot Recycling Solutions Waste Management Plan dated March 2015 shall be adhered to at all times subject to the following exceptions":

| DA Condition | Elephant Foots Response |
|--|--|
| 111. The management of the building waste system including the transfer of full bins, returning empty bins back to the garbage rooms, ensuring proper waste system and garbage room operations, must be included in the building caretaker's statement of duties. The caretaker shall also be responsible for returning empty bins back inside the garbage rooms within 5 hours of being emptied. | The building caretaker will be responsible for the rotation and monitoring of bins, bin washdown and maintenance activities with contractor/s, and ensuring bins are returned to their designated location to resume their operational use within 5 hours of being emptied. |
| 112. The requirements of Elephants Foot Recycling Solutions Waste Management Plan dated March 2015 shall be adhered to at all times subject to the following exceptions: <ul style="list-style-type: none"> a. The garbage be collected in 660L bins instead of 1100L bins; b. Recycling be presented in 240L bins instead of 1100L bins; c. All waste bins (garbage and recycling) shall be wheeled out easily from the waste and recycling in holding room for collection outside in Court Road driveway. This waste holding room, located behind the 2A Block lobby, shall be provided with double opening doors connecting the holding room to outside the Court driveway; d. The Court Riad driveway shall be designed to allow for a 22.5 tonne GVM garbage truck to safely drive upon it. | <ul style="list-style-type: none"> a. The garbage bins have been recalculated to reflect 660L bins instead of 1100L bins; b. The recycling bins have been recalculated to reflect 240L bins; c. All bins have been proposed to be collected via 'onsite collection' using the Councils collection vehicle by parking into a dedicated loading bay for servicing bins. d. The loading bay has been designed to reflect Councils collection vehicle to service bins. |
| The Waste Management Plan shall include the need for the building management to employ a caretaker to manage all elements of the waste management system. | |

Waste management strategies and audits are required for new developments in order to support the design and sustainable performance of the building. It is EFC's belief that a successful waste management strategy contains three key objectives:

- i. **Promote responsible source separation** to reduce the amount of waste that goes to landfill by implementing convenient and efficient waste management systems.
- ii. **Ensure adequate waste provisions and robust procedures** that will cater for potential changes during the operational phase of the development.
- iii. **Comply** with all relevant council codes, policies, and guidelines.

To achieve these objectives, this operational waste management plan (OWMP) identifies the different waste streams likely to be generated during the operational phase of the development, as well as how the waste will be handled and disposed, details of bin sizes/quantities and waste rooms, descriptions of the proposed waste management equipment used, and information on waste collection points and frequencies.

It is essential that this OWMP is integrated into the overall management of the building and is clearly communicated to all relevant stakeholders.

2.1 SCOPE OF REPORT

This operational waste management plan (OWMP) only applies to the **operational** phase of the proposed development; therefore, the requirements outlined in this OWMP must be implemented during the operational phase of the site and may be subject to review upon further expansion of, and/or changes to the development.

2.2 REPORT CONDITIONS

The purpose of this report is to document an OWMP as part of a development application, which is supplied by EFC with the following limitations:

- Drawings, estimates and information contained in this OWMP have been prepared by analysing the information, plans and documents supplied by the client and third parties including Council and other government agencies. The assumptions based on the information contained in the OWMP is outside the control of EFC,
- The figures presented in the report are an estimate only – the actual amount of waste generated will be dependent on the occupancy rate of the building/s and waste generation intensity as well as the building management's approach to educating residents and tenants regarding waste management operations and responsibilities,
- The building manager will adjust waste management operations as required based on actual waste volumes (e.g. if waste is greater than estimated) and increase the number of bins and collections accordingly,
- The report will not be used to determine or forecast operational costs or prepare any feasibility study or to document any safety or operational procedures,
- The report has been prepared with all due care; however, no assurance is made that the OWMP reflects the actual outcome of the proposed waste facilities, services, and operations, and EFC will not be liable for plans or results that are not suitable for purpose due to incorrect or unsuitable information or otherwise,
- EFC offer no warranty or representation of accuracy or reliability of the OWMP unless specifically stated,
- Any manual handling equipment recommended in this OWMP should be provided at the recommendation of the appropriate equipment provider who will assess the correct equipment for supply,
- Design of waste management chute equipment and systems must be approved by the supplier,
- EFC cannot be held accountable for late changes to the design after the OWMP has been submitted to Council,
- EFC will provide specifications and recommendations on bin access and travel paths within the OWMP; however, it is the architect's responsibility to ensure the architectural drawings meet these provisions,
- EFC are not required to provide information on collection vehicle swept paths, head heights, internal manoeuvring or loading requirements. It is assumed this information will be provided by a traffic consultant,
- Council are subject to changing waste and recycling policies and requirements at their own discretion.

This OWMP is only finalised once the Draft Watermark has been removed. If the Draft Watermark is present, the information in the OWMP is not confirmed.

3.0 LEGISLATION & GUIDANCE

Waste management and resource recovery regulation in Australia is administered by the Australian Constitution, Commonwealth laws, and international agreements. State and territory governments maintain primary responsibility for controlling development and regulating waste. The following legislation has been enacted in New South Wales, and provides the lawful underpinnings of this OWMP.

- NSW Environmental Planning & Assessment Act 1979
- NSW Protection of the Environment Operations Act 1997
- NSW Waste Avoidance & Resource Recovery Act 2001

At the local level, councils or Local Government Areas (LGAs) require OWMPs to be included in new development applications. This OWMP is specifically required by:

- Fairfield City Wide Development Control Plan 2013
- Fairfield Local Environmental Plan 2013

The primary purpose of a development control plan (DCP) is to guide development according to the aims of the corresponding local environmental plan (LEP). The DCP must be read in conjunction with the provisions of the relevant LEP.

Information provided in this OWMP comes from a wide range of waste management guidance at the local, state, and federal levels. The primary sources of guidance include:

- Fairfield City Wide Development Control Plan 2013
- NSW Better Practice Guidelines for Waste Management and Recycling in Commercial and Industrial Facilities 2012
- NSW Better practice guide for resource recovery in residential developments 2019
- NSW Waste Avoidance and Resource Recovery (WARR) Strategy 2014-2021
- NSW Waste Classification Guidelines 2014
- Australia's National Waste Policy 2018

3.1 FAIRFIELD CITY COUNCIL OBJECTIVES

Fairfield City Council considers waste management to be highly important for the protection and enhancement of both the natural and built environments. As such, Council aims to:

- Reduce the demand for waste disposal through waste separation and resource recovery in demolition, design, construction and operation of buildings and land use activities;
- Achieve the design of waste and recycling storage systems in buildings and land use activities which are hygienic, accessible, quite to operate, of adequate size, and are visually compatible with their surroundings;
- To encourage waste minimisation, source separation, reuse and recycling.

4.0 DEVELOPMENT OVERVIEW

The proposed development falls under the LGA of Fairfield City Council, and consists of four buildings. The proposed site has a total quantity of 356 residential units, with the breakdown listed below.


- **Building A** incorporates three cores, with the quantities of residential units below:
 - Building A1 has 17 units in total.
 - Building A2 has 35 units in total.
 - Building A3 has 18 units in total.
- **Building B** incorporates a single core, with 117 residential units in total.
- **Building C** incorporates a single core, with 117 residential units in total.
- **Building D** incorporates two cores, with the quantities of residential units below:
 - Building D1 has 28 units in total.
 - Building D2 has 25 units in total.
 - The ground floor has a total of 5 units in total.
- The proposed site has 8 retail tenancies, with a total GFA of approximately 1074 m².

All figures and calculations are based on area schedules as advised by our client and shown on architectural drawings. The current labelling of each core for the buildings can be viewed in a pattern similar to the below.

4.1 SITE LOCATION

The site is located at 46 Court Road, Fairfield NSW as shown in Figure.1 (boundaries are indicative only). The site has frontages and vehicular access via Court Road.

Figure 1: Site Location

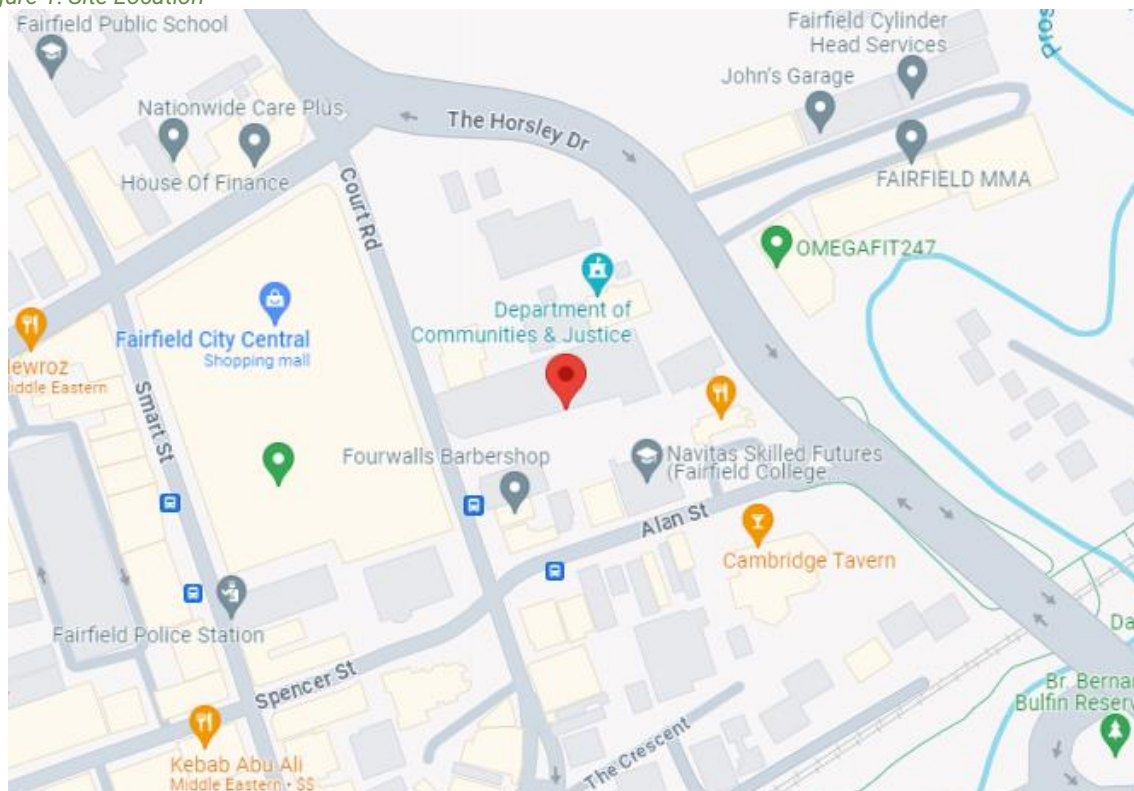

Source: Google Maps

5.0 RESIDENTIAL WASTE MANAGEMENT

The following section outlines best practice waste management for the residential component of the development, including waste generation estimates and waste disposal and collection procedures.

5.1 WASTE GENERATION ESTIMATES

The 'Fairfield City Centre Development Control Plan 2013', and the Fairfield City Councils 'Notice of Determination Development Application: No. 687.1/2014', and Council advice has been referenced to calculate the total number of bins required for the residential units. Calculations are based on generic figures, and waste generation rates may differ according to the residents' actual waste management practice.

During operation, it is the responsibility of the building manager to monitor the number of bins required for the residential component. Waste, recycling and FOGO volumes may change according to residents' attitudes to waste disposal and recycling, building occupancy levels or development's management. Any requirements for adjusting the capacity of the waste facilities can be achieved by changing the number of bins, the bin sizes or collection frequencies. Building management will be required to negotiate any changes to bins or collections with the collection service provider.

The following table shows the estimated volume (L) of general waste, recycling and FOGO generated by the residential component of the development.

Table 1: Estimated Waste and Recycling Volumes – Residential Flat Building

| Core | # Units | Waste Generation Rate (L/Unit/Week) | Generated Waste (L/Week) | Recycling Generation Rate (L/Unit/Week) | Generated Recycling (L/Week) | FOGO Generation Rate (L/Unit/Week) | Generated FOGO (L/Week) |
|-------------------------------|------------|--|--------------------------|---|------------------------------|--------------------------------------|-------------------------|
| A1 | 17 | 120 | 2040 | 80 | 1360 | 40 | 680 |
| A2 | 35 | 120 | 4200 | 80 | 2800 | 40 | 1400 |
| A3 | 18 | 120 | 2160 | 80 | 1440 | 40 | 720 |
| B | 117 | 120 | 14040 | 80 | 9360 | 40 | 4680 |
| C | 117 | 120 | 14040 | 80 | 9360 | 40 | 4680 |
| D1 | 28 | 120 | 3360 | 80 | 2240 | 40 | 1120 |
| D2 | 20 | 120 | 2400 | 80 | 1600 | 40 | 800 |
| TOTAL | 352 | | 42240 | | 28160 | | 14080 |
| Bins & Collections | | General waste Bin Size (L) | 660 | Recycling Bin Size (L) | 240 | Recycling Bin Size (L) | 240 |
| | | General Waste Collections per Week | 1 | Recycling Collections per Week | 1 | FOGO Collections per Week | 1.0 |
| | | Total General Waste Bins Required | 69 | Total Recycling Bins Required | 119 | Total Recycling Bins Required | 61 |
| Bins Per Building Core | | Core | # Bins | Core | # Bins | Core | # Bins |
| | | A1 | 4 | A1 | 6 | A1 | 3 |
| | | A2 | 7 | A2 | 12 | A2 | 6 |
| | | A3 | 4 | A3 | 6 | A3 | 3 |
| | | B | 22 | B | 39 | B | 20 |
| | | C | 22 | C | 39 | C | 20 |
| | | D1 | 6 | D1 | 10 | D1 | 5 |
| | | D2 | 4 | D2 | 7 | D2 | 4 |

*Note: Additional bins should be provided for each chute discharge for use during collection periods. These bins are not included in the above figures.

It is understood that there would be residents located in the same level as the chute discharge room. These residents will not have access to the chute system, and will therefore be provided with a residential communal bin room containing 240L bins.

Table 2: Estimated Waste and Recycling Volumes – Ground Floor Residents

| Core | # Units | Waste Generation Rate (L/Unit/Week) | Generated Waste (L/Week) | Recycling Generation Rate (L/Unit/Week) | Generated Recycling (L/Week) | FOGO Generation Rate (L/Unit/Week) | Generated FOGO (L/Week) |
|--------------------|---------|-------------------------------------|--------------------------|---|------------------------------|------------------------------------|-------------------------|
| GF | 5 | 120 | 600 | 80 | 400 | 40 | 200 |
| TOTAL | 356 | | 600 | | 400 | | 200 |
| Bins & Collections | | General waste Bin Size (L) | 240 | Recycling Bin Size (L) | 240 | Recycling Bin Size (L) | 240 |
| | | General Waste Collections per Week | 1 | Recycling Collections per Week | 1 | FOGO Collections per Week | 1.0 |
| | | Total General Waste Bins Required | 3 | Total Recycling Bins Required | 2 | Total Recycling Bins Required | 1 |

5.2 BIN SUMMARY

Based on the estimated waste generated by the residential component of this development, the recommended bin quantities and collection frequencies are as follows:

Residential Flat Building:

| | |
|-----------------------|--|
| General Waste: | 69 x 660L MGBs collected 1 x weekly. |
| Recycling: | 119 x 240L MGBs collected 1 x weekly. |
| FOGO: | 61 x 240L MGBs collected 1 x weekly. |

Ground Floor Residents

| | |
|-----------------------|--|
| General Waste: | 3 x 240L MGBs collected 1 x weekly. |
| Recycling: | 2 x 240L MGBs collected 1 x weekly. |
| FOGO: | 1 x 240L MGBs collected 1 x weekly. |

EFC recommends bins sizes, collection frequencies and/or equipment for best practice waste management at this site, however EFC also acknowledges there are a range of other suitable options that may alter waste room requirements (e.g. floor area, accessibility, head height, etc.)

5.3 WASTE DISPOSAL PROCEDURES

One (1) single chute equipped for general waste will be installed with access provided on each residential level of each core. Residents will wrap or bag their general waste before placing in the waste chute. Bagged waste should not exceed 3kg in weight, or 35cm x 35cm x 35cm. Recycling (comingle only) must not be bagged, and disposed of instead within the 240L recycling bins available on each residential level.

The general waste will discharge from the chute into either linear track systems, or carousel systems for each building. Space for 2 x 240L bins has been provided on each residential level for recycling and FOGO in the form of a cupboard, adjacent to the general waste chute. The

building caretaker will be responsible for monitoring each bin, and rotating them with an empty bin when required. The full and spare bins will be kept within the residential bin holding room.

Some residents will reside on the same level as the chute discharge room and therefore these residents will not have access to the chute. This is applicable to all residents located at ground floor. The residents of these units will be provided with a communal bin room, and will be responsible for placing their waste, recycling and FOGO into the designated receptacles as required.

Refer to Council guidance for the types of materials accepted in the general waste and recycling streams.

5.3.1 COMMON AREAS

Residential common areas such as lobbies, amenities and circulation areas will be supplied with suitably branded waste and recycling bins where considered appropriate. These areas generate minimal waste, however general waste and recycling receptacles should be placed in convenient locations.

5.4 WASTE COLLECTION PROCEDURES

Council will be engaged to collect the residential waste, recycling and FOGO in accordance with Council's collection schedule ^(1,2). This report assumes collections will occur once weekly in accordance with Council's schedule, and approved OWMP produced by EFC, Revision C, dated September 2019.

On the nominated waste collection day, the building caretaker will be responsible for transporting all bins for waste, recycling and FOGO to the residential bin holding room located on the ground level (see APPENDIX A.1). It is recommended that extra service bins are placed under the chute for waste and recycling to collect discharge while the other bins are being serviced.

To service the bins, a Council collection vehicle will enter the site from Court Road and park in the loading bay (see APPENDIX A.1). The building caretaker will provide the driver with access to the residential bin holding room. Once the bins are serviced, the collection vehicle will exit the site onto Court Road in a forward direction.

All access and clearances to the waste collection room must be able to accommodate an HRV per AS2890.2-2002.

It is the responsibility of the caretaker to ensure that the loading area is clear of any vehicles or obstructions prior to waste collection. When waste collection is complete, the building caretaker will return the bins to resume operational use.

**Notes:*

(1) Tia Mills, 29-04-2022, Senior Development Planner

(2) Development Approval 687.1/2014, Condition 74

5.5 BULKY WASTE PROCEDURES

An area has been made available for the storage of discarded residential bulky items (e.g. whitegoods, furniture, etc.). This room is located within close proximity of the garbage and recycling bin collection room and must have a minimum doorway width of 2.5m to allow for easy movement of large waste items in and out of the room.

Residents will need to liaise with building management regarding the transportation of bulky items and the availability of the bulky waste storage room on ground floor (see APPENDIX A.1). It is the caretaker's responsibility to arrange collection dates with Council and then coordinate with the residents.

On the day of bulky waste collection, a Council collection vehicle will enter the site from Court Road and park in the loading bay. The building caretaker will provide the driver with access to the bulky waste storage room. Once bulky items have been loaded, the collection vehicle will exit the site onto Court Road in a forward direction. Refer to Council's website for acceptable items and other information regarding bulky waste collection.

The bulky waste room has been calculated with "10m² for the first 40 units, and 2m² for every remaining 10 units".

6.0 RETAIL WASTE MANAGEMENT

The following section outlines best practice waste management for the retail components of the development, including waste generation estimates and waste disposal and collection procedures.

6.1 WASTE GENERATION ESTIMATES

The NSW EPA's *Better practice guide for resource recovery in residential developments 2019* has been referenced to calculate the total number of bins required for the anticipated tenants. Calculations are based on generic figures, and waste generation rates may differ according to the tenants' actual waste management practice. The waste and recycling generation rates from the NSW EPA's *Better practice guide for resource recovery in residential developments 2019* have been adapted to reflect litres per 100m² per day.

The following table shows the estimated volume (L) of general waste and recyclables that will be generated by the retail tenants.

The total GFA of the retail component has been divided into halves to take into account the waste generation of future possible tenancies. It is assumed that retail tenancies will share waste bins, the waste storage room, and the waste collection service.

The following estimates are based on a seven-day operating week.

Table 3: Estimated Waste and Recycling Volumes – Commercial and Retail

| Tenancy Type | GFA m ² | Waste Generation Rate (L/100m ² /Day) | Generated Waste (L/Week) | Recycling Generation Rate (L/100m ² /Day) | Generated Recyclables (L/Week) |
|----------------------|--------------------|--|--------------------------|--|--------------------------------|
| Café | 461 | 100 | 3227.7 | 120 | 3873.2 |
| Retail: Non-Food | 461 | 50 | 1613.9 | 100 | 3227.7 |
| TOTALS | 922 | | 4842 | | 7101 |
| Bins and Collections | | Bin Size (L) | 660 | Bin Size (L) | 660 |
| | | Bins/Week | 7.3 | Bins/Week | 10.8 |
| | | Collections/Week | 3 | Collections/Week | 3 |
| | | Total Bins | 3 | Total Bins | 4 |

6.2 BIN SUMMARY

Based on the estimated waste generated by the retail tenancies, the recommended bin quantities and collection frequencies are as follows:

General Waste: 3 x 1100L MGBs collected **3 x weekly**.
Recycling: 5 x 1100L MGBs collected **3 x weekly**.

Bin sizes, quantities, and/or collection frequencies may be modified by the building manager once the proposed development is operational. Building management will be required to negotiate any changes to bins or collections with the collection service provider. Seasonal peak periods such as public and school holidays should also be considered.

6.3 WASTE DISPOSAL PROCEDURES

On completion of each trading day or as required, nominated staff or contracted cleaners will transport all general waste and recyclables to the retail bin room, and place into the appropriate collection bins (see APPENDIX A.1).

6.4 WASTE COLLECTION PROCEDURES

A private waste collection contractor will be engaged to service the retail waste and recycling bins per an agreed schedule. This report assumes waste and recycling is collected three times weekly.

On the day of service, a private waste collection vehicle will enter the site from Court Road and park in the loading bay. The building caretaker will provide the driver with access to the retail bin room. Once the bins are serviced, the collection vehicle will exit the site Court Road in a forward direction.

Please note that the collection of retail bins should occur on separate days from the collection of residential bins to ensure proper segregation of waste streams.

6.5 OTHER WASTE MANAGEMENT CONSIDERATIONS

Based on the types of tenancies anticipated for this development, the following waste management practices are recommended.

6.5.1 KITCHEN, OFFICE TEA ROOMS AND FOOD PREPARATION AREAS

Any food preparation area, including kitchens and office tea rooms will be provided with dedicated source separation bins including a general waste bin and a recycling bin. Cleaners or nominated staff will be responsible for monitoring these bins and emptying them as required.

6.5.2 BATHROOMS

Washroom facilities should be supplied with collection bins for paper towels (if used). Sanitary bins for female restroom facilities must also be arranged with an appropriate contractor.

6.5.3 LIQUID WASTE

Liquid wastes such cleaning products, chemicals, paints, and cooking oil, etc., will be stored in a secure space that is bunded and drained to a grease trap in accordance with State government authorities and legislation.

6.5.4 PROBLEM WASTE

The building manager is responsible for making arrangements for the disposal and recycling of problem waste streams with an appropriate contractor. Problem wastes cannot be placed in general waste as they can have adverse impacts to human health and the environment if disposed of in landfill. Retail and Commercial tenants will need to liaise with the building manager when disposing of problem waste streams.

Problem waste streams include chemical waste, light bulbs, toner cartridges, eWaste, batteries and liquid wastes.

7.0 STAKEHOLDER ROLES & RESPONSIBILITIES

The following table demonstrates the primary roles and responsibilities of the respective stakeholders:

Table 4: Stakeholder Roles and Responsibilities

| Roles | Responsibilities |
|---|--|
| Strata/ Owners Corporation or Management | <ul style="list-style-type: none"> • Ensure that all waste service providers submit monthly reports on all equipment movements and waste quantities/weights; • Organise internal waste audits/visual assessments on a regular basis • Purchase any on-going waste management equipment or maintenance of equipment once building is operational; and • Manage any non-compliances/complaints reported through waste audits. |
| Building Manager or Waste Caretaker | <ul style="list-style-type: none"> • Maintain and clean chute doors on each level; • Coordinate general waste and recycling collections; • Clean and transport bins as required; • Organise replacement or maintenance requirements for bins; • Organise, maintain and clean the waste holding area; • Organise bulky goods collection when required • Investigate and ensure prompt clean-up of illegally dumped waste materials. • Prevent storm water pollution by taking necessary precautions (securing bin rooms, preventing overfilling of bins) • Abide by all relevant WH&S legislation, regulations, and guidelines; • Provide staff/contractors with equipment manuals, training, health and safety procedures, risk assessments, and PPE to control hazards associated with all waste management; • Assess any manual handling risks and prepare a manual handling control plan for waste and bin transfers; • Ensure site safety for residents, children, visitors, staff and contractors; and • Ensure effective signage, communication and education is provided to occupants, tenants, maintenance staff, and cleaning contractors. |
| Residents | <ul style="list-style-type: none"> • Dispose of all general waste and recycling in the allocated waste chutes and/or MGBs provided; • Ensure adequate separation of general waste and recycling; and • Compliance with the provisions of Council and the OWMP. |
| Retail Tenants | <ul style="list-style-type: none"> • Manage the back of house storage of generated waste and recycling during daily operation. • Correctly separate waste and recycling streams; bag general waste and ensure recyclables are not bagged. • Flatten cardboard within the recycling bin. • If required, make arrangements for storing used and unused cooking oil in a bunded storage area, • Organise grease interceptor trap servicing, • Ensure dry basket arrestors are provided to the floor wastes in the food preparation, and • Ensure the suitable storage for chemicals, pesticides and cleaning products waste back of house. |
| Waste Collection Contractor | <ul style="list-style-type: none"> • Provide a reliable and appropriate waste collection service; • Provide feedback to building managers/residents regarding contamination of recyclables; and • Work with building managers to customise waste systems where possible. |
| Gardening/ Landscaping Contractor | <ul style="list-style-type: none"> • Remove all garden organic waste generated during gardening maintenance activities for recycling at an offsite location. |
| Developer | <ul style="list-style-type: none"> • Purchase all equipment required to implement this OWMP prior to the occupation of the building to be provided to the strata/ owner's corporation. |

8.0 SOURCE SEPARATION

Better practice waste management includes the avoidance, reuse, and recovery of unwanted items, which can be achieved through source separation. The table below outlines what is typically included in various waste streams and how they can be managed. Refer to your local council for a list of accepted materials. Planet Ark can be accessed online to find other facilities that recover unwanted items.

Table 5: Operational Waste Streams

| Waste Stream | Description | Typical Destination | Waste Stream Management |
|-------------------------|--|--------------------------------------|--|
| General Waste | The remaining portion of the waste stream that is not recovered for re-use, processing, or recycling. May include soft plastics, food scraps, polystyrene, etc. | Landfill | Waste should be bagged before placing in chutes, or in designated waste bins. |
| Recycling | A mixture of items that are commonly recycled usually segregated through a MRF. Typically include food and beverage containers (e.g. aluminium, glass, steel, hard plastics, cartons). Also included cardboard and paper products. | Resource Recovery Centre | Recycling must not be bagged, and instead should be placed loosely in the recycling chute or in designated recycling bins. Bulky cardboard must not be placed in any chute. Cardboard should be flattened before placing in the designated cardboard bin. |
| Secure Documents | Secure documents are printed paper materials that contain sensitive information. | Recycling Facility | Secure documents are placed in allocated secure document bins. Private contractor removes bins from site. |
| Green Waste | Green waste consists of unwanted organic materials that are easily biodegradable and/or compostable (e.g. lawn clippings, branches) | Resource Recovery Centre | Landscape Maintenance Contractors will remove the green waste from site during scheduled maintenance. Green waste will be collected in council or private contractor bins and removed from site. |
| Food Waste | Food waste consists of unwanted or uneaten kitchen scraps that are easily compostable/biodegradable (e.g. vegetable peels, fruit rinds, coffee grounds). | Composting facility or Landfill | Food waste can be composted on-site, off-site, or else included in the general waste stream. |
| Electronic Waste | Discarded e-waste, electronic components and materials such as computers, mobile phones, keyboards, etc. | Resource Recovery Centre | Building manager arranges collection for e-waste recycling as needed by residents. Commercial tenants arrange for recycling of their own e-waste. |
| Bulky Items | Items that are too large to place into general rubbish collection. This includes disused and/or broken furniture, mattresses, white goods, etc. | Resource Recovery Centre or Landfill | Residents liaise with building manager to store in Bulky Goods Room. Building manager arranges with Council for removal. Commercial tenants are responsible for removal of their bulky items. |
| Sanitary Waste | Feminine hygiene waste generated from female bathrooms. | Incineration or Landfill | Sanitary bins are serviced by sanitary waste contractor. |
| Other | Other recyclable items that require special recovery may include ink cartridges, batteries, chemical waste, fluorescent tubes, etc. | Resource Recovery Facility | Building manager arranges collection by appropriate recycling services when required. |

9.0 EDUCATION

Educational materials encouraging correct separation of general waste and recyclables must be provided to each resident and commercial/retail tenant. This should include the correct disposal process for bulky waste such as old furniture, large discarded items, and other materials including electronic and chemical wastes. It is recommended that the building caretaker provides information in multiple languages to support correct behaviours, and to minimise the possibility of chute blockages and contamination in communal waste bins.

Education and communication must be provided consistently on a regular basis to encourage behaviour change and account for transient building personnel such as new residents, tenants, or cleaning staff. It is also recommended that the owners' corporation website contain information for residents' referral regarding use of the chute. Information should include:

- Directions on using the chute doors;
- Descriptions of items accepted in the recycling and general waste streams (refer to Council guidance);
- How to dispose of bulky goods and any other items that are not general waste or recycling (refer to Council guidance);
- Residents' obligations to health and safety as well as building management; and
- How to prevent damage or blockages to the chute (example below).

To prevent damage or blockage to rubbish chute DO NOT dispose of any umbrellas, bedding, cigarettes, cartons, coat hangers, brooms, mops, large plastic wrappings from furniture, white goods, any sharp objects, hot liquid or ashes, oil, unwrapped vacuum dust, syringes, paint and solvents, car parts, bike parts, chemicals, corrosive and flammable items, soil, timber, furniture, bricks or other building materials down the chute.

9.1 SIGNAGE

Signage and education are essential components to support best practice waste management including resource recovery, source separation, and diversion of waste from landfill. Signage should include:

- Clear and correctly labelled waste and recycling bins,
- Instructions for separating and disposing of waste items. Different languages should be considered,
- Locations of, and directions to, the waste storage areas with directional signs, arrows, or lines,
- The identification of all hazards or potential dangers associated with the waste facilities, and
- Emergency contact information should there be issues with the waste systems or services in the building.

The building manager is responsible for waste room signage including safety signage. Appropriate signage must be prominently displayed on doors, walls and above all bins, clearly stating what type of waste or recyclables is to be placed in each bin.

All chute doors on all residential levels will be labelled with signs directing chute operations and use of chute door. All signage should conform to the relevant Australian Standards.

9.2 POLLUTION PREVENTION

Building management shall be responsible for the following to minimise dispersion of site litter and prevent stormwater pollution to avoid impact to the environment and local amenity:

- Promoting adequate waste disposal into the bins;
- Securing all bin rooms (whilst affording access to staff/contractors);
- Prevent overfilling of bins, keep all bin lids closed and bungs leak-free;
- Taking action to prevent dumping or unauthorised use of waste areas;
- Require collection contractor/s to clean up any spillage when clearing bins.

10.0 SYSTEMS SUMMARY

Table 6: Systems Summary

| | Part | Qty | Notes |
|-----------------|--|--------|---|
| Chutes | Please refer to supplier's information | 7 | (See APPENDIX B.1 for Typical Chute System Specifications). |
| Chute Equipment | Waste 4-bin 660L MGB Carousel 2-bin 660L track system | 5 2 | (See APPENDIX B.3 and B.4 for Applicable Systems). |
| Other Equipment | Bin Tug | 1 | (See APPENDIX C.4 for Typical Bin Mover). |

11.0 WASTE ROOMS

The areas allocated for waste storage and collection areas are detailed in the table below, and are estimates only. Final areas will depend on room and bin layouts.

Table 7: Waste Room Areas

| Level | Waste Room Type | Equipment and MGBs | Estimated Area Required (m ²) |
|-------|--------------------------------|---|---|
| GF | Chute Discharge Room A1 | General waste: 2-bin 660L linear track system | 7 |
| | Chute Discharge Room A2 | General waste: 4-bin 660L carousel system | 25 |
| | Chute Discharge Room A3 | General waste: 2-bin 660L linear track system | 7 |
| | Chute Discharge Room B | General waste: 4-bin 660L carousel system | 25 |
| | GF Communal Bin Room | General waste: 3 x 240L Bins Recycling: 2 x 240L Bin FOGO: 1 x 240L Bin | 6 |
| | Chute Discharge Room C | General waste: 4-bin 660L carousel system | 25 |
| | Chute Discharge Room D1 | General waste: 4-bin 660L carousel system | 25 |
| | Chute Discharge Room D2 | General waste: 4-bin 660L carousel system | 25 |
| | Residential Bin Holding Room | General waste: 69 x 660L Bins *3 x 240L Bins Recycling: 121 x 240L Bins FOGO: 62 x 240L Bins 1 x Bin Lifter | 277 |
| | Bin Tug Area | 1 x Bin Tug. | 4 |
| | Residential Bulky Waste Room | | Min. 74 |
| | Retail Bin Room | General waste: 3 x 1100L Bins Recycling: 5 x 1100L Bins | 22 |

Note: includes the additional bins for ground floor residents.

The waste room areas have been calculated based on equipment requirements and/or bin dimensions with an additional 50-70% of bin GFA factored in for manoeuvrability. In addition, all doorways and passageways facilitating the movement of bins and/or bulky waste items must be at least 1600mm wide per Council's DCP. The following table provides further waste room requirements.

Table 8: Waste Room Requirements

| Waste Room Type | Waste Room Requirements |
|---|--|
| Chute Discharge Room | <ul style="list-style-type: none"> • Ceiling clearance height must be a minimum of 3100mm (Subject to penetration location) • The chute penetration must have a minimum 500mm clearance of any service pipes or other overhead obstacles • All waste discharge points should be caged off to ensure the safety of any personnel accessing the waste room • 200mm clearance is required around compaction equipment • Where a chute offset is required, the angle of the offset must not exceed 40 degrees. (Subject to number of consecutive and/or up to 1500mm) |
| Residential Bin Holding Room and/or Bin Collection Area | <ul style="list-style-type: none"> • Bins must not be stacked in rows that are more than two bins deep |
| Bulky Waste Storage Room | <ul style="list-style-type: none"> • May be a dedicated room or screened area within another waste room • Must be in close proximity to the collection area • Area must also be allocated for the segregation of e-waste, gas bottles, cardboard, etc. • Doorway should be a minimum of 1600mm wide |
| Retail/Commercial Waste Room | <ul style="list-style-type: none"> • In order to ensure staff safety, all bins should be arranged so they can be accessed without moving another bin |

12.0 BIN MOVING PATHS

The building caretaker is responsible for the transportation of bins as required from their designated operational locations to the bin holding room as required and returning them once emptied to resume operational use.

Transfer of bins should minimise manual handling where possible, as bins become heavy when full. The building manager must assess manual handling risks and provide any relevant documentation to key personnel.

The routes along the bin moving path should;

- Allow for a continuous route that is wholly within the property boundary.
- Be free from obstruction and obstacles such as steps and kerbs.
- Be constructed of solid materials with a non-slip surface.
- Be a minimum of 300mm wider than the largest bin used onsite.
- If bins are moved manually, the route must not exceed a grade of 1:14.
- If a bin moving device is used, the route cannot exceed the maximum operating grade of the device. This is typically a grade of 1:4, however this will vary depending on the model of bin moving device acquired for the site.

As the distance of the bin moving paths exceeds 10m, a bin moving device is required to aid the movement of full bins. The developer is responsible for supplying all equipment required for moving bins this includes any bin lifters, bin moving devices and waste transfer bins. This equipment must be new and appropriate for the site. The developer should contact a bin-tug, trailer or tractor consultant to provide equipment recommendations.

Once the site is operational (and the developers is no longer involved) the building proprietors/strata/ owner's corporation will be responsible for maintaining, repairing and replacing waste management equipment.

13.0 CONSTRUCTION REQUIREMENTS

Waste room construction must comply with the minimum standards as outlined in the *Fairfield City Wide Development Control Plan 2013*, in order to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area.

The *NSW Better Practice Guide for Resource Recovery in Residential Developments (2019)* also states that better practice bin storage areas should achieve more than the minimum compliance requirements, which are as follows:

- Ensuring BCA compliance, including ventilation. Where required, ventilation system must comply with AS1668.4-2012 The use of ventilation and air conditioning in buildings.
- Ensuring storage areas are well lit (sensor lighting preferred) and have lighting available 24 hours a day.
- Provision of bin washing facilities, including taps for hot and cold water provided through a centralised mixing valve. The taps must be protected from bins and be located where they can be easily accessed even when the area is at bin capacity.
- Floor constructed of concrete at least 75mm thick.
- Floor graded so that any water is directed to a sewer authority approved drainage connection to ensure washing bins and/or waste storage areas do not discharge flow into the stormwater drain.
- Provision of smooth, cleanable and durable floor and wall surfaces that extend up the wall to a height equivalent to any bins held in the area.
- Ensuring ceilings are finished with a smooth-faced non-absorbent material capable of being cleaned.
- All surfaces (walls, ceiling and floors) finished in a light colour.

12.1 ADDITIONAL CONSIDERATIONS

- Waste room floor to be sealed with a two-pack epoxy;
- All corners coved and sealed 100mm up, this is to eliminate build-up of dirt;
- Tap height and light switch height of 1.6m;
- Storm water access preventatives (grate);
- All walls painted with light colour and washable paint;
- Equipment electric outlets to be installed 1700mm above finished floor level;
- Optional automatic odour and pest control system installed
- If 660L or 1100L bins are utilised, 2 x 820mm (minimum) double-doors must be used;
- All personnel doors are hinged, lockable and self-closing;
- Conform to the Building Code of Australia, Australian standards and local laws; and
- Childproofing and public/operator safety shall be assessed and ensured
- Waste and recycling rooms must have their own exhaust ventilation system either;
 - Mechanically - exhausting at a rate of 5L/m² floor area, with a minimum rate of 100L/s minimum. Mechanical exhaust systems shall comply with AS1668.4.2012 and not cause any inconvenience, noise or odour problem; or
 - Naturally - permanent, unobstructed, and opening direct to the external air, not less than one-twentieth (1/20) of the floor area

13.0 USEFUL CONTACTS

EFC does not warrant or make representation for goods or services provided by suppliers.

LOCAL COUNCIL

Fairfield City Council Customer Service Ph: 02 9725 0222 E: mail@fairfieldcity.nsw.gov.au

PRIVATE WASTE COLLECTION PROVIDER

| | | |
|-----------------------------|------------------|---|
| Capital City Waste Services | Ph: 02 9599 9999 | E: service@ccws.net.au |
| Remondis | Ph: 02 9032 7100 | |
| Suez Environmental | Ph: 13 13 35 | |
| Wastewise NSW | Ph: 1300 550 408 | E: admin@wastewise.com.au |

BIN MOVING DEVICE SUPPLIERS

| | | |
|--------------|------------------|---|
| Electrodrive | Ph: 1800 333 002 | E: sales@electrodrive.com.au |
| Sitecraft | Ph: 1300 363 152 | E: sales@sitecraft.com.au |
| Spacepac | Ph: 1300 763 444 | |

ORGANIC DIGESTERS AND DEHYDRATORS

| | | |
|--------------|------------------|---|
| Closed Loop | Ph: 1300 762 166 | |
| Orca | | E: contact.australia@feedtheorca.com |
| Soil Food | Ph: 1300 556 628 | |
| Waste Master | Ph: 1800 614 272 | E: hello@wastemasterpacific.com.au |

COOKING OIL CONTAINERS AND DISPOSAL

| | | |
|--------|------------------|---|
| Auscol | Ph: 1800 629 476 | E: sales@auscol.com |
|--------|------------------|---|

ODOUR CONTROL

| | | |
|----------------|------------------|---|
| EF Neutralizer | Ph: 1300 435 374 | E: info@elephantsfoot.com.au |
|----------------|------------------|---|

SOURCE SPERATION BINS

| | | |
|---------------------------|------------------|---|
| Source Separation Systems | Ph: 1300 739 913 | E: info@sourceseparationsystems.com.au |
|---------------------------|------------------|---|

MOBILE GARBAGE BINS, BULK BINS AND BIN EQUIPMENT


| | | |
|----------------|------------------|---|
| SULO | Ph: 1300 364 388 | E: sales@sulo.com.au |
| OTTO Australia | Ph: 02 9153 6999 | |

CHUTES, COMPACTORS AND EDIVERTER SYSTEMS

| | | |
|----------------|------------------|---|
| Elephants Foot | Ph: 1800 025 073 | E: info@elephantsfoot.com.au |
|----------------|------------------|---|

APPENDIX A: ARCHITECTURAL PLANS

APPENDIX: A.1 GROUND FLOOR PLAN

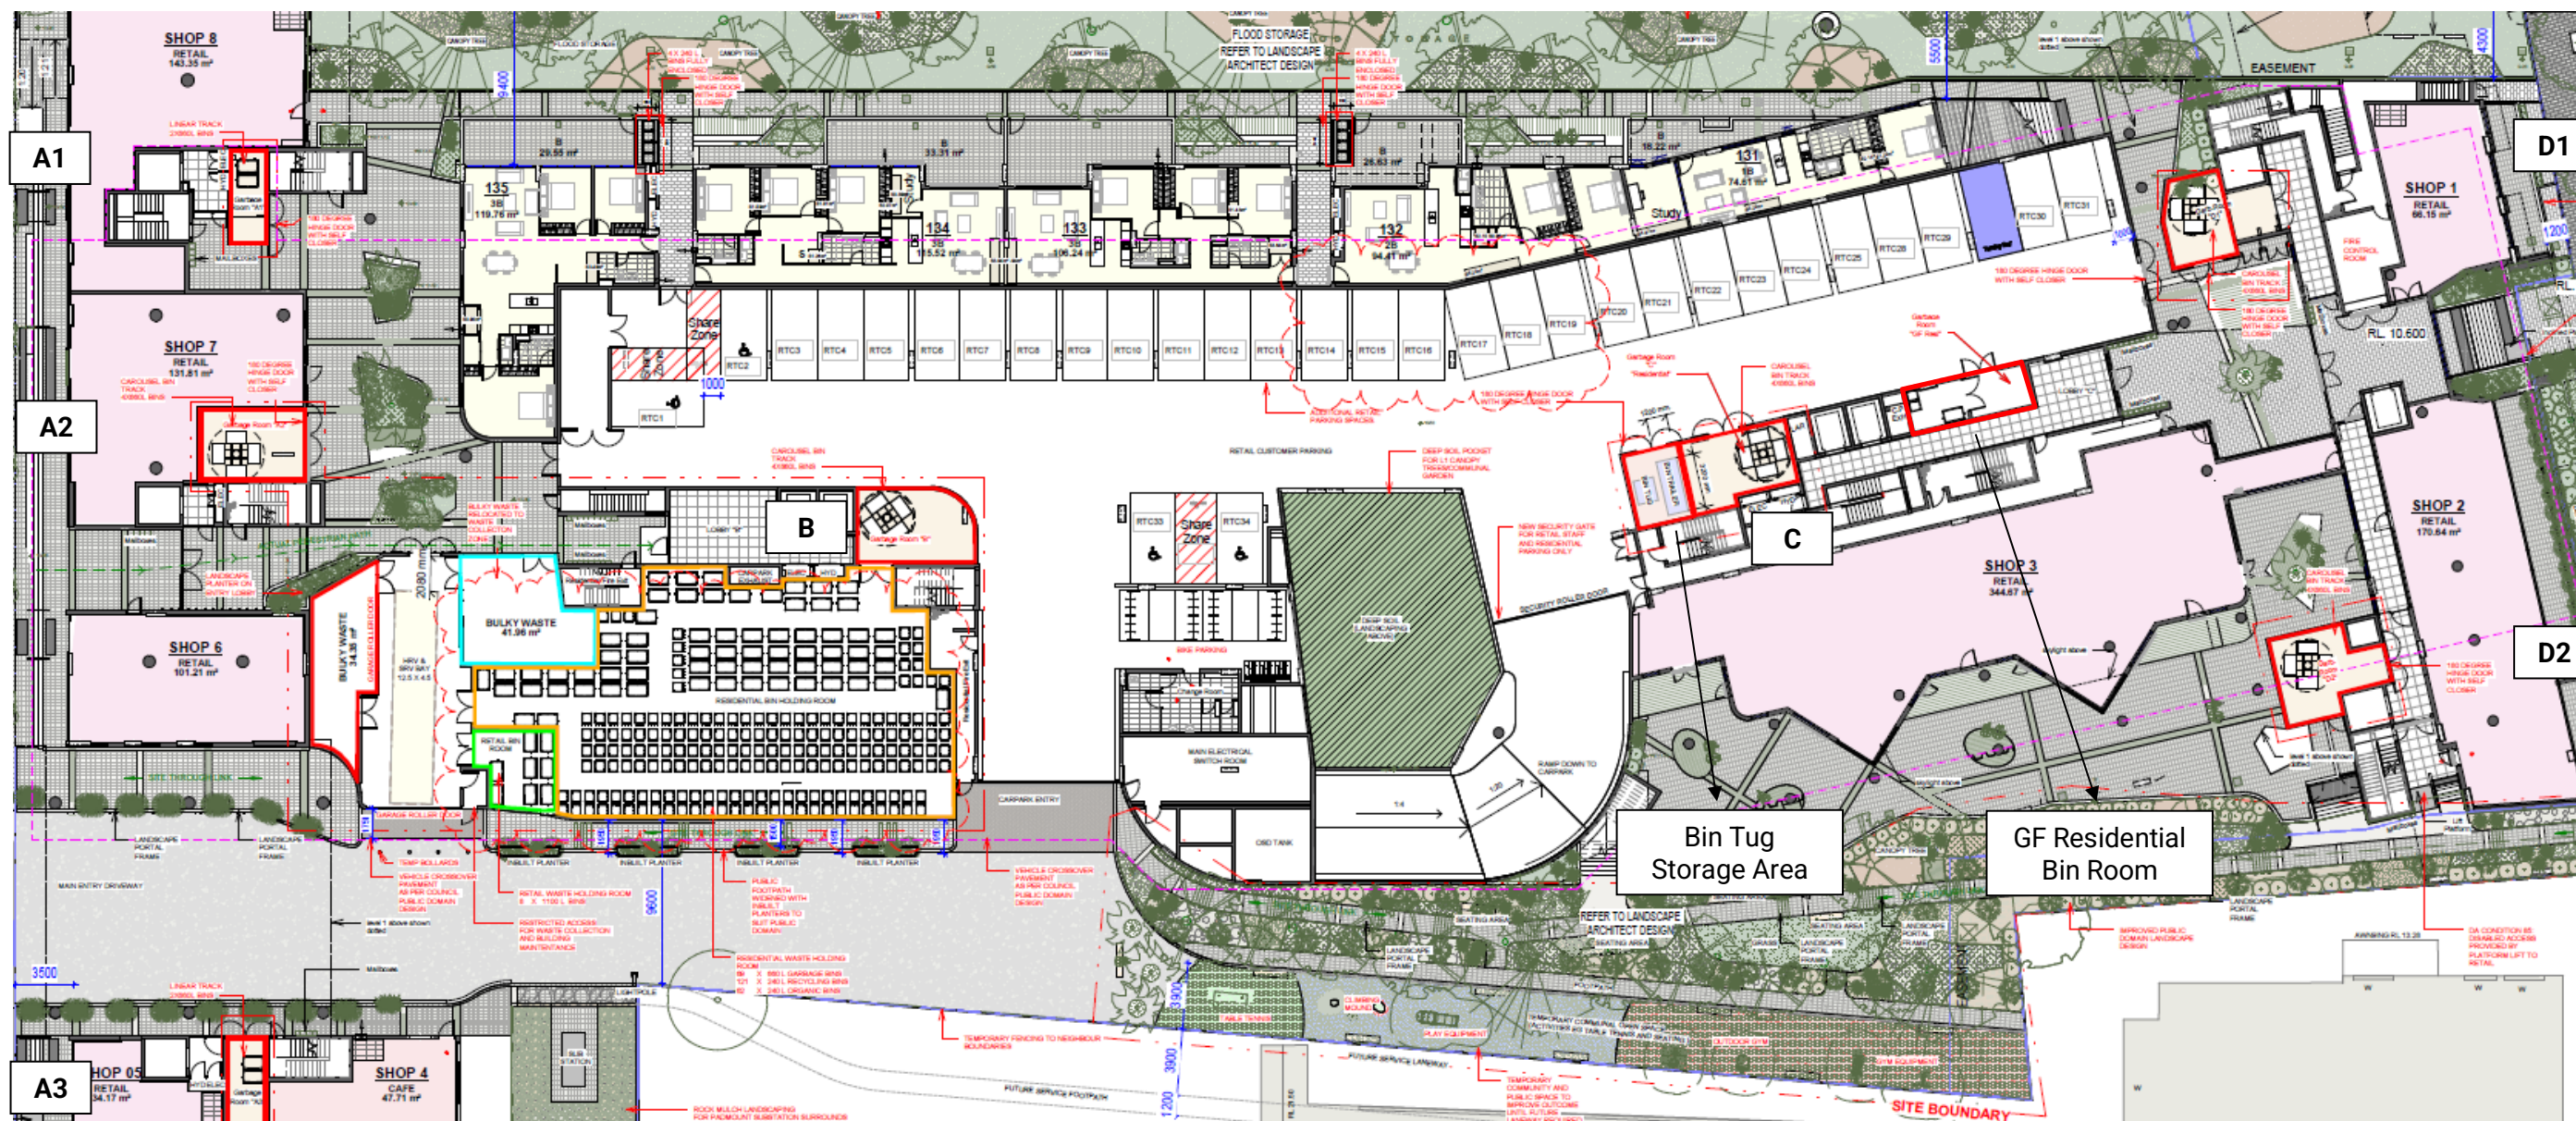


Source: Level 33 Architectural Division, Drawing no. MA100, Revision 5 (Section 32 RFI Set 3), 16.01.2025 - Ground Floor Plan

Keys:

- -Residential Chute Discharge Rooms
- -Retail Bin Room
- -Residential Bulky Waste Room
- -Residential Bin Collection Room

APPENDIX B: INSTALLATION EQUIPMENT


APPENDIX: B.1 TYPICAL SINGLE CHUTE SHAFT & PENETRATION LAYOUT

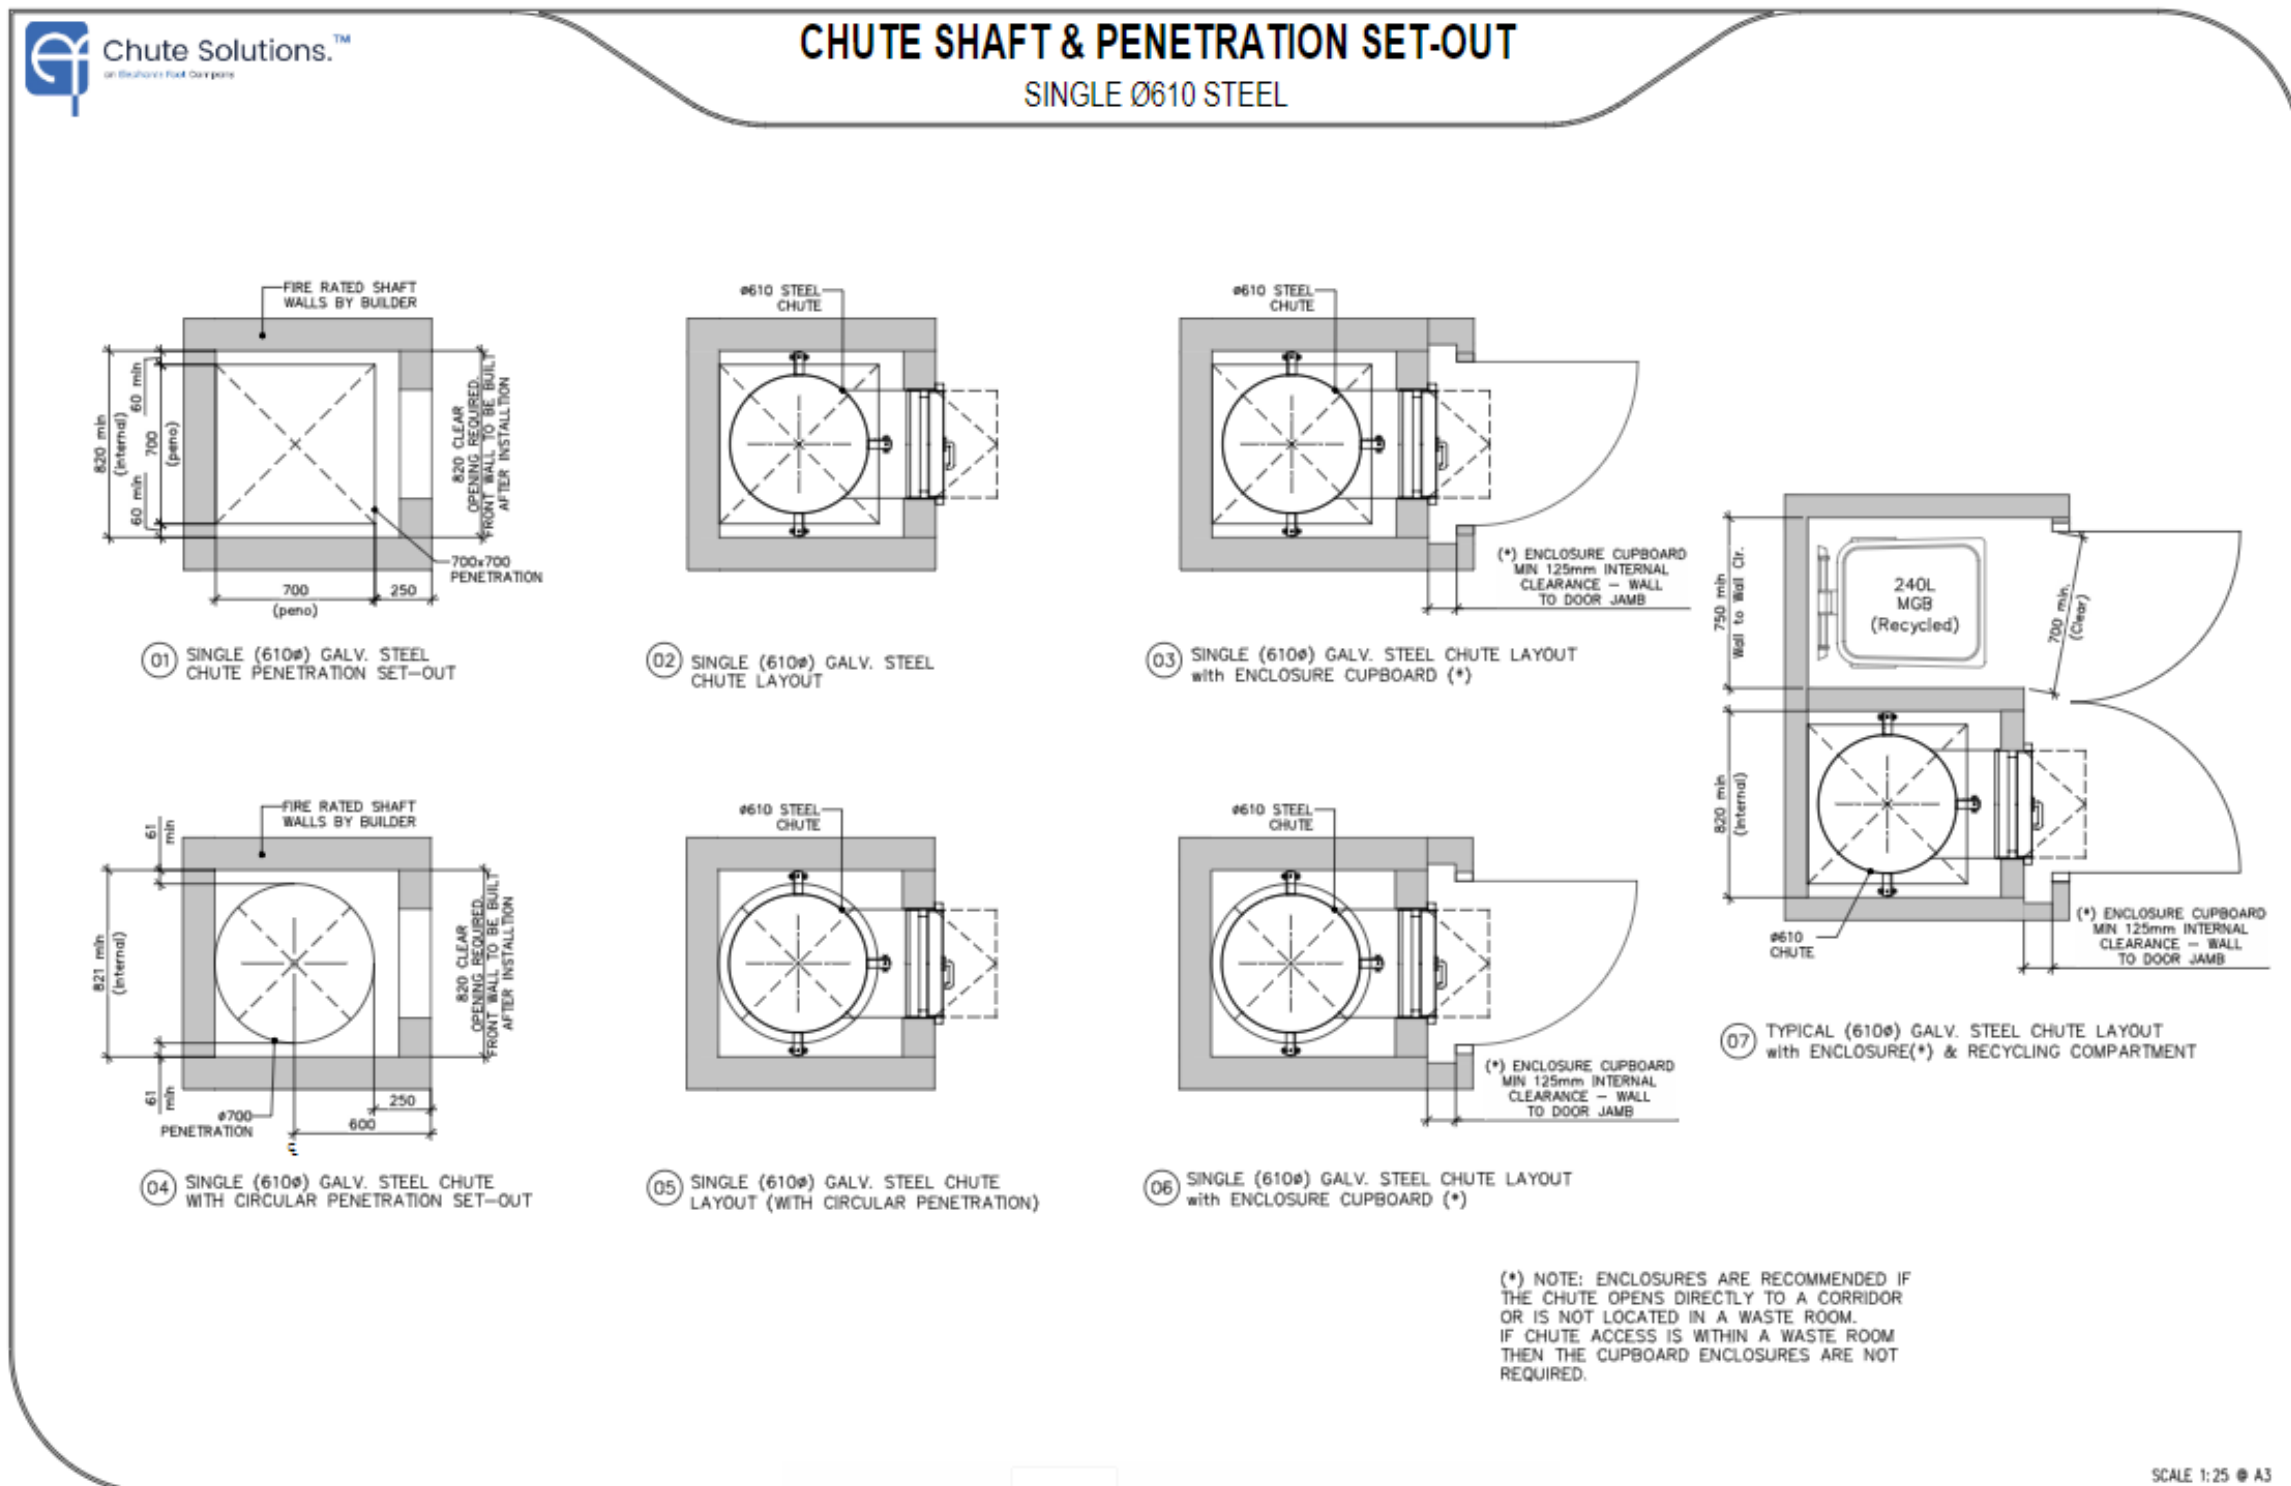

Chute Shaft & Peno – Ver 1.2 April 26, 2022

Please Note: This is an example only – please refer to supplier's information and specification. The current proposed scheme will involve 2 x 240L bins for recycling and FOGO.


APPENDIX: B.2 EXAMPLE RESIDENTIAL LEVEL RECYCLING BIN LAYOUT

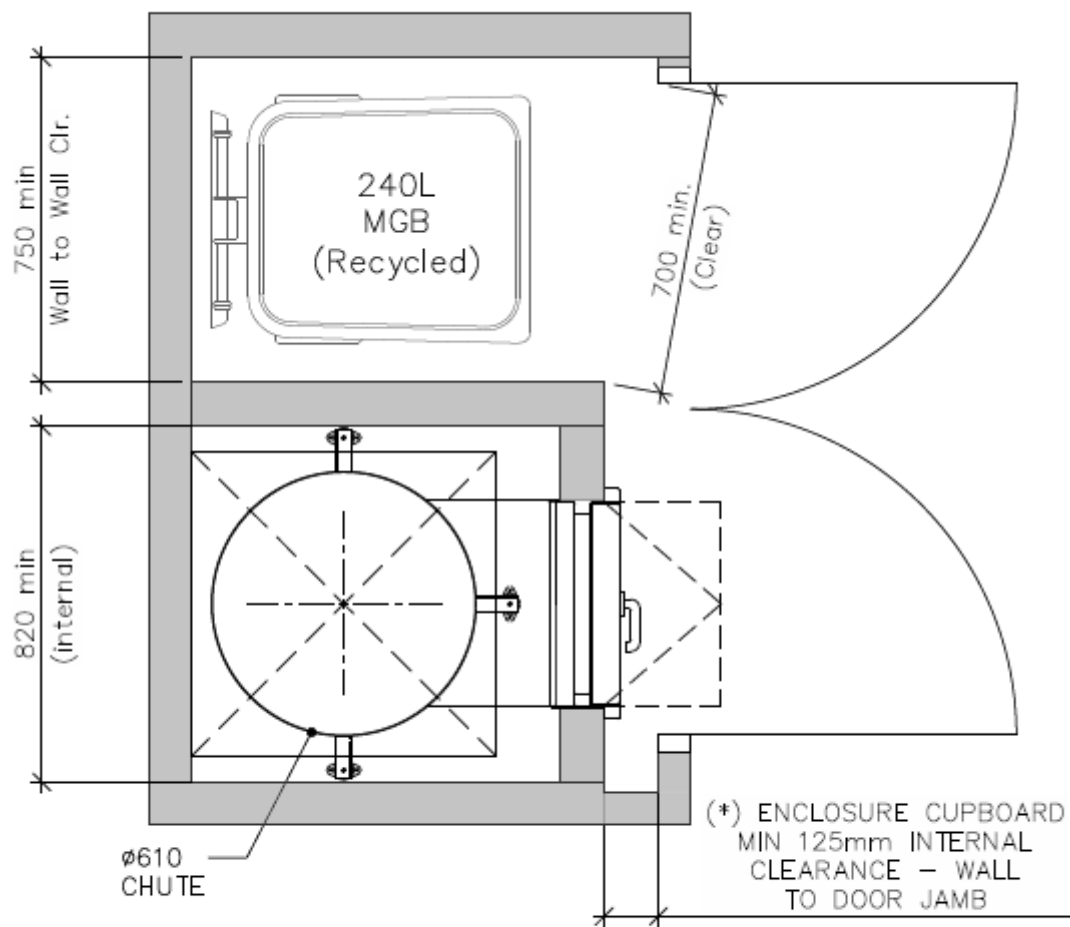

07 TYPICAL (610 ϕ) GALV. STEEL CHUTE LAYOUT
with ENCLOSURE(*) & RECYCLING COMPARTMENT

Please Note: This is an example only – please refer to supplier's information and specification


APPENDIX: B.3 TYPICAL LINEAR TRACK SYSTEM FOR 660L MGBS

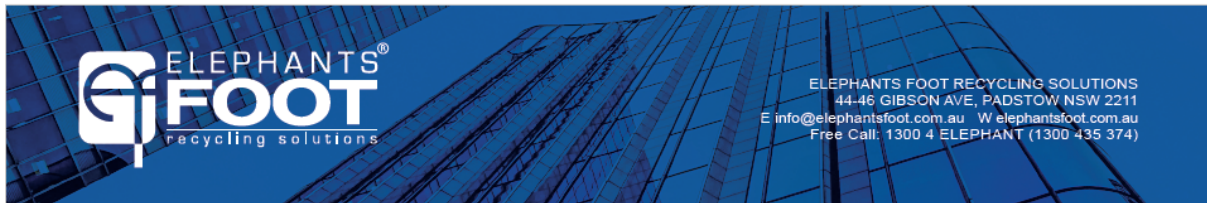

660 LITRE LINEAR TRACK SYSTEM

PRODUCT INFORMATION

Elephants Foot 660 Litre bin Linear Track System is a versatile waste handling solution for many types of multi-storey or multi-level developments. The Linear Track System collects waste or recycling being disposed from the floors above through the chute system, discharging the material via a hopper that feeds the bins. Electromechanically driven with automated operation, the system utilises linear motion to automatically change over full bins. Once all the bins are filled, an indicator light will illuminate signifying that the bins are ready for withdrawal and collection. Available with or without compaction unit, our standard 660 litre bin Linear Track System is available in standard 2 or 3. Our 4 Bin option is available as a special order.

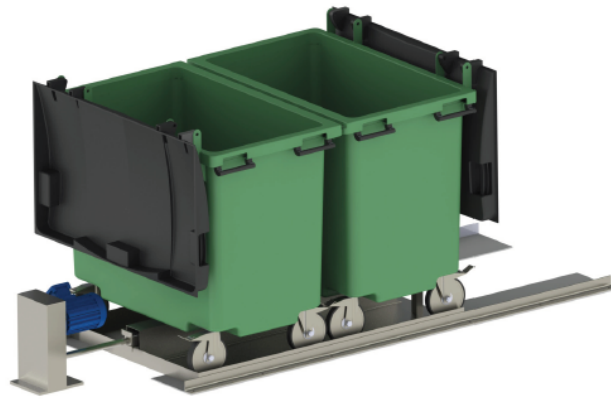

SPECIFICATIONS

| | |
|----------------------|------------------------|
| System Control | Electric PLC |
| Power Supply | 415 V AC / 10A / 5 PIN |
| Motor Size (kW) | 0.55 |
| Maximum bin load | 265 kg |
| Noise (dBA) | <85 |
| Bin Size (L) | 660 |
| Cycle time (sec) | 60 |
| Bin Quantity options | 2, 3, or 4 |

OPTIONAL EXTRAS

- Compaction unit – Please refer to the bin compactor product information sheet for details and specifications
- Enhanced safety add on's – Interlocking barriers, occupancy sensors or safety light curtains (presence sensing light barriers)
- Full bin SMS and email notification
- CMMS and BMS integration
- Extend warranty – Terms and conditions apply

STANDARD FEATURES & BENEFITS




- Simple operation with user friendly controls
- Increased waste servicing efficiency for the development
- Automatic system control with manual override
- Robust unit construction for long performance life
- Low service and maintain costs
- Rotating flashing beacon (activated during operation)
- Quiet and efficient system operation
- Maximise safety for residents, caretakers and collectors
- Restrained design with minimal moving parts
- Can suit low ceiling clearances
- Floor contact components fully galvanised steel
- Retro fitting options to suit other chutes systems
- Compliant with relevant Building Codes and Standards
- Standard 12 month warranty



660 LITRE LINEAR TRACK SYSTEM

| No. of Bins | Reference (mm) | | |
|-------------|----------------|------|------|
| | A | B | C |
| 2 | 500 | 2950 | 4350 |
| 3 | 1450 | 4850 | 6050 |
| 4 | 2300 | 6300 | 7750 |

Available with or without compaction unit, our standard 240 litre bin Linear Track System can support 2, 3 or 4 bin quantities.

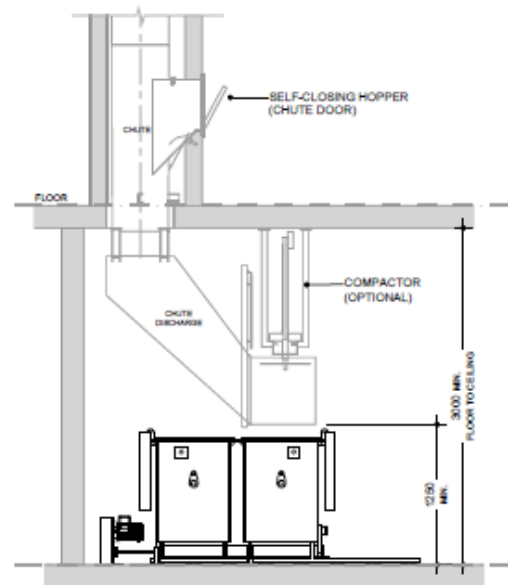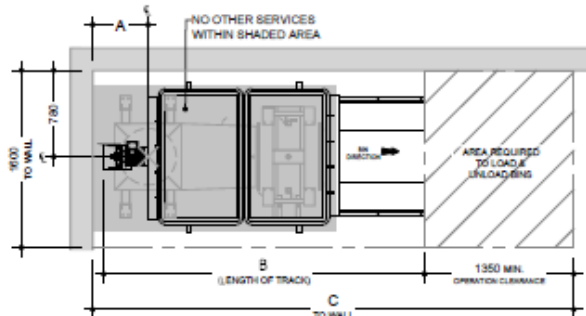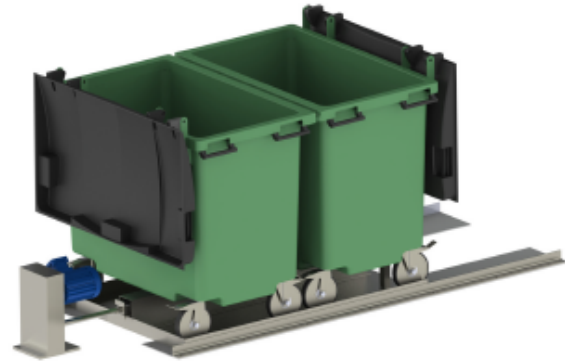

Notes:
Bins not provided by Elephants Foot

Drawings shown are for general information purposes only and provide minimum equipment spacial requirements for waste room design.

These drawings are not intended for site specific use or for construction. Each project is unique and will be designed to suit.

Additional equipment options, systems and configurations are available. For design assessment, information and advice, please contact an Elephants Foot design consultant on 1300 435 374

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX: B.4 TYPICAL CAROUSEL SYSTEM FOR 660L MGBS



ELEPHANTS FOOT RECYCLING SOLUTIONS
 44-46 GIBSON AVE, PADSTOW NSW 2211
 E: info@elephantsfoot.com.au W: elephantsfoot.com.au
 Free Call: 1300 4 ELEPHANT (1300 435 374)

660 LITRE CAROUSEL SYSTEM

PRODUCT INFORMATION

Elephants Foot 660 Litre bin Carousel System is a versatile waste handling solution for many types of multi-storey or multi-level developments. The Carousel System collects waste or recycling being disposed from the floors above through the chute system, discharging the material via a hopper that feeds the bins positioned on the unit. Electromechanically driven with automated operation, the Carousel System automatically replaces full bins by a revolving circular platform. Once all the bins on the system are filled, an indicator light will illuminate signifying that the bins are ready for withdrawal and collection. Available with or without compaction unit, our standard 660litre bin Carousel System is available in standard 2, 3 or 4 bin options. Our 5 Bin option is available as a special order.



SPECIFICATIONS

| | |
|----------------------|------------------------|
| System Control | Electric PLC |
| Power Supply | 415 V AC / 10A / 5 PIN |
| Motor Size (kW) | 0.37 |
| Maximum bin load | 265 kg |
| Noise (dBA) | <85 |
| Bin Size (L) | 660 |
| Cycle time (sec) | 60 |
| Bin Quantity options | 2, 3, 4 or 5 |

OPTIONAL EXTRAS

- Compaction unit – Please refer to the bin compactor product information sheet for details and specifications
- Enhanced safety add on's – Interlocking barriers, occupancy sensors or safety light curtains (presence sensing light barriers)
- Full bin SMS and email notification
- CMMS and BMS integration
- Extend warranty – Terms and conditions apply

STANDARD FEATURES & BENEFITS

- Simple operation with user friendly controls
- Increased waste servicing efficiency for the development.
- Automatic system control with manual override
- Robust unit construction for long performance life
- Low service and maintain costs
- Rotating flashing beacon (activated during operation)
- Quiet and efficient system operation
- Maximise safety for residents, caretakers and collectors
- Restrained design with minimal moving parts
- Can suit low ceiling clearances
- Floor contact components fully galvanised steel
- Retro fitting options to suit other chutes systems
- Compliant with relevant Building Codes and Standards
- Standard 12 month warranty





660 LITRE CAROUSEL SYSTEM



| No. of Bins | Reference (mm) | | | |
|-------------|----------------|------|------|------|
| | A | B | C | D |
| 2 | 500 | 1450 | 2700 | 2850 |
| 3 | 500 | 1550 | 2850 | 2950 |
| 4 | 500 | 1750 | 3300 | 3450 |
| 5 | 500 | 2050 | 3760 | 3900 |

Available with or without compaction unit, our standard 660litre bin Carousel System is available in standard 2, 3 or 4 bin options. Our 5 Bin option is available as a special order.

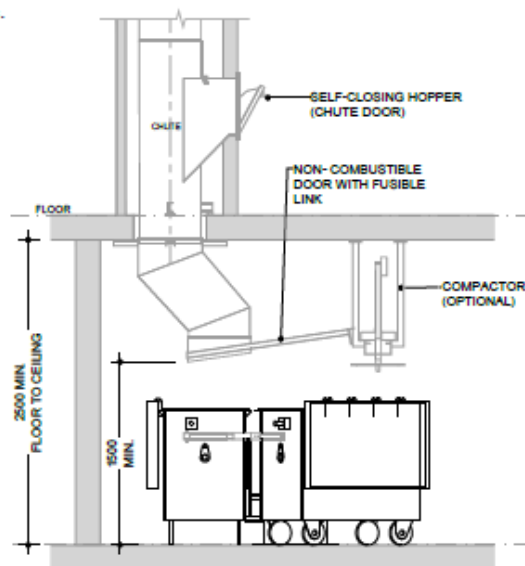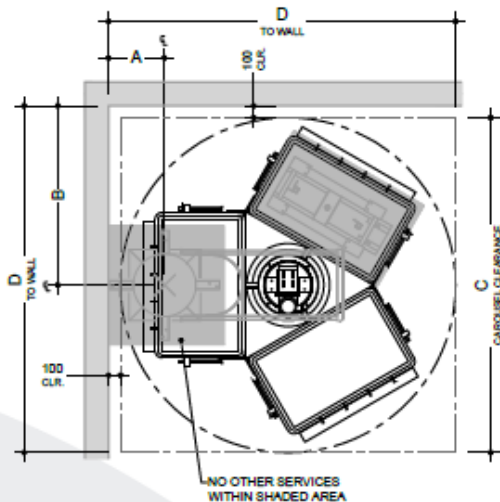

Notes:

Bins not provided by Elephants Foot

Drawings shown are for general information purposes only and provide minimum equipment spatial requirements for waste room design.

These drawings are not intended for site specific use or for construction. Each project is unique and will be designed to suit.

Additional equipment options, systems and configurations are available. For design assessment, information and advice, please contact an Elephants Foot design consultant on 1300 435 374

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX C: PRIMARY WASTE MANAGEMENT PROVISIONS

APPENDIX: C.1 TYPICAL BIN SPECIFICATIONS


Mobile bins

Mobile bins come in a variety of sizes and are designed for lifting and emptying by purpose-built equipment.

Mobile bins with capacities of up to 1700L must comply with *AS4123.6-2006 Mobile waste containers* which specifies standard sizes and sets out the colour designations for the bodies and lids of mobile waste containers indicating the type of materials they are used to collect.

The most common bin sizes are provided below, although not all sizes are shown. The dimensions are a guide only and differ slightly between manufacturers. Some bins have flat or domed lids and are used with different lifting devices. Refer to *AS4123.6-2006* for further details.

Table G1.1: Average dimension ranges for two-wheel mobile bins




| Bin capacity | 80L | 120L | 140L | 240L | 360L |
|---|------|-----------|-----------|-----------|-----------|
| Height (mm) | 870 | 940 | 1065 | 1080 | 1100 |
| Depth (mm) | 530 | 530 | 540 | 735 | 820 |
| Width (mm) | 450 | 485 | 500 | 580 | 600 |
| Approximate footprint (m ²) | 0.24 | 0.26–0.33 | 0.27–0.33 | 0.41–0.43 | 0.49 |
| Approximate weight (kg) | 8.5 | 9.5 | 10.4 | 15.5 | 23 |
| Approximate maximum load (kg) | 32 | 48 | 56 | 96 | Not known |

Wheelie bin

Sources include Sulo, Single Waste, Cleanaway, SUEZ, just wheelie bins and Perth Waste for two-wheel mobile bins

Table G1.2: Average dimension ranges for four-wheel bulk bins



| Bin capacity | 660L | 770L | 1100L | 1300L | 1700L |
|------------------------------------|-----------|-----------|-----------|-----------|-----------|
| Height (mm) | 1250 | 1425 | 1470 | 1480 | 1470 |
| Depth (mm) | 850 | 1100 | 1245 | 1250 | 1250 |
| Width (mm) | 1370 | 1370 | 1370 | 1770 | 1770 |
| Approx footprint (m ²) | 0.86–1.16 | 1.51 | 1.33–1.74 | 2.21 | 2.21 |
| Approx weight (kg) | 45 | Not known | 65 | Not known | Not known |
| Approx maximum load (kg) | 310 | Not known | 440 | Not known | Not known |

Dome or flat lid container

Sources include Sulo, Signal Waste, Cleanaway, SUEZ, Just Wheelie Bins and Perth Waste

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: C.2 SIGNAGE FOR WASTE AND RECYCLING BINS

Waste signs

Signs and educational materials perform several functions including:

- informing residents why it is important to recover resources and protect the environment
- providing clear instructions on how to use the bins and services provided
- alerting people to any dangers or hazards within the bin storage areas.

All waste, recycling and organic bins should be Australian Standard colours and clearly and correctly labelled, such as by a sticker on the lid and/or the body of the bin.

Communal bin storage areas should be clearly signposted with signs outlining how to correctly separate waste into the bins provided. The local council responsible for waste services may be a good source of signs and posters and can advise on what signs are suitable.

Information on who to contact to find out more about the recycling and/or other resource recovery services in the building should also be displayed in communal areas, such as on a noticeboard.

The Planet Ark website also has resources available free of charge for use by businesses and councils. These signs can be found at businessrecycling.com.au/research/signage.cfm

Figure I1.1: Examples of waste wall posters (EPA supplied)



Figure I1.2: Examples of bin lid stickers (EPA supplied)



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Problem waste signs

The EPA has also produced a range of images and signs that can be used for problem wastes, such as fluoro globes and tubes, household and car batteries, e-waste and smoke detectors. To access these resources, contact the NSW EPA. Some examples are shown below.

Figure I2.1: Problem waste signs



Safety signs

The use of safety signs for waste resource recovery rooms must comply with *AS1319 Safety signs for occupational environments*. Safety signs must be used to regulate and control safety related to behaviour, warn of hazards and provide emergency information, including fire protection information. Suitable signs should be decided for each development as required.

Figure I3.1: Example safety signs



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: C.3 TYPICAL COLLECTION VEHICLE INFORMATION

General

Appropriate heavy rigid vehicle standards should be incorporated into the road and street designs in new developments where onsite collections are proposed. Road and street designs must comply with relevant Acts, regulations, guidelines, and codes administered by Austroads, Standards Australia, NSW Roads and Maritime Services, WorkSafe NSW and any local council traffic requirements.

Applicants and building designers should consult with councils and other relevant authorities before designing new roads or streets and access points for waste collection vehicles to establish specific design requirements.

Table H4.1: Australian Standards for turning circles for medium and heavy rigid class vehicles

| Vehicle class | Overall length (m) | Design width (m) | Design turning radius (m) | Swept circle (m) | Clearance (travel) height (m) |
|----------------------|--------------------|------------------|---------------------------|------------------|-------------------------------|
| Medium rigid vehicle | 8.80 | 2.5 | 10.0 | 21.6 | 4.5 |
| Heavy rigid vehicle | 12.5 | 2.5 | 12.5 | 27.8 | 4.5 |

Large collection vehicles

Waste collection vehicles may be side-loading, rear-loading, front-lift-loading, hook or crane lift trucks. Vehicle dimensions vary by collection service, manufacturer, make and model. It is not possible to provide definitive dimensions, so architects and developers should consult with the local council and/or contractors.

The following characteristics represent typical collection vehicles and are provided for guidance only. Reference to *AS2890.2 Parking facilities: off-street commercial vehicle facilities* for detailed requirements, including vehicle dimensions, is recommended.

Table B2.1: Collection vehicle dimensions


| Vehicle type | Rear-loading | Side-loading* | Front-lift-loading | Hook truck | Crane truck |
|------------------------------------|--------------|---------------|--------------------|------------|-------------|
| Length overall (m) | 10.5 | 9.6 | 11.8 | 10.0 | 10.0 |
| Width overall (m) | 2.5 | 2.5 | 2.5 | 3.0 | 2.5 |
| Travel height (m) | 3.9 | 3.6 | 4.8 | 4.7 | 3.8 |
| Operational height for loading (m) | 3.9 | 4.2 | 6.5 | 3.0 | 8.75 |
| Vehicle tare weight (t) | 13.1 | 11.8 | 16.7 | 13.0 | 13.0 |
| Maximum payload (t) | 10.0 | 10.8 | 11.0 | 14.5 | 9.5 |
| Turning circle (m) | 25.0 | 21.4 | 25.0 | 25.0 | 18 |

* The maximum reach of a side arm is 3 m.

Sources: JJ Richards, SUEZ, MacDonald Johnson, Cleanaway, Garwood, Ros Roca, Bingo and Edbro. Figures shown represent the maximum dimensions for each vehicle type.

Rear-loading collection vehicles


These vehicles are commonly used for domestic waste collections from MUDs and RFBs and sometimes for recycling. They can be used to collect waste stored in mobile bins or bulk bins, particularly where bins are not presented at the kerbside. They are also used for collecting bulky waste.

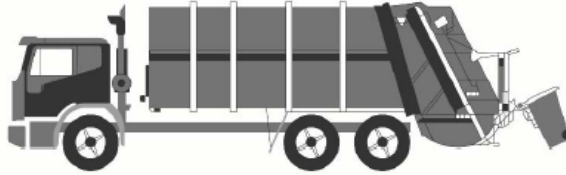

Rear-loading waste collection vehicle

Side-loading collection vehicles

This is the most commonly used vehicle for domestic waste, recycling and organics collections. It is only suitable for collecting mobile bins up to 360L in capacity.

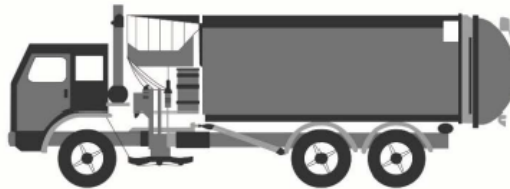

Side-loading waste collection vehicle

Front-lift-loading collection vehicles

These vehicles are commonly used for collecting commercial and industrial waste. They can only collect specially designed front-lift bulk bins and not mobile bins.



Front-lift-loading waste collection vehicle

Small collection vehicles

Typically, councils and their contractors operate with large collection vehicles (heavy rigid class vehicles) because they carry greater payloads and allow for more cost-effective collection services. Some councils, or their contractors, may have smaller collection vehicles in their fleet. Early discussion with the council is important to confirm this, but it should not be assumed that the council will have access to small collection vehicles.

The waste management systems and the location of the collection point should always be designed so that the council can provide the standard domestic waste service.

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: C.4 TYPICAL BIN MOVERS

Battery powered tug with a 1 or 2 tonne tow capacity



Features at a glance

One tonne (Evo 1T) or two tonne (Evo 2T) tow capacity

Auto latching hitch

Three speed motor with emergency stop

Typical applications

The Tug Evo is suitable for airports, factories, warehouses, apartment buildings or large facilities. This powered tug is also suitable for transporting medical carts around hospitals or moving heavy specialist equipment.

Features:

- 1 or 2 tonne tow capacity of inclines up to 6 degrees
- 500kg tow capacity if inclines up to 14 degrees
- CE Compliant
- 5 km/h max speed
- 2 x 12V 42Ah MK-gel batteries with 24V smart charger.
- Powerful transaxle

Safety Features:

- Intuitive control with standard automatic safety brake, forward and reverse drive.
- Emergency stop button.

Emergency back-off button

Source: <http://www.electrodrive.com.au/products/tugs/tug-evo.aspx>

APPENDIX D: SECONDARY WASTE MANAGEMENT PROVISIONS

APPENDIX: D.1 EXAMPLE APARTMENT STYLE COMPOST BIN



Apartment Style Compost bin – available from hardware stores

Suitable for:

- Vegetables
- Coffee grounds and filters
- Tea and tea bags
- Crushed eggshells (but not eggs)
- Nutshells
- Houseplants
- Leaves
- Cardboard rolls, cereal
- Boxes, brown paper bags
- Clean paper
- Shredded newspaper
- Fireplace ashes
- Wood chips, sawdust,
- Toothpicks, burnt matches
- Cotton and wool rags
- Dryer and vacuum cleaner lint
- Hair and fur
- Hay and straw

APPENDIX: D.2 TYPICAL COOKING OIL CONTAINERS



Drums 205L



Pour in Bulk Tank

[View Brochure](#)



Oil Kaddy System

[View Brochure](#)



Eco System 700L Fixed

Eco System 310L mobile

Eco Systems



Direct-Connect to Fryer

Source: <http://www.auscol.com/services/collection-systems/>