



Site Context + Heritage

Local Context

SummitCare Randwick is situated on Frenchmans Road in the heart of the Eastern suburbs in Randwick. Randwick is a leafy suburb and primarily a residential area.

Within the local contextual precinct, the closest shops are a 3 minute walk from the SummitCare Site. This small village of shops consists of a local pub, service station, small cafes, restaurants and bakeries as well as a Bunnings and a small boutique grocer. The closest open space offerings are Queens Park and Centennial Park which are a 15 minute walk or 5 minute drive from Site.

Site History

The SummitCare Facility in Randwick has been providing aged care to the communities within the Eastern Suburbs for over 40 years. The facility caters for respite care, dementia support and personal care and currently houses up to 90 residents.and spans over two levels.

The new proposal will cater for an increased number of residents and will encroach on the 2x house blocks to the east and west of the current development.



















Site Context + Heritage

Local Landscape Heritage

Due to the location of Randwick, being in close proximity to both Queens Park and Centennial Park it tends to take on a similar formal character in terms of its landscape character.

Streets, gardens and parks in Randwick feel relaxed, leafy and quite formal in planting style.

Species which define the area include; Ficus sp, Acmenas, Melaleuca quinquinervia, Eucalyptus sp and Banksias. Prominent street tree species include: Agonis flexuosa, Metrosideros kermadecensis, Lophostemon confertus, Callsitemon viminalis, Melaleuca armillaris, Callistemon 'Kings Park Special', Melaleuca quinquinervia, Ficus microcarpa var. Hillii and Banksia

From a landscape perspective we aim to expand on this existing planted character to ensure the new site responds and connects to its local landscape context.











Date

Existing Site Conditions

The existing site character and quality of landscape spaces appear tired and run down. The outdoor spaces seem cramped, with limited function for residents everyday use.

Residents have moved furniture into sunny areas which gives the indication that current outdoor spaces are not suitably places to maximise sun exposure, something the residents and staff desire.

There are several existing established trees along the Frenchman's road edge of the site which need to be protected and maintained to retain the unique site character as well as providing a green outlook for residents and a screen to the neighbouring properties.



The site sits on the intersection of Frenchmans + Chapel St. Existing significant trees along Frenchmans Road frontage are a strong element of the existing bedge along Frenchman's Road provides a visual barrier to the busy road and helps to decrease traffic noise.





Residents have moved furniture into more desirable, sunny locations.



Vegetation screening is limited to adjacent neighbouring properties.



Access is limited and restricted around building perimeters.



Outdoor spaces are potentially under-used, poorly planned and shaded which Outdoor spaces are potentially under-used, poorly planned and shaded which Existing established trees should be retained and protected where possible. means they are less desirable in winter months.



means they are less desirable in winter months.



Landscapes for Health + Healing

Humans are complex beings. Our physical, mental and spiritual wellbeing can be directly influenced through our environment. Research tells us that green spaces and important for physical and mental health. Having access to green spaces can reduce health inequalities, improve well-being and aid in treatment of mental illness.

It is therefore a central focus of our landscape strategy to provide a strong indoor outdoor connection to increase the exposure of residents to green spaces.

Layering and promoting these green environments is central to the design. Through program, orientation and material, the landscape experience is curated, enhancing the experience for users.









Design for Dementia

KEY DESIGN PRINCIPLES

1/ REDUCE RISKS

2/ PROVIDE A HUMAN SCALE

3/ ALLOW PEOPLE TO SEE AND BE SEEN

4/ MANAGE STIMULATION

5/ SUPPORT MOVEMENT AND ENGAGEMENT

6/ CREATE A FAMILIAR PLACE

7/ PROVIDE PLACES TO BE ALONE OR WITH OTHERS

8/ CREATE A VISION FOR A WAY OF LIFE

*Refer 'Dementia Training Australia - Environmental Design Resources' by Richard Fleming and Kirsty Bennett, February 2017









Design Principles



Prioritise vegetation screening to boundaries to provide a green outlook for residents as well as privacy for neighbouring properties



Provide a series of **exterior spaces** that provide a platform for **social interaction** and inclusion for
residents and staff



Protect and enhance existing
established vegetation and
allow proposed planting palette
to respond strongly to local and
native species

Landscape Precedent Imagery



















Landscape Masterplan



Cafe/Outdoor Dining


LEGEND


- Generous planting to Frenchman's Road frontage with large trees in deep soil zone
- 02 Raised planters with integrated seating
- 03 Loose tables + chairs adjacent to cafe zone
- 04 Arbor with climbing plants
- 05 Existing mature tree retained
- 06 Elevated timber decking provides a social setting and small scale play zone to accommodate for visitors/ families with children
- Planting adjacent to building to provide a green outlook for residents







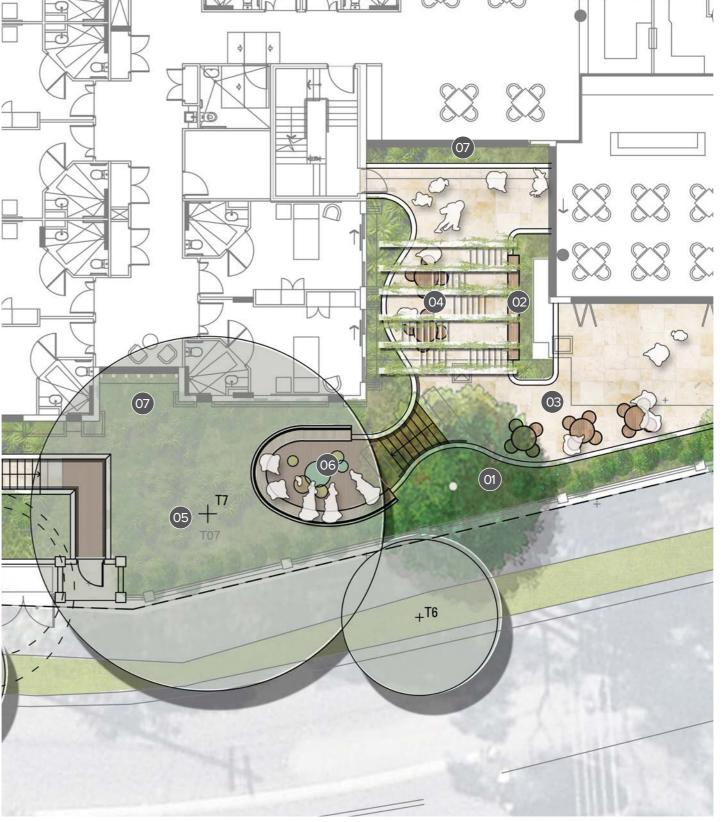

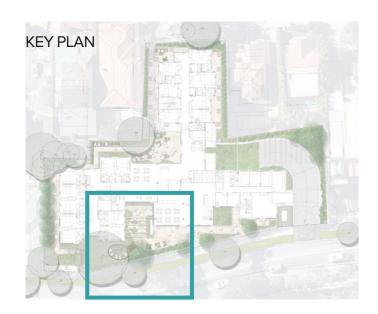

ARCADIA

Date

Respite Garden

LEGEND

01 Existing trees to be retained + protected

02 Large paved area for outdoor flexible seating options


03 Screen planting to neighbouring properties

04 Bench seating nooks recessed into garden

05 Water features

06 Raised planters provide leafy outlooks from internal

spaces

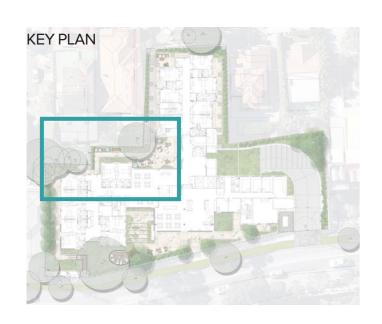



















Residents Rooftop Terrace

LEGEND

01 Lift access to rooftop

02 Comfortable lounge furniture

O3 Dining table beneath pergola structure with operable

awnings for shade and wind protection

04 BBQ and sink

05 Bar with tall chairs for sunset views


06 Kitchen garden with mediterranean herbs


Ornamental planting to perimeter with safety

balustrade to outer wall





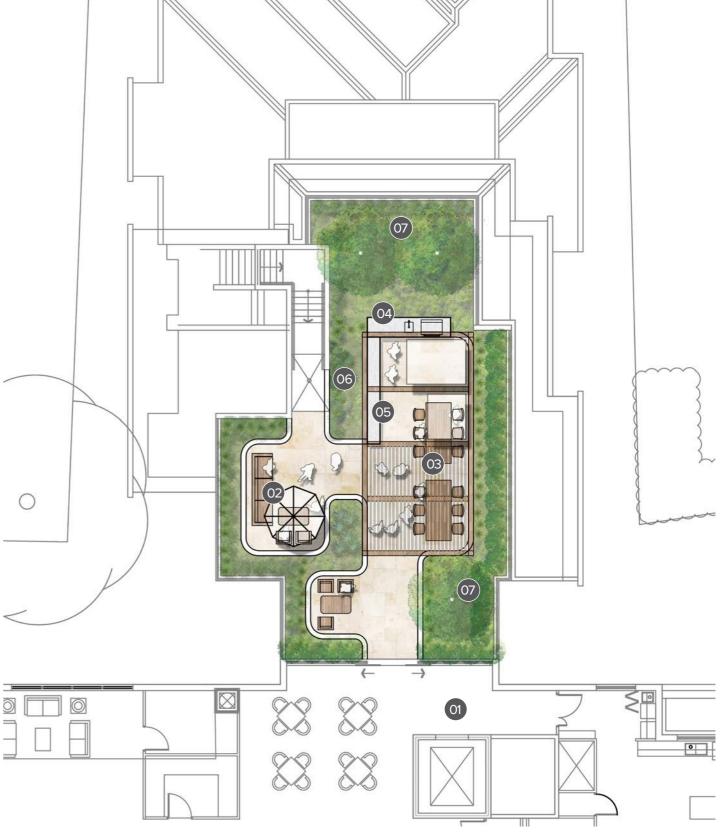

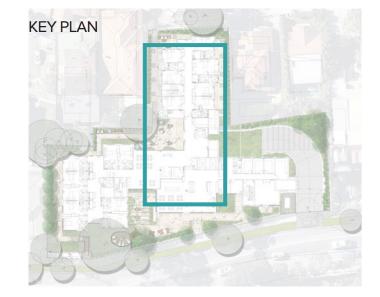




Design Strategies

Open Space Program



Vegetation Strategy

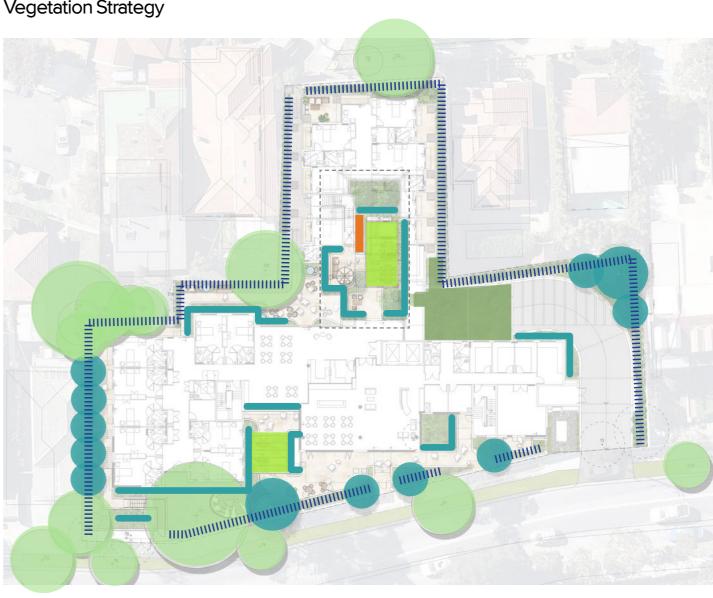



LEGEND






LEGEND





Design Strategies

Circulation + Access

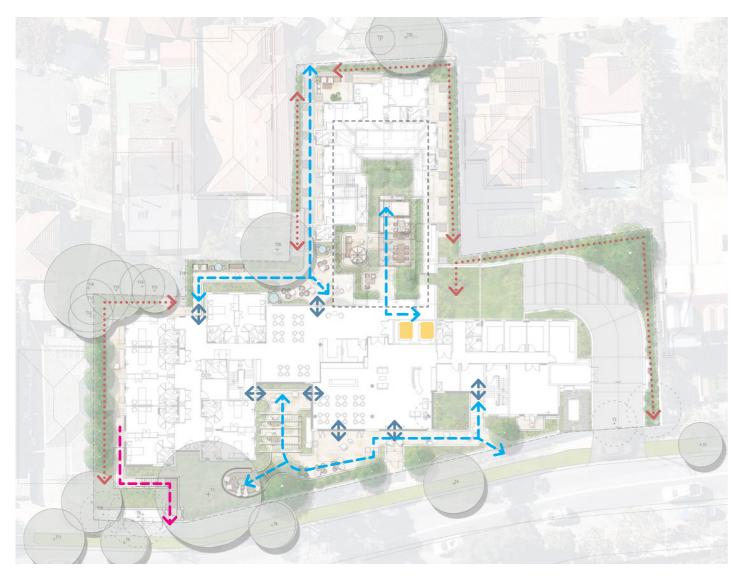

SummitCare Randwick Landscape Development Application

Planting + Deep Soil Areas



LEGEND

← → Indoor Outdoor Connections

Accessible pathways

Non accessible pathways - garden maintenance only


Vertical transport (Lifts) --> Fire egress route

LEGEND


Soft landscaping on deep soil 487m2 (18%) Soft landscaping on slab 247m2 (9%)

> Total Soft Landscaping Area: 734m2 (27% of total site area) Total Site Area 2708m2


Landscape Sections

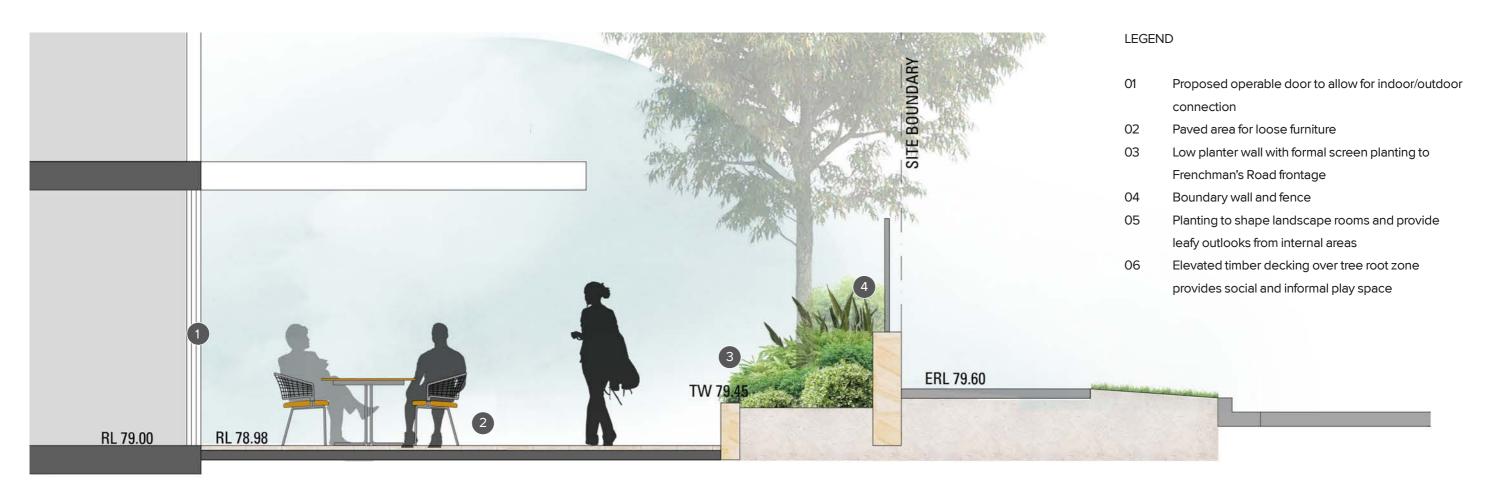

SECTION A

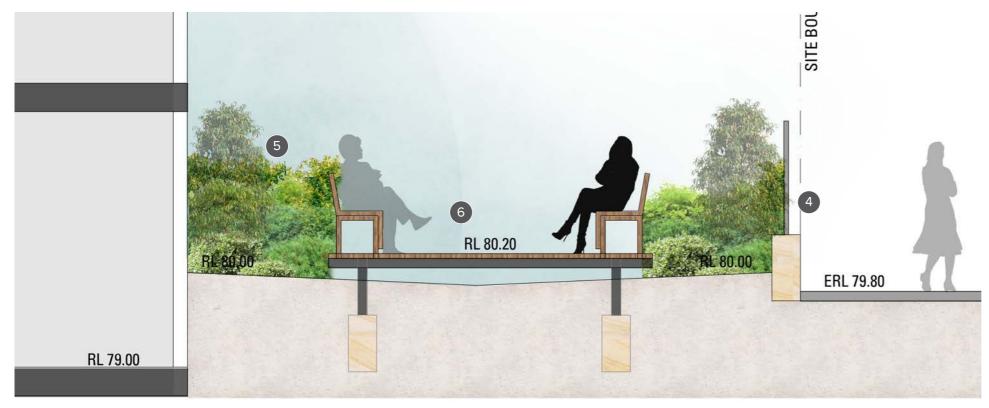

KEY PLAN



SECTION B








Landscape Sections



LEGEND

- 01 Existing tree retained
- 02 Boundary wall and fence
- Planting to shape landscape rooms and provide leafy outlooks from internal areas
- Screen planting to deep soil setback provides privacy to neighbours and leafy outlooks
 - from residents balconies
- 1800mm height boundary fence

KEY PLAN

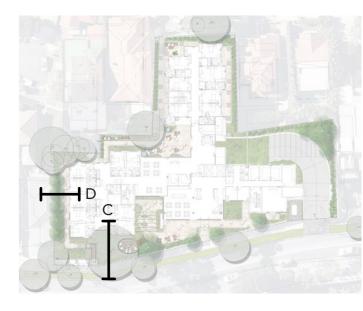




SECTION D

RL 79.00

Landscape Sections

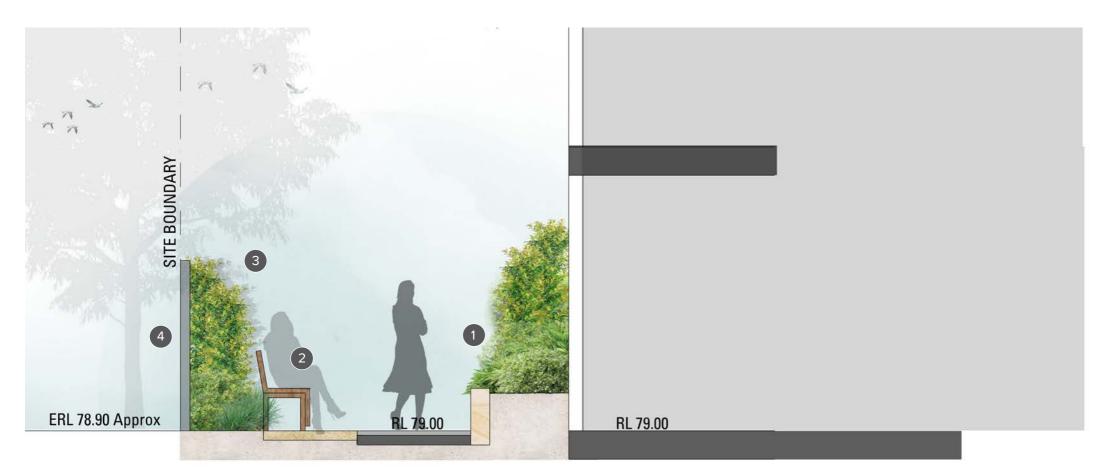

LEGEND

leafy outlooks from internal areas 02 Seating nooks Screen planting to deep soil setback provides privacy to neighbours 1800mm height boundary fence

Planting to shape landscape rooms and provide

ROOFTOP

08


05 Dining table beneath pergola structure with operable awnings for shade and wind protection Ornamental planting to perimeter with safety balustrade to outer wall 07 BBQ and sink

Bar with tall chairs for sunset views

SECTION E



KEY PLAN

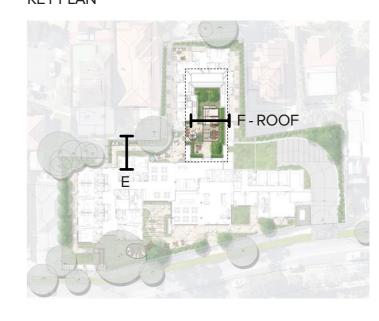

SECTION F



SummitCare Randwick



Landscape Character

Indicative Materials Palette
















Landscape Character

Planting Look and Feel

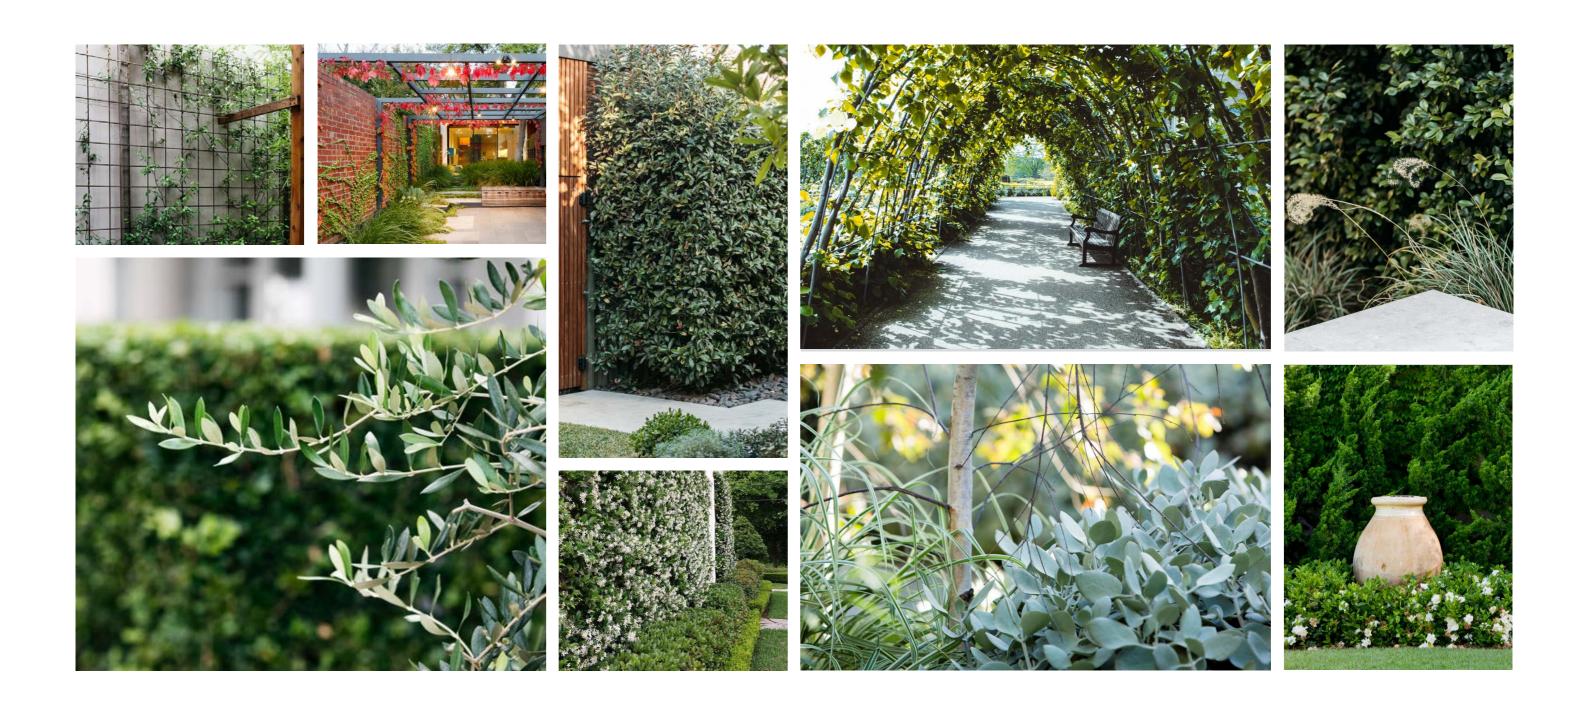

Planting Palette





Planting Schedule


19-639 Summitcare Randwick_Plant Schedule

CODE	BOTANIC NAME	COMMON NAME	MATURE SIZE (h x w) (m)	PROPOSED POT SIZE	QUANTITY GROUND FLOOR	QUANTITY LEVEL 3
	TREES & PALMS					
FG MLG PC TL	Fraxinus griffithii Magnolia grandiflora 'Little Gem' Pyrus calleryana 'Chanticleer' Tristaniopsis laurina 'Luscious'	Evergreen Ash Dwarf Magnolia Pyrus Watergum	8 x 4 6 x 3 11 x 6 7 x 5	100L 100L 400L 400L	7 1 4	3
	SHRUBS & ACCENTS					
CGS GR HEG LH Mpa PMM PX Rex Vod Vod WGB	Ctenanthe 'Grey Star' Gardenia 'Radicans' Hebe 'Emerald Gem' Lavandula angustifolia 'Hidcote' Murraya paniculata Pittosporum 'Miss Muffet' Philodendron 'Xanadu' Rhapis excelsa Rhapis excelsa Viburnum odoratissimum Viburnum odoratissimum Westringia 'Grey Box'	Grey Star Dwarf Gardenia Blue Veronica Blue English Lavender Orange Jessamine Miss Muffet Xanadu Lady Palm Lady Palm Sweet Viburnum Sweet Viburnum Grey Box	0.5 x 1 0.5 x 1 0.4 x 0.5 1 x 1 3 x 2 0.75 x 0.75 0.75 x 0.75 2 x 1 2 x 1 2 x 1 2 x 1 2 x 1 0.5 x 0.5	200mm 200mm 200mm 200mm 45L 200mm 200mm 45L 75L 45L 75L	37 13 16 136 62 48 43 34 92 18 53	24 86 22
	FERNS + SHADE LOVING PLANTS					
Ad Ae Bc Cd Do	Adiantum aethiopicum Aspidistra elatior Blechnum cartilagineum Calochlaena dubia Doodia aspera	Maidenhair Fern Cast Iron Plant Gristle Fern False Bracken Fern Prickly Rasp Fern	0.5 x 0.5 0.8 x 0.8 1.5 x 1.5 1.2 x 1.2 0.5 x 0.5	200mm 200mm 200mm 200mm 200mm	37 79 21 51 43	
	GROUNDCOVERS & CLIMBERS					
ALR AA CAR Di Bnu Lm	Alternanthera dentata 'Little Ruby' Ajuga reptans 'Atropurpurea' Carpobrotus glaucescens 'Aussie Rambler' Dichondra repens Blechnum nudum Liriope muscari	Alternanthera Atropurpureum Bugle Aussie Rambler Pigface Kidney Weed Fishbone Water Fern Lilyturf	0.25 x 0.5 0.25 x 0.5 0.3 x 0.2 0.2 x spreading 0.5 x 1 0.5 x 0.5	150mm 150mm 200mm 150mm 150mm 200mm	140 104 218 268 194 173	62 54 106
Tja TFM Vhe	Trachelospermum jasminoides Trachelospermum 'Flat Mat' Viola hederacea	Star Jasmine Flat Mat Star Jasmine Ivy Leaf Violet	0.25 x spreading 0.4 0.15	150mm 10L 150mm	50 405	12
	MATRIX PLANTING					
CAR Hv Lm LV Wm	Carpobrotus glaucescens 'Aussie Rambler' Hardenbergia violacea Liriope muscari Lomandra 'Verday' Westringia fruticosa 'Mundi'	Aussie Rambler Pigface False Sarsaparilla Lilyturf Mat Rush Groundcover native rosemary	0.3 x 0.2 0.25 x spreading 0.5 x 0.5 0.6 x 0.6 0.4 x 1.5	200mm 150mm 200mm 200mm 150mm	167 167 167 167 167	





LANDSCAPE MASTERPLAN

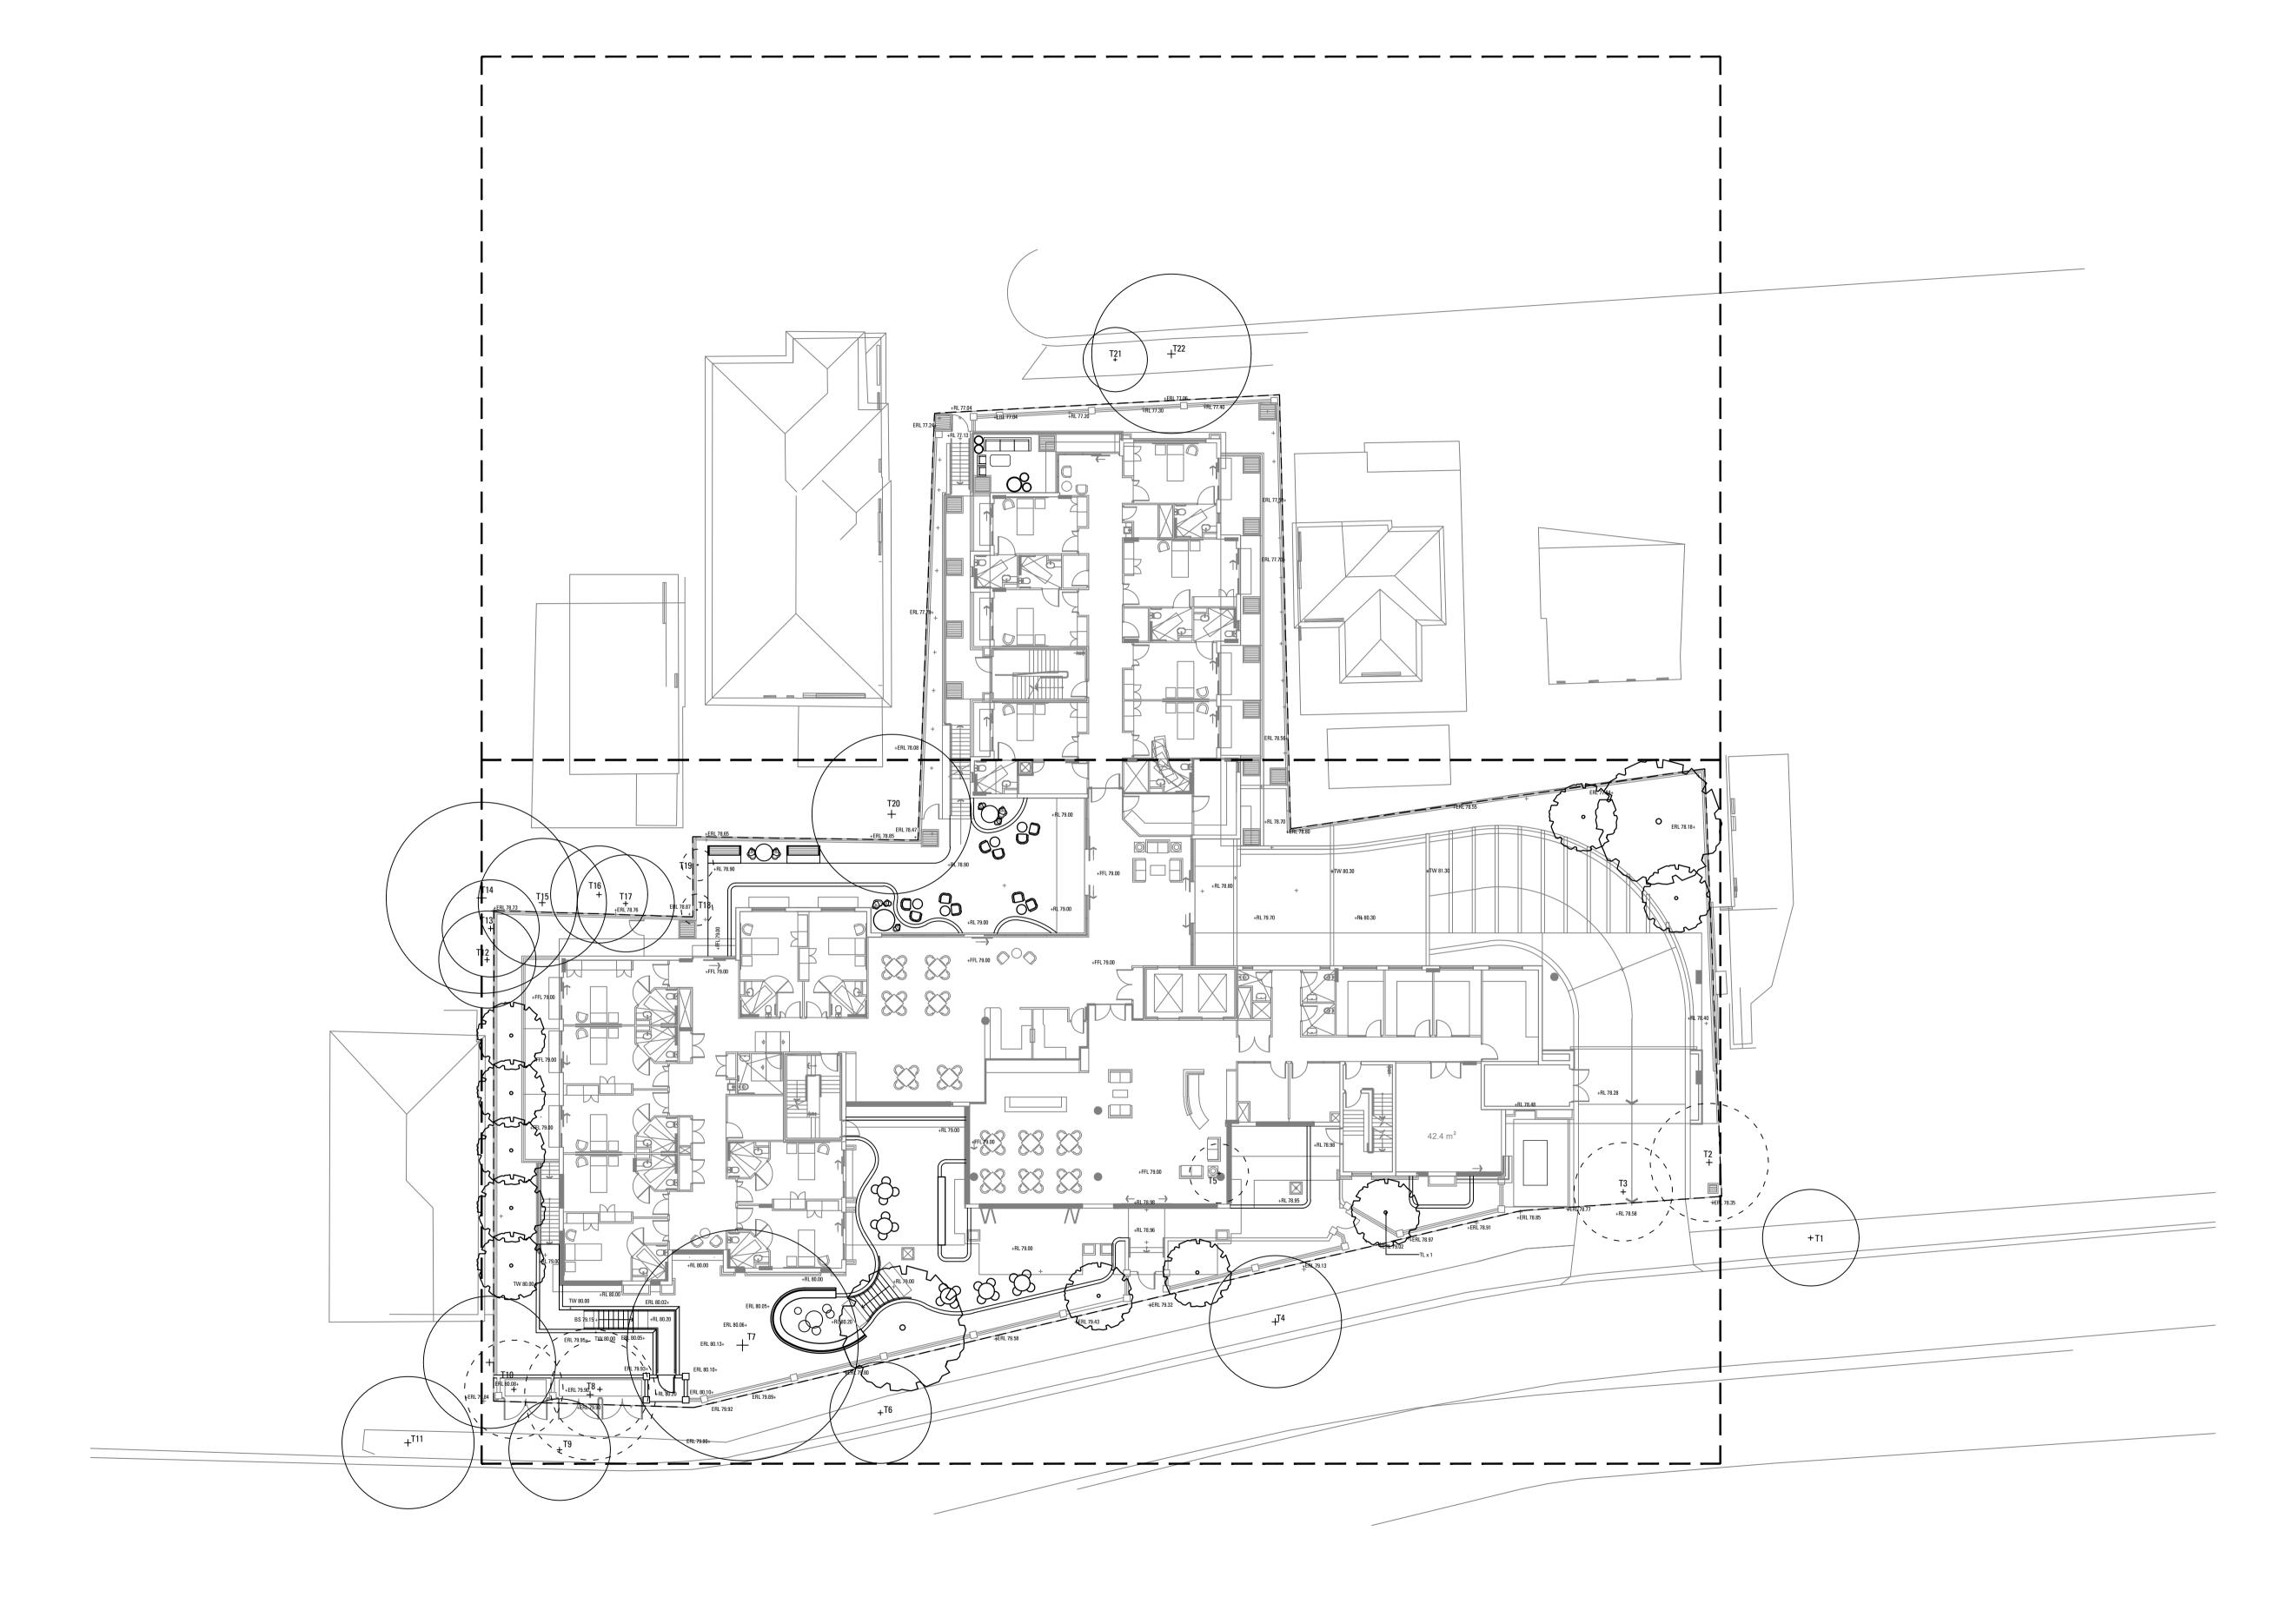



SUMMITCARE RANDWICK
DEVELOPMENT APPLICATION



PREPARED BYArcadia Landscape ArchitectureCLIENTSummitcareARCHITECTBoffa Robertson Group

cape Architecture


DATE

SCALE

1:200 @ A1

ISSUE

D

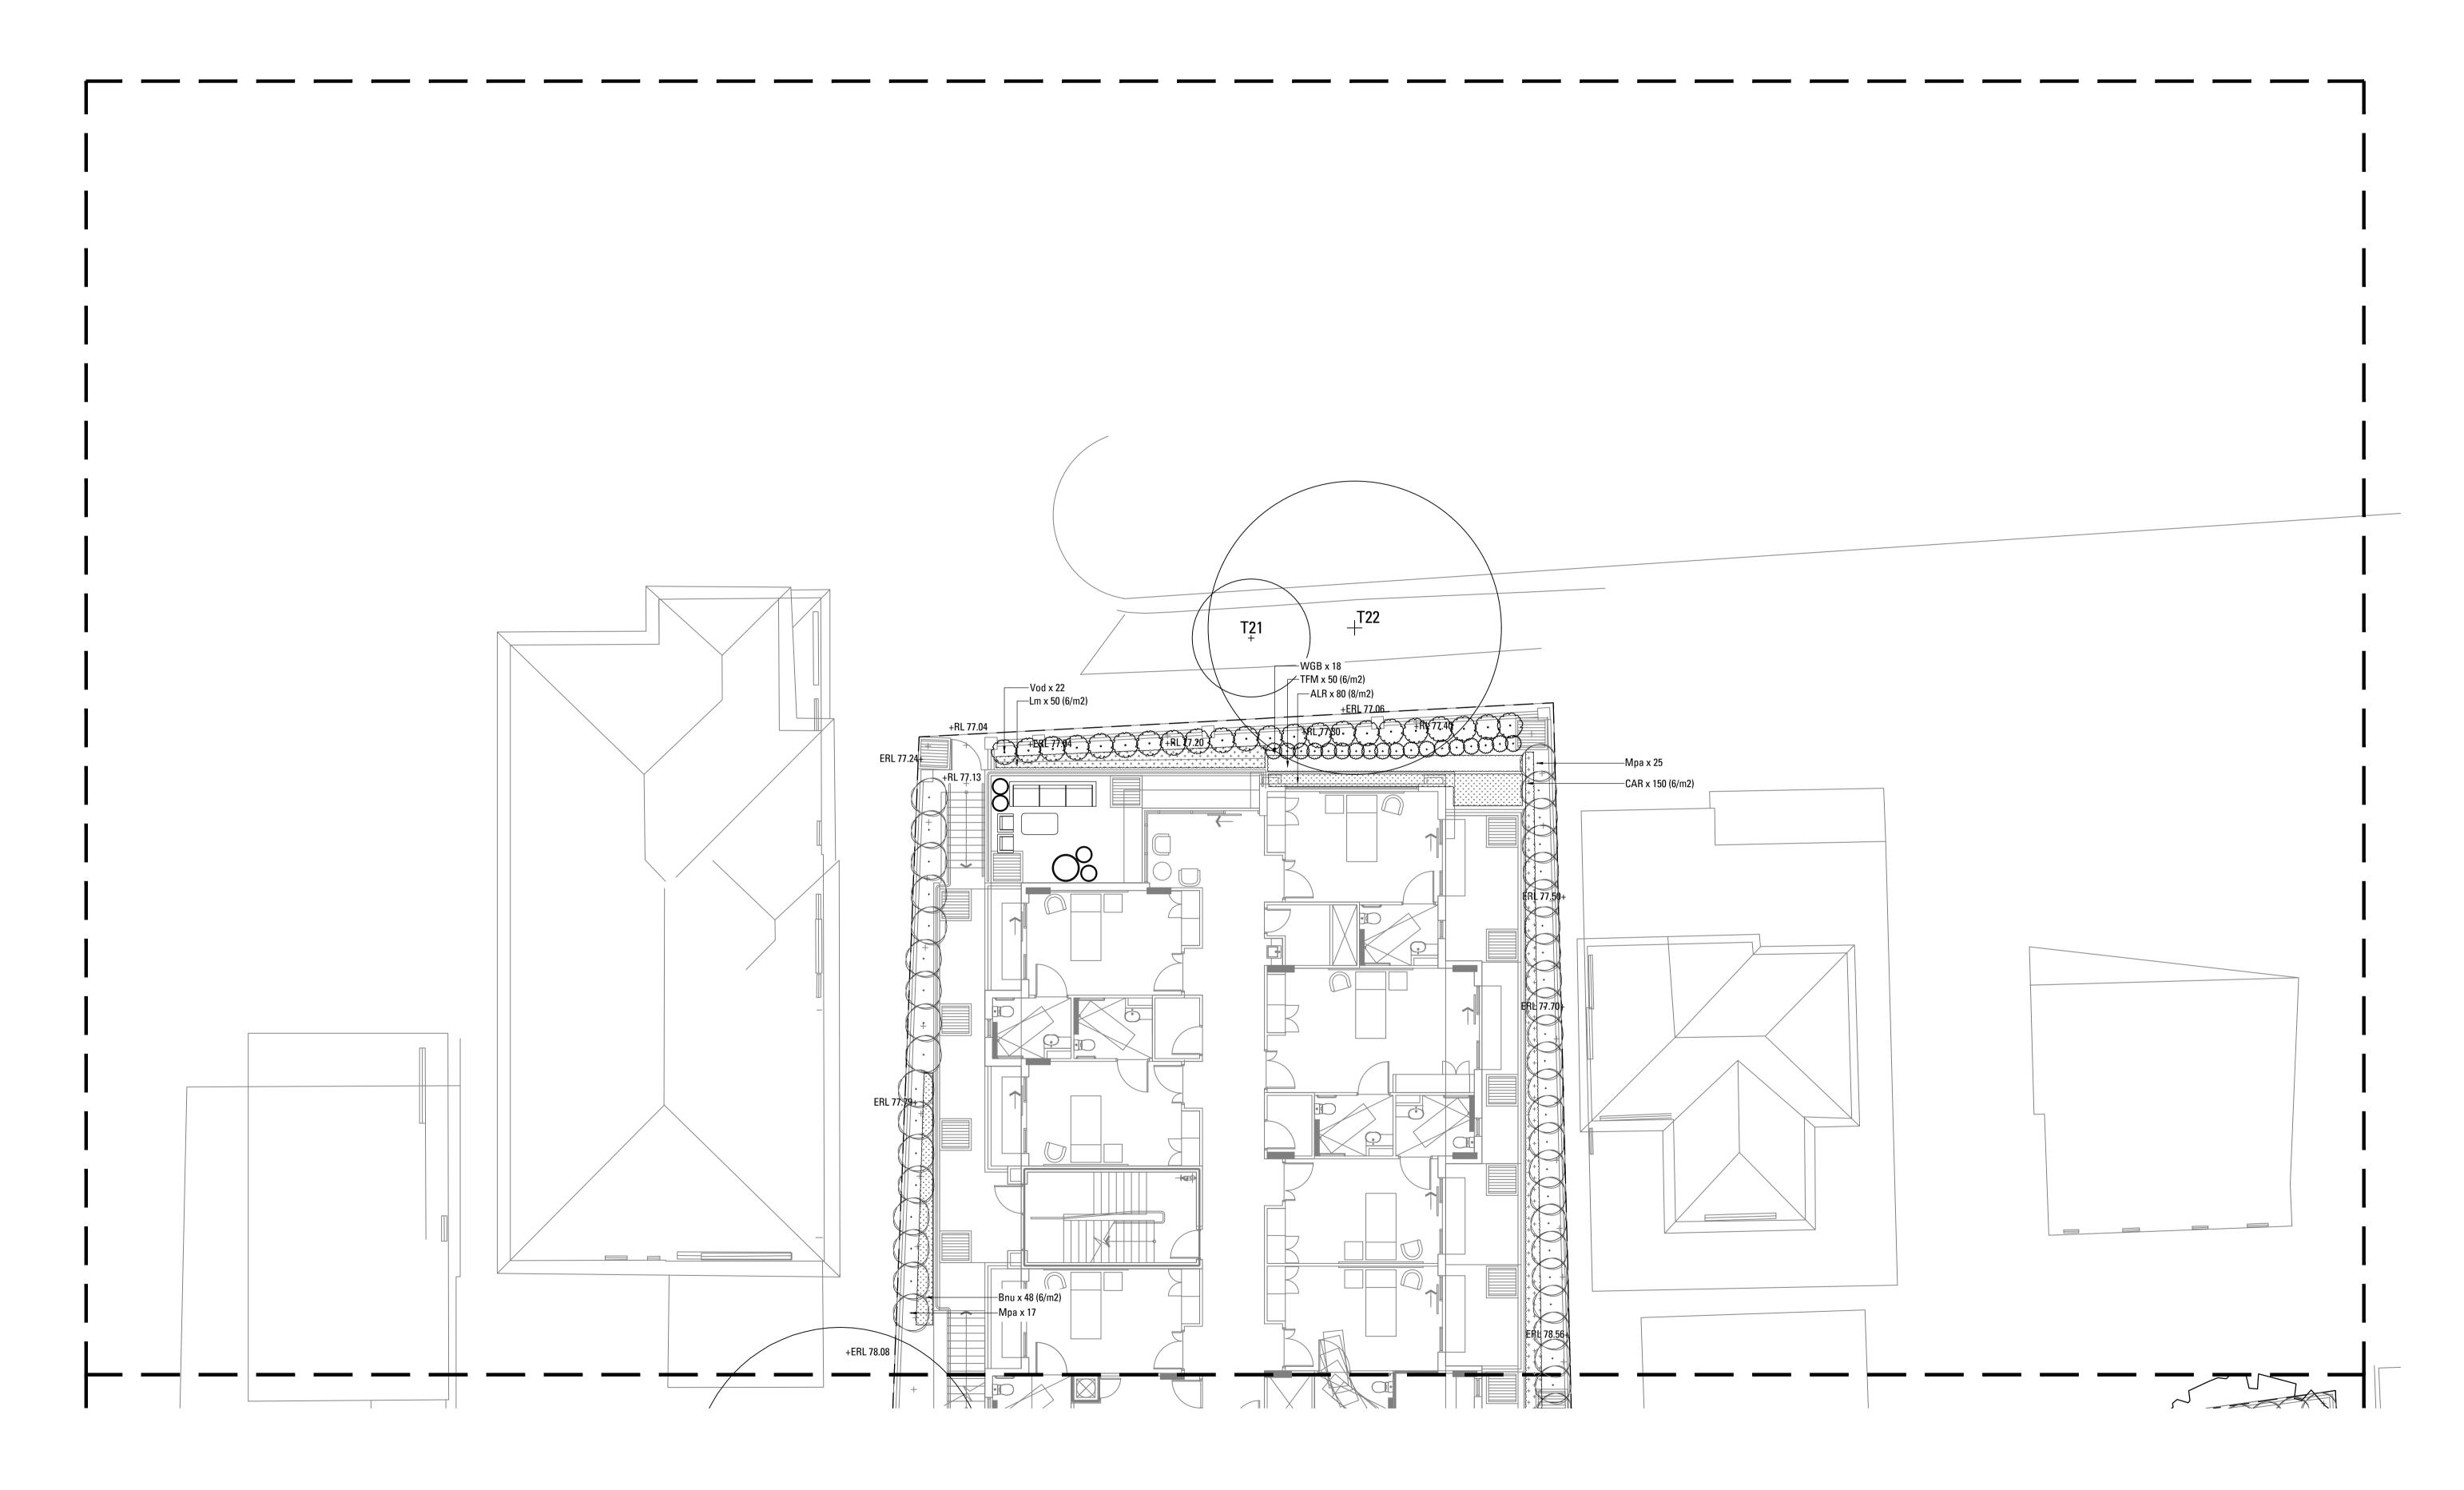



SUMMITCARE RANDWICK
DEVELOPMENT APPLICATION



PREPARED BYArcadia Landscape ArchitectureCLIENTSummitcareARCHITECTBoffa Robertson Group

scape Architecture


DATE

SCALE

1:100 @ A1

ISSUE

D

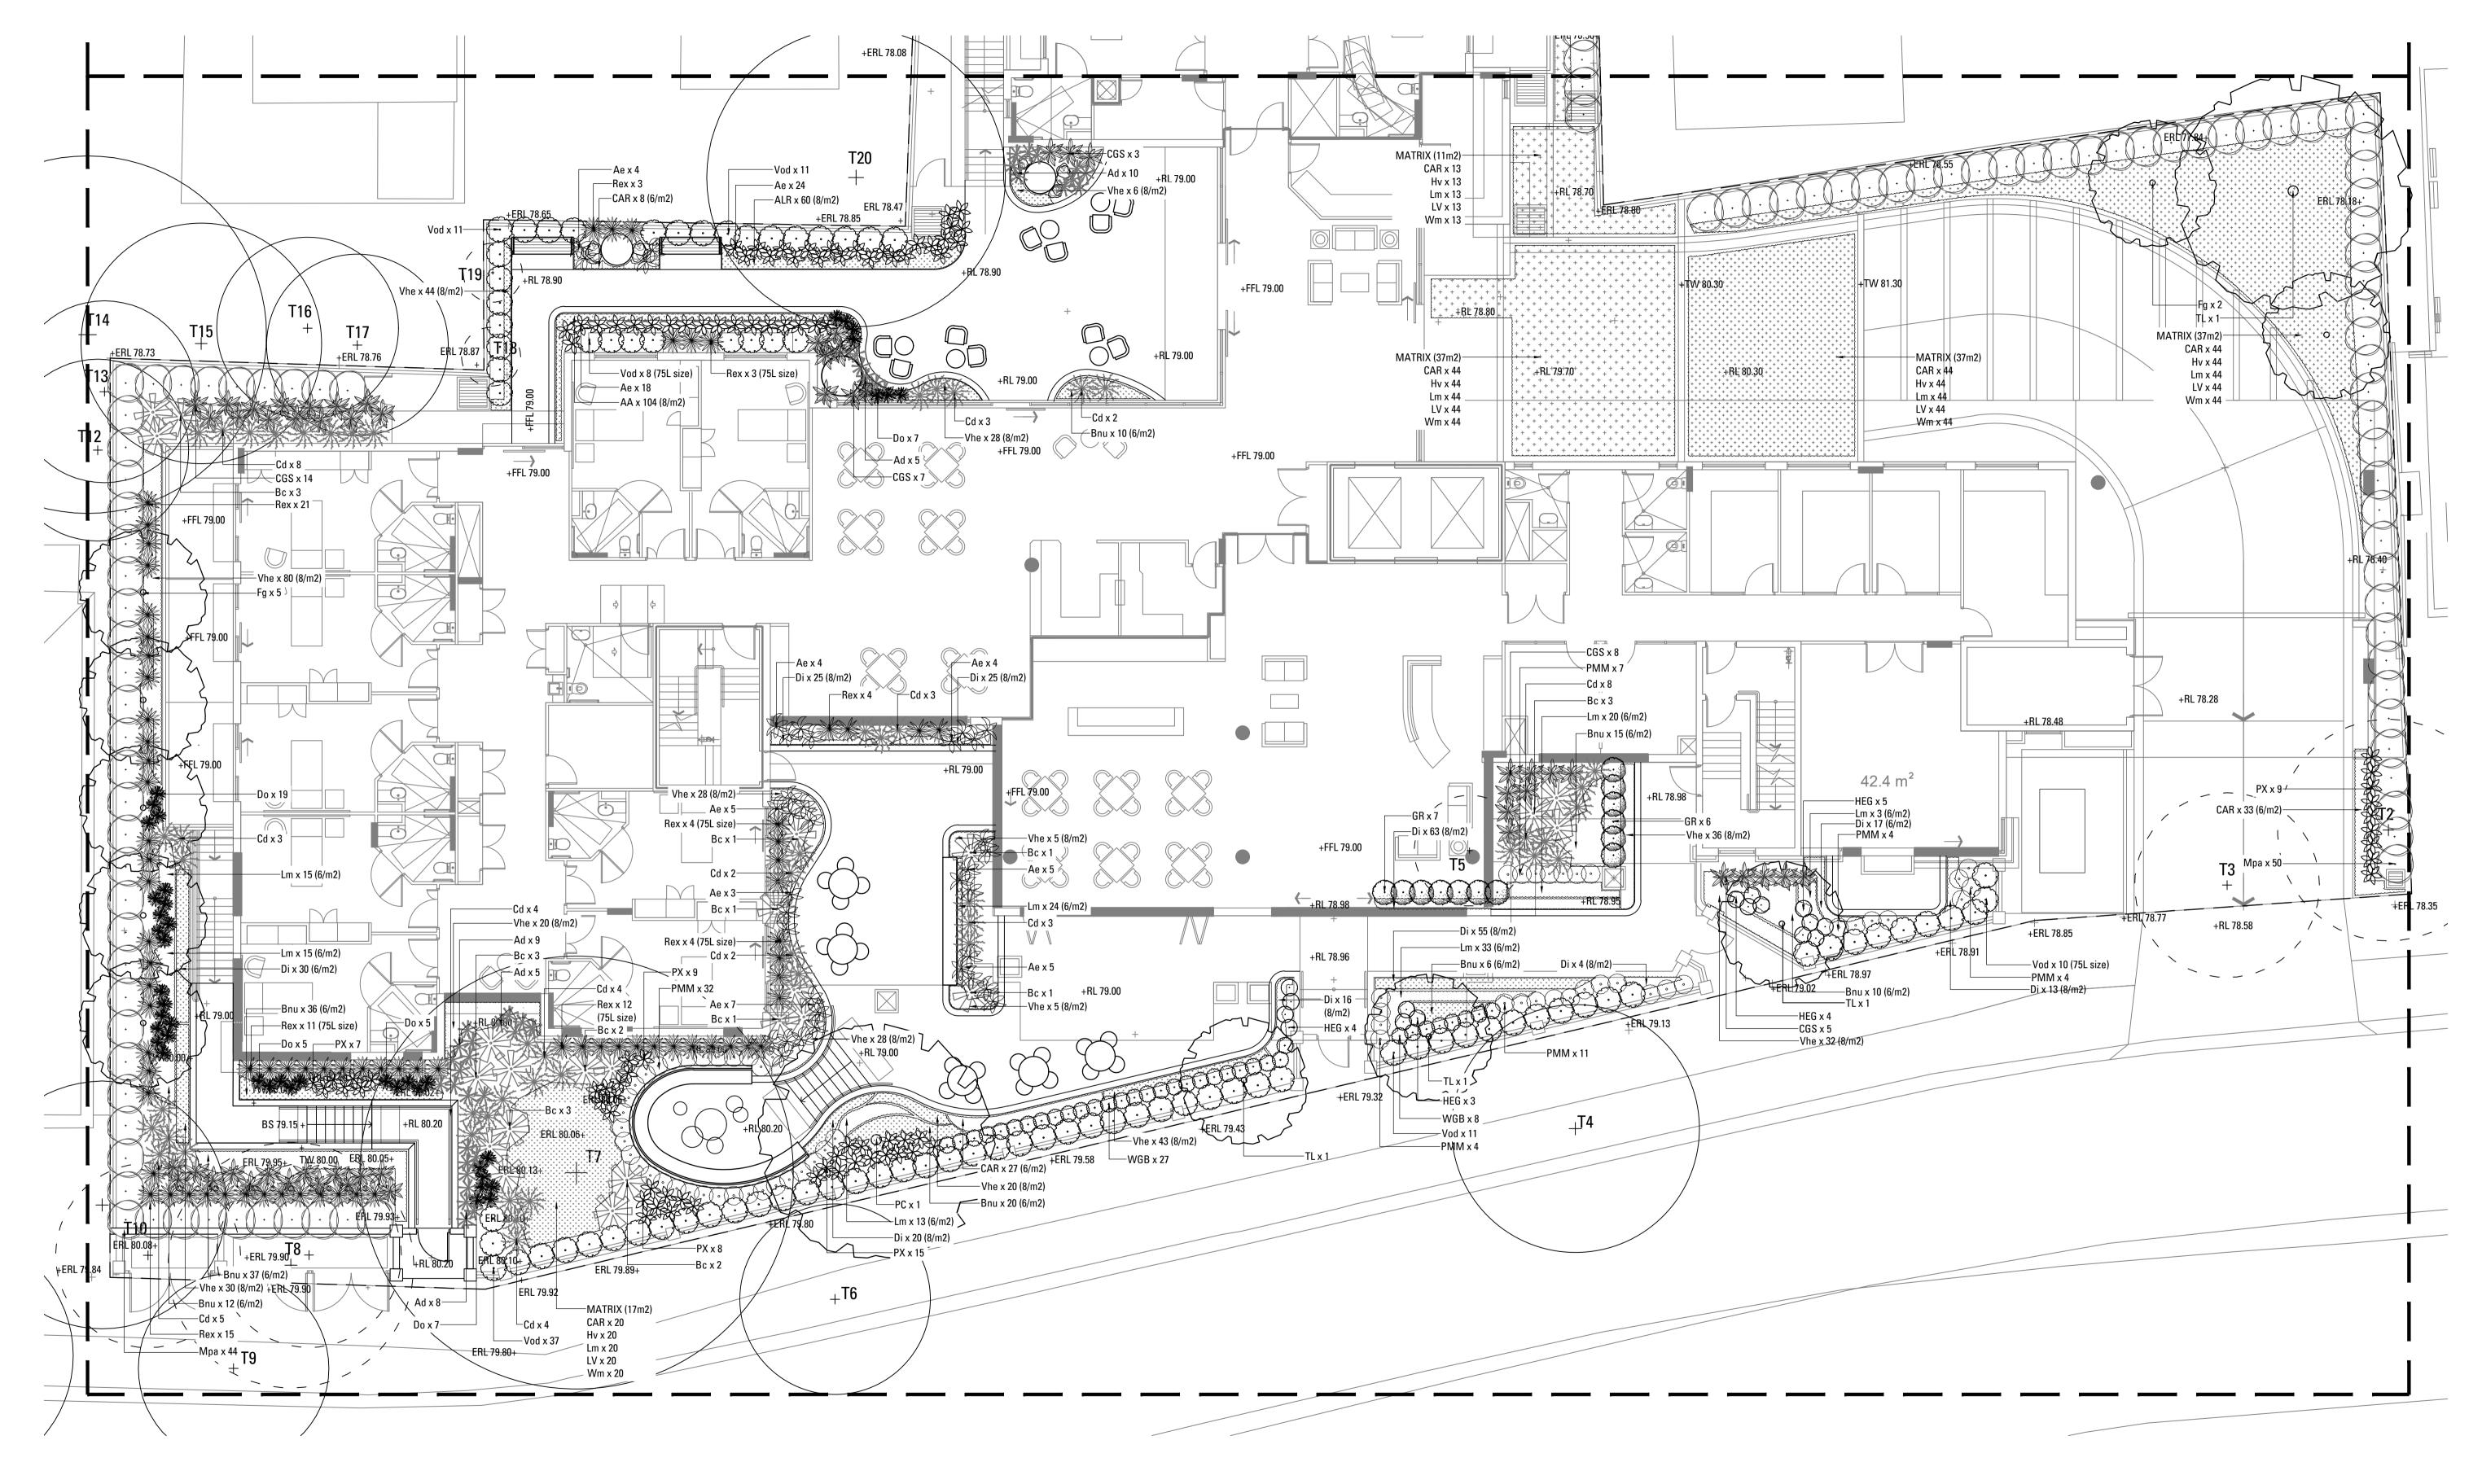




SUMMITCARE RANDWICK DEVELOPMENT APPLICATION



CLIENT ARCHITECT

PREPARED BY Arcadia Landscape Architecture Summitcare Boffa Robertson Group

DATE May 2021 SCALE 1:1 ISSUE D 1:100 @ A1 SOFTWORKS | LEVEL 3

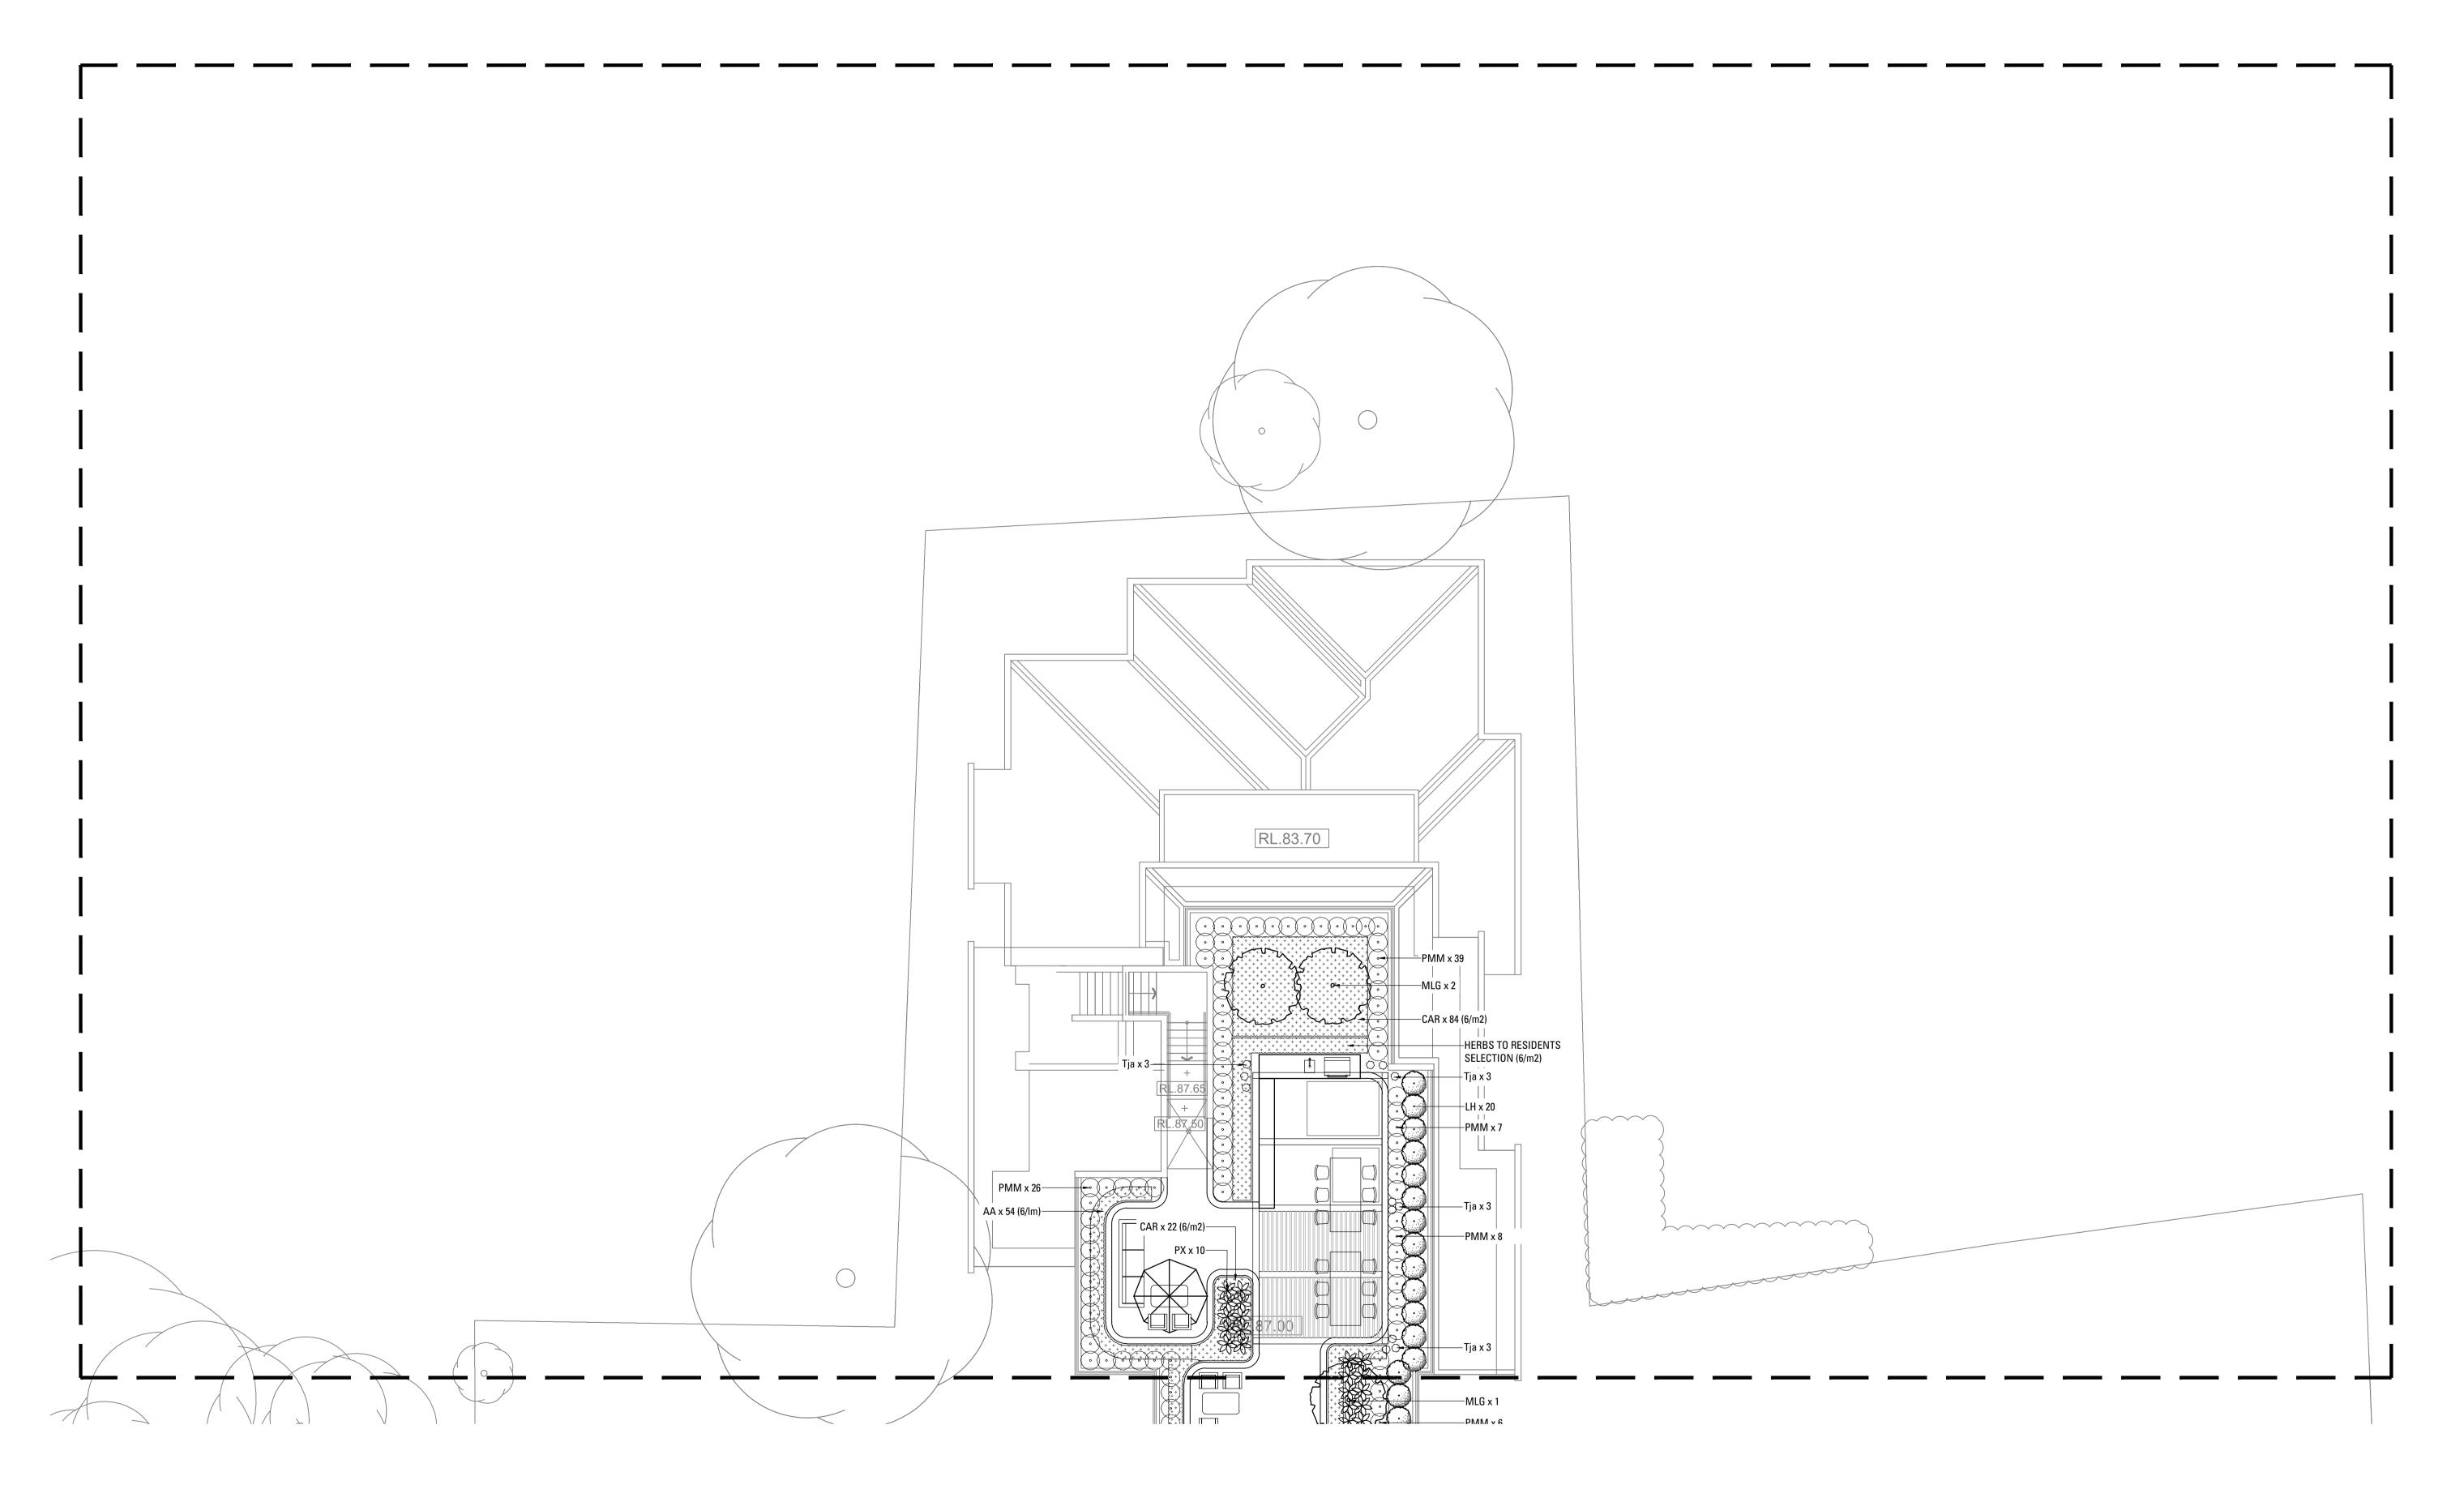




SUMMITCARE RANDWICK DEVELOPMENT APPLICATION





CLIENT Summitcare ARCHITECT Boffa Robertson Group

PREPARED BY Arcadia Landscape Architecture

DATE May 2021 SCALE 1:100 @ A1 ISSUE D

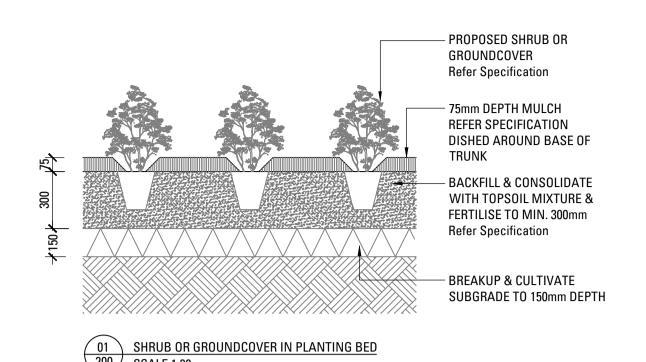

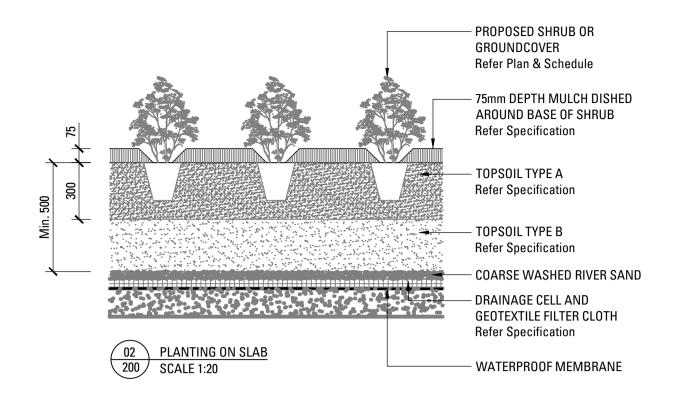

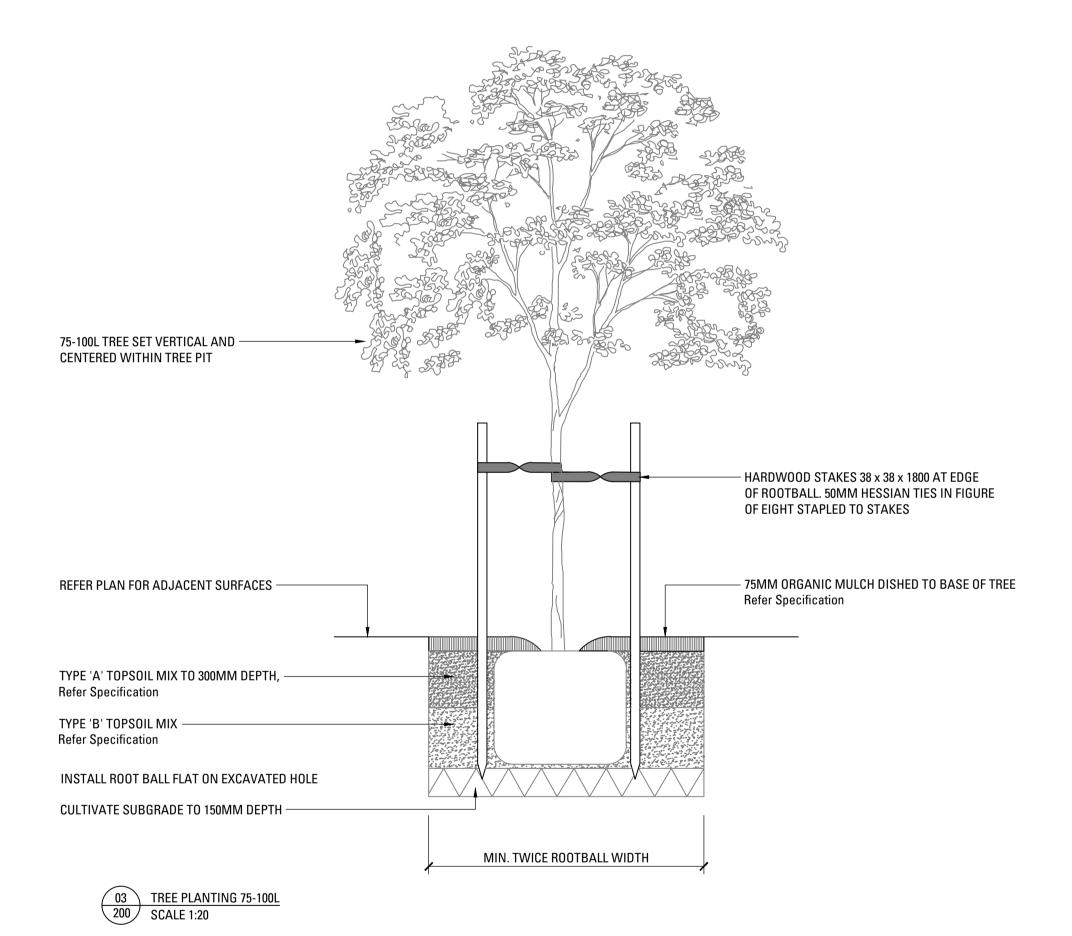

LANDSCAPE SPECIFICATION NOTES

BEFORE LANDSCAPE WORK IS COMMENCED THE LANDSCAPE CONTRACTOR IS TO ESTABLISH THE POSITION OF ALL SERVICE LINES AND ENSURE TREE PLANTING IS CARRIED OUT AT LEAST 3 METRES AWAY FROM THESE SERVICES. SERVICE LIDS, VENTS AND HYDRANTS SHALL BE LEFT EXPOSED AND NOT COVERED BY ANY LANDSCAPE FINISHES (TURFING, PAVING, GARDEN BEDS ETC.) FINISH ADJOINING SURFACES FLUSH WITH PIT LIDS.

ABORIST MANAGEMENT OF TREE PROTECTION

A QUALIFIED AND APPROVED ABORIST IS TO BE CONTRACTED TO UNDERTAKE OR MANAGE THE INSTALLATION OF PROTECTIVE FENCING, AND TO UNDERTAKE SUCH MEASURES AS HE DEEMS APPROPRIATE TO PRESERVE THE SUBJECT TREES TO BE RETAINED. THE ARBORIST IS TO BE RETAINED FOR THE ENTIRE CONTRACT PERIOD TO UNDERTAKE ONGOING MANAGEMENT AND

DRAINAGE CELL AND FILTER FABRIC

FOR ON-SLAB AREAS INSTALL AN APPROVED 'DRAINAGE CELL' PRODUCT TO COMPREHENSIVELY COVER THE BOTTOM OF ALL PLANTERS. OVER DRAINAGE CELL TO ON-SLAB AREAS, A POLYFELT GEOTEXTILE LINING (AS SUPPLIED BY 'POLYFELT TS' OR APPROVED EQUIVALENT) IS TO BE INSTALLED TO COVER THE BOTTOM OF ALL PLANTERS. TURNED UP 300MM AND TAPED TO THE PLANTER SIDES TO ENSURE SOIL MIX DOES NOT ESCAPE INTO DRAINAGE OUTLETS/HOLES. INSTALL MIN. 50MM COARSE RIVER SAND OVER ALL GEOTEXTILE LINING PRIOR TO INSTALLATION OF SOIL MIX.

SHALL BE HOMOGENOUS BLEND OF SOIL AND ADDITIVES IN THE FOLLOWING PROPORTIONS:

EXISTING SITE SOIL IF SUITABLE OR IMPORTED TOPSOIL 50%

COMPOST 30%

SOIL TESTING OF EXISTING SITE SOIL IS TO BE UNDERTAKEN TO ASSESS SUITABILITY OF USE AS PLANTING TOPSOIL AND COMPLIANCE WITH AUSTRALIAN STANDARDS.

PLACE MULCH TO THE REQUIRED DEPTH, (REFER TO DRAWINGS) CLEAR OF PLANT STEMS, AND RAKE TO AN EVEN SURFACE FINISHING 25MM RELOW AD IDINING LEVELS. ENSURE MUI CH IS WATERED IN AND TAMPED DOWN DURING INSTALLATION

PINE BARK: FROM MATURE TREES, GRADED IN SIZE FROM 15MM TO 30MM, FREE FROM WOOD SLIVERS, DARK BROWN IN COLOUR AND TEXTURE

SHALL BE WELL ROTTED VEGETATIVE MATERIAL OR ANIMAL MANURE, OR OTHER APPROVED MATERIAL, FREE FROM HARMFUL

CHEMICALS, GRASS AND WEED GROWTH AND WITH NEUTRAL PH. PROVIDE A CERTIFICATE OF PROOF OF PH UPON REQUEST.

ALL PLANTS SUPPLIED ARE TO CONFORM WITH THOSE SPECIES LISTED IN THE PLANT SCHEDULE ON THE DRAWINGS. GENERALLY PLANTS SHALL BE VIGOROUS, WELL ESTABLISHED, HARDENED OFF, OF GOOD FORM CONSISTENT WITH SPECIES OR VARIETY, NOT SOFT OR FORCED, FREE FROM DISEASE OR INSECT PESTS WITH LARGE HEALTHY ROOT SYSTEMS AND NO EVIDENCE OF HAVING BEEN RESTRICTED OR DAMAGED. TREES SHALL HAVE A LEADING SHOOT. IMMEDIATELY REJECT DRIED OUT, DAMAGED OR UNHEALTHY PLANT MATERIAL BEFORE PLANTING. ALL STOCK IS TO BE CONTAINER GROWN FOR A MINIMUM OF SIX (6) MONTHS PRIOR TO DELIVERY TO SITE

FERTILISER SHALL BE 'NUTRICOTE' OR APPROVED EQUIVALENT IN GRANULE FORM INTENDED FOR SLOW RELEASE OF PLANT NUTRIENTS OVER A PERIOD OF APPROXIMATELY NINE MONTHS. THOROUGHLY MIX FERTILISER WITH PLANTING MIXTURE AT THE

SHALL BE SIR WALTER BUFFALO. SHIRLEYS NO. 17 OR APPROVED EQUAL LAWN FOOD SHALL BE THOROUGHLY MIXED INTO THE TOPSOIL PRIOR TO PLACING TURE

TREES IN GRASS AND SUPER ADVANCED TREES:

PELLETS SHALL BE IN THE FORM INTENDED TO UNIFORMLY RELEASE PLANT FOOD ELEMENTS FOR A PERIOD OF APPROXIMATELY NINE MONTHS EQUAL TO SHIRLEYS KOKEI PELLETS, ANALYSIS 6.3:1.8:2.9. KOKEI PELLETS SHALL BE PLACED AT THE TIME OF PLANTING TO THE BASE OF THE PLANT, 50MM MINIMUM FROM THE ROOT BALL AT A RATE OF TWO PELLETS PER 300MM OF TOP GROWTH TO A MAXIMUM OF 8 PELLETS PER TREE.

STAKES SHALL BE STRAIGHT HARDWOOD, FREE FROM KNOTS AND TWISTS, POINTED AT ONE END AND

SIZED ACCORDING TO SIZE OF PLANTS TO BE STAKED.

A. 5-15 LITRE SIZE PLANT 1X(1200X25X25MM)

B. 35-75 LITRE SIZE PLANT 2X(1500X38X38MM) C. 100-GREATER THAN 200LITRE 3X(1800X50X50MM)

TIES SHALL RE 50MM WIDE HESSIAN WERRING OR APPROVED FOLLVALENT NAILED OR STAPLED TO STAKE DRIVE STAKES A MINIMUM ONE THIRD OF THEIR LENGTH, AVOIDING DAMAGE TO THE ROOT SYSTEM, ON THE WINDWARD SIDE OF THE PLANT.

SUPPLY AN AUTOMATIC WATERING SYSTEM USING 'TORO IRRIGATION SYSTEM' OR SIMILAR APPROVED, WITH MICRO-JET SPRINKLER HEADS AND LOW DENSITY, RUBBER MODIFIED POLYPROPYLENE RETICULATION, TO INCLUDE FILTERS, BENDS JUNCTIONS, ENDS AND OTHER ANCILLARY EQUIPMENT. THE LANDSCAPER SHALL NOMINATE HIS SOURCE OF SUPPLY FOR THE WATERING SYSTEM AND OBTAIN APPROVAL FROM THE SUPERINTENDENT BEFORE PLACING ORDERS FOR EQUIPMENT OR

A SCHEMATIC PLAN OF THE PROPOSED IRRIGATION SYSTEM IS TO BE PREPARED BY THE CONTRACTOR, SHOWING SOLENOIDS, PIPE DIAMETERS. AND ALL NOZZLE AND TRICKLE ATTACHMENT TYPES (INCLUDING SPRAY/HEAD ANGLE), FOR REVIEW BY THE

THE CONTRACTOR IS TO LIASE WITH THE HYDRAULIC ENGINEER AND COUNCIL AS NECESSARY. TO ENSURE THE THE IRRIGATION SYSTEM CONFORMS WITH ALL THE COUNCIL AND WATER BOARD CODES AND REQUIREMENTS.

PROVIDE AN AUTOMATIC CONTROLLER THAT PROVIDES FOR TWO WEEK SCHEDULING AND HOURLY MULTI-CYCLE OPERATION. THE CONTROLLER SHALL MANUAL OVERRIDE. PROGRAMMING SHALL BE UNDERTAKEN BY THE CONTRACTOR WHO SHALL ADVISE ON THE OPERATION OF THE SYSTEM.

PROVISION OF SECURE HOUSING FOR THE AUTOMATIC IRRIGATION CONTROLLER TO BE LOCATED IN ASSOCIATION WITH THE LANDSCAPE CONTRACTOR AND LOCATION CONFIRMED BY THE SUPERINTENDENT. WIRING TO CONNECT REMOTE SOLENOID LOCATIONS IS TO BE PROVIDED. THE CONTROLLER SHALL BE LOCATED IN A DRY PLACE, PROTECTED FROM THE WEATHER, AND ALL CABLE CONNECTIONS SHALL BE MADE WITH WATERPROOF CONNECTORS.

WATER SUPPLY POINTS TO BE SUPPLIED BY BUILDER.

IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE AND GUARANTEE SATISFACTORY OPERATION OF THE IRRIGATION

AFTER THE SYSTEM HAS BEEN INSTALLED TO THE SATISFACTION OF THE SUPERINTENDENT, THE INSTALLATION SHALL BE TESTED UNDER KNOWN WORKING CONDITIONS. ACCEPTANCE OF THE INSTALLED PLANT AND EQUIPMENT SHALL BE SUBJECT

TIMBER EDGE: 100 X 25MM CCA TREATED RADIATA PINE TIMBER STAKES: 50 X 50 X 500MM CCA TREATED RADIATA PINE-SHARPENED AT ONE END. INSTALL IN LOCATIONS SHOWN ON THE DRAWINGS FLUSH TO FINISHED SURFACE LEVELS.

TURF ALL LANDSCAPE AREAS AS SHOWN ON THE LANDSCAPE DRAWINGS. TURF IS TO HAVE AN EVEN THICKNESS OF NOT LESS THAN 25MM. OBTAIN TURF FROM AN APPROVED GROWER. FURNISH A WARRANTY FROM THE GROWER THAT THE TURF IS FREE FROM WEEDS AND OTHER FOREIGN MATTER. DELIVER TURF TO THE SITE WITHIN 24 HOURS OF BEING CUT, AND LAY IT WITHIN 24 HOURS OF BEING DELIVERED.

TO PREPARE GRADED AREAS TO RECEIVE TURF, EXCAVATE THE AREA AND CULTIVATE SO AS TO ALLOW FOR IMPORTING OF 100MM OF TURF UNDERLAY SOIL. REMOVE ALL STONES OVER 50MM Ø AND REMOVE ALL WEEDS AND FOREIGN MATTER. SPREAD SOIL MIX A.B.S TO A DEPTH OF 100MM AND GRADE TO APPROPRIATE LEVELS TO ACHIEVE GENERAL EVEN GRADES TO DRAINAGE

LAY THE TURF ALONG THE LAND CONTOURS WITH STAGGERED, CLOSE BUTTED JOINTS, SO THAT THE FINISHED TURF SURFACE IS FLUSH WITH ADJACENT FINISHED SURFACES OF PAVING AND THE LIKE. AS SOON AS PRACTICABLE AFTER LAYING, ROLL THE TURF WITH A ROLLER WEIGHING NOT MORE THAN 90KG PER METRE OF WIDTH FOR SANDY OR LIGHT SOILS.

WATER AS NECESSARY TO KEEP THE SOIL MOIST TO A DEPTH OF 100MM. PROTECT NEWLY TURFED AREAS AGAINST TRAFFIC

'TOP DRESS' THE TURF WHEN IT IS ESTABLISHED TO A DEPTH OF 10MM WITH COARSE WASHED RIVER SAND. RUB THE DRESSING WELL INTO THE JOINTS AND CORRECT ANY UNEVENNESS IN THE TURF SURFACES.

LANDSCAPE MAINTENANCE PROGRAM

UNTIL GRASS IS ESTABLISHED. FERTILISE TWO WEEKS AFTER LAYING FERTILISE A.B.S

MAINTENANCE SHALL MEAN THE CARE AND MAINTENANCE OF THE LANDSCAPE WORKS BY ACCEPTED HORTICULTURAL PRACTICE AS RECTIEVING ANY DEFECTS THAT BECOME APPARENT IN THE LANDSCAPE WORKS LINDER NORMAL LISE. THIS SHALL INCLUDE, BUT SHALL NOT BE LIMITED TO, WATERING, MOWING, FERTILISING, RESEEDING, RETURFING, WEEDING, PEST AND DISEASE CONTROL, STAKING AND TYING, REPLANTING, CULTIVATION, PRUNING, AERATING, RENOVATING, TOP DRESSING, MAINTAINING THE SITE IN A NEAT AND TIDY CONDITION AS FOLLOWS:-

THE LANDSCAPE CONTRACTOR SHALL MAINTAIN THE LANDSCAPE WORKS FOR THE TERM OF THE MAINTENANCE (OR PLANT ESTABLISHMENT) PERIOD TO THE SATISFACTION OF THE COUNCIL. THE LANDSCAPE CONTRACTOR SHALL ATTEND TO THE SITE ON A WEEKLY BASIS. THE MAINTENANCE PERIOD SHALL COMMENCE AT PRACTICAL COMPLETION AND CONTINUE FOR A PERIOD

GRASS, TREES AND GARDEN AREAS SHALL BE WATERED REGULARLY SO AS TO ENSURE CONTINUOUS HEALTHY GROWTH.

DURING THE TERM OF THE MAINTENANCE PERIOD THE LANDSCAPE CONTRACTOR SHALL REMOVE RUBBISH THAT MAY OCCUR AND REOCCUR THROUGHOUT THE MAINTENANCE PERIOD. THIS WORK SHALL BE CARRIED OUT REGULARLY SO THAT AT WEEKLY INTERVALS THE AREA MAY BE OBSERVED IN A COMPLETELY CLEAN AND TIDY CONDITION.

THE LANDSCAPE CONTRACTOR SHALL REPLACE ALL PLANTS THAT ARE MISSING, UNHEALTHY OR DEAD AT THE LANDSCAPE CONTRACTOR'S COST. REPLACEMENTS SHALL BE OF THE SAME SIZE, QUALITY AND SPECIES AS THE PLANT THAT HAS FAILED UNLESS OTHERWISE DIRECTED BY THE LANDSCAPE ARCHITECT. REPLACEMENTS SHALL BE MADE ON A CONTINUING BASIS NOT EXCEEDING TWO (2) WEEKS AFTER THE PLANT HAS DIED OR IS SEEN TO BE MISSING.

THE LANDSCAPE CONTRACTOR SHALL REPLACE OR ADJUST PLANT STAKES, AND TREE GUARDS AS NECESSARY OR AS DIRECTED BY THE LANDSCAPE ARCHITECT. REMOVE STAKES AND TIES AT THE END OF THE MAINTENANCE PERIOD IF SO DIRECTED.

TREES AND SHRUBS SHALL BE PRUNED AS DIRECTED BY THE LANDSCAPE ARCHITECT. PRUNING WILL BE DIRECTED AT THE MAINTENANCE OF THE DENSE FOLIAGE OR MISCELLANEOUS PRUNING AND BENEFICIAL TO THE CONDITION OF THE PLANTS. ANY DAMAGED GROWTH SHALL BE PRUNED. ALL PRUNED MATERIAL SHALL BE REMOVED FROM THE SITE.

ALL MULCHED SURFACES SHALL BE MAINTAINED IN A CLEAN AND TIDY CONDITION AND BE REINSTATED IF NECESSARY TO ENSURE THAT A DEPTH OF 75MM IS MAINTAINED. ENSURE MULCH IS KEPT CLEAR OF PLANT STEMS AT ALL TIMES.

PEST AND DISEASED CONTROL

THE LANDSCAPE CONTRACTOR SHALL SPRAY AGAINST INSECT AND FUNGUS INFESTATION WITH ALL SPRAYING TO BE CARRIED OUT IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS. REPORT ALL INSTANCES OF PESTS AND DISEASES (IMMEDIATELY THAT THEY ARE DETECTED) TO THE LANDSCAPE ARCHITECT.

THE LANDSCAPE CONTRACTOR SHALL MAINTAIN ALL GRASS AND TURF AREAS BY WATERING, WEEDING, DRESSING, ROLLING, MOWING, TRIMMING OR OTHER OPERATIONS AS NECESSARY. SEED AND TURF SPECIES SHALL BE THE SAME AS THE ORIGINAL SPECIFIED MIXTURE. GRASS AND TURF AREAS SHALL BE SPRAYED WITH APPROVED SELECTIVE HERBICIDE AGAINST BROAD LEAFED WEEDS AS REQUIRED BY THE LANDSCAPE ARCHITECT AND IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS. GRASS AND TURF AREAS SHALL BE FERTILISED ONCE A YEAR IN AUTUMN WITH "DYNAMIC LIFTER" FOR LAWNS AT A RATE OF 20KG PER 100M2. FERTILISER SHALL BE WATERED IN IMMEDIATELY AFTER APPLICATION. IRREGULARITIES IN THE GRASS AND TURF SHALL BE WATERED IN IMMEDIATELY AFTER APPLICATION. GRASS AND TURF AREAS SHALL BE KEPT MOWN TO MAINTAIN A HEALTHY AND VIGOROUS SWARD, MOWING HEIGHT: 30-50MM.

WEED ERADICATION

ERADICATE WEEDS BY ENVIRONMENTALLY ACCEPTABLE METHODS USING A NON-RESIDUAL GLYPHOSATE HERBICIDE (EG. ROUNDUP') IN ANY OF ITS REGISTERED FORMULAE, AT THE RECOMMENDED MAXIMUM RATE. REGULARLY REMOVE BY HAND, WEED GROWTH THAT MAY OCCUR OR RECUR THROUGHOUT GRASSED. PLANTED AND MULCHED AREAS. REMOVE WEED GROWTH FROM AN AREA 750MM DIAMETER AROUND THE BASE OF TREES IN GRASSED AREAS. CONTINUE FRADICATION THROUGHOUT THE COURSE OF THE WORKS AND DURING THE MAINTENANCE PERIOD.

ARCHITECT

ANY SOIL SUBSIDENCE OR EROSION WHICH MAY OCCUR AFTER THE SOIL FILLING AND PREPARATION OPERATIONS SHALL BE MADE GOOD BY THE LANDSCAPE CONTRACTOR AT NO COST TO THE CLIENT.

Boffa Robertson Group