



REPORT R230411R1

Revision 6

Construction Noise & Vibration Impact Assessment

Proposed Activity

Stage 2 - Bradfield City Centre Stage 2A

PREPARED FOR:

SMEC

15 January 2024



Construction Noise & Vibration Management Plan

Proposed Development

Stage 2 - Bradfield City Centre Stage 2A

PREPARED BY:

Rodney Stevens Acoustics Pty Ltd

Telephone: 61 2 9943 5057 Facsimile 61 2 9475 1019

Email: info@rodneystevensacoustics.com.au

Web: www.rodneystevensacoustics.com.au

DISCLAIMER

Reports produced by Rodney Stevens Acoustics Pty Ltd are prepared for a particular Client's objective and are based on a specific scope, conditions and limitations, as agreed between Rodney Stevens Acoustics and the Client. Information and/or report(s) prepared by Rodney Stevens Acoustics may not be suitable for uses other than the original intended objective. No parties other than the Client should use any information and/or report(s) without first conferring with Rodney Stevens Acoustics.

The information and/or report(s) prepared by Rodney Stevens Acoustics should not be reproduced, presented or reviewed except in full. Before passing on to a third party any information and/or report(s) prepared by Rodney Stevens Acoustics, the Client is to fully inform the third party of the objective and scope and any limitations and conditions, including any other relevant information which applies to the material prepared by Rodney Stevens Acoustics. It is the responsibility of any third party to confirm whether information and/or report(s) prepared for others by Rodney Stevens Acoustics are suitable for their specific objectives.

DOCUMENT CONTROL

Reference	Status	Date	Prepared	Checked	Authorised
R230411R1	Revision 0	12 July 2023	James Wilkinson	Rodney Stevens	Rodney Stevens
R230411R1	Revision 1	14 September 2023	James Wilkinson	Rodney Stevens	Rodney Stevens
R230411R1	Revision 2	26 October 2023	James Wilkinson	Rodney Stevens	Rodney Stevens
R230411R1	Revision 3	17 November 2023	James Wilkinson	Rodney Stevens	Rodney Stevens
R230411R1	Revision 4	29 November 2023	James Wilkinson	Rodney Stevens	Rodney Stevens
R230411R1	Revision 5	19 December 2023	James Wilkinson	Rodney Stevens	Rodney Stevens





TABLE OF CONTENTS

1	INTRODUCTION	6
2	OBJECTIVES	6
3	PROPOSED ACTIVITY	7
3.1	Development Site	7
4	BASELINE NOISE SURVEY	9
4.1	Unattended Noise Monitoring	9
4.2	Data Processing	9
5	NOISE GUIDELINES AND CRITERIA	10
5.1	Construction Noise Management Levels	10
5.1.1	Residential Receivers	10
5.2	Commercial and Industrial Premises	11
5.3	Vibration Damage Criteria - Surface Structures	12
5.3.1	British Standard 7385: Part 2 - 1993	12
5.4	Human Comfort Vibration Criteria	14
5.4.1	General	14
5.4.2	Human Comfort Criteria for Construction Vibration	14
5.4.3	Vibration Dose Limits	15
6	CONSTRUCTION NOISE ASSESSMENT	16
6.1	Sleep Disturbance	16
6.2	Construction Noise Calculations	16
6.2.1	Typical Equipment Noise Levels	16
6.2.2	Construction Stages	20
6.2.3	Project Construction Hours	20
6.2.4	Modelling Results	20
7	MONITORING OF CONSTRUCTION NOISE & VIBRATION	20
7.1	Noise Monitoring	20
7.2	Vibration Monitoring	21
8	NOISE MITIGATION MEASURES	22
9	VIBRATION MITIGATION MEASURES	22
10	SUMMARY OF MITIGATION MEASURES	23
11	IDENTIFYING AND MANAGING FUTURE NOISE AND VIBRATION ISSUES	23
12	NON-COMPLIANCE AND CORRECTIVE ACTION	24
13	COMPLAINT HANDLING	24



14	COMMUNITY CONSULTATION AND LIAISON	24
15	CONCLUSION	25
	APPENDIX A – ACOUSTIC TERMINOLOGY	26
	APPENDIX B – BASELINE NOISE SURVEY GRAPHS	30
	APPENDIX C – INSTRUMENT CALIBRATION CERTIFICATE	34
	APPENDIX D – NOISE COMPLAINT HANDLING STRATEGY	35
	APPENDIX E – ARCHITECTURAL PLANS	36
Table 3-1	Sensitive Receivers	7
Table 4-1	Measured Baseline Noise Levels Corresponding to Defined NPfl Periods	9
Table 5-1	Construction airborne noise management levels for residences (ICNG)	10
Table 5-2	Adopted Construction Noise Management Levels for Residential Receivers	11
Table 5-3	Transient Vibration Guide Values - Minimal Risk of Cosmetic Damage	12
Table 5-4	Peak Vibration Levels and Human Perception of Motion	14
Table 5-5	Vibration Dose Values ($m/s^{1.75}$) above which Various Degrees of Adverse Comment May Be Expected in Residential Buildings, Offices and Workshops	15
Table 6-1	Typical Sound Levels of Construction Equipment	17
Table 6-2	Calculated Noise Level Results	20
Table 7-1	Nominated Site Control Vibration Criteria (ie Operator Warning and Halt Levels)	21
Table 10-1	Noise and Vibration Mitigation Measures	23
Figure 3-1	Site Location	8
Figure 5-1	Graph of Transient Vibration Guide Values for Cosmetic Damage	13
Figure 6-1	Site Layout and Nearest Receivers	16



1 INTRODUCTION

Rodney Stevens Acoustics Pty Ltd (RSA) has been engaged by SMEC to prepare a Construction Noise & Vibration Management Plan (CNVMP) for the proposed addition at Bradfield City Centre.

The CNVMP has been prepared in accordance with NSW Environment Protection Authority's (EPA) *Interim Construction Noise Guideline* (ICNG, 2009). prior to issue of the Construction Certificate.

Specific acoustic terminology is used in this report. An explanation of common acoustic terms is provided in Appendix A.

2 OBJECTIVES

Develop a Construction Noise & Vibration Management Plan for the subject works addressing the following aspects:

- Identification of the specific activities that will be carried out and associated plant and equipment.
- Identification of all potentially affected sensitive receivers.
- Procedure for the determination of the construction noise objectives, in accordance with the NSW Environment Protection Authority's (EPA) *Interim Construction Noise Guideline* (ICNG, 2009).
- Determination of appropriate construction vibration criteria.
- Determination of appropriate noise and vibration objectives for each identified sensitive receiver.
- Noise and vibration monitoring, reporting and response procedures.
- Description of specific mitigation treatments, management methods and procedures that can be implemented to control noise (and vibration) during construction.
- Procedures for notifying residents of construction activities that are likely to affect their amenity through noise and vibration.
- Contingency plans to be implemented in the event of non-compliances and/or noise complaints.



3 PROPOSED ACTIVITY

3.1 Development Site

The proposed activities for the development relates to site clearing, construction of new roads, the provision of service authority utilities, street landscaping, and drainage and stormwater infrastructure.

Specifically, the scope of works for the BCC Stage 2A REF will include the following:

- Construction of new roads, and associated stormwater, earthworks and civil works.
- Provision of waste water, potable water, recycle water infrastructure.
- Provision of electrical services network and reticulation infrastructure.
- Provision of data and telecommunications network infrastructure.
- Streetscape landscape works.

In addition, the BCC Stage 2A REF will also involve several activities which are ancillary to the construction of roads, including:

- Site clearance (including removal of vegetation).
- Provision of service authority utilities within the road corridors.
- Street landscaping.
- Drainage and stormwater infrastructure (including temporary stormwater basins. Stockpiling of excess soil.
- Construction of temporary haul roads during construction, (together with the construction of the new roads).
- Road works.

There are a number of sensitive receivers surrounding the proposed development, these receivers will be affected by noise generated by the proposed development. The site is bounded by residential receivers to the west and open park land in all other directions. The following table shows the most affected receivers.


Table 3-1 Sensitive Receivers

Receiver	Sensitive Receiver's Address
R1	115 – 205 Badgerys Creek Road, Bringelly
R2	25 The Retreat, Bringelly

Figure 3-1 shows an aerial image of the site area and the surrounding environment.



Figure 3-1 Site Location

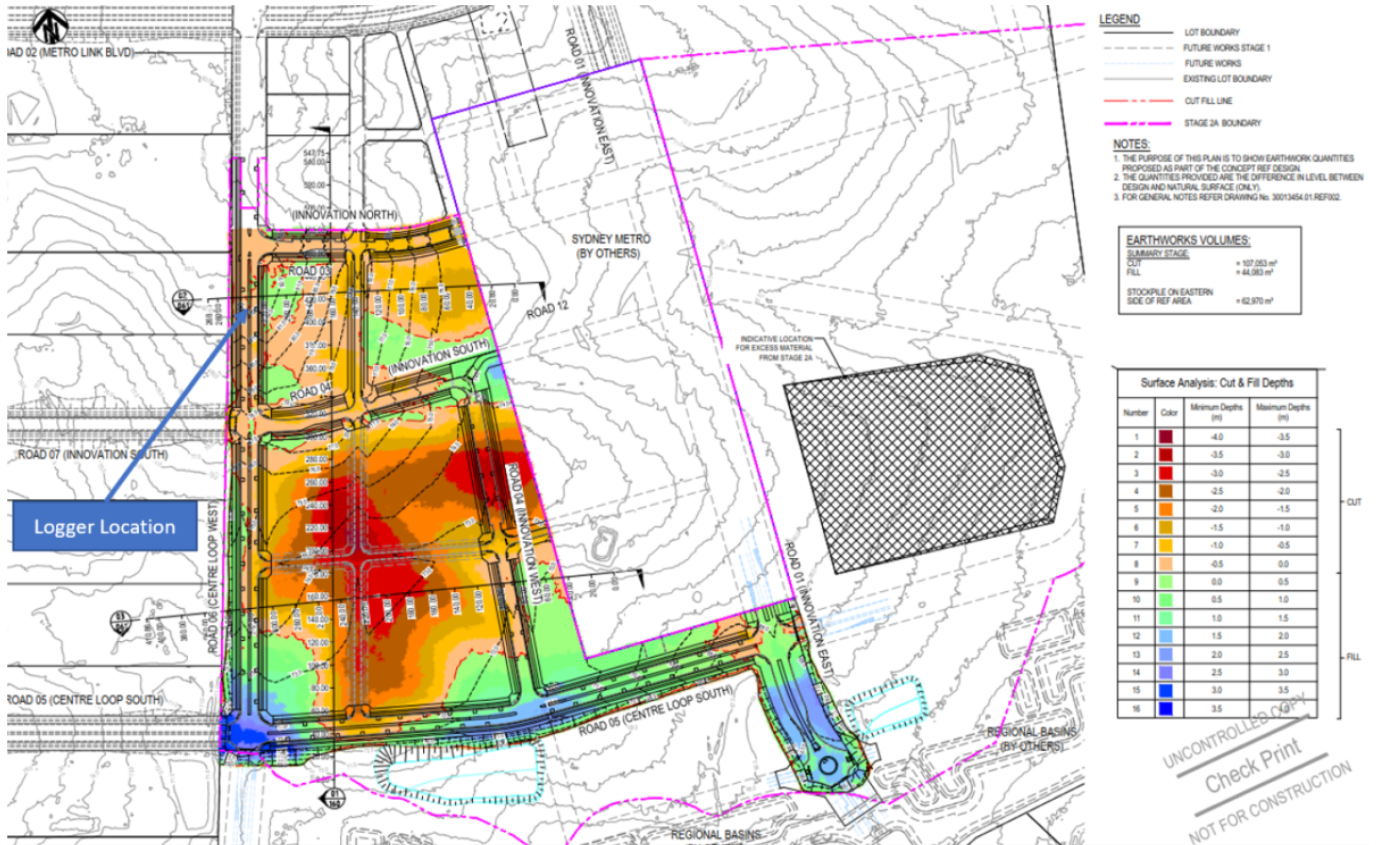



4 BASELINE NOISE SURVEY

4.1 Unattended Noise Monitoring

In order to characterise the existing acoustical environment of the area unattended noise monitoring was conducted between Wednesday 28th June and Wednesday 5th July 2023 at the logging location shown in Figure 3-1. The noise logger was set up on the western boundary of the site. This logger provides the baseline background noise environs.

Logger location was selected with consideration to other noise sources which may influence readings, security issues for noise monitoring equipment and gaining permission for access from residents and landowners.

Instrumentation for the survey comprised of a RION NL-42 environmental noise logger (serial number 322761) fitted with microphone windshields. Calibration of the logger was checked prior to and following measurements. Drift in calibration did not exceed ± 0.5 dB(A). All equipment carried appropriate and current NATA (or manufacturer) calibration certificates. The logger determines L_{A1} , L_{A10} , L_{A90} and L_{Aeq} levels of the ambient noise. L_{A1} , L_{A10} , L_{A90} are the levels exceeded for 1%, 10% and 90% of the sample time respectively (see Glossary for definitions in Appendix A). Detailed results at the monitoring location are presented in graphical format in Appendix B. The graphs show measured values of L_{A1} , L_{A10} , L_{A90} and L_{Aeq} for each 15-minute monitoring period.

4.2 Data Processing

In order to assess noise emission from the proposed development, the data obtained from the noise logger has been processed in accordance with the procedures contained in the NSW Environmental Protection Authority's (EPA) *Noise Policy for Industry* (NPfI, 2017) to establish representative noise levels that can be expected in the residential vicinity of the site. The monitored baseline noise levels are detailed in Table 4-1.

Table 4-1 Measured Baseline Noise Levels Corresponding to Defined NPfI Periods

Location	Measurement Descriptor	Measured Noise Level – dB(A) re 20 μ Pa		
		Daytime 7 am - 6 pm	Evening 6 pm – 10 pm	Night-time 10 pm – 7 am
Logger on western boundary (Rear of site)	L_{Aeq}	51	42	45
	RBL (Background)	38	35	32

Notes: All values expressed as dB(A) and rounded to nearest 1 dB(A);

L_{Aeq} Equivalent continuous (energy average) A-weighted sound pressure level. It is defined as the steady sound level that contains the same amount of acoustic energy as the corresponding time-varying sound.

L_{A90} Noise level present for 90% of time (background level). The average minimum background sound level (in the absence of the source under consideration).



5 NOISE GUIDELINES AND CRITERIA

In the absence of specific criteria for construction noise, the EPA *Interim Construction Noise Guideline* (ICNG, 2009) will be used.

5.1 Construction Noise Management Levels

Construction noise is managed in accordance with the EPA *Interim Construction Noise Guideline* (ICNG, 2009) which provides management objectives for construction noise at residential and other sensitive land uses.

The ICNG airborne noise goals are to be applied to assess noise impacts and determine requirement for the reasonable and feasible management of construction noise to minimise potential for disturbance.

5.1.1 Residential Receivers

Table 5-1 details the ICNG guidelines for determining construction noise management levels at residential receivers.

Table 5-1 Construction airborne noise management levels for residences (ICNG)

Time of Day	Noise Management Level. L_{Aeq} dB(A)	How to Apply
Recommended standard hours (SH): Monday to Friday 7 am to 6 pm Saturday 8 am to 1 pm No work on Sundays or public holidays	Noise affected Rating Background Level (RBL) + 10 dB(A)	The noise affected level represents the point above which there may be some community reaction to noise. Where the predicted or measured L_{Aeq} (15 min) is greater than the noise affected level, the proponent should apply all feasible and reasonable work practices to meet the noise affected level. The proponent should also inform all potentially impacted residents of the nature of works to be carried out, the expected noise levels and duration, as well as contact details.
	Highly noise affected 75 dB(A)	The highly noise affected level represents the point above which there may be strong community reaction to noise. Where noise is above this level, the relevant authority (consent, determining or regulatory) may require respite periods by restricting the hours that the very noisy activities can occur, taking into account: times identified by the community when they are less sensitive to noise (such as before and after school for works near schools, or mid-morning or mid-afternoon for works near residences if the community is prepared to accept a longer period of construction in exchange for restrictions on construction times.
Outside recommended standard hours (OOH) - All other times	Noise affected Rating Background Level (RBL) + 5 dB(A)	A strong justification would typically be required for works outside the recommended standard hours.



including Public Holidays	<p>The proponent should apply all feasible and reasonable work practices to meet the noise affected level.</p> <p>Where all feasible and reasonable practices have been applied and noise is more than 5 dB(A) above the noise affected level, the proponent should negotiate with the community.</p> <p>For guidance on negotiating agreements see section 7.2.2 of the ICNG.</p>
---------------------------	--

Site specific L_{Aeq} construction noise management levels in Table 5-2 have been established adopting measured existing baseline L_{A90} noise levels (Rating Background Level, RBL) and the ICNG corrections for the time of construction work.

Table 5-2 Adopted Construction Noise Management Levels for Residential Receivers

Residential Receivers	Construction Noise Management Level $L_{Aeq,(15min)}$ - dB(A)			
	Standard Hours (SH)		Out-of-Hours (OOH)	
	Daytime Mon-Fri	Daytime Saturday	Evening	Night
	7.00am – 6.00 pm	8.00am – 1.00 pm	6.00pm – 10.00pm	10.00pm – 7.00am
Surrounding Residential Receivers	48	48	-	-

5.2 Commercial and Industrial Premises

Due to the broad range of sensitivities that commercial or industrial land can have to noise from construction, the process of defining management levels is separated into three categories. The external noise levels should be assessed at the most-affected occupied point of the premises:

- Industrial premises: external $L_{Aeq} (15 \text{ min})$ 75 dB(A)
- Offices, retail outlets: external $L_{Aeq} (15 \text{ min})$ 70 dB(A)
- Other businesses that may be very sensitive to noise, where the noise level is project specific as discussed below.

Examples of other noise-sensitive businesses are theatres and childcare centres. The proponent should undertake a special investigation to determine suitable noise levels on a project-by-project basis; the recommended 'maximum' internal noise levels in AS 2107 Acoustics – Recommended design sound levels and reverberation times for building interiors may assist in determining relevant noise levels (Standards Australia 2000).

The proponent should assess construction noise levels for the project and consult with occupants of commercial and industrial premises prior to lodging an application where required.

During construction, the proponent should regularly update the occupants of the commercial and industrial premises regarding noise levels and hours of work



5.3 Vibration Damage Criteria - Surface Structures

Most commonly specified “safe” structural vibration limits are designed to minimise the risk of threshold or cosmetic surface cracks, and are set well below the levels that have potential to cause damage to the main structure.

5.3.1 British Standard 7385: Part 2 - 1993

In terms of the most recent relevant vibration damage criteria, Australian Standard AS 2187: Part 2-2006 “*Explosives - Storage and Use - Part 2: Use of Explosives*” recommends the frequency dependent guideline values and assessment methods given in BS 7385 Part 2-1993 “*Evaluation and measurement for vibration in buildings Part 2*” as they “are applicable to Australian conditions”.

The standard sets guide values for building vibration based on the lowest vibration levels above which damage has been credibly demonstrated. These levels are judged to give a minimum risk of vibration-induced damage, where minimal risk for a named effect is usually taken as a 95% probability of no effect.

Sources of vibration that are considered in the standard include demolition, blasting (carried out during mineral extraction or construction excavation), piling, ground treatments (e.g compaction), construction equipment, tunnelling, road and rail traffic and industrial machinery.

The recommended limits (guide values) for transient vibration to ensure minimal risk of cosmetic damage to residential and industrial buildings are presented numerically in Table 5-3 and graphically in Figure 5-1.

Table 5-3 Transient Vibration Guide Values - Minimal Risk of Cosmetic Damage


Line	Type of Building	Peak Component Particle Velocity in Frequency Range of Predominant Pulse	
		4 Hz to 15 Hz	15 Hz and Above
1	Reinforced or framed structures industrial and heavy commercial buildings	50 mm/s at 4 Hz and above	
2	Unreinforced or light framed structures Residential or light commercial type buildings	15 mm/s at 4 Hz increasing to 20 mm/s at 15 Hz	20 mm/s at 15 Hz increasing to 50 mm/s at 40 Hz and above

The standard states that the guide values in Table 5-3 relate predominantly to transient vibration which does not give rise to resonant responses in structures and low-rise buildings.

Where the dynamic loading caused by continuous vibration is such as to give rise to dynamic magnification due to resonance, especially at the lower frequencies where lower guide values apply, then the guide values in Table 5-3 may need to be reduced by up to 50%.

Note: rock breaking/hammering and sheet piling activities are considered to have the potential to cause dynamic loading in some structures (e.g. residences) and it may therefore be appropriate to reduce the transient values by 50%.

Figure 5-1 Graph of Transient Vibration Guide Values for Cosmetic Damage

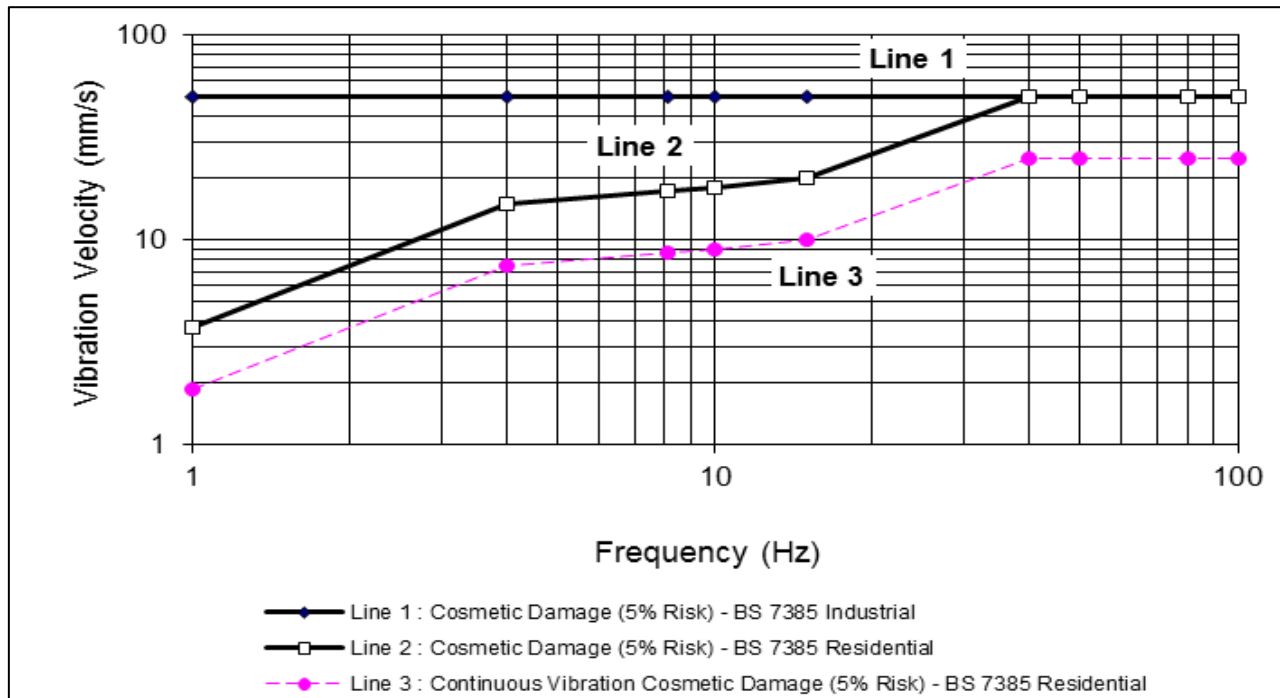

In the lower frequency region where strains associated with a given vibration velocity magnitude are higher, the guide values for building types corresponding to Line 2 are reduced. Below a frequency of 4 Hz where a high displacement is associated with the relatively low peak component particle velocity value, a maximum displacement of 0.6 mm (zero to peak) is recommended. This displacement is equivalent to a vibration velocity of 3.7 mm/s at 1 Hz.

The standard goes on to state that minor damage is possible at vibration magnitudes which are greater than twice those given in Table 5-3 and major damage to a building structure may occur at values greater than four (4) times the tabulated values.

Fatigue considerations are also addressed in the standard and it is concluded that unless calculation indicates that the magnitude and number of load reversals is significant (in respect of the fatigue life of building materials) then the guide values in Table 5-3 should not be reduced for fatigue considerations.

In order to assess the likelihood of cosmetic damage due to vibration, AS 2187 specifies that vibration measured should be undertaken at the base of the building and the highest of the orthogonal vibration components (transverse, longitudinal and vertical directions) should be compared with the criteria curves presented in Table 5-3.

It is noteworthy that extra to the guide values nominated in Table 5-3, the standard states that:

“Some data suggests that the probability of damage tends towards zero at 12.5 mm/s peak component particle velocity. This is not inconsistent with an extensive review of the case history information available in the UK.”

Also that:

“A building of historical value should not (unless it is structurally unsound) be assumed to be more sensitive.”



5.4 Human Comfort Vibration Criteria

5.4.1 General

Humans are far more sensitive to vibration than is commonly realised. They can detect vibration levels which are well below those causing any risk of damage to a building or its contents.

The actual perception of motion or vibration may not, in itself, be disturbing or annoying. An individual's response to that perception, and whether the vibration is "normal" or "abnormal", depends very strongly on previous experience and expectations, and on other connotations associated with the perceived source of the vibration. For example, the vibration that a person responds to as "normal" in a car, bus or train is considerably higher than what is perceived as "normal" in a shop, office or dwelling.

Human tactile perception of random motion, as distinct from human comfort considerations, was investigated by Diekmann. On this basis, the resulting degrees of perception for humans are suggested by the vibration level categories given in Table 5-4.

Table 5-4 Peak Vibration Levels and Human Perception of Motion

Approximate Vibration Level	Degree of Perception
0.10 mm/s	Not felt
0.15 mm/s	Threshold of perception
0.35 mm/s	Barely noticeable
1 mm/s	Noticeable
2.2 mm/s	Easily noticeable
6 mm/s	Strongly noticeable
14 mm/s	Very strongly noticeable

Note: These approximate vibration levels (in floors of building) are for vibration having a frequency content in the range of 8 Hz to 80 Hz.

Table 5-4 suggests that people will just be able to feel floor vibration at levels of about 0.15 mm/s and that the motion becomes "noticeable" at a level of approximately 1 mm/s.

5.4.2 Human Comfort Criteria for Construction Vibration

British Standard 6472-2008 "*Guide to evaluation of human exposure to vibration in building*" nominates criteria for various categories of disturbance, the most stringent of which are the levels of building vibration associated with a "low probability of adverse comment" from occupants. The "low probability of adverse comment" level for residential buildings is:

0.4 to 0.8 m/s^{1.75} (16-hour daytime Vibration Dose Value)

0.2 to 0.4 m/s^{1.75} (8-hour night-time Vibration Dose Value)

BS 6472-2008 provides criteria for continuous, transient and intermittent (in the case of road traffic) events that are based on a Vibration Dose Value (VDV), rather than a continuous vibration level. The vibration dose



value is dependent upon the level and duration of the short-term vibration event, as well as the number of events occurring during the daytime or night-time period.

The criteria presented in BS 6472 supersede the EPA's "Assessing Vibration: A Technical Guideline".

5.4.3 Vibration Dose Limits

The permissible rms particle velocity levels corresponding to the vibration dose value vary according to the duration of exposure. Table 5-5 shows the range of satisfactory vibration dose values for which various degrees of adverse comment may be expected in the buildings surrounding the project.

Table 5-5 Vibration Dose Values ($\text{m/s}^{1.75}$) above which Various Degrees of Adverse Comment May Be Expected in Residential Buildings, Offices and Workshops

Location	Low Probability of Adverse Comment	Adverse Comment Possible	Adverse Comment Probable
Residential buildings 16 hour day	0.2 to 0.4	0.4 to 0.8	0.8 to 1.6
Offices 16 hour day	0.4 to 0.8	0.8 to 1.6	1.6 to 3.2
Workshops 16 hour day	0.8 to 1.6	1.6 to 3.2	3.2 to 6.4

Situations exist where motion magnitudes above the dose levels given in BS 6472 can be acceptable, particularly for temporary disturbances and infrequent events of short-term duration. An example is a construction project.

When short-term works such as piling, demolition or compaction give rise to impulsive vibrations, it should be considered that undue restriction on vibration levels can significantly prolong these operations and result in greater annoyance.

In certain circumstances, the use of higher magnitudes of acceptability may be considered, e.g. for projects having social worth or broader community benefits or in view of the economic or practical feasibility of reducing vibration to the recommended levels. In such cases, best management practices should be employed to reduce levels as far as practical.

6 CONSTRUCTION NOISE ASSESSMENT

The most sensitive receivers are the residential dwellings to the west and east. Figure 6-1 below shows the site location in reference to the surrounding receivers

Figure 6-1 Site Layout and Nearest Receivers



6.1 Sleep Disturbance

The proposed construction activities will only occur during the day time hours (7:00 to 18:00 Monday to Friday and 8:00 to 13:00 on Saturday) and no works will be carried out during the Sunday and/or public holidays, therefore a sleep disturbance assessment is not required.

6.2 Construction Noise Calculations

6.2.1 Typical Equipment Noise Levels

A detailed construction equipment schedule has not been provided at this stage. We have used equipment noise levels for demolition and excavation activities in accordance to Australian Standard AS2436-2010. The following table presents the sound power levels (SWL) from the related equipment.



Table 6-1 Typical Sound Levels of Construction Equipment

Plant Description	A-weighted Sound power Levels L_{WA} dB ref: $10^{-12}W$		A-weighted Sound Pressure Levels L_{PA} (mid-point) dB at 10m
	Typical Range	Typical (mid point)	
Asphalt paver	103-112	108	80
Asphalt rotomill	111	111	83
Backhoe	100-108	104	76
Backhoe with auger	100-111	106	78
Bulldozer	102-114	108	80
Cherry picker	105	105	77
Compactor	110-115	113	85
Compressor (silenced)	93-110	101	73
Concrete agitator truck	107-111	109	76
Concrete pencil vibrator	101-105	103	75
Concrete pump truck	103-113	108	80
Concrete saw	112-122	117	89



Concrete vibratory screed	115	115	87
Crane (mobile)	95-113	104	76
Crane (tower)	105	105	77
Excavator	97-117	107	79
Filtration unit (40 000 cfm)	109	109	81
Forklift	106	106	78
Front end loader	110-115	113	85
Generator (diesel)	84-113	99	71
Grader	105-115	110	82
Gritblaster (grit & nozzle air noise)	129	129	101
Hand tools (electric)	95-110	102	74
Jack hammers	121	121	93
Loader (wheeled)	99-111	105	77
Machine mounted hydraulic drill	110-115	113	85



Machine mounted percussive drill	116	116	88
Machine mounted pneumatic drill	110-121	116	88
Piling (bored)	111	111	83
Piling (impact sheet) (L_{max})	126-147	137	109
Piling (vibratory)	116-133	125	97
Rock breaker	118	118	90
Roller (vibratory)	103-112	108	80
Scraper	116	116	88
Spreader	95	95	67
Truck (>20 tonne)	107	107	79
Truck (dump)	117	117	89
Truck (water cart)	106-108	107	79
Vehicle (light commercial e.g. 4WD)	100-111	106	78
Welder	100-110	105	77



6.2.2 Construction Stages

The proposed construction works will comprise of site establishment, excavation, landscape, construction of roads and utilities. The project will be developed in five stages.

Calculations using the data from the table above have been carried out in order to assess the impacts of the proposed activities, we have assumed the worst-case scenarios were all machinery will be operating at once.

6.2.3 Project Construction Hours

The hours of operation will be in accordance with the NSW Environment Protection Authority's (EPA) *Interim Construction Noise Guideline* (ICNG, 2009) and are as follows:

- Monday to Friday 7 am to 6 pm
- Saturday 8 am to 1 pm
- No work on Sundays or public holidays

We note that no out of hours construction has been proposed at this stage.

6.2.4 Modelling Results

Calculations of the expected noise levels at the nearest sensitive receivers are presented in the tables below. We note that all noise levels are external $L_{Aeq}(15min)$

Table 6-2 Calculated Noise Level Results

Receiver	Calculated Noise Level $L_{Aeq}(15min)$	Criteria		Complies
		Standard Hours RBL + 10 dB	Highly Noise Affected	
R1	53	48	75	No
R2	35	48	75	Yes

We note that no out of hours works have been proposed at this stage. If out of hours works are required in the future, a new noise assessment must be carried out by a suitable consultant.

The results presented in the tables above are based on noise levels for construction equipment derived from Australian Standard AS2436-2010. These noise levels are likely to change if different construction equipment is used.

7 MONITORING OF CONSTRUCTION NOISE & VIBRATION

7.1 Noise Monitoring

Noise monitoring will be performed in the event of a complaint received by the construction contractor, by an Acoustical Consultant engaged directly by the client.

Noise monitoring would be undertaken using statistical noise loggers supplemented by attended monitoring (where necessary) in order to differentiate between construction noise sources and other sources (such as



road traffic and aircraft noise) and also in order to observe and identify any abnormally noisy construction equipment or operations.

During attended monitoring, typical maximum noise levels associated with particular operations and/or plant items will be noted. Where possible, extraneous noise events such as road and air traffic noise will be excluded from the results or highlighted in accompanying notes.

Noise monitoring will, if required, be undertaken by the Acoustical Consultant and reported weekly. Equipment and methods will comply with AS 1055.1-1989. The statistical parameters to be measured will be the L_{Amin} , L_{A90} , L_{A10} , L_{A1} , L_{Amax} and L_{Aeq} evaluated over consecutive 15-minute periods.

7.2 Vibration Monitoring

Vibration monitoring, will be performed in the event of a complaint received by the construction contractor, by an Acoustical Consultant engaged directly by the client. Vibration monitoring would be carried out continuously on the closest, potentially most affected structures during any works considered to potentially generate significant levels of vibration.

A single geophone mounting plate would be installed on the adjacent buildings/structures. The monitoring locations would be on a stiff part of the structures (at the foundations) on the side of the structures adjacent to the subject excavation works, in accordance with BS 7385:1993 Part 2.

The vibration monitoring system will be configured to record the peak vibration levels and to trigger an audible/visual alarm when predetermined vibration thresholds are exceeded. The thresholds correspond to an “Operator Warning Level” and an “Operator Halt Level”, where the Warning Level is 75% of the Halt Level

The vibration threshold will be set to an “Operator Warning Level” of 6 mm/s (ppv) and an “Operator Halt Level” of 8 mm/s (ppv), the exceedance of which will be indicated by the audible/visual alarm in the construction site.

Based on the foregoing information, the nominated site control vibration criteria are presented in Table 7-1 and correspond to the minimal risk of cosmetic damage criterion from BS 7385.

Table 7-1 Nominated Site Control Vibration Criteria (ie Operator Warning and Halt Levels)

Structure	Site Control Criteria	
	Operator Warning Level	Operator Halt Level
Nearest Potentially Affected	6 mm/s	8 mm/s

Exceedance of the “Operator Warning Level” does not require excavation activity to cease but rather alerts the construction contractor to proceed with caution at reduced force or load. An exceedance of the “Operator Halt Level” requires the construction contractor to implement an alternative excavation technique. The vibration monitoring equipment would be downloaded on a weekly basis by the Acoustical Consultant.

Weekly reports of the measured vibration levels and their likely impacts would be prepared by the Acoustical Consultant and distributed by the Project Manager.

Attended vibration monitoring will, if considered necessary, be conducted by the Acoustical Consultant. Attended vibration monitoring (structural damage and/or human comfort) will also be carried out in response to complaints or to structural damage criterion exceedances. This monitoring will provide direct feedback to the operators in order to allow appropriate modification of excavation techniques.



8 NOISE MITIGATION MEASURES

The following noise mitigation measures will be implemented by the construction contractor.

The construction contractor will, where reasonable and feasible, apply best practice noise mitigation measures including:

- Maximising the offset distance between noisy plant items and nearby noise sensitive receivers.
- Avoiding the coincidence of noisy plant working simultaneously close together and adjacent to sensitive receivers.
- Minimising consecutive works in the same locality.
- Orienting equipment away from noise sensitive areas.
- Carrying out loading and unloading away from noise sensitive areas.

Further, in order to minimise noise impacts during the works, the construction contractor will take all reasonable and feasible measures to mitigate noise effects.

The contractor will also take reasonable steps to control noise from all plant and equipment. Examples of appropriate noise control include efficient silencers and low noise mufflers. Silenced air compressors fitted with noise labels indicating a maximum (L_{Amax}) sound pressure level of not more than 75 dB(A) at 7 m will be used on site. The sound pressure level of noise emitted from a compressor used will comply with noise label requirements.

9 VIBRATION MITIGATION MEASURES

The following vibration mitigation measures will be implemented by the construction contractor:

- Relocate any vibration generating plant and equipment to areas within the site in order to lower the vibration impacts.
- Investigate the feasibility of rescheduling the hours of operation of major vibration generating plant and equipment.
- Use lower vibration generating items of excavation plant and equipment e.g. smaller capacity rock breaker hammers.
- Minimise consecutive works in the same locality (if applicable).
- Schedule a minimum respite period of at least 0.5 hour before activities commence which are to be undertaken for a continuous 4-hour period.
- Use only dampened rock breakers and/or “city” rock breakers to minimise the impacts associated with rock breaking works.



10 SUMMARY OF MITIGATION MEASURES

The noise and vibration mitigation measures to be implemented by the construction contractor are summarised in Table 10-1.

Table 10-1 Noise and Vibration Mitigation Measures

Item	Description
Construction Hours	Works will be carried out within the approved construction hours.
Deliveries	Deliveries will be carried out within the approved construction hours.
Site Layout	Where possible, plant and equipment will be located and orientated to direct noise away from sensitive receivers.
Quietest Suitable Equipment	Plant and equipment will be selected to minimise noise emission, where possible, whilst maintaining efficiency of function. Residential grade silencers will be fitted and all noise control equipment will be maintained in good order.
Reversing Alarms	Mobile plant and trucks operating on site for a significant portion of the project will have reversing alarm noise emissions minimised, where possible, recognising the need to maintain occupational safety standards.
PA System	No public address system will be used at this site.
Vibration Monitoring	Vibration monitoring will be carried out where any vibration intensive activities are required to be carried out where there is considered to be a risk that vibration levels may exceed the relevant structural damage criteria.
Truck Noise (off site)	All trucks regularly used for the project are to have mufflers and all noise control equipment will be maintained in good working order. Trucking routes will use main roads, where feasible.
Community Liaison	A programme of community liaison and complaint response will be implemented.
Training	Site induction training will include a noise awareness component.

11 IDENTIFYING AND MANAGING FUTURE NOISE AND VIBRATION ISSUES

If additional activities or plant are found to be necessary that will emit noise and/or vibration emissions significantly exceeding those assumed for this assessment, these will be assessed by the Acoustical Consultant on a case-by-case basis and appropriate mitigation measures will be implemented.

Progressive impact assessments will be conducted as the works proceed in the event that works significantly deviate from those originally planned.



12 NON-COMPLIANCE AND CORRECTIVE ACTION

Where the noise and/or vibration monitoring identifies non-compliance with the relevant criteria, the construction contractor will plan and carry out corrective action. The corrective action may involve supplementary monitoring in order to identify the source of the non-conformance and/or may involve modification of the construction techniques or programme to avoid any recurrence or minimise its adverse effects.

13 COMPLAINT HANDLING

The construction contractor will adopt the following protocol for handling complaints. This protocol is intended to ensure that the issues are addressed and that appropriate corrective action is identified and implemented as necessary:

- The construction contractor will record all verbal and telephone complaints in writing and will forward all complaints to the Project Manager together with details of the circumstance leading to the complaint and all subsequent actions.
- Complaints received by the Project Manager will, as an initial step, be referred to the construction contractor. The construction contractor will respond as described above.
- The Project Manager will investigate the complaint in order to determine whether a criterion exceedance has occurred or whether noise and/or vibration have occurred unnecessary.
- If excessive or unnecessary noise and/or vibration have been caused, corrective action will be planned and implemented by the construction contractor.
- Complainants will be informed by the Project Manager that their complaints are being addressed, and (if appropriate) that corrective action is being taken.
- Follow up monitoring or other investigations will be carried out by the Project Manager and the construction contractor to confirm the effectiveness of the corrective action.
- Complainants will be informed of the implementation of the corrective action that has been taken to mitigate the adverse effects.

14 COMMUNITY CONSULTATION AND LIAISON

Community consultation will be undertaken via the construction contractor and will include:

- Advising the community of work to be undertaken.
- Recording and managing any complaints.

These and other elements of the community consultation will be addressed under the relevant procedures for the subject works.

15 CONCLUSION

RSA has conducted a construction noise impact assessment of the proposed remedial works at Bradfield City Centre. The assessment has comprised the establishment of noise criteria and assesses noise impacts regarding relevant statutory requirements.

RSA has concluded the following from modelling and ambient noise measurement:

- R1 may experience some non-compliant noise exceedances from site works.
- R2 is not expected to experience any noise exceedances.
- R1 and R2 are not expected to experience exceedance of the highly noise affected criteria (75 dB(A))
- Any complaints resulting from noise exceedances should be investigated and corrective action initiated in the form of supplementary monitoring to identify the source of the non-conformance and/or modification of the construction techniques or programme to avoid any recurrence or minimise its adverse effects.


This assessment has addressed the potential direct and cumulative construction noise impacts of the project and found that noise impacts have been predicted to exceed the 'noise affected' management level at some of the considered receiver locations. Consequently, feasible and reasonable work practices and best practice methods utilised on construction and demolition sites have been recommended to avoid, mitigate and manage any adverse noise throughout the work activities for the proposed site.

It is advised that site management review the work processes of the major noise source contributors and investigate the implementation of the most practical feasible and reasonable work practices detailed in this report.

Noise emissions criteria for mechanical plant has been established in this report, a future noise survey may be required once the mechanical plan schedules are available.

It is understood that complaints received surrounding construction noise will be managed and therefore, it is anticipated that a satisfactory noise complaint handling strategy is currently in place, however an indicative noise complaint handling strategy has been provided within Appendix D.

Approved: -

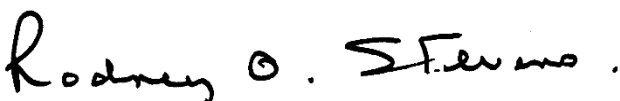

Rodney Stevens


Manager/Principal

Appendix A – Acoustic Terminology

A-weighted sound pressure	The human ear is not equally sensitive to sound at different frequencies. People are more sensitive to sound in the range of 1 to 4 kHz (1000 – 4000 vibrations per second) and less sensitive to lower and higher frequency sound. During noise measurement an electronic ' <i>A-weighting</i> ' frequency filter is applied to the measured sound level <i>dB(A)</i> to account for these sensitivities. Other frequency weightings (B, C and D) are less commonly used. Sound measured without a filter is denoted as linear weighted <i>dB(linear)</i> .
Ambient noise	The total noise in a given situation, inclusive of all noise source contributions in the near and far field.
Community annoyance	<p>Includes noise annoyance due to:</p> <p>character of the noise (e.g. sound pressure level, tonality, impulsiveness, low-frequency content)</p> <p>character of the environment (e.g. very quiet suburban, suburban, urban, near industry)</p> <p>miscellaneous circumstances (e.g. noise avoidance possibilities, cognitive noise, unpleasant associations)</p> <p>human activity being interrupted (e.g. sleep, communicating, reading, working, listening to radio/TV, recreation).</p>
Compliance	The process of checking that source noise levels meet with the noise limits in a statutory context.
Cumulative noise level	The total level of noise from all sources.
Extraneous noise	Noise resulting from activities that are not typical to the area. Atypical activities may include construction, and traffic generated by holiday periods and by special events such as concerts or sporting events. Normal daily traffic is not considered to be extraneous.
Feasible and reasonable measures	<p>Feasibility relates to engineering considerations and what is practical to build; reasonableness relates to the application of judgement in arriving at a decision, considering the following factors:</p> <p>Noise mitigation benefits (amount of noise reduction provided, number of people protected).</p> <p>Cost of mitigation (cost of mitigation versus benefit provided).</p> <p>Community views (aesthetic impacts and community wishes).</p> <p>Noise levels for affected land uses (existing and future levels, and changes in noise levels).</p>



Impulsiveness	Impulsive noise is noise with a high peak of short duration or a sequence of these peaks. Impulsive noise is also considered annoying.
Low frequency	Noise containing major components in the low-frequency range (20 to 250 Hz) of the frequency spectrum.
Noise criteria	The general set of non-mandatory noise levels for protecting against intrusive noise (for example, background noise plus 5 dB) and loss of amenity (e.g. noise levels for various land use).
Noise level (goal)	A noise level that should be adopted for planning purposes as the highest acceptable noise level for the specific area, land use and time of day.
Noise limits	Enforceable noise levels that appear in conditions on consents and licences. The noise limits are based on achievable noise levels, which the proponent has predicted can be met during the environmental assessment. Exceedance of the noise limits can result in the requirement for either the development of noise management plans or legal action.
Performance-based goals	Goals specified in terms of the outcomes/performance to be achieved, but not in terms of the means of achieving them.
Rating Background Level (RBL)	The rating background level is the overall single figure background level representing each day, evening and night time period. The rating background level is the 10 th percentile min L _{A90} noise level measured over all day, evening and night time monitoring periods.
Receptor	The noise-sensitive land use at which noise from a development can be heard.
Sleep disturbance	Awakenings and disturbance of sleep stages.
Sound and decibels (dB)	<p>Sound (or noise) is caused by minute changes in atmospheric pressure that are detected by the human ear. The ratio between the quietest noise audible and that which should cause permanent hearing damage is a million times the change in sound pressure. To simplify this range the sound pressures are logarithmically converted to decibels from a reference level of 2×10^{-5} Pa.</p> <p>The picture below indicates typical noise levels from common noise sources.</p>

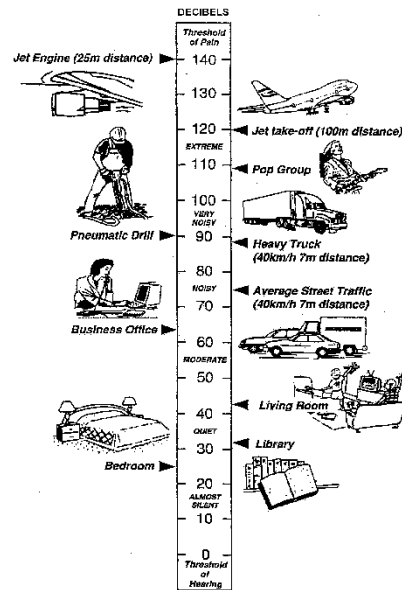

dB is the abbreviation for decibel – a unit of sound measurement. It is equivalent to 10 times the logarithm (to base 10) of the ratio of a given sound pressure to a reference pressure.

Sound power Level (SWL)

The sound power level of a noise source is the sound energy emitted by the source. Notated as SWL, sound power levels are typically presented in $dB(A)$.


Sound Pressure Level (SPL)

The level of noise, usually expressed as SPL in $dB(A)$, as measured by a standard sound level meter with a pressure microphone. The sound pressure level in $dB(A)$ gives a close indication of the subjective loudness of the noise.

Statistic noise levels

Noise levels varying over time (e.g. community noise, traffic noise, construction noise) are described in terms of the statistical exceedance level.

A hypothetical example of A weighted noise levels over a 15 minute measurement period is indicated in the following figure:

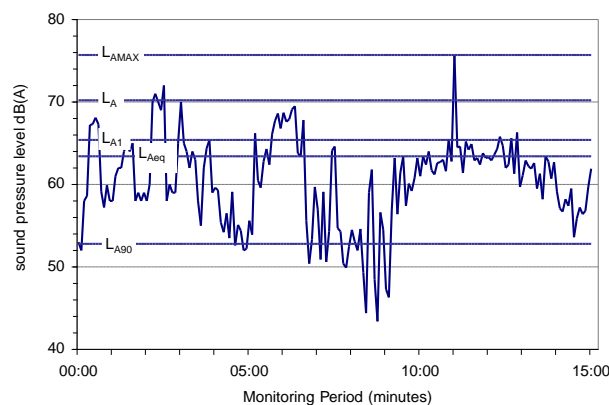



Key descriptors:



	<p>L_{Amax} Maximum recorded noise level.</p> <p>L_{A1} The noise level exceeded for 1% of the 15 minute interval.</p> <p>L_{A10} Noise level present for 10% of the 15-minute interval. Commonly referred to the average maximum noise level.</p> <p>L_{Aeq} Equivalent continuous (energy average) A-weighted sound pressure level. It is defined as the steady sound level that contains the same amount of acoustic energy as the corresponding time-varying sound.</p> <p>L_{A90} Noise level exceeded for 90% of time (background level). The average minimum background sound level (in the absence of the source under consideration).</p>
Threshold	<p>The lowest sound pressure level that produces a detectable response (in an instrument/person).</p>
Tonality	<p>Tonal noise contains one or more prominent tones (and characterised by a distinct frequency components) and is considered more annoying. A 2 to 5 dB(A) penalty is typically applied to noise sources with tonal characteristics</p>



Appendix B – Baseline Noise Survey Graphs

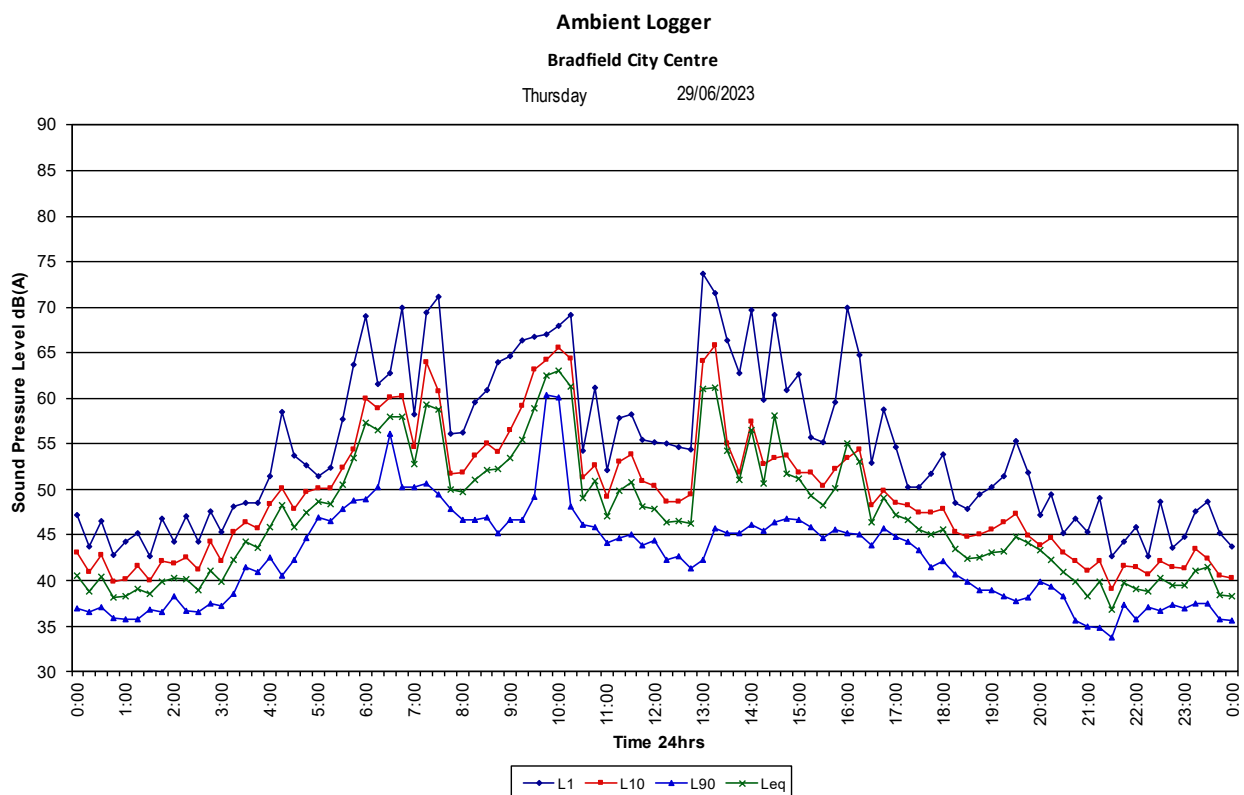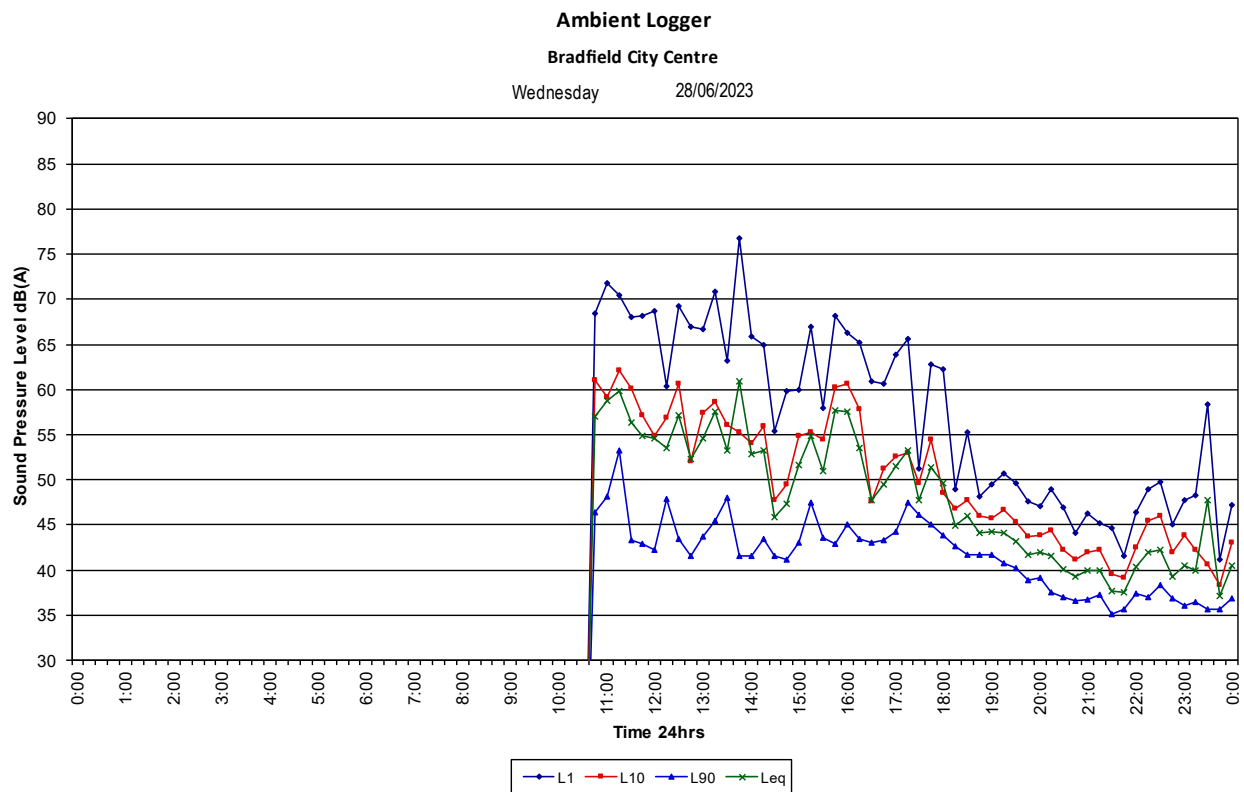




Ambient Logger

Bradfield City Centre


Friday 30/06/2023

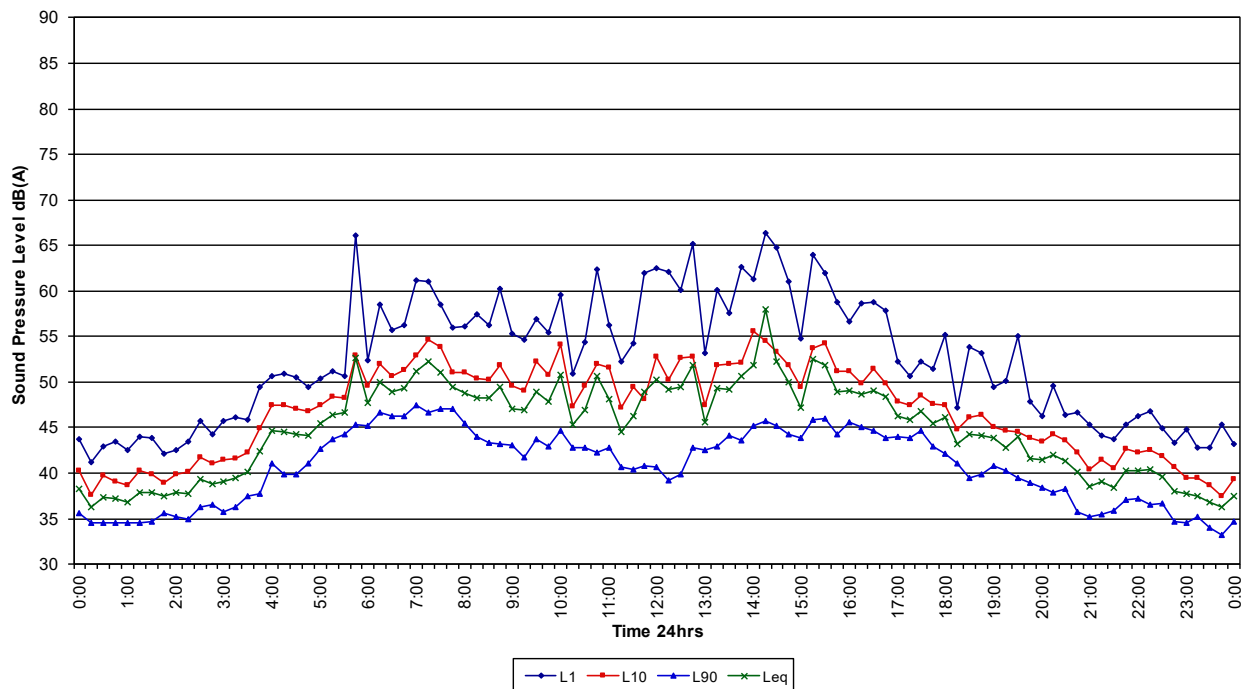

Ambient Logger

Bradfield City Centre

Saturday 1/07/2023

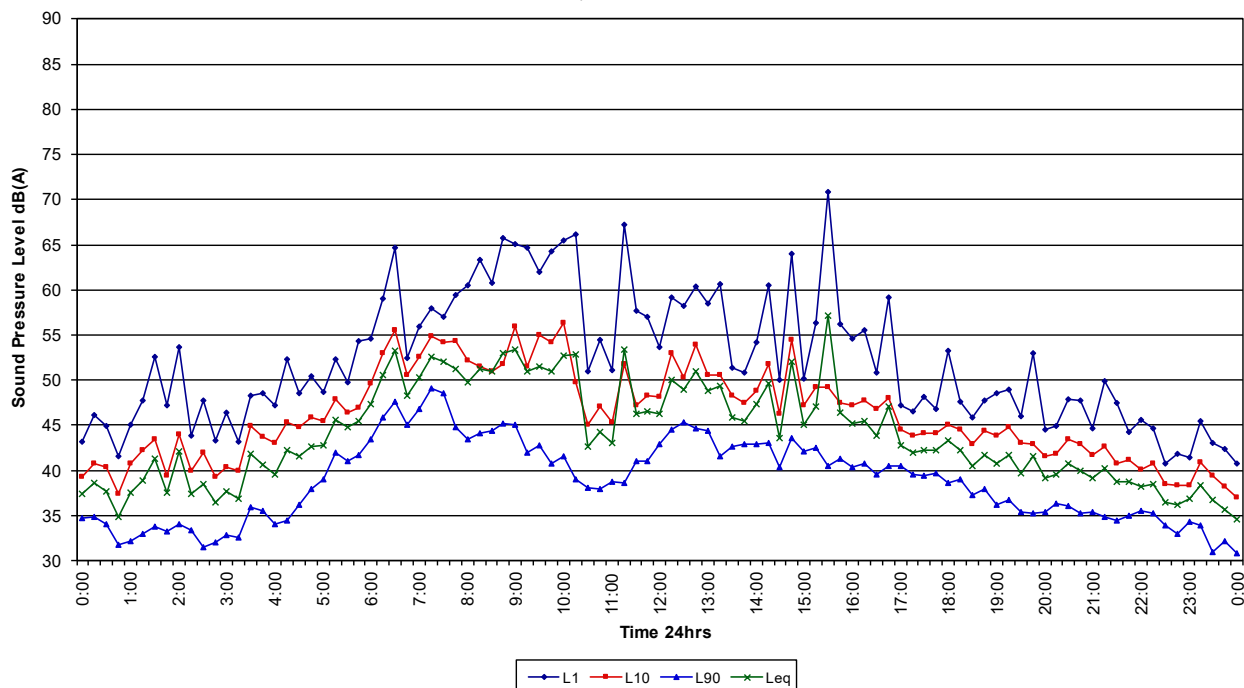




Ambient Logger

Bradfield City Centre


Sunday 2/07/2023

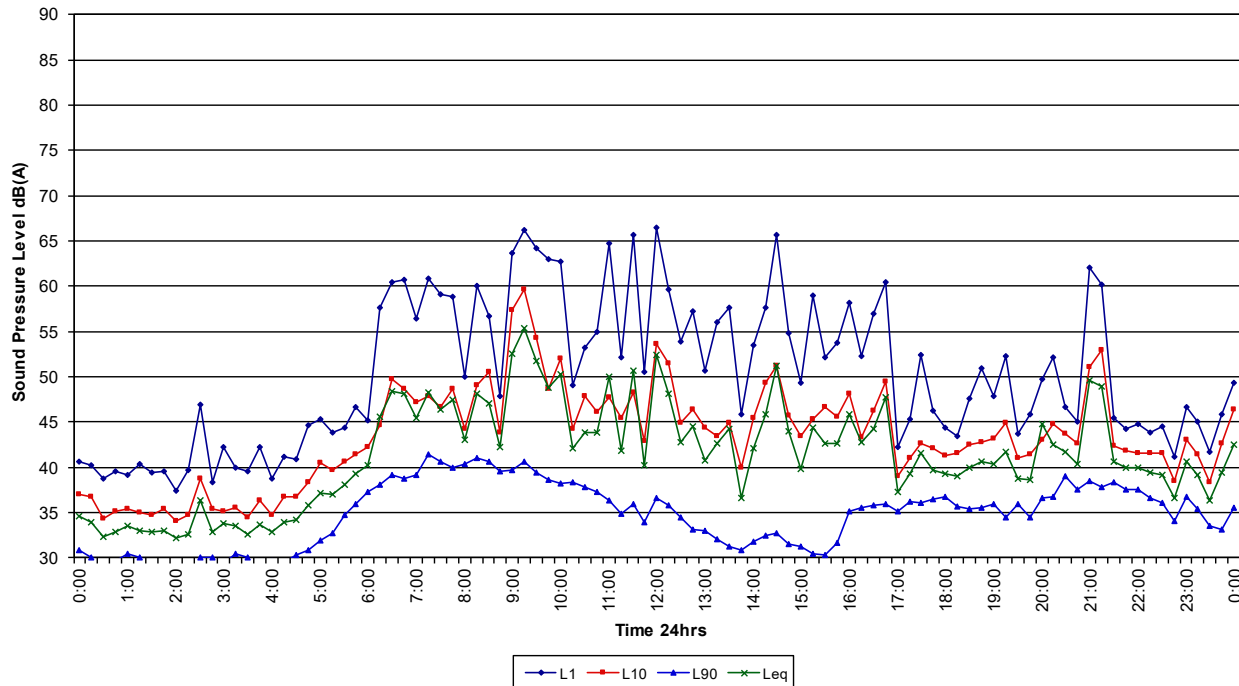

Ambient Logger

Bradfield City Centre

Monday 3/07/2023

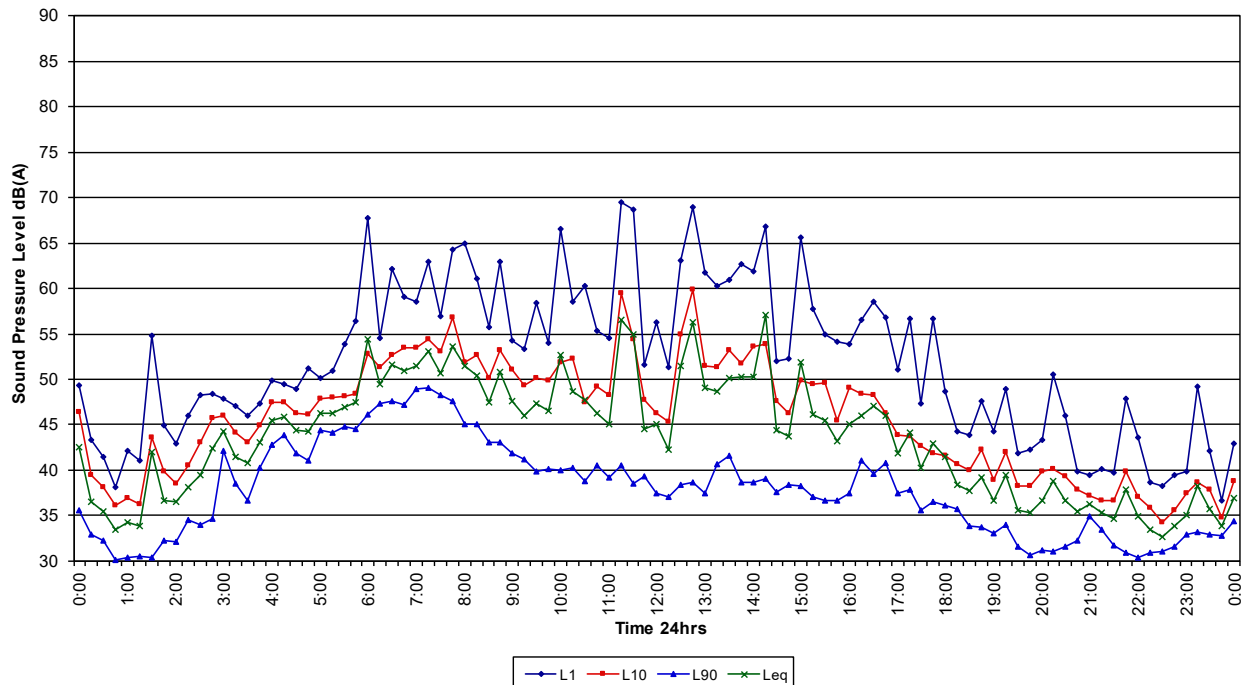




Ambient Logger

Bradfield City Centre

Tuesday

4/07/2023

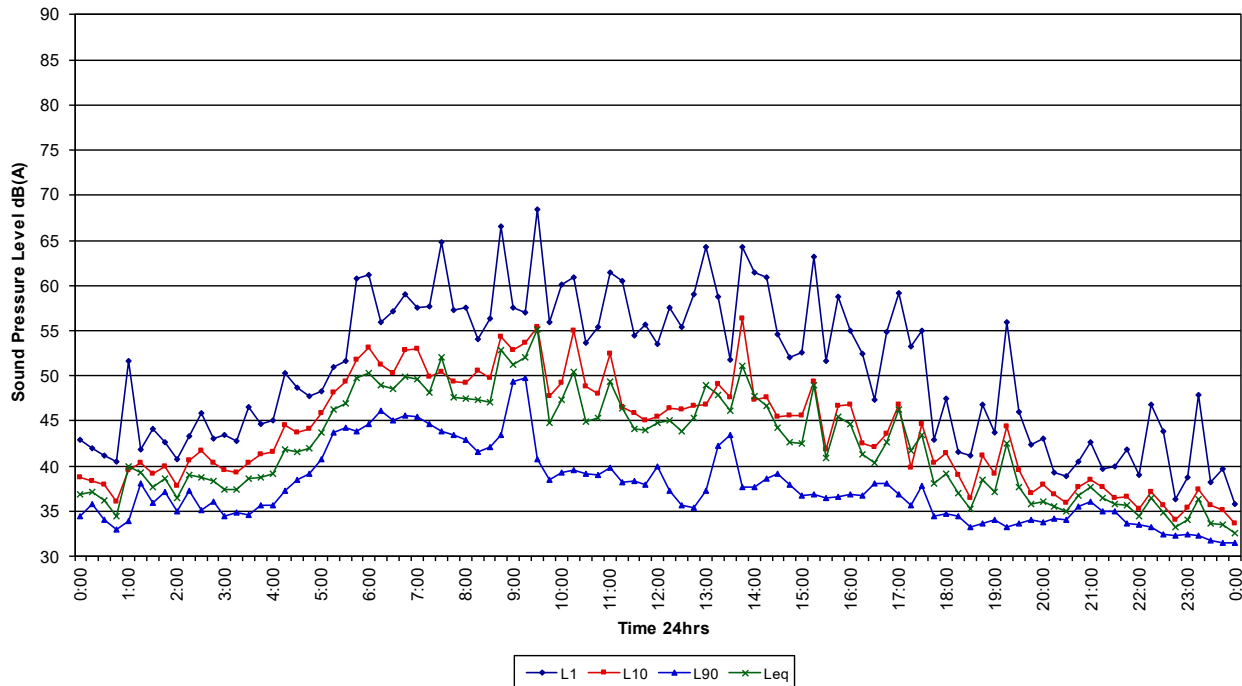


Ambient Logger

Bradfield City Centre

Wednesday

5/07/2023

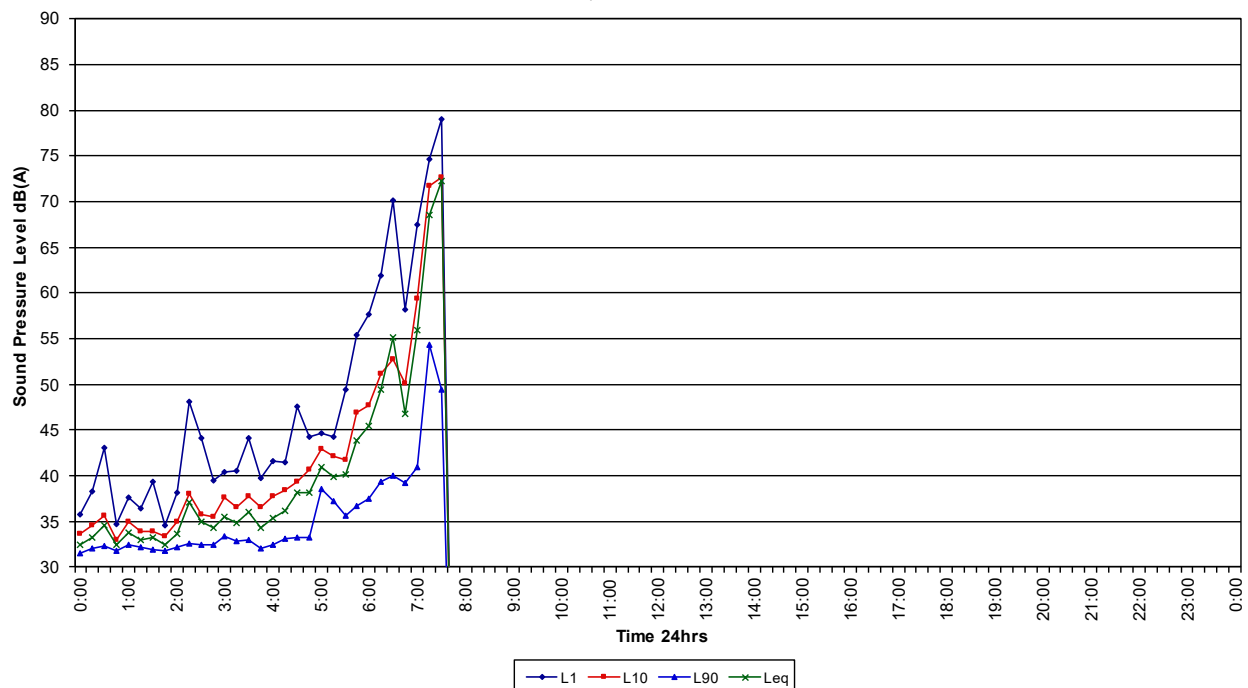



Appendix C – Instrument Calibration Certificate



**Acoustic
Research
Labs Pty Ltd**

Unit 36/14 Loyalty Rd
North Rocks NSW AUSTRALIA 2151
Ph: +61 2 9484 0800 A.B.N. 65 160 399 119
www.acousticresearch.com.au

Sound Level Meter IEC 61672-3:2013 Calibration Certificate Calibration Number C22448

Client Details	Rodney Stevens Acoustics Pty Ltd 1 Majura Close St Ives Chase NSW 2075
Equipment Tested/ Model Number :	Rion NL-42AEX
Instrument Serial Number :	00322761
Microphone Serial Number :	196485
Pre-amplifier Serial Number :	15493
Pre-Test Atmospheric Conditions	Post-Test Atmospheric Conditions
Ambient Temperature : 20.2°C	Ambient Temperature : 22.5°C
Relative Humidity : 66.8%	Relative Humidity : 59%
Barometric Pressure : 101.07kPa	Barometric Pressure : 101.09kPa
Calibration Technician : Lucky Jaiswal	Secondary Check: Dhanush Bonu
Calibration Date : 5 Jul 2022	Report Issue Date : 7 Jul 2022
Approved Signatory :	Ken Williams

Clause and Characteristic Tested	Result	Clause and Characteristic Tested	Result
12: Acoustical Sig. tests of a frequency weighting	PASS	17: Level linearity incl. the level range control	N/A
13: Electrical Sig. tests of frequency weightings	PASS	18: Toneburst response	PASS
14: Frequency and time weightings at 1 kHz	PASS	19: C Weighted Peak Sound Level	PASS
15: Long Term Stability	PASS	20: Overload Indication	PASS
16: Level linearity on the reference level range	PASS	21: High Level Stability	PASS

The sound level meter submitted for testing has successfully completed the class 2 periodic tests of IEC 61672-3:2013, for the environmental conditions under which the tests were performed.

However, no general statement or conclusion can be made about conformance of the sound level meter to the full requirements of IEC 61672-1:2013 because evidence was not publicly available, from an independent testing organisation responsible for pattern approvals, to demonstrate that the model of sound level meter fully conformed to the requirements in IEC 61672-1:2013 and because the periodic tests of IEC 61672-3:2013 cover only a limited subset of the specifications in IEC 61672-1:2013.

Uncertainties of Measurement -			
Acoustic Tests		Environmental Conditions	
125Hz	±0.13dB	Temperature	±0.1°C
1kHz	±0.13dB	Relative Humidity	±1.9%
8kHz	±0.14dB	Barometric Pressure	±0.014kPa
Electrical Tests	±0.13dB		

All uncertainties are derived at the 95% confidence level with a coverage factor of 2.



This calibration certificate is to be read in conjunction with the calibration test report.

Acoustic Research Labs Pty Ltd is NATA Accredited Laboratory Number 14172.
Accredited for compliance with ISO/IEC 17025 - Calibration.

The results of the tests, calibrations and/or measurements included in this document are traceable to SI units.

NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration and inspection reports.

PAGE 1 OF 1




Appendix D – Noise Complaint Handling Strategy

In the absence of a pre-existing noise complaint handling strategy the following strategy may be adopted for all noise enquiries / complaints. The strategy provides guidance on actions to be undertaken by site management or nominated personnel to actively address complaints received from the surrounding community.

- [1]. On receipt of a noise enquiry/complaint, site management or nominated personnel will complete a Record of Construction Noise Complaint, including specific details as follows:
 - full name and contact details of the complainant;
 - time and date of the incident;
 - details of the complainant's location;
 - description of construction noise;
 - any other details the complainant may wish to provide; and
 - whether the complainant requests further action.
- [2]. The noise enquiry is then referred to site management for investigation. Upon completion of the investigation, the complainant will be contacted by site management or nominated personnel to discuss the event that caused the noise enquiry. Contact with the complainant should take place as soon as practicable, but no later than 1 day from when the complaint was recorded.
- [3]. If the complaint requires further action, or site management believes the matter warrants further investigation, an independent acoustic consultant should be engaged to undertake attended noise measurements at the location of the complainant during works identified as giving rise to the complaint.
- [4]. In the event that attended noise measurements reveal that construction noise levels comply with the applicable noise criteria for the location, no further action is required however it is advised to provide the complainant with relevant information about the construction works.
- [5]. Should the attended noise measurements reveal that construction noise levels exceed the applicable noise criteria for the location, all feasible, reasonable and practical work practices must be investigated and implemented in order to reduce the current level of construction noise. Noise levels should then be re-measured in order to evaluate the level of reduction achieved.
- [6]. If the construction noise levels have been satisfactorily reduced to comply with the applicable noise criteria no further action is required. If the construction noise levels continue to exceed the applicable noise criteria for the location number 5 should be repeated in order to further reduce construction noise levels.



Appendix E – Architectural Plans

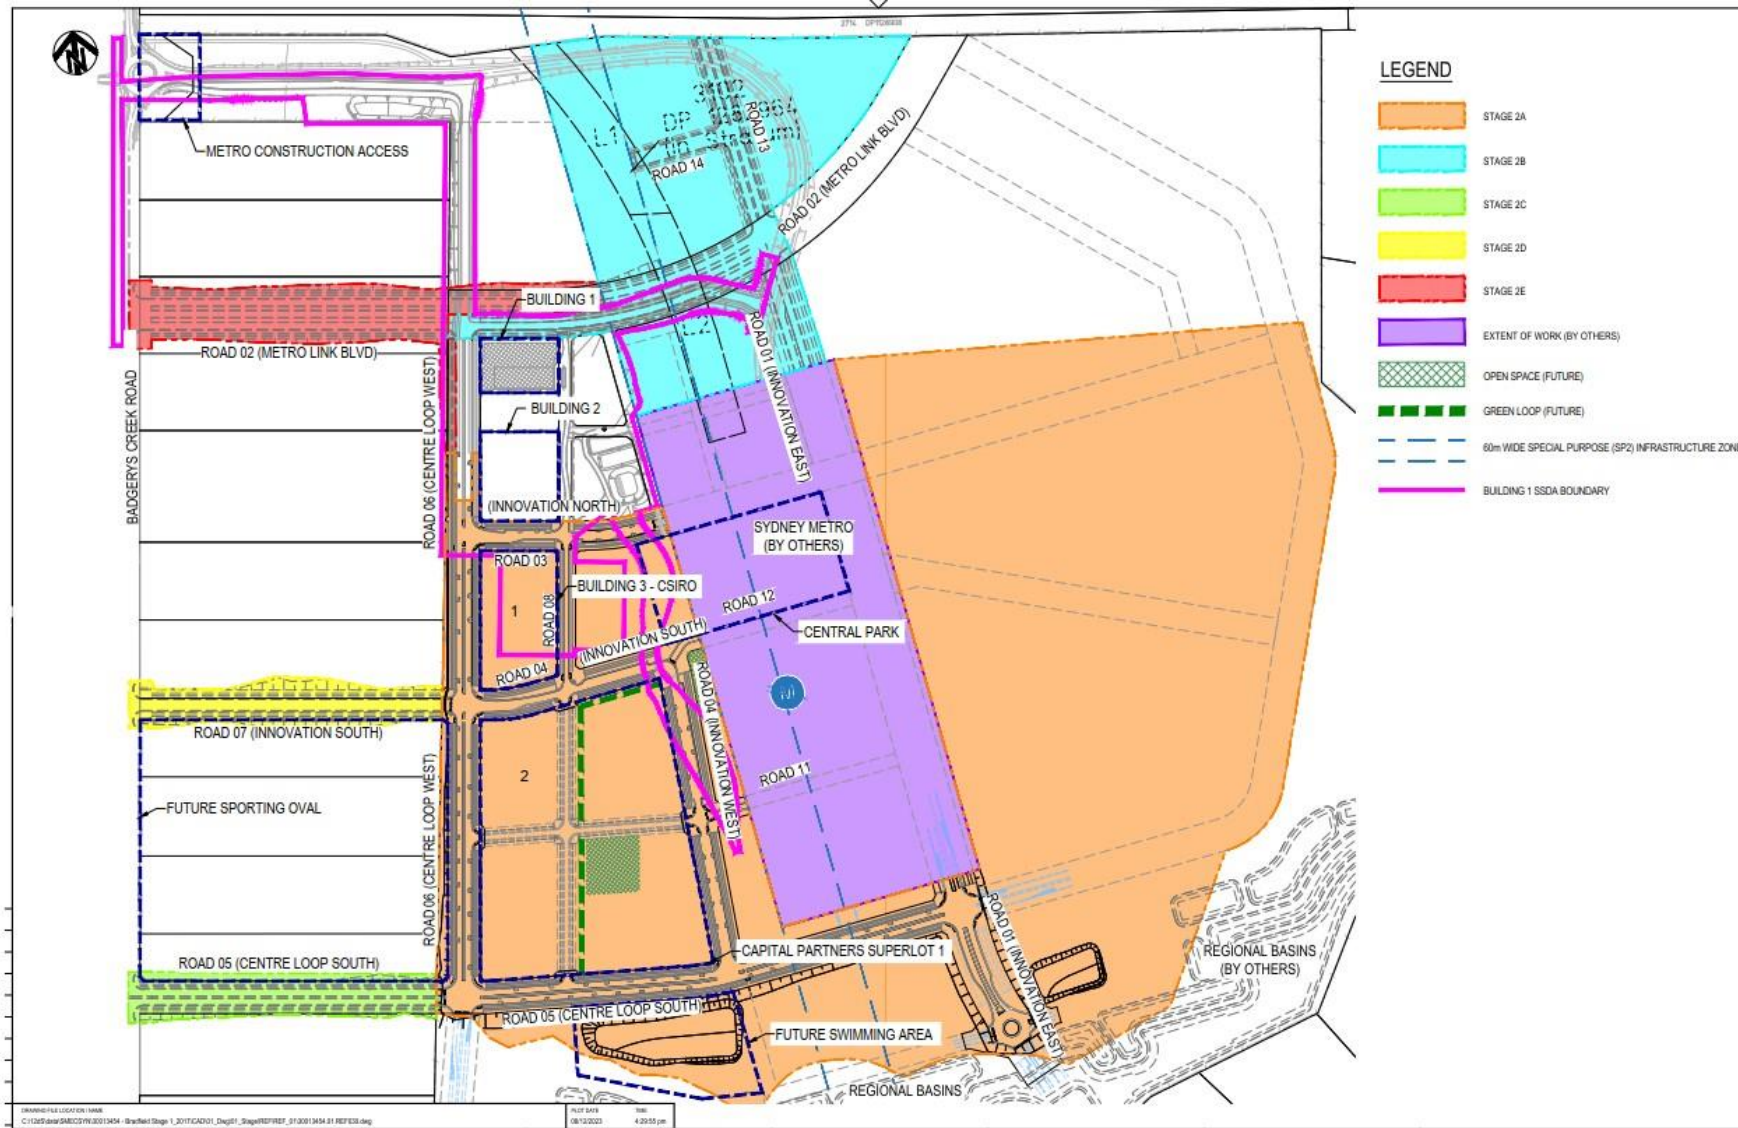

Appendix B

Site Induction Record

Site Name: Bradfield City Centre Stage 2A

Contractor:

Name	Date	Company Name	Signature

Appendix C

Incident Report Form

Date & Time of Incident	
Location of Incident	
Description of Incident	
Person making Report	
Date of Report	
Actions Taken at the time of incident	
Incident Reported To	
Cause of the Incident	
Corrective Action	
Project Manager Comments	
List of Attachments	

Appendix D

Record of Waste Disposal

Date	Waste Disposal Information	Action By	Comments/Action

Sign:_____

Appendix E

Non-conformance and Preventative Action Record

Date	Non-Conformance	Action By	Comments/Action

Sign:_____

Appendix F

Site Evacuation Plan





SMEC

Level 6, 3 Horwood Place, Parramatta, 2150

Email: parramatta@smec.com

We're redefining exceptional

Through our specialist expertise, we're challenging boundaries to deliver advanced infrastructure solutions.

www.smec.com