



DAY DESIGN PTY LTD
CONSULTING ACOUSTICAL ENGINEERS

SUITE 17, 808 FOREST ROAD, PEAKHURST NSW 2210 ABN: 73 107 291 494
P 02 9046 3800 ACOUSTICS@DAYDESIGN.COM.AU WWW.DAYDESIGN.COM.AU#

Construction Noise & Vibration Management Plan

Upgrades to Orange Grove Public School
2-8 Perry Street, Lilyfield, NSW

REPORT No
7572-5.1R

DATE ISSUED
6 March 2026

Prepared For:
School Infrastructure NSW
GPO Box 33
Sydney NSW 2001

Attention: Mr Frank Princi



Revision History

Report	Date	Prepared	Checked	Comment
Final	06/03/2026	Ricky Thom	Stephen Gauld	

Document R\7572-5.1R, 26 pages plus attachments

Disclaimer

The work presented in this document was carried out in accordance with the Day Design Pty Ltd Quality Management System. Day Design is certified to ISO9001.

Day Design Pty Ltd reserves all copyright of intellectual property in any or all of Day Design's documents. No permission, license or authority is granted by Day Design to any person or organisation to use any of Day Design's documents for any purpose without written consent of Day Design.

This report has been prepared for the client identified and cannot be relied or used by any third party. Any representation, statement, opinion or advice, expressed or implied in this report is made in good faith but on the basis that Day Design is not liable (whether by reason of negligence, lack of care or otherwise) to any person for any damage or loss whatsoever which has occurred or may occur in relation to that person taking or not taking (as the case may be) action in any respect of any representation, statement, or advice referred to above.

Recommendations made in this report are intended to resolve acoustical problems only. No claims of expertise in other areas are made and no liability is accepted in respect of design or construction for issues falling outside the specialist field of acoustical engineering including but not limited to structural, fire, thermal, architectural buildability, fit for purpose, waterproofing or other aspects of building construction. Supplementary professional advice should be sought in respect of these issues.

The information in this document should not be reproduced, presented or reviewed except in full. Prior to passing onto a third party, the Client is to fully inform the third party of the specific brief and limitations associated with the commission. The only exception to this is for the Regulatory Authority in its use of this report to make a Determination.



TABLE OF CONTENTS

1.0	CONSULTING BRIEF	5
2.0	PROJECT DESCRIPTION & SUMMARY OF FINDINGS.....	8
3.0	NOISE CRITERIA.....	11
3.1	Measured Ambient Noise Level	11
3.2	Australian Standard AS2436.....	12
3.3	NSW Environment Protection Authority	13
3.3.1	EPA Construction Noise Guideline	13
3.3.2	EPA Vibration Guideline	15
3.4	Project Noise Trigger Levels	16
3.4.1	Noise Management Levels	16
3.4.2	Vibration Management Levels	16
4.0	NOISE & VIBRATION EMISSION	17
4.1	Phase 1 – Demolition Works	18
4.2	Phase 2 – Construction.....	19
4.3	Noise Emission Summary.....	20
4.4	Vibration Emission.....	21
5.0	NOISE CONTROL RECOMMENDATIONS	22
5.1	Engineering and Practical Noise Controls.....	22
5.2	Noise Management Controls	23
5.3	Noise Monitoring	25
5.4	Vibration Monitoring	25
5.5	Construction Disclaimer	25
6.0	CONCLUSION	26



TABLES

Table 1	Part 5 Guidelines.....	6
Table 2	Noise Sensitive Receptors	10
Table 3	Ambient Noise Levels – 2-8 Perry Street, Lilyfield, NSW	11
Table 4	L_{eq} Noise Management Levels from Construction Activities.....	14
Table 5	Vibration Dose Values (VDV) from Construction Activities.....	15
Table 6	Transient Vibration Guide Values for Cosmetic Damage	15
Table 7	Typical Demolition Plant and Equipment - Sound Power Levels	18
Table 8	Calculated Receptor Sound Pressure Levels from Demolition Works.....	18
Table 9	Typical Construction Equipment - Sound Power Levels	19
Table 10	Calculated Receptor Sound Pressure Levels from Construction Works.....	19
Table 11	Calculated $L_{eq\ 15\ minute}$ Noise Levels (Without Noise Controls) – R1 to R4.....	20
Table 12	Calculated $L_{eq\ 15\ minute}$ Noise Levels (Without Noise Controls) – R5 to R7.....	20
Table 13	Relative Effectiveness of Various Forms of Noise Control.....	22



1.0 CONSULTING BRIEF

This Construction Noise and Vibration Management Plan has been prepared to accompany a Review of Environmental Factors (REF) for an activity proposed by the Department of Education under Part 5 of the *Environmental Planning and Assessment Act 1979* (EP&A Act) and *State Environmental Planning Policy (Transport and Infrastructure) 2021* (SEPP TI).

Day Design Pty Ltd was engaged by School Infrastructure NSW to prepare a Construction Noise and Vibration Management Plan for the proposed new building, Building J, and associated REF works at Orange Grove Public School, 2-8 Perry Street, Lilyfield, NSW.

This commission involves the following:

Scope of Work:

- Inspect the site and environs
- Measure the background noise levels at critical locations and times
- Establish acceptable noise level criterion
- Quantify noise emissions from the construction of proposed REF works
- Calculate the level of noise emission, taking into account distance attenuation
- Prepare a site plan identifying the development and nearby noise sensitive locations
- Provide recommendations for noise control
- Prepare a Construction Noise and Vibration Management Plan.

This document has been prepared in accordance with the *Guidelines for Division 5.1 assessments* (the Guidelines) by the Department of Planning, Housing and Infrastructure.

This report examines and takes into account the relevant environmental factors in the Guidelines and *Environmental Planning and Assessment Regulations 2021* under Section 171(1) of the EP&A Regulation as outlined in Table 1.



Table 1 Part 5 Guidelines

EP&A Regulation Section 171(1) Guidelines for Division 5.1 Assessment Section	Requirement	Response	Report Section
<u>a) the environmental impact on the community</u>	(a1) Impact during construction – such as noise, vibration, traffic, construction vehicle routes, access and parking, pollution/dust, water and stormwater flow, sediment and run-off, waste removal, servicing arrangements, bushfire, flooding, contamination, other construction occurring in the area	A construction noise assessment has been conducted in accordance with Australian Standard AS2436 and the NSW Environment Protection Authority's <i>Interim Construction Noise Guideline</i> . Noise from the demolition and construction works has been assessed against relevant criteria, and suitable noise control recommendations have been provided to minimise the acoustic impact of the construction as much as feasibly possible	Noise criteria and Project Noise Trigger Levels – Section 3.0
<u>l) pollution of the environment</u>	(l1) any pollution during construction and post construction e.g. air (including odours and greenhouse gases); water (including runoff patterns, flooding/tidal regimes, water quality health); soil (including contamination, erosion, instability risks); noise and vibration (including consideration of sensitive receptors); light pollution; waste, including hazardous waste		Noise control recommendations – Section 5.0



This construction noise and vibration management plan has been prepared in accordance with Australian Standard AS2436:2010 *“Guide to noise and vibration control on construction, demolition and maintenance sites”*. Construction noise and vibration management levels have been derived from the Environment Protection Authority’s *Interim Construction Noise Guideline 2009* and *Assessing Vibration: a technical guideline 2006* and are used for a quantitative assessment at the nearest affected residential receiver locations.

The major noise sources associated with the project are mobile plant and machinery to be used during the demolition and construction works, and the transport of materials to and from site in trucks.

There is potential, at least on some occasions, for noise emission from construction works to exceed the noise management level at the residential receivers during various stages of the works.

All feasible and reasonable methods to reduce noise emissions and minimise the noise impact on neighbouring properties have been provided in Section 5.0 of this report. These include limiting construction activity to within the prescribed hours, selecting quiet equipment, incorporating periods of respite, maintaining community consultation relations, managing noise complaints and conducting ground-borne vibration monitoring (if necessary).

Provided the recommendations in Section 5.0 of this report are implemented and adhered to, the level of noise and vibration from the construction works will be minimised in accordance with Australian Standard AS2436:2010 and the NSW Environment Protection Authority’s *Interim Construction Noise Guideline 2009* and *Assessing Vibration: a technical guideline 2006*.



2.0 PROJECT DESCRIPTION & SUMMARY OF FINDINGS

Orange Grove Public School (*OGPS*) is a co-educational primary school located at 2-8 Perry Street, Lilyfield. The site has street frontage to Perry Street, Balmain Road, Emmerick Street and Rayner Street. The site comprises 15 allotments with a total area of 17,956m² including:

- Lots 21 & 22 Deposited Plan (DP) 3796;
- Lots 1 & 5 DP 114899;
- Lot 1 DP 122488;
- Lot 1 DP 169451;
- Lots 1 – 3 DP 312710;
- Lot 1 DP 449967;
- Lots 1 & 2 DP 925435;
- Lot 1 DP 931891;
- Lot 1 DP 1037366; and
- Lot 102 DP 1160224.

The existing permanent buildings on the site include:

- **Building A:** Two-storey, neo-Georgian, inter-war brick building built in 1928 containing administration and staff areas, along with 7 homebases/classrooms;
- **Building B:** Single storey, pre-WW1 brick structure containing 4 homebases;
- **Building C:** Single storey brick building containing library and music rooms;
- **Building D:** Single storey 'L' shaped building (c. 1894) containing 6 homebases;
- **Building E:** Single storey pre-school building facing Balmain Road;
- **Building G:** Amenities building;
- **Building H:** Canteen; and
- **Building I:** Storage Shed.

Demountable classrooms are located in the north-eastern and north-western corners of the school site. A Covered Outdoor Learning Area (COLA) is located centrally within the site. The COLA links Buildings A, B and C. Playing areas are located on the northern, western and eastern boundaries of the site.

OGPS is comprised of four school buildings containing general learning spaces (GLSs), amenities, library, staff and administration areas, outdoor playing areas and car park.

OGPS caters for up to 585 students from preschool to Year 6. Following the proposed upgrades to *OGPS*, the school will be able to cater for up to 611 students.



The proposed activity is for upgrades to Orange Grove Public School and comprises the following:

- **Demolition of** Building C;
- **Removal of** ancillary structures – paths, fencing;
- **Removal of** posts on sports courts (to be undertaken in consultation with the school);
- **Removal of** existing assembly Covered Outdoor Learning Area (COLA) south of Building C;
- **Removal of** portable classroom buildings;
- **Removal of** one (1) tree;
- **Construction of** a three-storey building (Building J);
- **Construction of** a COLA south of Building J;
- **Use of** a portable buildings for the purpose of a library during construction works;
- Associated works including stormwater drainage works, services works including installation of a substation, installation of an onsite detention tank, waste storage facilities, landscaping and fencing.

The development process is separated into two phases:

- Phase 1 – Demolition:
 - o Expected timeframe of approximately 4 weeks;
 - o Activities include use of an excavator and trucks.
- Phase 2 – Construction:
 - o Expected timeframe of approximately 52 weeks;
 - o Activities include use of cement trucks, cranes, gensets, and hand tools.

OGPS is bounded by Perry Street to the north, Balmain Road to the east, residential premises to the south, and by residential premises and Emmerick Street to the west. Residential premises are also located on the other side of Perry Street to the north, Balmain Street to the east and Emmerick Street to the west.

Perry Street to the north is zoned SP2 - *Classified Road*, while the surrounding residential premises to the north, east and west are zoned R1 - *General Residential*. The site and surrounding residential premises are shown on Figure 1.

The nearest noise sensitive receptors to the proposed Building J at OGPS, in various directions, are shown on Figure 1 and are as follows in Table 2.



Table 2 Noise Sensitive Receptors

Receptor and Type	Address	Direction from site
R1 – Residential	3 Perry Street	North
R2 – Residential	2 Fredbert Street	North
R3 – Residential	315 Balmain Road	East
R4 – Residential	20 Rayner Street	South
R5 – Residential	17 Emmerick Street	Southwest
R6 – Residential	34 Emmerick Street	West
R7 – Residential	25 Rayner Street	South

**Figure 1 - Location Plan – Orange Grove Public School, 2-8 Perry Street, Lilyfield**

3.0 NOISE CRITERIA

3.1 Measured Ambient Noise Level

In order to assess the severity of a possible environmental noise problem in a residential area it is necessary to measure the ambient background noise level at the times and locations of worst possible annoyance. The lower the background noise level, the more perceptible the intrusive noise becomes and the more potentially annoying.

The ambient L_{90} background noise level is a statistical measure of the sound pressure level that is exceeded for 90% of the measuring period (typically 15 minutes).

The Rating Background Level (RBL) is defined by the Environment Protection Authority (NSW) as the median value of the (lower) tenth percentile of L_{90} ambient background noise levels for day, evening or night periods, measured over a number of days during the proposed days and times of operation.

The places of worst possible annoyance are the nearby residential dwellings to the north, east, south west of the proposed buildings, as shown in Figure 1 as 'R1', 'R2', 'R3', 'R4', 'R5' and 'R6', as these residences are closest to the proposed works. The times of worst possible annoyance will be during the day when *OGPS* is operating. Consideration has also been given residences to the south at 'R7'.

Ambient noise levels were measured at the northern and southern sides of the *OGPS* site, shown as Location 'A' and Location 'B' on Figure 1 respectively. The noise monitor at Location 'A' was approximately 4.5 metres above ground level, and recorded noise levels from Tuesday 26 July to Thursday 4 August, 2022. The noise monitor at Location 'B' was approximately 1.5 metres above ground level, and recorded noise levels from Tuesday 26 July to Tuesday 2 August, 2022.

The noise monitors at Location 'A' and Location 'B' are considered to be representative of ambient noise levels at the residential receivers to the north and south respectively.

The day time ambient noise levels are presented in the attached Appendix B, and also below in Table 3.

Table 3 Ambient Noise Levels – 2-8 Perry Street, Lilyfield, NSW

Noise Measurement Location	Time Period	L_{90} Rating Background Level	Existing L_{eq} Noise Level
Location 'A' – Northern Boundary, 2-8 Perry Street	Day (7 am to 6 pm)	50 dBA	63 dBA
Location 'B' – Southern Boundary, 2-8 Perry Street	Day (7 am to 6 pm)	44 dBA	61 dBA

Meteorological conditions during the testing typically consisted of overcast and clear skies, with temperatures ranging from 6 to 25°C. Noise measurements are considered reliable and typical for the receptor areas.



3.2 Australian Standard AS2436

Australian Standard AS2436:2010 *“Guide to noise and vibration control on construction, demolition and maintenance sites”* provides guidance on noise control in respect to construction, demolition and maintenance sites. The Standard also provides guidance for the preparation of noise and vibration management plans.

Section 1.5 ‘Regulatory Requirements’ of the Standard states:

“Legislation associated with the control of noise and vibration on and from construction, demolition and maintenance sites in Australia is generally the responsibility of the relevant State or Territory government, local council or a designated statutory authority.”

Consequently, the Standard does not provide specific noise criteria rather sets out practical methods for determining the potential for noise and vibration impact on the community from construction, demolition and maintenance sites.

A qualitative method is described in Section 3.3 of the standard, which is designed to avoid the need for complex noise predictions by following a series of questions relating to, for example, whether the noise is likely to be loud, have annoying characteristics or affect sleep.

In the event that any of these outcomes are likely, a more detailed and quantitative approach should be adopted.

In relation to carrying out detailed noise impact assessments, Section 4 ‘General’ of the standard states:

“Regulatory authorities may have relevant policies and/or guidelines for the control of noise and vibration on construction sites. These should also be referred to when developing noise and vibration management plans for such projects.”

In NSW this is the NSW Environment Protection Authority’s *Interim Construction Noise Guideline 2009* as outlined in Section 4.4 of this report.

Section 4.6.1 of the Standard further states that, if noisy processes cannot be avoided, then the amount of noise reaching the receiver should be minimised and goes on to provide advice and recommendations to reduce noise and vibration impacts as far as reasonably practicable.

This report has been prepared in accordance with the guidance provided in AS2436:2010.



3.3 NSW Environment Protection Authority

3.3.1 EPA Construction Noise Guideline

The NSW Environment Protection Authority published the *Interim Construction Noise Guideline* in July 2009. While some noise from construction sites is inevitable, the aim of the Guideline is to protect the majority of residences and other sensitive land uses from noise pollution most of the time.

The Guideline presents two ways of assessing construction noise impacts; the quantitative method and the qualitative method.

The quantitative method is generally suited to longer term construction projects and involves predicting noise levels from the construction phase and comparing them with noise management levels given in the guideline.

The qualitative method for assessing construction noise is a simplified way to identify the cause of potential noise impacts and may be used for short-term works, such as repair and maintenance projects of short duration.

In this instance, the quantitative method is the most appropriate and has been used in this assessment. Details of the quantitative method are given in Section 4 of the Guideline.

Normal construction hours are defined by the EPA as follows:

- 7.00 am to 6.00 pm Monday to Friday;
- 8.00 am to 1.00 pm Saturday; and
- No work on Sunday or Public Holiday.

Table 2 in Section 4 of the Guideline sets out noise management levels at affected residences and how they are to be applied during normal construction hours. The noise management level is derived from the rating background level (RBL) plus 10 dB in accordance with the Guideline. This level is considered to be the 'noise affected level' which represents the point above which there may be some community reaction to noise.

The 'highly noise affected' level of 75 dBA represents the point above which there may be strong community reaction to noise. This level is provided in the Guideline and is not based on the RBL. Restrictions to the hours of construction may apply to activities that generate noise at residences above the 'highly noise affected' noise management level.



Based on the RBLs at all sensitive residential receiver locations in the daytime, the recommended noise management level during all aspects of the construction program is summarised in Table 4.

Table 4 L_{eq} Noise Management Levels from Construction Activities

Receptor Location	Noise Management Level	How to Apply
All Residential Receptors	'R1', 'R2', 'R3' and 'R6' (50+ 10 =) 60 dBA First Floor 'R4', 'R5' and 'R7' (44+ 10 =) 54 dBA	The noise affected level represents the point above which there may be some community reaction to noise. - Where the predicted or measured L_{Aeq} (15 min) noise level is greater than the noise affected level, the proponent should apply all feasible and reasonable* work practices to meet the noise affected level. - The proponent should also inform all potentially impacted residents of the nature of works to be carried out, the expected noise levels and duration, as well as contact details.
	Highly noise affected 75 dBA	The highly noise affected level represents the point above which there may be strong community reaction to noise. - Where noise is above this level, the relevant authority (consent, determining or regulatory) may require respite periods by restricting the hours that the very noisy activities can occur, taking into account: - times identified by the community when they are less sensitive to noise (such as before and after school for works near schools, or mid-morning or mid-afternoon for works near residences); - if the community is prepared to accept a longer period of construction in exchange for restrictions on construction times.

*Section 6, 'work practices' of The *Interim Construction Noise Guideline*, states: "there are no prescribed noise controls for construction works. Instead, all feasible and reasonable work practices should be implemented to minimise noise impacts. This approach gives construction site managers and construction workers the greatest flexibility to manage noise".

Definitions of the terms feasible and reasonable are given in Section 1.4 of the Guideline.



3.3.2 EPA Vibration Guideline

The NSW EPA published the *Assessing Vibration: a technical guideline* in February 2006. This guideline is based on the British Standard BS6472:1992 “*Evaluation of human exposure to vibration in buildings (1 Hz to 80 Hz)*.”

The guideline presents preferred and maximum vibration values for use in assessing human responses to vibration and provides recommendations for measurement and evaluation techniques. The guideline considers vibration from construction activities as Intermittent Vibration. Table 2.4 of the guideline sets out limits for Vibration Dose Values to assess intermittent vibration and is replicated below in Table 5 for residential receptor locations.

Table 5 Vibration Dose Values (VDV) from Construction Activities

Receptor Location	Daytime	
	Preferred value (m/s ^{1.75})	Maximum value (m/s ^{1.75})
All Residences	0.20	0.40

The British Standard BS7385-2:1993 “*Evaluation and measurement for vibration in buildings – Part 2: Guide to damage levels from groundborne vibration*” provides guide values for transient vibration relating to cosmetic damage, replicated below in Table 6 for residential buildings.

Table 6 Transient Vibration Guide Values for Cosmetic Damage

Type of building	Peak component particle velocity in frequency range of predominant pulse	
	4 Hz to 15 Hz	15 Hz and above
Residential and light commercial type buildings	15 mm/s at 4 Hz increasing to 20 mm/s at 15 Hz	20 mm/s at 15 Hz increasing to 50 mm/s at 40 Hz and above

In our opinion, an overall peak particle velocity of **15 mm/s** at the Site boundaries will comply with the recommended values in Table 6, and is an acceptable criterion for intermittent vibration to prevent cosmetic damage to the adjacent residential buildings.



3.4 Project Noise Trigger Levels

In our opinion, the most relevant noise and vibration management levels for this development are those outlined in Sections 4.4.1 and 4.4.2 of this report, and summarised as follows:

3.4.1 Noise Management Levels

Residential receptors 'R1', 'R2', 'R3' and 'R6' – Based on the measured noise levels at Location 'A'

- Noise management level of **60 dBA** $L_{Aeq, 15 \text{ minute}}$.

Residential receptors 'R4', 'R5' and 'R7' – Based on the measured noise levels at Location 'B'

- Noise management level of **54 dBA** $L_{Aeq, 15 \text{ minute}}$ for all residential receptors.

3.4.2 Vibration Management Levels

- A Vibration Dose Value (VDV) between **0.2 – 0.4 m/s^{1.75}** for human annoyance in residential buildings; and
- A Peak Particle Velocity no greater than **15 mm/s** to prevent cosmetic damage at the nearby residential buildings.



4.0 NOISE & VIBRATION EMISSION

The main sources of noise on the site during the two phases of demolition and construction will be from heavy machinery such as excavators, trucks, cranes, cement mixers, etc.

Unless otherwise noted, the predicted noise levels in the following Sections assume that all equipment and plant listed are operating at the same time within the same general area along the nearest or furthest boundaries. This constitutes a worst-case scenario, however, due to the nature of the works, it is more likely that equipment will be dispersed over a wider area of the construction site and will not be continuously operating simultaneously. Typically, therefore, lower average levels can be expected.

A schedule of the sound power levels for the main demolition and construction equipment was extracted from the Day Design database of Sound Power Levels and the Australian Standard AS2436:1981 *“Guide to Noise Control on Construction, Maintenance and Demolition Sites”*.

Knowing the sound power level of a noise source, the sound pressure level (as measured with a sound level meter) can be calculated at a remote location using suitable formulae to account for distance losses, barrier effects, etc.

Calculations consider distance attenuation only and the range of levels are based on the closest potential distance and furthest potential distance at which each item of plant may operate from each respective residential location. The calculated noise levels at nearby residential receptors are presented in Tables 7, 9, 11 and 12.



4.1 Phase 1 – Demolition Works

The demolition of the existing buildings is estimated to take 4 weeks and will involve the use of an excavator, hand tools and regular truck movements transporting waste materials from the Site. The equipment likely to be used and their corresponding sound power levels are presented below in Table 7.

Table 7 Typical Demolition Plant and Equipment - Sound Power Levels

Description	Sound Power Level, dBA
Excavator – Hitachi 330 (or similar)	107
Compressor	101
Generator	99
Hand Tools	102
Truck	107

Note: (Sound power levels are based on previous noise measurements and median values found in Table A1 of AS2436:2010).

The calculated noise levels at nearby residential receptors are presented below in Table 8 as a worst-case scenario.

Table 8 Calculated Receptor Sound Pressure Levels from Demolition Works

Receptor Location	Calculated Sound Pressure Levels (dBA)
R1 – Residence	66 – 73
R2 – Residence	65 – 70
R3 – Residence	61 – 63
R4 – Residence	66 – 71
R5 – Residence	65 – 73
R6 – Residence	63 – 68
R7 – Residence	66 – 74



4.2 Phase 2 – Construction

The construction is estimated to take a total of 52 weeks and will involve the use of heavy vehicles, power tools and portable mechanical plant such as generators and compressors. The equipment likely to be used and their corresponding sound power levels are presented below in Table 9.

Table 9 Typical Construction Equipment - Sound Power Levels

Description	Sound Power Level, dBA
Crane	104
Generator	99
Compressor	101
Hand Tools	102
Bobcat	106
Cement Truck	109

Note: (All sound power levels are based on previous noise measurements at various sites)

During the construction phase, work will be more dispersed across the site as the scale of work, compared to the previous phase, is less intensive. The calculated noise levels at nearby residential receptors are presented below in Table 10 as a worst-case scenario.

Table 10 Calculated Receptor Sound Pressure Levels from Construction Works

Receptor Location	Calculated Sound Pressure Levels (dBA)
R1 – Residence	65 – 71
R2 – Residence	64 – 69
R3 – Residence	60 – 62
R4 – Residence	64 – 70
R5 – Residence	64 – 71
R6 – Residence	62 – 66
R7 – Residence	65 – 72



4.3 Noise Emission Summary

From the calculated noise levels in Sections 4.1 and 4.2 the levels of noise exceedance are presented below in Table 11 and Table 12.

Table 11 Calculated L_{eq} 15 minute Noise Levels (Without Noise Controls) – R1 to R4

Description	Calculated Noise Levels (dBA)			
	R1	R2	R3	R4
Phase 1 – Demolition Works				
Demolition Works	66 – 73	65 – 70	61 – 63	66 – 71
Noise Management Level	60	60	60	54
Exceedance	Up to 13 dB	Up to 10 dB	Up to 3 dB	Up to 17 dB
Phase 2 – Construction				
Construction Works	65 – 71	64 – 69	60 – 62	64 – 70
Noise Management Level	60	60	60	54
Exceedance	Up to 11 dB	Up to 9 dB	Up to 2 dB	Up to 16 dB

Table 12 Calculated L_{eq} 15 minute Noise Levels (Without Noise Controls) – R5 to R7

Description	Calculated Noise Levels (dBA)		
	R5	R6	R7
Phase 1 – Demolition Works			
Demolition Works	65 – 73	63 – 68	66 – 74
Noise Management Level	54	60	54
Exceedance	Up to 19 dB	Up to 8 dB	Up to 20 dB
Phase 3 – Construction			
Construction Works	64 – 71	62 – 66	65 – 72
Noise Management Level	54	60	54
Exceedance	Up to 17 dB	Up to 6 dB	Up to 18 dB

It can be seen from Table 11 and Table 12 above, that the predicted levels of noise from construction activities will at times be in excess of the noise management levels of 54 dBA and 60 dBA at the residential receptors. However, the highly affected noise level of 75 dBA will not be exceeded during either of the construction phases.

To minimise the noise impact from the construction activities we recommend that the noise controls and the management plan detailed in Section 5.0 of this report be implemented.



4.4 Vibration Emission

It is difficult to accurately predict levels of ground borne vibration at remote locations as there are many variables to consider including the surrounding terrain, strata, rock density, etc. Levels of ground borne vibration are often highest when bulk excavation works are occurring, which are not currently proposed for the site.

Previous measurements of ground borne vibration from works show that vibration levels can vary significantly at different distances and receptor locations. Given the distances from neighbouring developments to the proposed works on site, if warranted (a substantiated complaint is received regarding vibration levels, cosmetic damage to a structure, etc), we recommend that compliance monitoring of ground borne vibration is carried out at the critical receptor.

Recommendations are provided in Section 5.0 of this report to ensure vibration from the site to nearby residential premises meets the relevant criteria.



5.0 NOISE CONTROL RECOMMENDATIONS

The predicted level of noise emission from the demolition and construction activities of the proposed REF works at *OGPS* is in excess of the noise management levels established in Section 3.4 of this report.

In order to minimise the noise impact from all demolition and construction activities, we recommend the following engineering and management noise controls be implemented.

5.1 Engineering and Practical Noise Controls

Australian Standard AS2436:2010, Appendix C, Table C3 provides the relative effectiveness of various forms of noise control that may be applicable and implemented on various construction sites and projects. Table C3 is replicated below in Table 13.

Table 13 Relative Effectiveness of Various Forms of Noise Control

Control by	Nominal Noise Reduction Possible
Distance	Approximately 6 dB for each doubling of distance
Enclosure	Normally 5 dB to 25 dB maximum 50 dB
Silencing	Normally 5 dB to 10 dB maximum 20 dB

Distance

Where applicable, we recommend locating mechanical plant such that it is as far as practically possible from the residences in all directions.

Enclosure

Constructing acoustical enclosures around items of mobile plant such as generators is recommended where extended use for long periods of time is expected.

Silencing

Consideration should be given to any mobile plant already acoustically treated when assessing tenders. All plant and machinery should be selected with consideration to low noise options where practicable and available.

Care should be taken to ensure that no more than one item of plant is operating simultaneously within close proximity of any given residence as far as reasonably practicable, to minimise cumulative noise impacts.



5.2 Noise Management Controls

The following noise management controls are derived from, or are in accordance with recommendations given in Australian Standard AS2436:2010 and the EPA's *Interim Construction Noise Guideline*.

Periods of Respite

We recommend that noisy construction activities only operate for 2 to 3 hours at a time.

Ensure activities in any one location are staggered, for instance, if breaking of concrete is occurring near to a residential receptor, all other construction activities will cease in the same location so as to minimise cumulative noise impacts.

Work Practices

We recommend that workers and contractors be trained in work practices to minimise noise emission such as the following:

- Avoid dropping materials from a height.
- Avoid shouting and talking loudly outdoors.
- Avoid the use of radios outdoors that can be heard at the boundary of residences.
- Turn off equipment when not being used.
- Carry out work only within the approved hours of operation (see Sections 3.2 and 4.2).

Heavy Vehicles and Staff Vehicles

- Keep truck drivers informed of designated vehicle routes, parking locations, acceptable delivery hours or other relevant practices (for example, minimising the use of engine brakes, and no extended periods of engine idling).
- Locate site vehicle entrances away from residences where practicable.
- Optimise the number of vehicle trips to and from the site – movements can be organised to amalgamate loads rather than using a number of vehicles with smaller loads.
- Staff parking areas should be located as far from residential receiver locations as practicable.
- No motor vehicles should access the site via, or park within residential areas prior to 7 am on any occasion, in order avoid sleep disturbance.

Community Relations

- A Community Liaison Officer (Project Manager or Site Manager) is to be appointed by the contractor prior to the commencement of any works.
- The Community Liaison Officer will approach all potentially affected residents prior to the commencement of any works as an initial introduction and provide his or her contact details.



- The Community Liaison Officer will explain the project, duration of works, potentially noisy periods as well as determine any particularly sensitive receivers or sensitive time periods and schedule works accordingly, as far as reasonably practical.
- A contact number will be provided for any residents to call with complaints or queries.

Once works commence, communication with the community should be maintained by the Community Liaison Officer. Communication should be maintained via a range of media including, for example, continued individual contact, letter box drops or a clearly visible notice board at the site office or on construction site boundaries.

Consultation and cooperation between the contractor and the neighbours and the removal of uncertainty and rumour can help to reduce adverse reaction to noise.

Managing a Noise Complaint

The Community Liaison Officer should receive and manage noise complaints.

All complaints should be treated promptly and with courtesy.

Should a justified noise complaint not be resolved, noise monitoring may be carried out at the affected receptor location and appropriate measures be taken to reduce the noise emission as far as reasonably practicable.

Where it is not practicable to stop the noise, or reduce the noise, a full explanation of the event taking place, the reason for the noise and times when it will stop should be given to the complainant.

The following guidelines are recommended in Section 6 of the *Interim Construction Noise Guideline* to manage a noise complaint:

- Provide a readily accessible contact point.
- Give complaints a fair hearing.
- Have a documented complaints process, including an escalation procedure so that if a complainant is not satisfied there is a clear path to follow.
- Call back as soon as possible to keep people informed of action to be taken to address noise problems. Call back at night-time only if requested by the complainant to avoid further disturbance.
- Provide a quick response to complaints, with complaint handling staff having both a good knowledge of the project and ready access to information.
- Implement all feasible and reasonable measures to address the source of complaint.
- Keep a register of any complaints, including details of the complaint such as date, time, person receiving complaint, complainant's contact number, person referred to, description of the complaint, work area (for larger projects), time of verbal response and timeframe for written response where appropriate.



5.3 Noise Monitoring

Noise monitoring should be carried out in response to noise complaints using an attended noise monitor at the potentially most affected receiver location (or as close as practically possible). Noise level measurements should be carried out by an appropriately qualified acoustical consultant/engineer, using Type 1 (see AS1259) noise measuring equipment.

The measured noise levels are to be compared against the Project Noise Trigger Levels shown in Section 3.4 of this report. The outcomes of the noise monitoring should be submitted to the relevant authority for review.

5.4 Vibration Monitoring

Vibration monitoring should be carried out in response to complaints using either an attended or an unattended vibration monitor. An unattended vibration monitor should be fitted with an alarm in the form of a strobe light, siren or digital (mobile/computer) alert system to make the plant operator aware immediately when the vibration limit is exceeded. The vibration monitor should be set to trigger the alarm when the overall Peak Particle Velocity (PPV) exceeds 15 mm/s at the nearest residential building.

Dilapidation reports should be commissioned for potentially affected nearby premises prior to any works being undertaken. This may be reassessed once the extent of required work is known.

In the event that levels of ground-borne vibration exceed the recommended acceptable levels for cosmetic damage, vibration causing works should cease immediately and alternative methods be considered.

5.5 Construction Disclaimer

Recommendations made in this report are intended to resolve acoustical problems only. We make no claims of expertise in other areas of building construction and therefore the recommended noise controls should be implemented into the building design in consultation with other specialists to ensure they meet the structural, fire, thermal or other aspects of building construction.


We encourage clients to check with us before using materials or equipment that are alternative to those specified in our Acoustical Report.



6.0 CONCLUSION

Day Design Pty Ltd was engaged by School Infrastructure NSW to prepare a Construction Noise and Vibration Management Plan for the proposed new building, Building J, and associated REF works at Orange Grove Public School, 2-8 Perry Street, Lilyfield, NSW.

Provided the recommendations in Section 5.0 of this report are implemented, the level of noise and vibration from the construction works at Orange Grove Public School, 2-8 Perry Street, Lilyfield, NSW, will be minimised as far as reasonably practical in accordance with the Australian Standard AS2436:2010 *“Guide to noise and vibration control on construction, demolition and maintenance sites”* and the EPA’s *Interim Construction Noise Guideline 2009* and *Assessing Vibration: a technical guideline 2006*, as detailed in Section 4 of this report.



Ricky Thom, BA, BE(Mech)Hons, MEnvSctMgt, MIEAust
Acoustical Engineer
for an on behalf of Day Design Pty Ltd

AAAC MEMBERSHIP

Day Design Pty Ltd is a member company of the Association of Australasian Acoustical Consultants, and the work herein reported has been performed in accordance with the terms of membership.

APPENDICES

Appendix A – Instrumentation

Appendix B – Ambient Noise Survey

AC108-1 to 4 – Glossary of Acoustical Terms



NOISE SURVEY INSTRUMENTATION

Noise level measurements and analysis in this report were made with instrumentation as follows:

Table A1 Noise Survey Instrumentation

Description	Model No	Serial No
Infobyte Noise Logger (Type 2)	iM4	107
Condenser Microphone 0.5" diameter	MK 250	107
Infobyte Noise Logger (Type 2)	iM4	112
Condenser Microphone 0.5" diameter	MK 250	112
Acoustical Calibrator	B&K 4231	2095415

An environmental noise logger is used to continuously monitor ambient noise levels and provide information on the statistical distribution of noise during an extended period of time. The Infobyte Noise Monitors iM4 #107 and #112 are Type 2 precision environmental noise monitors meeting all the applicable requirements of AS1259 for an integrating-averaging sound level meter.


All instrument systems had been laboratory calibrated using instrumentation traceable to Australian National Standards and certified within the last two years thus conforming to Australian Standards. The measurement system was also field calibrated prior to and after noise surveys. Calibration drift was found to be less than 1 dB during unattended measurements and less than 0.1 for attended measurements. No adjustments for instrument drift during the measurement period were warranted.



AMBIENT NOISE SURVEY

7572-5
Appendix B


Located at Northern Boundary, 2-8 Perry Street, Lilyfield, NSW

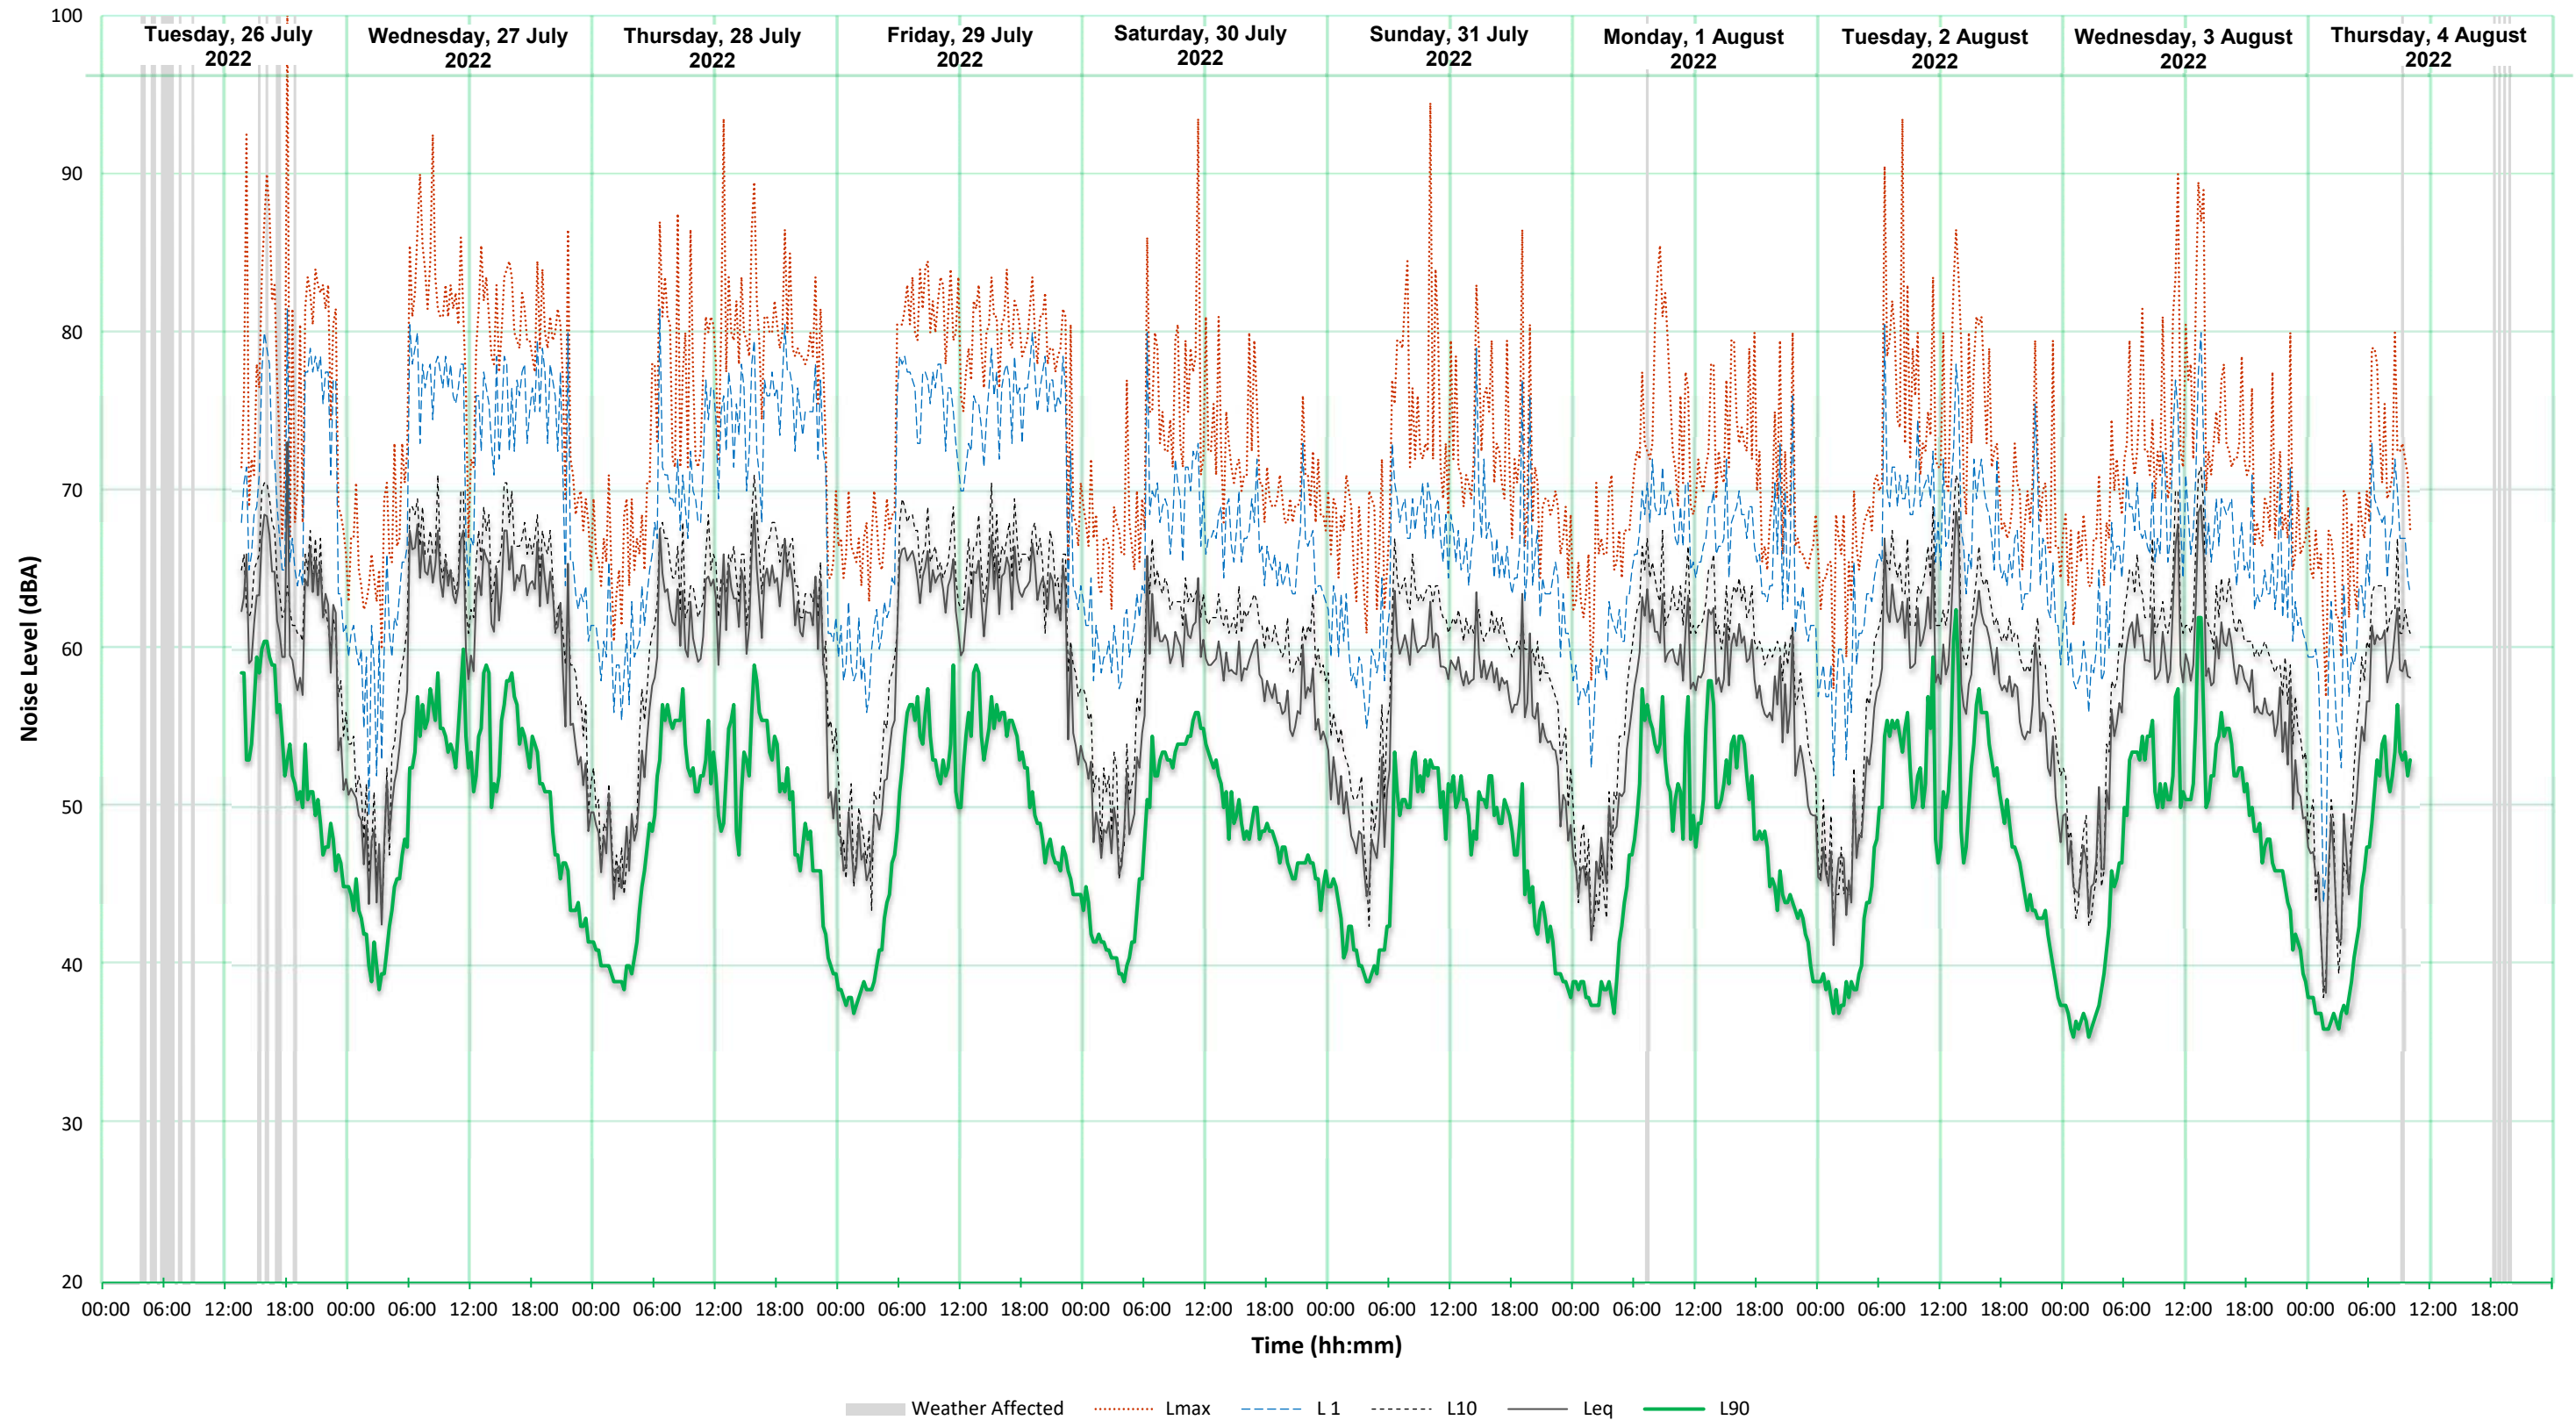

AMBIENT NOISE SURVEY

7572-5
Appendix B

Located at Southern Boundary, 2-8 Perry Street, Lilyfield, NSW

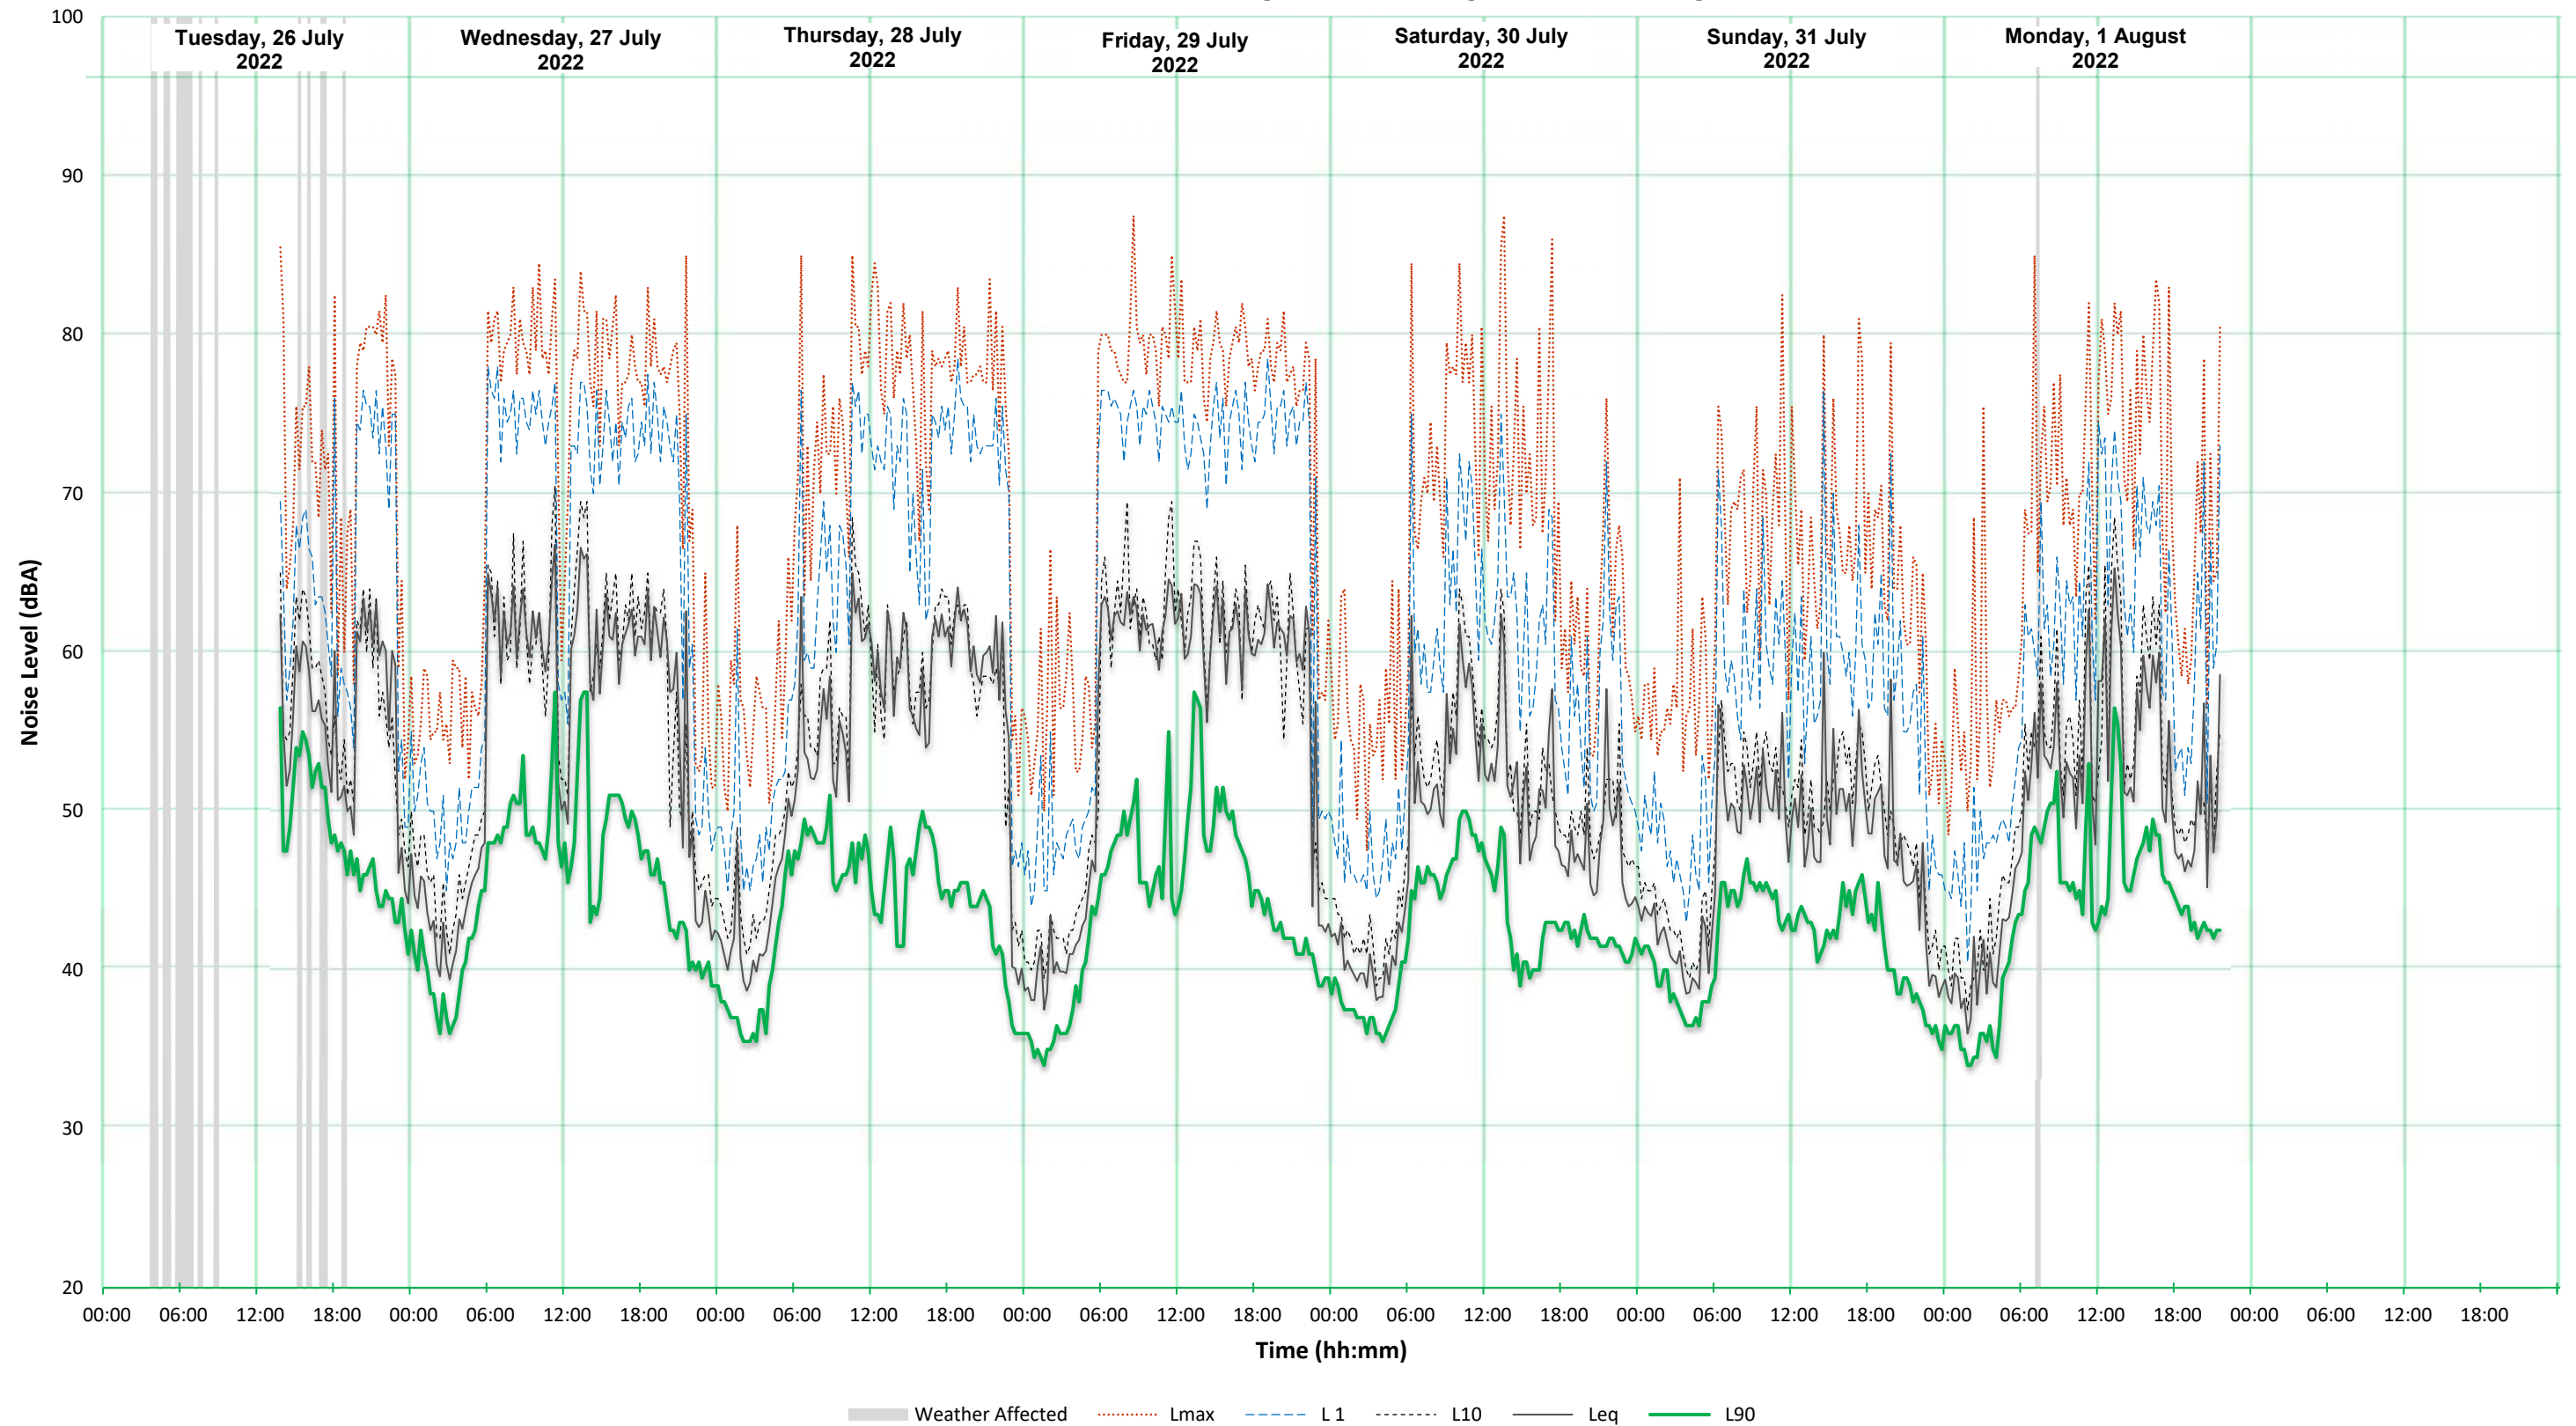

ACOUSTICAL – Pertaining to the science of sound, including the generation, propagation, effects and control of both noise and vibration.

AMBIENT NOISE – The ambient noise level at a particular location is the overall environmental noise level caused by all noise sources in the area, both near and far, including road traffic, factories, wind in the trees, birds, insects, animals, etc.

AUDIBLE – means that a sound can be heard. However, there are a wide range of audibility grades, varying from “barely audible” to “just audible”, “clearly audible” and “prominent”. Chapter 83 of the NSW Environment Protection Authority – Environmental Noise Control Manual (1985) states:

“noise from a particular source might be offensive if it is clearly audible, distinct from the prevailing background noise and of a volume or character that a reasonable person would be conscious of the intrusion and find it annoying or disruptive”.

It follows that the word “audible” in an environmental noise context means “clearly audible”.

BACKGROUND NOISE LEVEL – Silence does not exist in the natural or the built-environment, only varying degrees of noise. The Background Noise Level is the average minimum dBA level of noise measured in the absence of the noise under investigation and any other short-term noises such as those caused by cicadas, lawnmowers, etc. It is quantified by the L_{A90} or the dBA noise level that is exceeded for 90 % of the measurement period (usually 15 minutes).

- **Assessment Background Level (ABL)** is the single figure background level representing each assessment period – day, evening and night (ie three assessment background levels are determined for each 24hr period of the monitoring period). Determination of the assessment background level is by calculating the tenth percentile (the lowest tenth percent value) of the background levels (L_{A90}) for each period (refer: NSW Industrial Noise Policy, 2000).
- **Rating Background Level (RBL)** as specified by the Environment Protection Authority is the overall single figure (L_{A90}) background noise level representing an assessment period (day, evening or night) over a monitoring period of (normally) three to seven days.

The RBL for an assessment period is the median of the daily lowest tenth percentile of L_{90} background noise levels.

If the measured background noise level is less than 30 dBA, then the Rating Background Level (RBL) is considered to be 30 dBA.

DECIBEL – The human ear has a vast sound-sensitivity range of over a thousand billion to one. The decibel is a logarithmic unit that allows this same range to be compressed into a somewhat more comprehensible range of 0 to 120 dB. The decibel is ten times the logarithm of the ratio of a sound level to a reference sound level. See also Sound Pressure Level and Sound Power Level.

Decibel noise levels cannot be added arithmetically since they are logarithmic numbers. If one machine is generating a noise level of 50 dBA, and another similar machine is placed beside it, the level will increase to 53 dBA, not 100 dBA. Ten similar machines placed side by side increase the sound level by 10 dBA, and one hundred machines increase the sound level by 20 dBA.

dBA – The human ear is less sensitive to low frequency sound than high frequency sound. We are most sensitive to high frequency sounds, such as a child’s scream. Sound level meters have an inbuilt weighting network, termed the dBA scale, that approximates the human loudness response at quiet sound levels (roughly approximates the 40 phon equal loudness contour).



However, the dBA sound level provides a poor indication of loudness for sounds that are dominated by low frequency components (below 250 Hz). If the difference between the “C” weighted and the “A” weighted sound level is 15 dB or more, then the NSW Industrial Noise Policy recommends a 5 dBA penalty be applied to the measured dBA level.

dbc – The dbc scale of a sound level meter is similar to the dBA scale defined above, except that at high sound intensity levels, the human ear frequency response is more linear. The dbc scale approximates the 100 phon equal loudness contour.

EQUIVALENT CONTINUOUS NOISE LEVEL, L_{Aeq} – Many noises, such as road traffic or construction noise, vary continually in level over a period of time. More sophisticated sound level meters have an integrating electronic device inbuilt, which average the A weighted sound pressure levels over a period of time and then display the energy average or L_{Aeq} sound level. Because the decibel scale is a logarithmic ratio the higher noise levels have far more sound energy, and therefore the L_{Aeq} level tends to indicate an average which is strongly influenced by short term, high level noise events. Many studies show that human reaction to level-varying sounds tends to relate closely to the L_{Aeq} noise level.

FREE FIELD – This is a sound field not subject to significant reflection of acoustical energy. A free field over a reflecting plane is usually outdoors with the noise source resting on hard flat ground, and not closer than 6 metres to any large flat object such as a fence or wall; or inside an anechoic chamber.

FREQUENCY – The number of oscillations or cycles of a wave motion per unit time, the SI unit being the Hertz, or one cycle per second.

IMPACT ISOLATION CLASS (IIC) – The American Society for Testing and Materials (ASTM) has specified that the IIC of a floor/ceiling system shall be determined by operating an ISO 140 Standard Tapping Machine on the floor and measuring the noise generated in the room below. The IIC is a number found by fitting a reference curve to the measured octave band levels and then deducting the sound pressure level at 500 Hz from 110 decibels. Thus the higher the IIC, the better the impact sound isolation.

IMPACT SOUND INSULATION ($L_{nT,w}$) – Australian Standard AS ISO 717.2 – 2004 has specified that the Impact Sound Insulation of a floor/ceiling system be quantified by operating an ISO 140 Standard Tapping Machine on the floor and measuring the noise generated in the room below. The Weighted Standardised Impact Sound Pressure Level ($L_{nT,w}$) is the sound pressure level at 500 Hz for a reference curve fitted to the measured octave band levels. Thus the lower $L_{nT,w}$ the better the impact sound insulation.

IMPULSE NOISE – An impulse noise is typified by a sudden rise time and a rapid sound decay, such as a hammer blow, rifle shot or balloon burst.

INTRUSIVE NOISE LEVEL, L_{Aeq} – The level of noise from a factory, place of entertainment, etc. in NSW is assessed on the basis of the average maximum noise level, or the L_{Aeq} (15 min). This is the energy average A weighted noise level measured over any 15 minute period.

LOUDNESS – The degree to which a sound is audible to a listener is termed the loudness. The human ear perceives a 10 dBA noise level increase as a doubling of loudness and a 20 dBA noise increase as a quadrupling of the loudness.



MAXIMUM NOISE LEVEL, L_{Amax} – The rms maximum sound pressure level measured on the "A" scale of a sound level meter during a noise survey is the L_{Amax} noise level. It may be measured using either the Fast or Slow response time of the meter. This should be stated.

NOISE RATING NUMBERS – A set of empirically developed equal loudness curves has been adopted as Australian Standard AS1469-1983. These curves allow the loudness of a noise to be described with a single NR number. The Noise Rating number is that curve which touches the highest level on the measured spectrum of the subject noise. For broadband noise such as fans and engines, the NR number often equals the dBA level minus five.

NOISE – Noise is unwanted sound. Sound is wave motion within matter, be it gaseous, liquid or solid. "Noise includes sound and vibration".

NOISE REDUCTION COEFFICIENT – See: "Sound Absorption Coefficient".

OFFENSIVE NOISE - (Reference: Dictionary of the Protection of the Environment Operations Act 1997). *"Offensive Noise means noise:*

- (a) that, by reason of its level, nature, character or quality, or the time at which it is made, or any other circumstances:*
 - (i) is harmful to (or likely to be harmful to) a person who is outside the premise from which it is emitted, or*
 - (ii) interferes unreasonably with (or is likely to interfere unreasonably with) the comfort or repose of a person who is outside the premises from which it is emitted, or*
- (b) that is of a level, nature, character or quality prescribed by the regulations or that is made at a time, or in other circumstances prescribed by the regulations."*

PINK NOISE – Pink noise is a broadband noise with an equal amount of energy in each octave or third octave band width. Because of this, Pink Noise has more energy at the lower frequencies than White Noise and is used widely for Sound Transmission Loss testing.

REVERBERATION TIME, T_{60} – The time in seconds, after a sound signal has ceased, for the sound level inside a room to decay by 60 dB. The first 5 dB decay is often ignored, because of fluctuations that occur while reverberant sound conditions are being established in the room. The decay time for the next 30 dB is measured and the result doubled to determine the T_{60} . The Early Decay Time (EDT) is the slope of the decay curve in the first 10 dB normalised to 60 dB.

SOUND ABSORPTION COEFFICIENT, α – α Sound is absorbed in porous materials by the viscous conversion of sound energy to heat energy as the sound waves pass through it. Sound is similarly absorbed by the flexural bending of internally damped panels. The fraction of incident energy that is absorbed is termed the Sound Absorption Coefficient, α . An absorption coefficient of 0.9 indicates that 90 % of the incident sound energy is absorbed. The average α from 250 to 2000 Hz is termed the Noise Reduction Coefficient (NRC).

SOUND ATTENUATION – If an enclosure is placed around a machine, or a silencer is fitted to a duct, the noise emission is reduced or attenuated. An enclosure that attenuates the noise level by 30 dBA, reduces the sound energy by one thousand times.

SOUND EXPOSURE LEVEL (SEL) – The total sound energy of a single noise event condensed into a one second duration or in other words it is an L_{eq} (1 sec).



SOUND PRESSURE LEVEL, L_p – The level of sound measured on a sound level meter and expressed in decibels, dB, dBA, dBC, etc. $L_p = 20 \times \log (P/P_0) \dots \text{dB}$

where P is the rms sound pressure in Pascal and P_0 is a reference sound pressure of 20 μPa .
 L_p varies with distance from a noise source.

SOUND POWER LEVEL, L_w – The Sound Power Level of a noise source is an absolute that does not vary with distance or with a different acoustic environment.

$$L_w = L_p + 10 \log A \dots \text{dB, re: } 1\text{pW},$$

where A is the measurement noise-emission area in square metres in a free field.

SOUND TRANSMISSION CLASS (STC) – An internationally standardised method of rating the sound transmission loss of partition walls to indicate the decibels of noise reduction of a human voice from one side to the other. (Refer: Australian Standard AS1276 – 1979)

SOUND TRANSMISSION LOSS – The amount in decibels by which a random sound is reduced as it passes through a sound barrier. A method for the measurement of airborne Sound Transmission Loss of a building partition is given in Australian Standard AS1191 - 2002.

STATISTICAL EXCEEDENCE SOUND LEVELS, L_{A90} , L_{A10} , L_{A1} , etc – Noise which varies in level over a specific period of time (usually 15 minutes) may be quantified in terms of various statistical descriptors:

The L_{A90} is the dBA level exceeded for 90 % of the time. In NSW the L_{A90} is measured over periods of 15 minutes, and is used to describe the average minimum or background noise level.

The L_{A10} is the dBA level that is exceeded for 10 % of the time. In NSW the L_{A10} measured over a period of 10 to 15 minutes. It was until recently used to describe the average maximum noise level, but has largely been replaced by the L_{Aeq} for describing level-varying noise.

The L_{A1} is the dBA level that is exceeded for 1 % of the time. In NSW the L_{A1} may be used for describing short-term noise levels such as could cause sleep arousal during the night.

STEADY NOISE – Noise, which varies in level by 6 dBA or less, over the period of interest with the time-weighting set to “Fast”, is considered to be “steady”. (Refer AS 1055.1 1997)

WEIGHTED SOUND REDUCTION INDEX, R_w – This is a single number rating of the airborne sound insulation of a wall, partition or ceiling. The sound reduction is normally measured over a frequency range of 100 to 3,150 Hertz and averaged in accordance with ISO standard weighting curves (Refer AS/NZS 1276.1:1999).

Internal partition wall $R_w + C$ ratings are frequency weighted to simulate insulation from human voice noise. The $R_w + C$ is always similar in value to the STC rating value. External walls, doors and windows may be $R_w + C_{tr}$ rated to simulate insulation from road traffic noise. This is normally a lower number than the STC rating value.

WHITE NOISE – White noise is broadband random noise whose spectral density is constant across its entire frequency range. The sound power is the same for equal bandwidths from low to high frequencies. Because the higher frequency octave bands cover a wider spectrum, white noise has more energy at the higher frequencies and sounds like a hiss.

