

SEDIMENT CONTROL, CONSTRUCTION & WASTE MANAGEMENT PLAN

1:200

TYPICAL SHAKEDOWN SECTION

THIS DEVICE IS TO BE REGULARLY CLEANED OF DEPOSITED MATERIAL SO AS TO MAINTAIN A 50mm DEEP SPACE BETWEEN PLANKS. BDIM GEOTEXTILE FILTER

FABRIC (TIE FABRIC AT TOP & MID-HEIGHT) 150 x 100 TRENCH WITH COMPACTED BACKFILL & ON ROCK, STE INTO SURFACE CONCRETE 200 MIN STAR PICKETS AT 3m MAX.

GRID MADE FROM FULLY WELDED 150x75 PFC PERIMETER FRAME WITH 150x75 PFC SPACED AT 100mm. LAID ON 100mm THICK BED OF CRUSHED AGGREGRATE. FILLED GEOTEXTILE GRATE FABRIC SOCK FILTERED RUN-OFF WATER WITH WATER SEDIMENT COMPACTED SOIL TO PREVENT PIPING GEOTEXTILE FABRIC SOCK

TEMP. DROP INLET SEDIMENT TRAP

FILLED WITH CRUSHED

AGGREGATE OR SIMILAR

ALTERNATIVE SECTION

CENTRES

TEMP. SEDIMENT CONTROL FENCE

1. PROVIDE SEDIMENT CONTROL FENCE AT STORMWATER OUTLETS AND DOWNSTREAM BOUNDARIES UNTIL LANDSCAPING, PAVING

& TURFING IS COMPLETED.

2. MINIMISE BARE EARTH AND DISTURBED AREAS. ALL BARE SOIL AREAS ARE TO BE PROTECTED FROM EROSION BY TEMPORARY

- MEASURES AND REVEGETATED AT CESSATION OF CONSTRUCTION. 3. RETURN OR PROTECT AS SOON AS PRACTICABLE.
- 4. COVER ALL SOIL MOUNDS.
- 5. PROVIDE LARGE COARSE AGGREGATE SURFACE (100 MIN. DEEP) TO ENTRY AND EXIT AREAS WITH GEOTEXTILE FILTER UNDERLAY. 6. SATISFACTORILY COMPACT ALL BACKFILL.
- LOCATE ALL DEBRIS IN CATCH AREA BEHIND SEDIMENT FENCE. 8. REGULARLY CHECK AND MAINTAIN ALL SEDIMENT FEATURES.

ALL EROSION PROTECTION MEASURES TO MEET THE REQUIREMENTS OF COUNCIL & DEPT. OF CONSERVATION AND LAND MANAGEMENT.

SEDIMENT CONTROL DEVICES

FILTER DAMS ARE TO BE CONSTRUCTED AT ALL DRAINAGE OUTLETS WITHIN THE SITE. THESE DAMS SHALL BE CONSTRUCTED AS DETAILED IN THE APPROVED DRAWINGS SILT FENCES SHALL BE CONSTRUCTED AS DETAILED IN THE APPROVED DRAWINGS AROUND ALL DISTURBED AREAS,

STOCKPILES AND AS DIRECTED BY THE ENGINEER.

MATERIALS

MATERIALS AND WORKMANSHIP SHALL BE TO THE ENGINEER'S SATISFACTION AND UNLESS OTHERWISE SPECIFIED SHALL CONFORM TO SUCH STANDARD SPECIFICATIONS ISSUED BY THE STANDARDS ASSOCIATION OF AUSTRALIA AS APPLICABLE.

TRANSPORTATION OF MATERIALS

TRANSPORTATION OF MATERIALS AND OF EARTH, SAND, ROAD CONSTRUCTION MATERIAL, LOOSE DEBRIS AND ANY LOOSE MATERIALS TO OR FROM THE SITE WILL BE IN A MANNER THAT WILL PREVENT THE DROPPING OF MATERIAL ON THE SURROUNDING STREETS. LOAD COVERS ARE TO BE USED AT ALL TIMES.

SURVEY MARKS

ADEQUATE PRECAUTIONS ARE TO BE TAKEN TO PROTECT AND PRESERVE ANY SURVEY MARK RELATIVE TO OR AFFECTED BY THE DEVELOPMENT.


EARTHWORKS & CLEARING

DURING THE CLEARING, CARE SHALL BE TAKEN NOT TO DISTURB ANY BENCHMARK, SURVEY OR LEVEL PEG. TOPSOIL IS TO BE REMOVED FROM THE WORKS AREA, STOCKPILED AND REPLACED UPON THE DISTURBED AREAS AT THE COMPLETION OF CONSTRUCTION.

VEGETATION PROTECTION

PRIOR TO AND DURING ANY CONSTRUCTION WORKS THE ROOTS, TRUNKS AND BRANCHES OF ALL VEGETATION TO BE RETAINED SHALL BE PROTECTED FROM POLLUTANTS, MACHINERY, CHEMICAL AND FUEL SPILLAGE, COMPACTION OF SURROUNDING SOLES, LEVEL CHANGES WITHIN THE DRIP LINE, STOCKPILING OF SPOIL, AND STOCKPILING OF BUILDING MATERIALS. PROTECTIVE FENCING OF SUCH VEGETATION SHALL BE UNDERTAKEN AS NECESSARY. VEGETATION TO BE LEFT UNDISTURBED OUTSIDE THE APPROVED WORKS AREA

	Mr & Mrs Ferrara	ALTERATIONS & ADDITIONS	DRAWING TITLE SIDEMENT CONTROL, CONSTRUCTION & WASTE MANAGEMENT PLAN	
			SHEET NO: 14	ISSUE: B
B DEVELOPMENT APPLICATION 06-06-2022 DP RO A CONCEPT DESIGN 26-04-2022 DP RO		PROJECT STATUS DEVELOPMENT APPLICATION	scale: 1:200@A3	JOB NO: 888-1657
ISSUE AMENDMENTS DATE DRN C			DESIGN: DP DRAWN: DP	CHECKED : RO, EJS

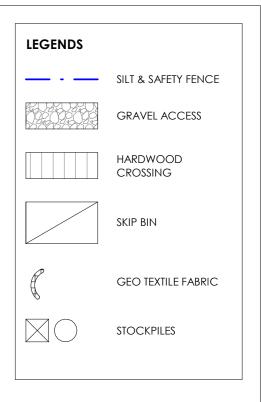







COPYRIGHT of designs shown heron is retained by DESIGN STUDIO 407. Authority is required for any reproduction.

Contractor(s) to verify all dimensions on site before commencing work. Figured dimensions given are to be taken in preference to scaling.

Rod O'Laco: Nominated Architect NSW A.R.B. 6520.