
A3 Sheet - 420(w) x 297(h) mm

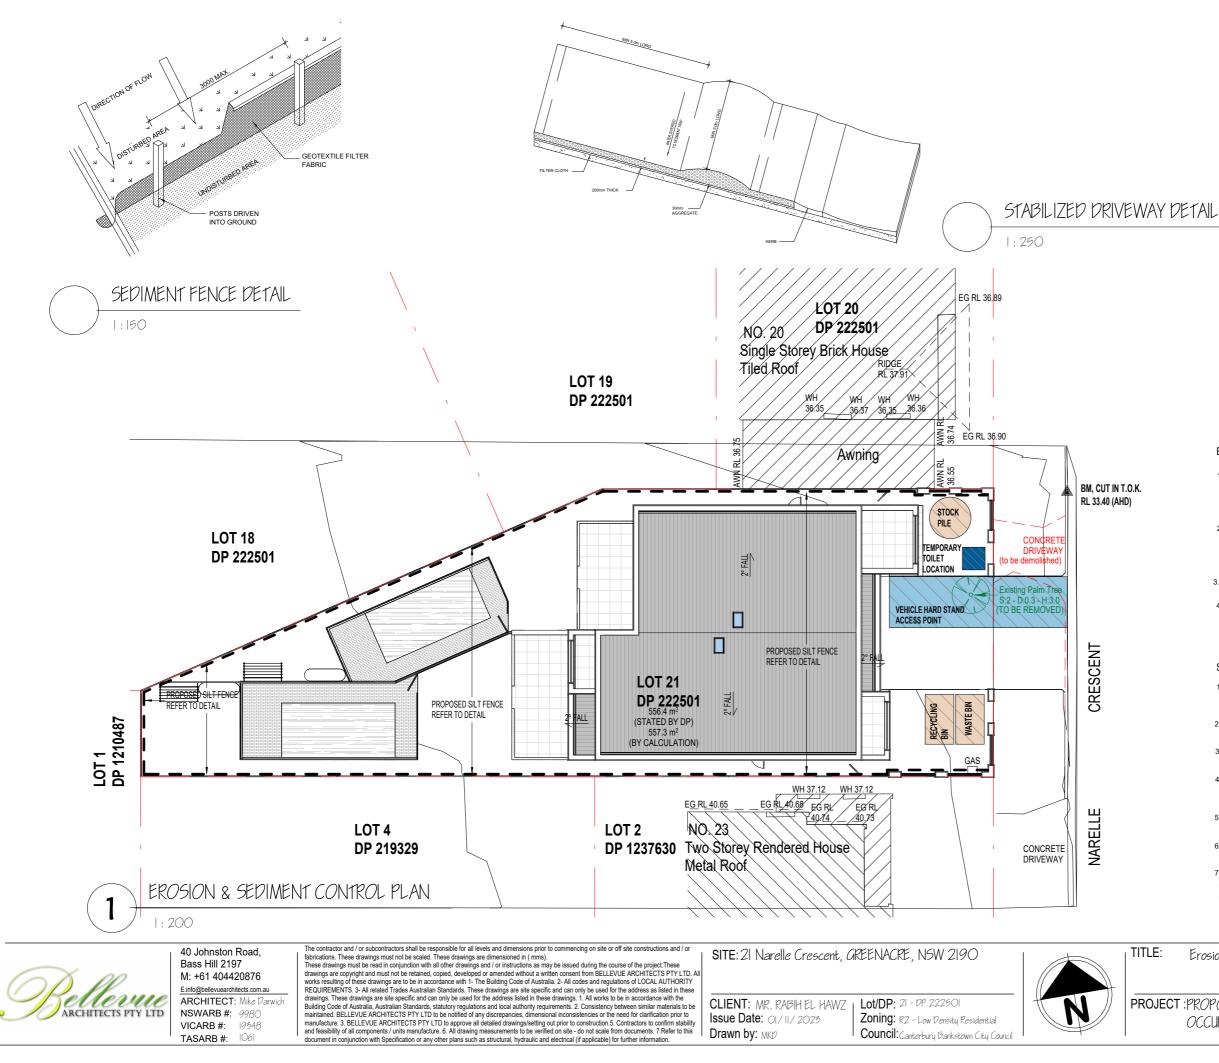

## **ISSUED FOR DA**

## EROSION CONTROL NOTES:

- 1. ALL EROSION AND SILTATION CONTROL DEVICES ARE TO BE PLACED PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION WORKS, AND ALL SILT TRAPS ARE TO HAVE DEPOSITED SILT REMOVED REGULARLY DURING CONSTRUCTION.
- 2. ALL TREES ARE TO BE PRESERVED UNLESS INDICATED OTHERWISE ON THE ARCHITECTURAL OR LANDSCAPE DRAWINGS. EXISTING GRASS COVER SHALL BE MAINTAINED EXCEPT IN AREAS CLEARED FOR BUILDING, PAVEMENTS ETC.
- 3. INSTALL TEMPORARY SEDIMENT BARRIERS TO ALL INLET PITS LIKELY TO COLLECT SILT LADDEN WATER. TO COUNCIL'S STANDARDS.
- 4. NOT WITHSTANDING DETAILS SHOWN IT IS THE CONTRACTORS SOLE RESPONSIBILITY TO ENSURE THAT ALL SITE ACTIVITIES COMPLY WITH THE REQUIREMENTS OF THE CLEAN WATERS ACT.

## SEDIMENT CONTROL NOTES:

- 1. ALL EROSION AND SEDIMENTATION CONTROL MEASURES, INCLUDING REVEGETATION AND STORAGE OF SOIL, SHALL BE IMPLEMENTED TO THE STANDARDS OF THE SOIL CONSERVATION OF N.S.W.
- 2. ALL DRAINAGE WORKS SHALL BE CONSTRUCTED AND STABILIZED AS EARLY AS POSSIBLE DURING DEVELOPMENT.
- 3. SEDIMENT STRAPS SHALL BE CONSTRUCTED AROUND ALL INLET PITS. CONSISTING OF 300mm WIDE x 300mm DEEP TRENCH.
- 4. ALL SEDIMENT BASINS AND TRAPS SHALL BE CLEARED WHEN THE STRUCTURES ARE A MINIMUM OF 60% FULL OF SOIL MATERIALS, INCLUDING THE MAINTENANCE PERIOD.
- 5. ALL DISTURBED AREAS SHALL BE REVEGETATED AS SOON AS THE RELEVANT WORKS ARE COMPLETED.
- 6. SOIL AND STOCKPILES SHALL BE LOCATED AWAY FROM DRAINAGE LINES AND AREA WHERE WATER MAY CONCENTRATED.
- 7. FILTER SHALL BE CONSTRUCTED BY STRETCHING A FILTER FABRICS (PROPEX OR APPROVED EQUIVALENT BETWEEN POSTS AT 3.0M CENTRES. FABRIC SHALL BE BURIED 150 mm ALONG LOWER EDGE.

Erosion and Sediment Control Plan	ISSUED FOR DA	
	Scale:	Project No:
	As indicated	H28
ECT : PROPOSED ATTACHED DUAL	Dwg NO:	Revision:
OCCUPANCY	A23	В