SCHEDULE OF PLANT MATERIAL

CODE	BOTANICAL NAME	COMMON NAME	QUANTITY	MATURE HEIGHT	CONTAINER SIZE	STAKES
AC	*Angophora costata #*	Red Sydney Gum	1	25m	25 litre	2
ACi	*Arthropodium cirratum*	Renga Renga Lily	72	1m	200mm	-
AN	*Aspenium nidus*	Birds Nest Fern	7	1m	200mm	-
APs	*Acer palmatum* 'Senkaki' *	Coral Bark Maple	7	5m	25 litre	2
AT	*Allocasuarina torulosa #*	Forest Oak	3	13m	25 litre	2
BO	*Breynia oblongifolia*	Breynia	16	2m	200mm	-
BSp	*Banksia spinulosa*	Hairpin Banksia	11	1.5m	200mm	-
CM	*Clivia miniata*	Kaffir Lily	56	0.4m	140mm	-
DC	*Dianella caerulea*	Paroo Lily	257	0.4m	140mm	-
DE	*Doryanthes excelsa*	Gymea Lily	10	1.5m	200mm	-
DT	*Dodonaea triquetra*	Hop Bush	57	2m	200mm	-
EP	*Eucalyptus pilularis #*	Blackbutt	1	25m	25 litre	2
EPa	*Eucalyptus paniculata #*	Grey Ironbark	2	20m	25 litre	2
ER	*Elaeocarpus reticulatus ***	Blueberry Ash	9	5m	25 litre	2
GF	*Gardenia* 'Florida'	Gardenia	26	1m	200mm	-
HVm	*Hardenbergia violacea* 'Meema'	Native Sarsparilla	13	0.5m	140mm	-
LF	*Lomandra fluviatilis*	Fine Leaf Lomandra	344	0.4m	140mm	-
Ll	*Lagerstroemia indica ****	Crepe Myrtle	2	7m	25 litre	-
LJr	*Liriope* 'Just Right'	Tuft Lily	177	0.4m	140mm	-
LL	*Lomandra longifolia*	Mat Rush	131	1m	140mm	-
ND	*Nandina domestica*	Sacred Bamboo	37	1.5m	200mm	-
NS	*Nyssa sylvatica #*	Tupelo	2	15m	25 litre	2
OD	*Ozothamnus diosmifolius*	Sago Flower	21	2m	200mm	-
PCc	*Pyrus calleryana* 'Chanticleer' *	Ornamental Pear	2	10m	75 litre	2
PTf	*Phormium tenax* 'Flamin'	Red NZ Flax	107	1m	200mm	-
PR	*Pittosporum revolutum*	Yellow Pittosporum	18	3m	200mm	-
SAe	*Syzygium australe* 'Elegance'	Dwarf Lilli Pilli	138	1.5m	200mm	-
SAr	*Syzygium australe* 'Resilience'	Dwarf Lilli Pilli	76	3m	200mm	-
SG	*Syncarpia glomulifera #*	Turpentine	7	20m	25 litre	2
TA	*Themeda australis*	Kangaroo Grass	108	0.4m	140mm	-
VT	*Viburnum tinus*	Laurustinus	34	3m	200mm	-

15 x proposed canopy trees to attain a minimum height of 13m on shale derived soils.
* 20 x proposed landscape (small) trees.
The majority of the plants in this schedule have been selected from a list of indigenous Sydney Turpentine Ironbark Forest species and also in Ku-ring-gai Council's indigenous plant list within the BASIX Specification.

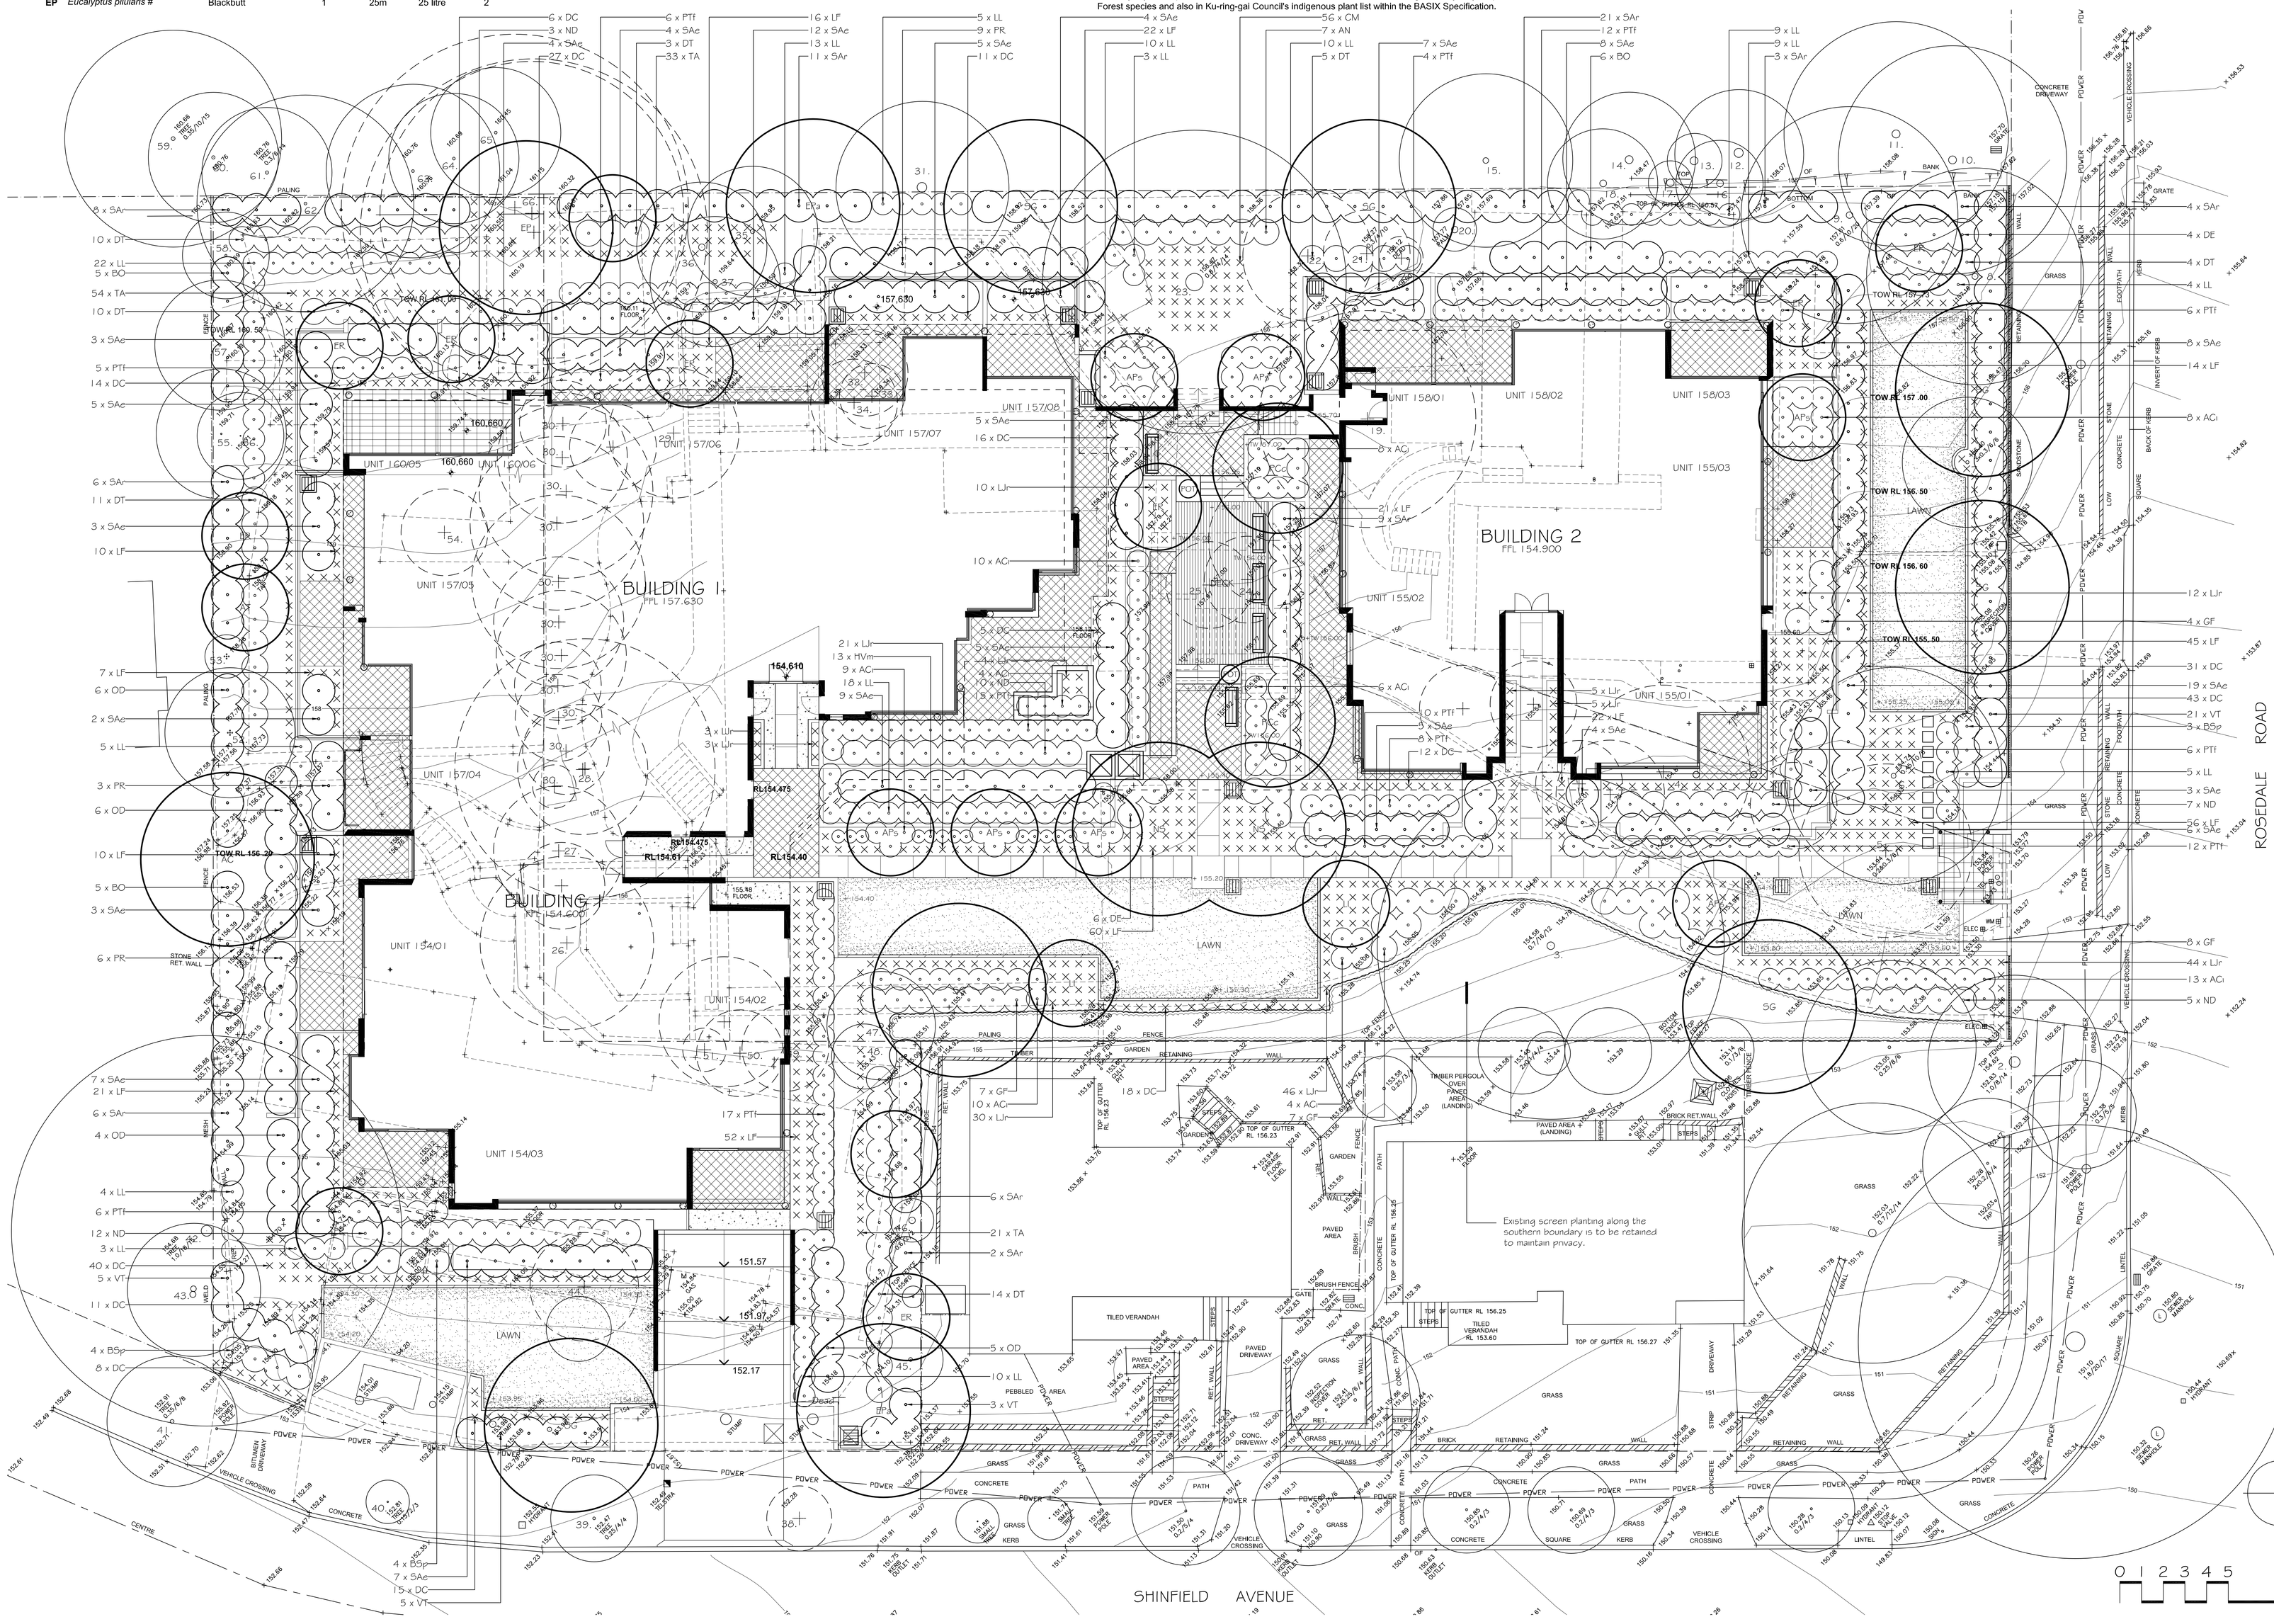

LEGEND

- EXISTING & ARCHITECTS LEVELS
- + 105.20 PROPOSED LANDSCAPE LEVELS
- EXISTING TREES TO BE RETAINED
- EXISTING TREES TO BE REMOVED
- EXISTING MASS PLANTING
- NEW TURF AREAS: SOFT LEAF BUFFALO
- PEBBLE MULCH
- UNIT PAVING
- BRICK GARDEN EDGING
- RETAINING WALLS
- BENCH SEATS

REVISIONS

1. Drainage works indicated as requested by Ku-ring-gai Council.

Verify all dimensions on site before commencing construction or ordering materials. Verify the dimensions of all manufactured products before installation. Use figured dimensions in preference to scaled dimensions. Report any discrepancies to the Landscape Architect for a decision before work commences.

NOTES

This plan is to be read in conjunction with all the documentation prepared by **Wolski Coppin Architecture Pty Ltd.**

The numbering system for the existing trees relates to the report prepared by **Landscape Matrix Pty Ltd.**

iScape LANDSCAPE ARCHITECTURE

office. 16/303 pacific highway
lindfield nsw 2070
postal. 25 bent street
lindfield nsw 2070
ph 9416 4290 fax 9416 4735
A.C.N 097 328 580
email ijla@netspace.net.au

project
Residential Development
116-118 Rosedale Rd &
18 Shinfield Ave, St Ives

drawing
Landscape Plan

client
Staldone Developments

date May 2010	**scale** 1:100 @ A0 1:200 @ A2
job.dwg no. 212.11(10)/414'A'	**no. in set** ONE/TWO
designed by GM	**drawn by** GM