




72 WILSONS ROAD, MT HUTTON, NSW, 2290
CIVIL ENGINEERING PACKAGE




DRAWING NUMBER	DRAWING TITLE
DAC01.01	COVER SHEET, DRAWING SCHEDULE AND LOCALITY PLAN
DAC02.01	CONCEPT EROSION AND SEDIMENT CONTROL PLAN
DAC02.11	CONCEPT EROSION AND SEDIMENT CONTROL DETAILS
DAC02.12	CONCEPT EROSION AND SEDIMENT CONTROL NOTES
DAC03.01	CONCEPT STORMWATER AND LEVELS PLAN - GROUND FLOOR
DAC03.02	CONCEPT STORMWATER AND LEVELS PLAN - BASEMENT LEVEL
DAC04.01	CONCEPT BULK EARTHWORKS PLAN
DAC05.01	CIVIL DETAILS



NOT FOR CONSTRUCTION

REVISION	DESCRIPTION	ISSUED	VER'D	APP'D	DATE	CLIENT	ARCHITECT		PROJECT	DRAWING TITLE	JOB NUMBER
1	ISSUED FOR CLIENT REVIEW	LS		JH	11/10/21	 OAK TREE ENGINEERING	 CKDS	 NORTHROP Newcastle Level 1, 215 Pacific Hwy, Charlestown NSW 2290 Ph (02) 4943 1777 Email newcastle@northrop.com.au ABN 81 094 433 100	PROPOSED AGED CARE FACILITY 72 WILSONS ROAD MT HUTTON NSW 2290	CIVIL ENGINEERING PACKAGE COVER SHEET, DRAWING SCHEDULE AND LOCALITY PLAN	NL211825 DAC01.01 DRAWING SHEET SIZE = A1
1	ISSUED FOR APPROVAL	JR		JH	27/10/21						

REVISION	DESCRIPTION	ISSUED	VER'D	APP'D	DATE
1	ISSUED FOR CLIENT REVIEW	LS		JH	11/10/21
2	ISSUED FOR APPROVAL	LS		JH	27/10/21
3	ISSUED FOR APPROVAL	JR		JH	22.02.22

 OAK TREE AN ENVIRONMENTAL BUSINESS	CLIENT
DRAWING NOT TO BE USED FOR CONSTRUCTION UNLESS VERIFICATION SIGNATURE HAS BEEN ADDED	

ARCHITECT 	THE COPYRIGHT OF THIS DRAWING REMAINS WITH NORTHROP CONSULTING ENGINEERS PTY LTD
--	---












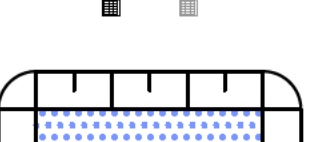

 ALL DIMENSIONS TO BE VERIFIED ON SITE BEFORE COMMENCING WORK. NORTHROP ACCEPTS NO RESPONSIBILITY FOR THE USABILITY, COMPLETENESS OR SCALE OF DRAWINGS TRANSFERRED ELECTRONICALLY. THIS DRAWING MAY HAVE BEEN PREPARED USING COLOUR, AND MAY BE INCOMPLETE IF COPIED TO BLACK & WHITE.	SCALE 1:400 @ A1 
--	---

 Newcastle Level 1, 215 Pacific Hwy, Charlestown NSW 2290 Ph (02) 4943 1777 Email newcastle@northrop.com.au ABN 81 094 433 100
--

PROJECT PROPOSED AGED CARE FACILITY 72 WILSONS ROAD MT HUTTON NSW 2290
--

DRAWING TITLE CIVIL ENGINEERING PACKAGE CONCEPT EROSION AND SEDIMENT CONTROL PLAN

JOB NUMBER NL211825	REVISION 3
DRAWING NUMBER DAC02.01	DRAWING SHEET SIZE = A1

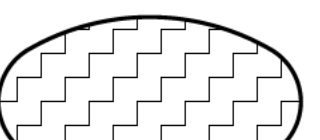
LEGEND	
	DENOTES PROPOSED BOUNDARY LINE
	DENOTES EXISTING BOUNDARY LINE
	DENOTES EXISTING SPOT HEIGHT.
	DENOTES EXISTING CONTOURS @ 0.25m INTERVALS.
	DENOTES PROPOSED SEDIMENT FENCE. REFER TO DRAWING DAC02.11 FOR DETAIL.
	DENOTES PROPOSED DROP INLET SEDIMENT TRAP. REFER TO DRAWING DAC02.11 FOR DETAIL.
	DENOTES PROPOSED DIVERSION DRAIN (CLEAN).
	DENOTES PROPOSED DIVERSION DRAIN (DIRTY).
	DENOTES PROPOSED STABILISED SITE ACCESS. REFER TO DRAWING DAC02.11 FOR DETAIL.
	DENOTES PROPOSED STOCKPILE. REFER TO DRAWING DAC02.11 FOR DETAIL.
	DENOTES GRATED INLET PIT (PROPOSED / EXISTING). REFER TO DRAWING DAC03.01 FOR FURTHER DETAILS.
	DENOTES SEDIMENT BASIN, REFER TO DRAWING DAC02.11 FOR FURTHER DETAILS.
	DENOTES 1% AEP FLOOD EXTENT, FROM INFORMATION PROVIDED BY COUNCIL.


SITE PARAMETERS	
CONSTRAINT	VALUE
SEDIMENT TYPE	D (DISPERSIBLE SOILS)
SOIL HYDROLOGY GROUP	B
K = SOIL ERODIBILITY (K-FACTOR)	0.059
R = RAINFALL EROSIVITY (R-FACTOR)	2580
S = 2 YEAR, 6 HOUR STORM INTENSITY	10.89
LS = SLOPE LENGTH/GRADIENT	168
P = EROSION CONTROL PRACTICE (P-FACTOR)	1.3
C = GROUND COVER (C-FACTOR)	1
SOIL LOSS (RUSLE METHOD) (tonnes/ha/yr)	332
EROSION HAZARD (TABLE 4.2 BLUE BOOK)	LOW-MODERATE

SEDIMENT BASIN SIZING		
CONSTRAINT	VALUE	UNITS
CV = VOLUMETRIC RUNOFF COEFFICIENT	0.34	
R = 5 DAY, 80 th PERCENTILE RAINFALL	30.5	mm
A = CATCHMENT AREA	1.22	ha
SETTLING ZONE VOLUME (10xCVxRxA)	127	m ³
SOIL LOSS (CALC ABOVE)	256	m ³ /ha/yr
A2 = DISTURBED CATCHMENT AREA	1.22	ha
SEDIMENT STORAGE VOLUME (0.17xSOIL LOSSxA2)	53	m ³
TOTAL BASIN VOLUME REQUIRED	180	m ³

CONSTRUCTION SEQUENCE	
1. INSTALL ACCESS POINT, AS DETAILED BELOW AND ON THE DETAILS SHEET.	
2. INSTALL SEDIMENT FENCE IN LOCATION SHOWN, AS PER DETAILS ON DRAWING C02.020D	
3. INSTALL OTHER SOIL AND WATER MANAGEMENT CONTROL MEASURES, AS DETAILED.	
4. COMPLETION OF CONSTRUCTION WORKS, IN ACCORDANCE WITH SOIL AND WATER MANAGEMENT PLAN, NOTES AND DETAILS.	
5. REHABILITATION OF DISTURBED AREAS AS SOON AS PRACTICAL TO MINIMIZE SOIL LOSS.	

NOT FOR CONSTRUCTION

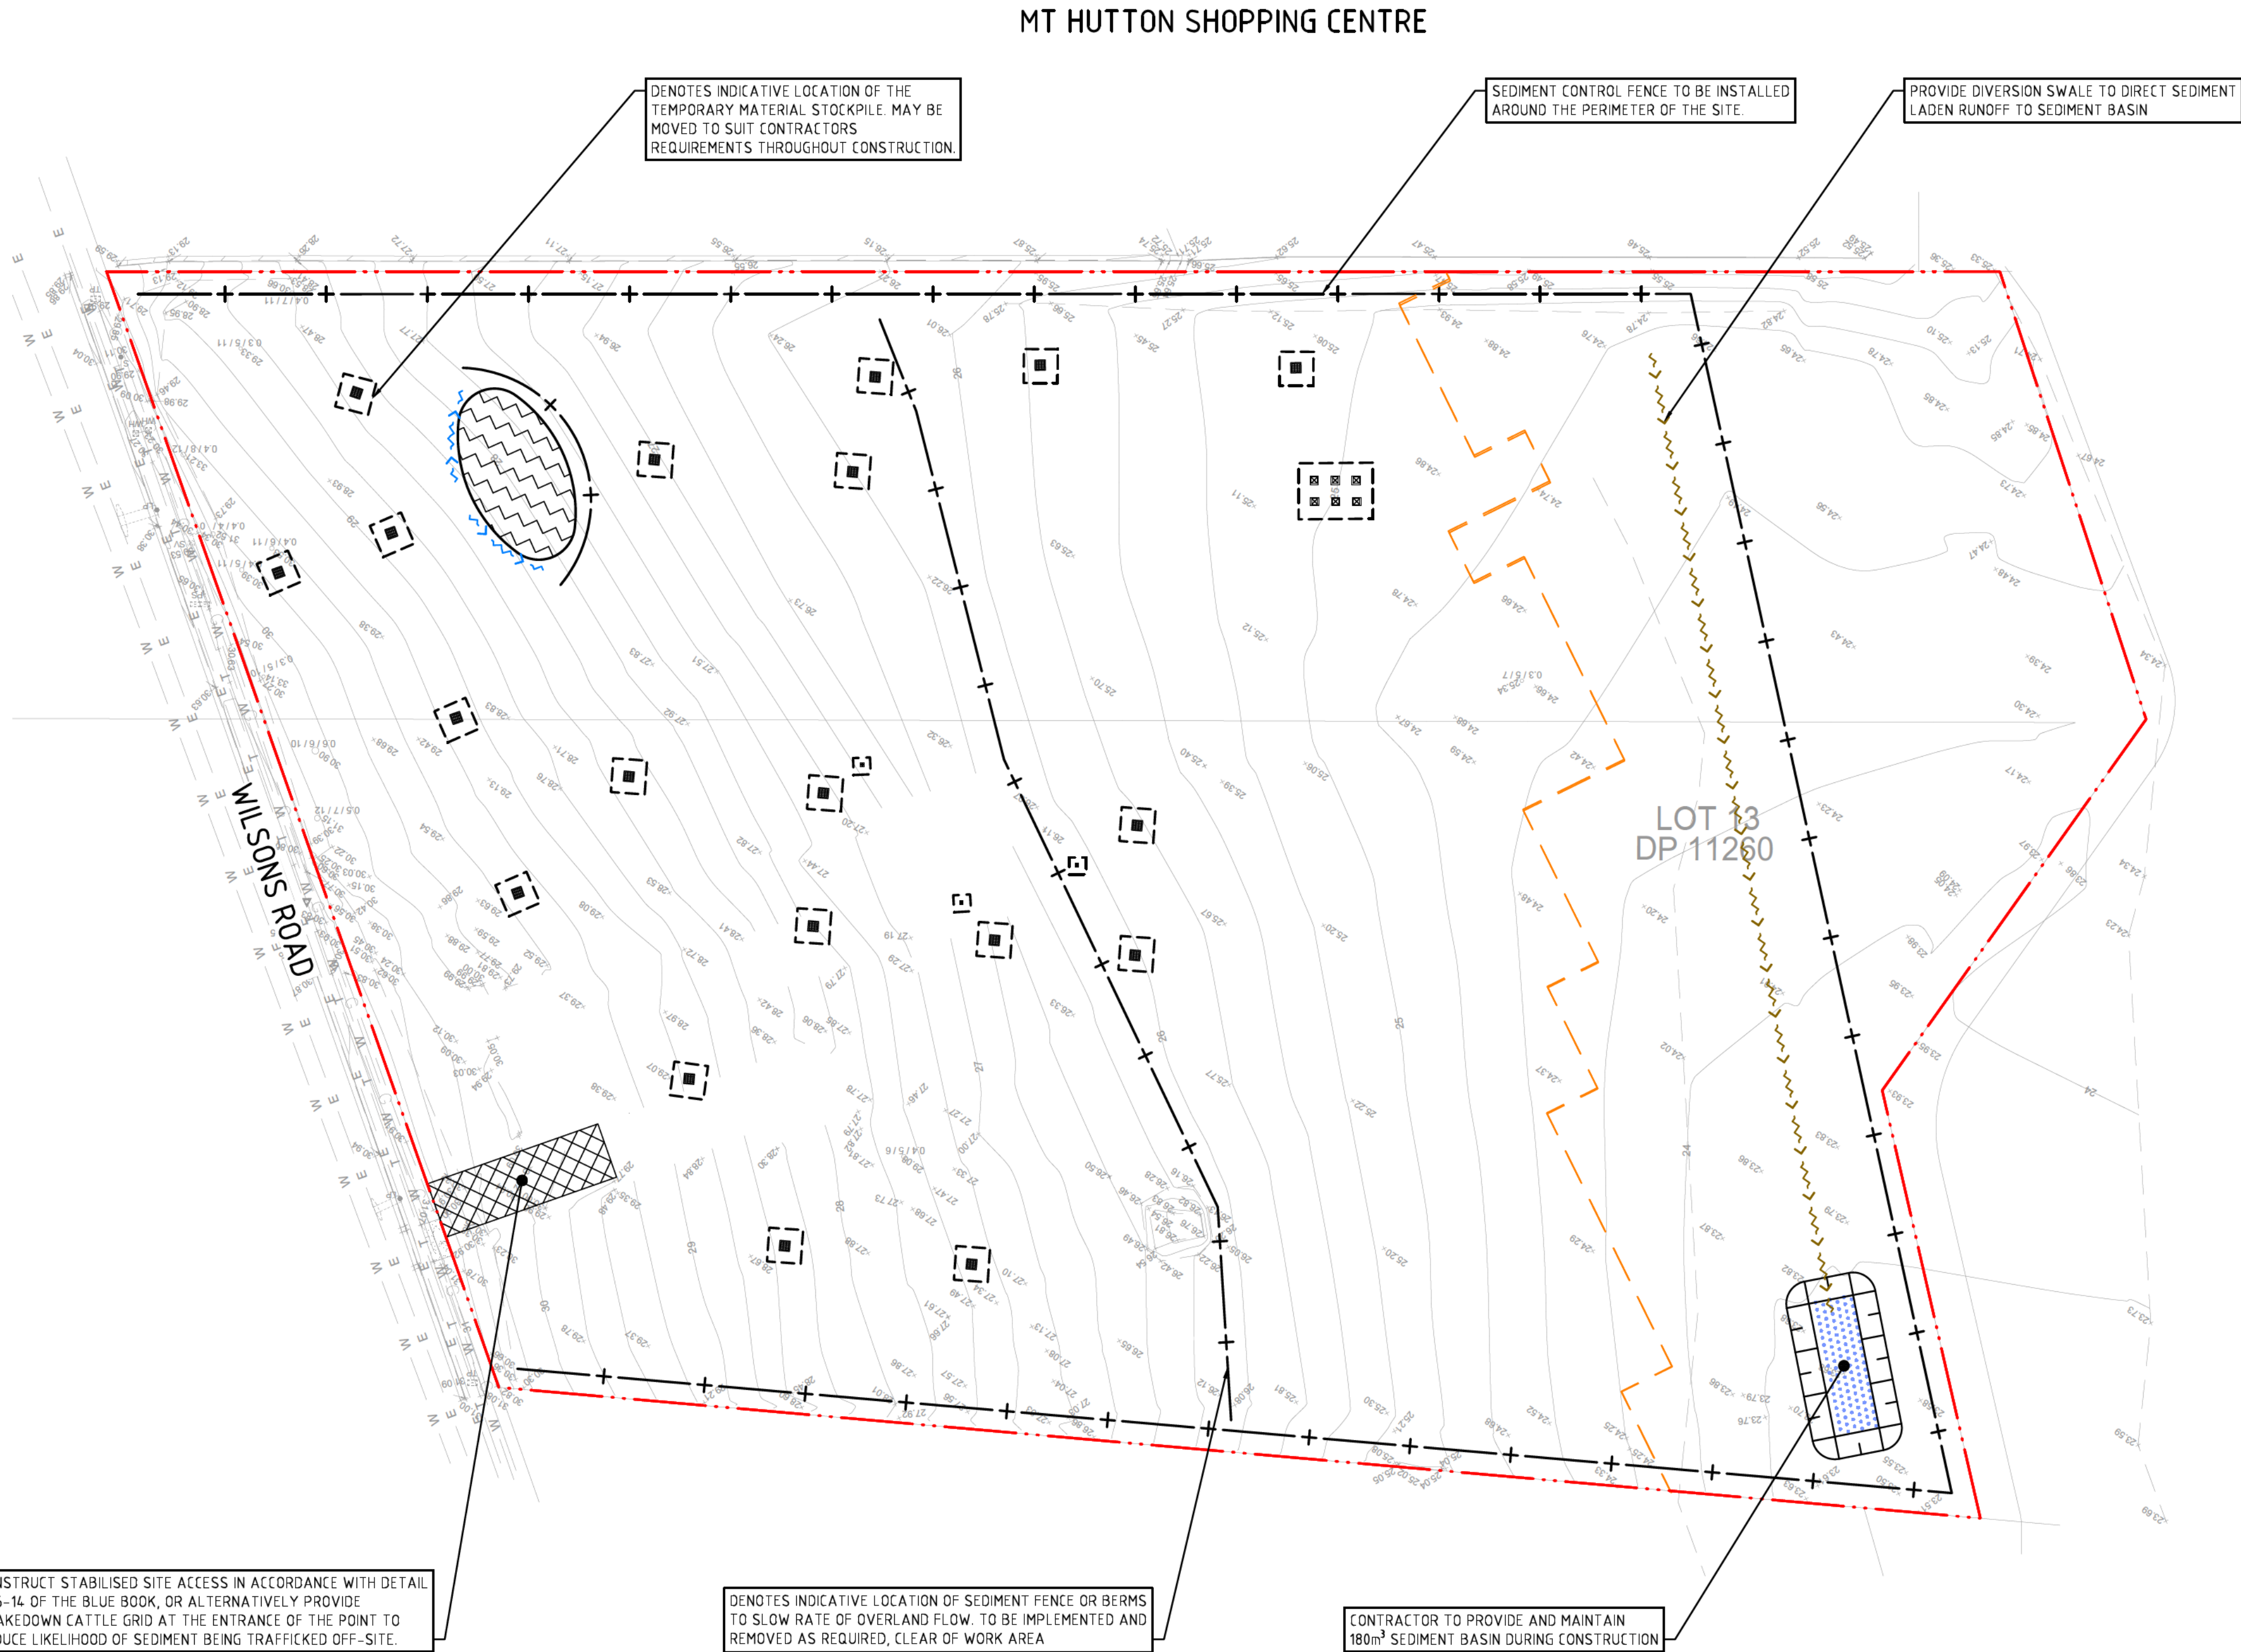


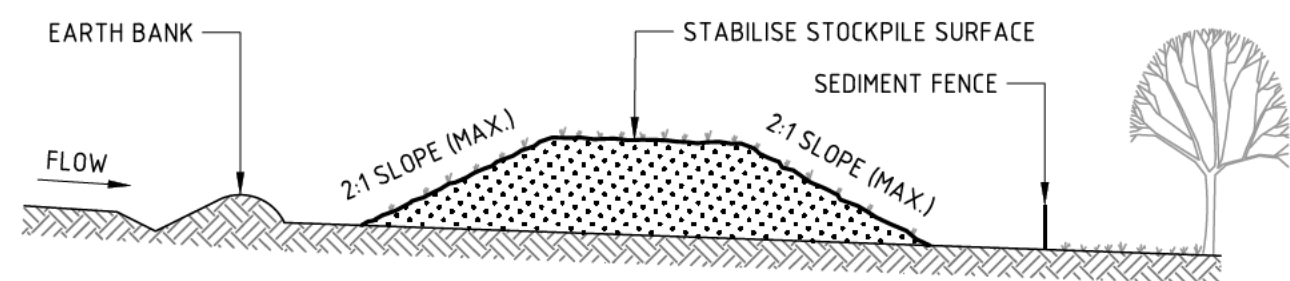

CONSTRUCTION NOTES

1. PLACE STOCKPILES MORE THAN 2m (PREFERABLY 5m) FROM EXISTING VEGETATION, CONCENTRATED WATER FLOW, ROADS AND HAZARD AREAS.
2. CONSTRUCT ON THE CONTOUR AS LOW, FLAT, ELONGATED MOUNDS.
3. WHERE THERE IS SUFFICIENT AREA, TOPSOIL STOCKPILES SHALL BE LESS THAN 2m IN HEIGHT.
4. WHERE THEY ARE TO BE IN PLACE FOR MORE THAN 10 DAYS, STABILISE FOLLOWING THE APPROVED ESCP OR SWMP TO REDUCE THE C-FACTOR TO LESS THAN 0.10.
5. CONSTRUCT EARTH BANKS (STANDARD DRAWING 5-5) ON THE UPSLOPE SIDE TO DIVERT WATER AROUND STOCKPILES AND SEDIMENT FENCES (STANDARD DRAWING 6-8) 1 TO 2m DOWNSLOPE.


STOCKPILES (SD 4-1)

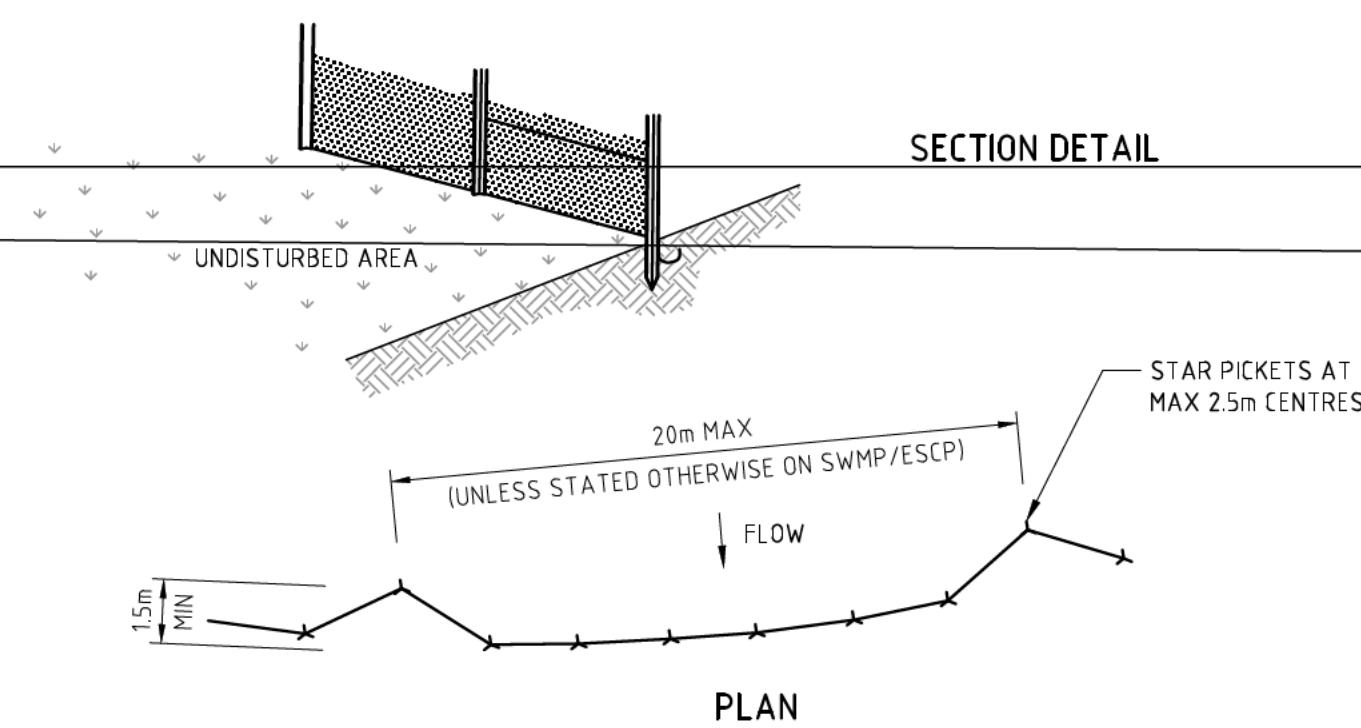

CONSTRUCTION NOTES

1. CONSTRUCT SEDIMENT FENCES AS CLOSE AS POSSIBLE TO BEING PARALLEL TO THE CONTOURS OF THE SITE, BUT WITH SMALL RETURNS AS SHOWN IN THE DRAWING TO LIMIT THE CATCHMENT AREA OF ANY ONE SECTION. THE CATCHMENT AREA SHOULD BE SMALL ENOUGH TO LIMIT WATER FLOW IF CONCENTRATED AT ONE POINT TO 50 LITRES PER SECOND IN THE DESIGN STORM EVENT, USUALLY THE 10-YEAR EVENT.
2. CUT A 150mm DEEP TRENCH ALONG THE UPSLOPE LINE OF THE FENCE FOR THE BOTTOM OF THE FABRIC TO BE ENTRENCHED.
3. DRIVE 15 METRE LONG STAR PICKETS INTO GROUND AT 25 METRE INTERVALS (MAX) AT THE DOWNSLOPE EDGE OF THE TRENCH ENSURE ANY STAR PICKETS ARE FITTED WITH SAFETY CAPS.
4. FIX SELF-SUPPORTING GEOTEXTILE TO THE UPSLOPE SIDE OF THE POSTS ENSURING IT GOES TO THE BASE OF THE TRENCH. FIX THE GEOTEXTILE WITH WIRE TIES OR AS RECOMMENDED BY THE MANUFACTURER. ONLY USE GEOTEXTILE SPECIFICALLY PRODUCED FOR SEDIMENT FENCING. THE USE OF SHADE CLOTH FOR THIS PURPOSE IS NOT SATISFACTORY.
5. JOIN SECTIONS OF FABRIC AT A SUPPORT POST WITH A 150mm OVERLAP.
6. BACKFILL THE TRENCH OVER THE BASE OF THE FABRIC AND COMPACT IT THOROUGHLY OVER THE GEOTEXTILE.


SEDIMENT FENCE (SD 6-8)

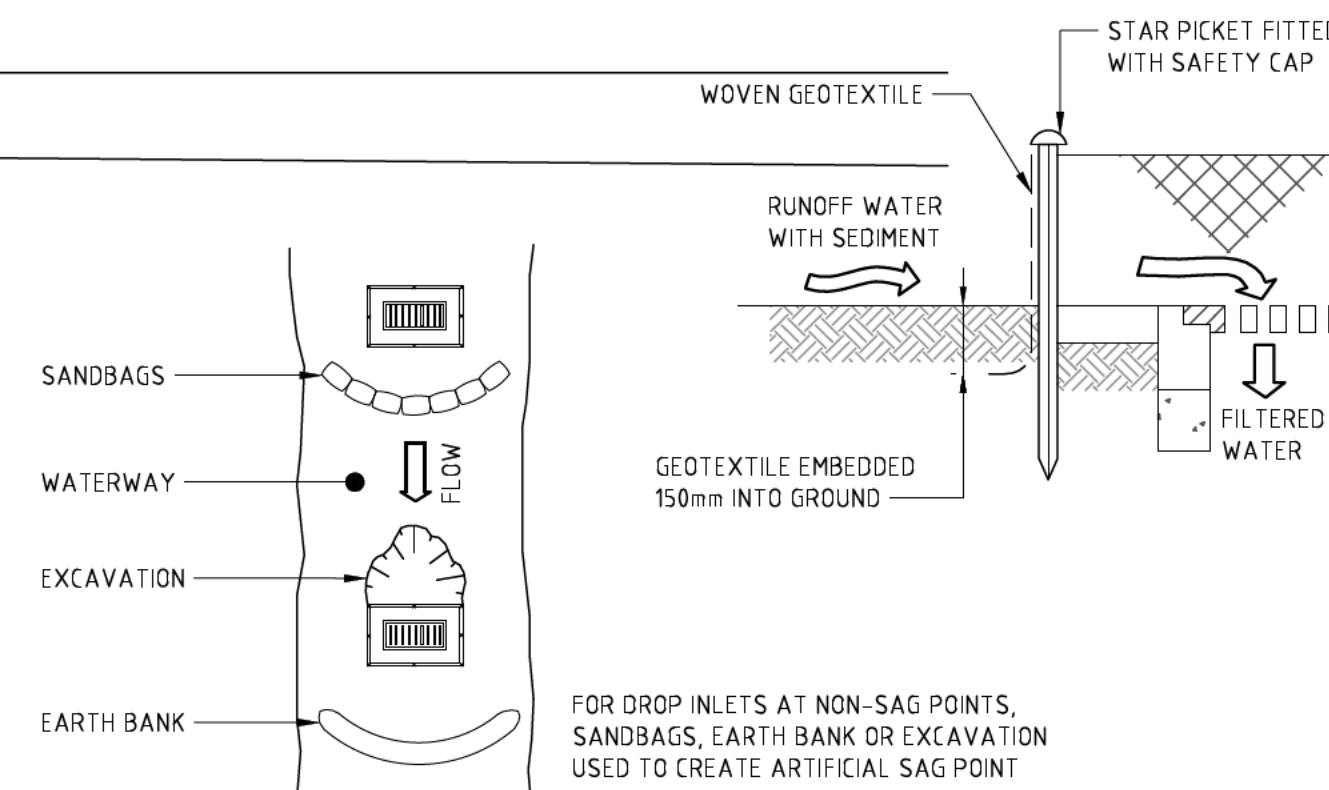

CONSTRUCTION NOTES

1. FABRICATE A SEDIMENT BARRIER MADE FROM GEOTEXTILE OR STRAW BALES.
2. FOLLOW STANDARD DRAWING 6-7 AND STANDARD DRAWING 6-8 FOR INSTALLATION PROCEDURES FOR THE STRAW BALES OR GEOFABRIC. REDUCE THE PICKET SPACING TO 1 METRE CENTRES.
3. IN WATERWAYS, ARTIFICIAL SAG POINTS CAN BE CREATED WITH SANDBAGS OR EARTH BANKS AS SHOWN IN THE DRAWING.
4. DO NOT COVER THE INLET WITH GEOTEXTILE UNLESS THE DESIGN IS ADEQUATE TO ALLOW FOR ALL WATERS TO BYPASS IT.


GEOTEXTILE INLET FILTER (SD 6-12)

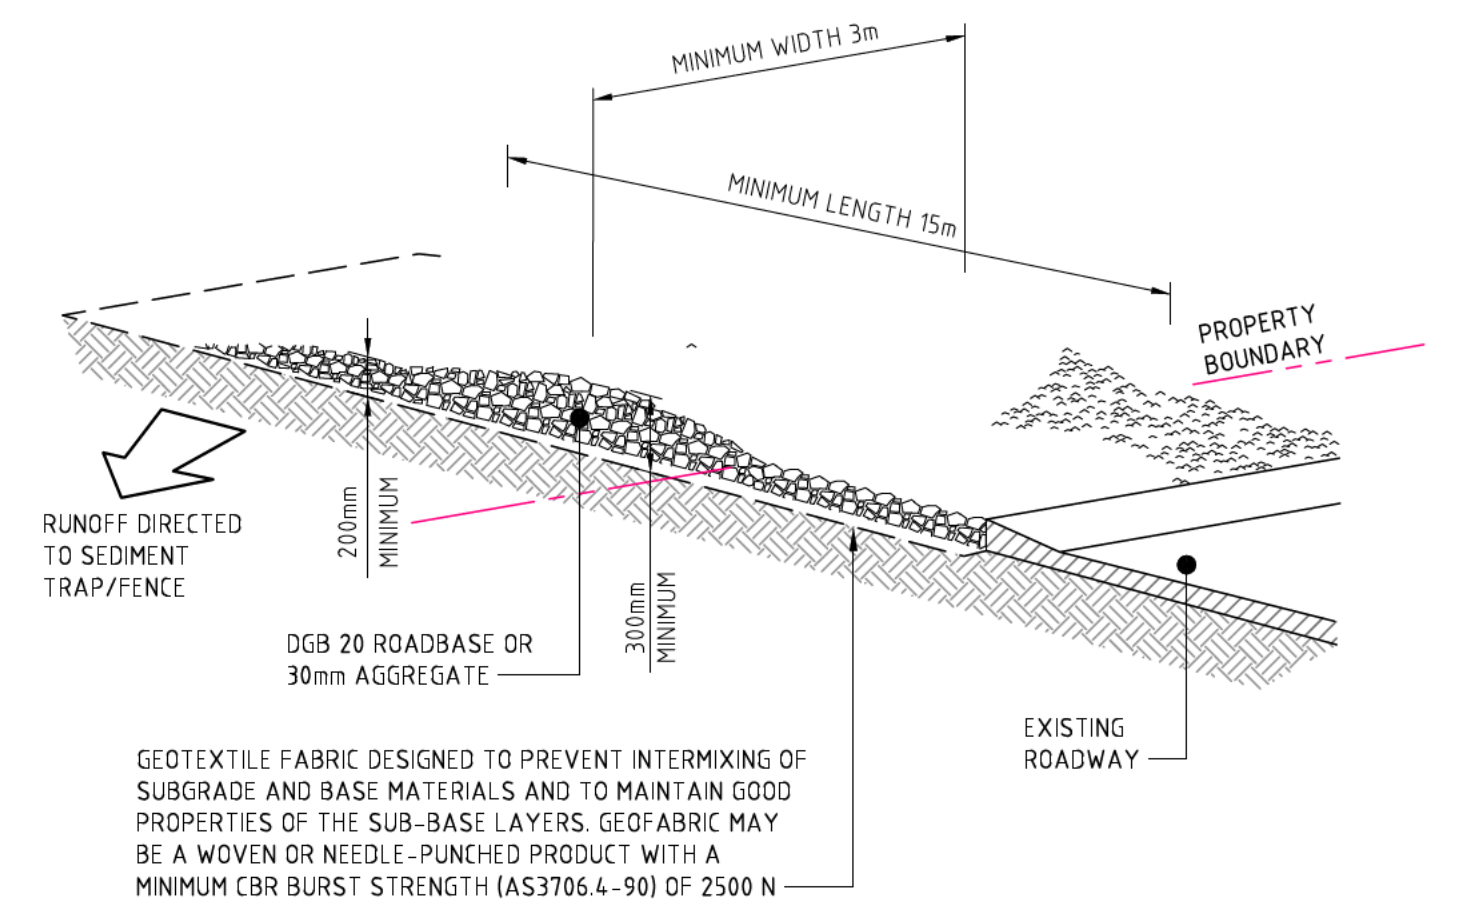

CONSTRUCTION NOTES

1. STRIP THE TOPSOIL, LEVEL THE SITE AND COMPACT THE SUBGRADE.
2. COVER THE AREA WITH NEEDLE-PUNCHED GEOTEXTILE.
3. CONSTRUCT A 200mm THICK PAD OVER THE GEOTEXTILE USING ROAD BASE OR 30mm AGGREGATE.
4. ENSURE THE STRUCTURE IS AT LEAST 15 METRES LONG OR TO BUILDING ALIGNMENT AND AT LEAST 3 METRES WIDE.
5. WHERE A SEDIMENT FENCE JOINS ONTO THE STABILISED ACCESS, CONSTRUCT A HUMP IN THE STABILISED ACCESS TO DIVERT WATER TO THE SEDIMENT FENCE.

STABILISED SITE ACCESS (SD 6-14)

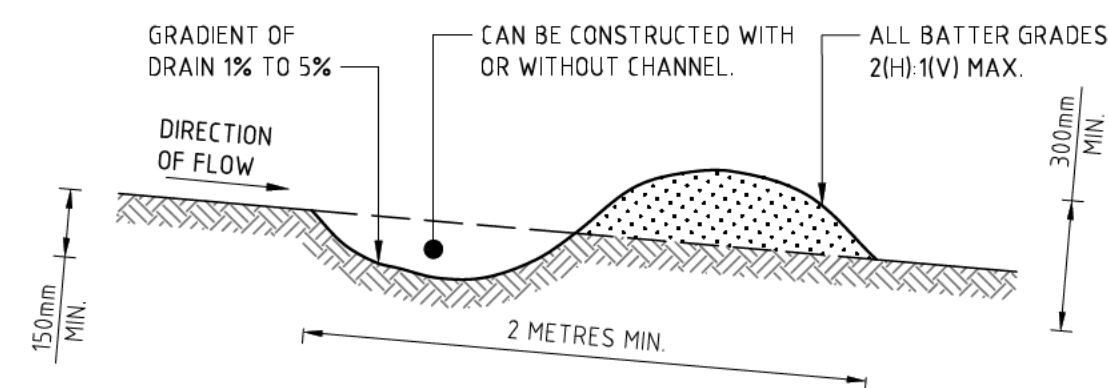


CONSTRUCTION NOTES

1. BUILD WITH GRADIENTS BETWEEN 1 AND 5 PERCENT.
2. AVOID REMOVING TREES AND SHRUBS IF POSSIBLE - WORK AROUND THEM.
3. ENSURE THE STRUCTURES ARE FREE OF PROJECTIONS OR OTHER IRREGULARITIES THAT COULD IMPEDE WATER FLOW.
4. BUILD THE DRAINS WITH CIRCULAR, PARABOLIC OR TRAPEZOIDAL CROSS SECTIONS, NOT V SHAPED.
5. ENSURE THE BANKS ARE PROPERLY COMPACTED TO PREVENT FAILURE.
6. COMPLETE PERMANENT OR TEMPORARY STABILISATION WITHIN 10 DAYS OF CONSTRUCTION.

NOTE: ONLY TO BE USED AS TEMPORARY BANK
WHERE MAXIMUM UPSLOPE LENGTH IS 80 METRES.

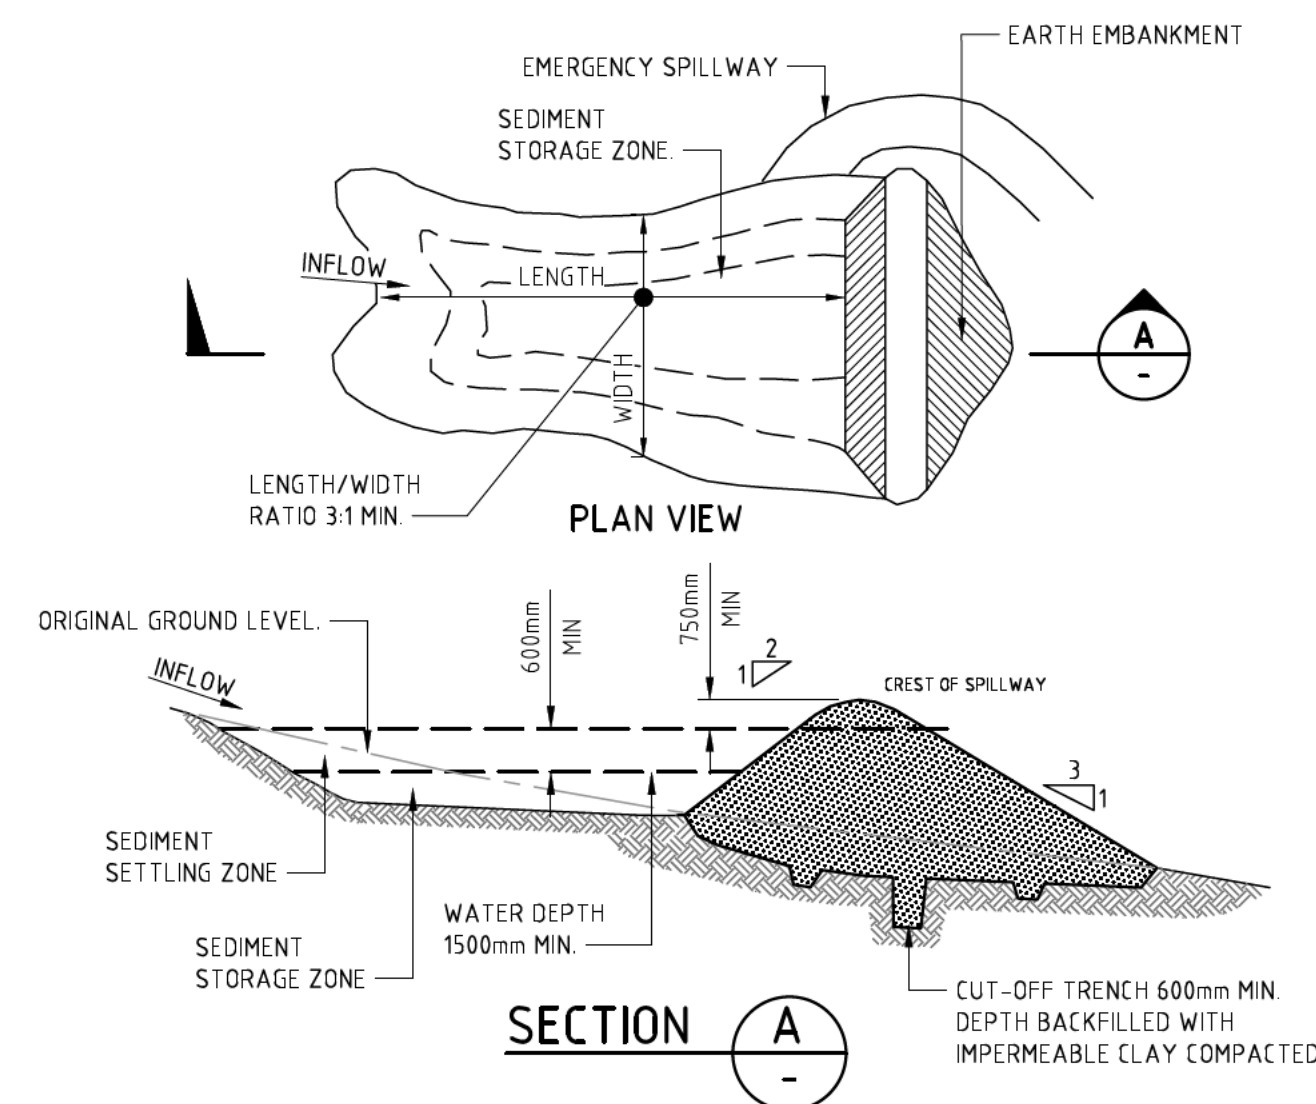


EARTH BANK - LOW FLOW (SD 5-5)



CONSTRUCTION NOTES

1. REMOVE ALL VEGETATION AND TOPSOIL FROM UNDER THE DAM WALL AND FROM WITHIN THE STORAGE AREA.
2. CONSTRUCT A CUT-OFF TRENCH 500mm DEEP AND 1200mm WIDE ALONG THE CENTRELINE OF THE EMBANKMENT EXTENDING TO A POINT ON THE GULLY WALL LEVEL WITH THE RISER CREST.
3. MAINTAIN THE TRENCH FREE OF WATER AND RECOMPACT THE MATERIALS WITH EQUIPMENT AS SPECIFIED IN THE SWMP TO 95 PER CENT STANDARD PROCTOR DENSITY.
4. SELECT FILL FOLLOWING THE SWMP THAT IS FREE OF ROOTS, WOOD, ROCK, LARGE STONE OR FOREIGN MATERIAL.
5. PREPARE THE SITE UNDER THE EMBANKMENT BY RIPPING TO AT LEAST 100mm TO HELP BOND COMPACTED FILL TO THE EXISTING SUBSTRATE.
6. SPREAD THE FILL IN 100mm TO 150mm LAYERS AND COMPACT IT AT OPTIMUM MOISTURE CONTENT FOLLOWING THE SWMP.
7. CONSTRUCT THE EMERGENCY SPILLWAY.
8. REHABILITATE THE STRUCTURE FOLLOWING THE SWMP.

(APPLIES TO 'TYPE D' AND 'TYPE F' SOILS ONLY)
EARTH BASIN - WET (SD 6-4)

REVISION	DESCRIPTION	ISSUED	VER'D	APP'D	DATE	CLIENT	ARCHITECT	ALL DIMENSIONS TO BE VERIFIED ON SITE BEFORE COMMENCING WORK. NORTHROP ACCEPTS NO RESPONSIBILITY FOR THE USABILITY, COMPLETENESS OR SCALE OF DRAWINGS TRANSFERRED ELECTRONICALLY. THIS DRAWING MAY HAVE BEEN PREPARED USING COLOUR, AND MAY BE INCOMPLETE IF COPIED TO BLACK & WHITE.	PROJECT	DRAWING TITLE	JOB NUMBER			
1	ISSUED FOR CLIENT REVIEW	LS		JH	11/10/21			NOT TO SCALE	 Newcastle Level 1, 215 Pacific Hwy, Charlestown NSW 2290 Ph (02) 4943 1777 Email newcastle@northrop.com.au ABN 81 094 433 100	PROPOSED AGED CARE FACILITY 72 WILSONS ROAD MT HUTTON NSW 2290	CIVIL ENGINEERING PACKAGE CONCEPT EROSION AND SEDIMENT CONTROL DETAILS	NL211825		
2	ISSUED FOR APPROVAL	LS		JH	27/10/21								DRAWING NUMBER	REVISION
													DAC02.11	2
						DRAWING NOT TO BE USED FOR CONSTRUCTION UNLESS VERIFICATION SIGNATURE HAS BEEN ADDED	THE COPYRIGHT OF THIS DRAWING REMAINS WITH NQTHROP CONSULTING ENGINEERS PTY LTD				DRAWING SHEET SIZE - A1			


VERIFIER: JHOEY
JOB MANAGER: JHOEY
DESIGNED: JHOEY
DRAWN: JRYALL


EROSION AND SEDIMENT CONTROL NOTES						
THE FOLLOWING NOTES MAY NOT BE RELEVANT TO EACH DEVELOPMENT.						
General						
1. ESCP refers to Erosion and Sediment Control Plan or a Soil and Water Management Plan (SWMP).						
2. ESC refers to erosion and sediment control.						
3. Sediment, includes, but is not limited to, clay, silt, sand, gravel, soil, mud, cement, and ceramic waste.						
4. Any reference to the Blue Book refers to Managing Urban Stormwater – Soils and Construction, Landcom, 2004.						
5. Any reference to the IECA White Books (2008) refers to IECA 2008, Best Practice Erosion and Sediment Control, Books 1-6, International Erosion Control Association (Australasia), Picton NSW.						
6. Any material deposited in any conservation area from works associated with the development shall be removed immediately by measures involving minimal ground and/or vegetation disturbance and no machinery, or following directions by Council and/or within a timeframe advised by Council.						
The ESCP						
7. The ESCP and its associated ESC measures shall be constantly monitored, reviewed, and modified as required to correct deficiencies. Council has the right to direct changes if, in its opinion, the measures that are proposed or have been installed are inadequate to prevent pollution.						
8. Prior to any activities onsite, the responsible person(s) is to be nominated. The responsible person(s) shall be responsible for the ESC measures onsite. The name, address and 24 hour contact details of the person(s) shall be provided to Council in writing. Council shall be advised within 48 hours of any changes to the responsible person(s), or their contact details, in writing.						
9. At least 14 days before the natural surface is disturbed in any new stage, the contractor shall submit to the Certifier, a plan showing ESC measures for that Stage. The degree of design detail shall be based on the disturbed area.						
10. At any time, the ESC measures onsite shall be appropriate for the area of disturbance and its characteristics including soils (in accordance with those required for the site as per DCP).						
11. The implementation of the ESCP shall be supervised by personnel with appropriate qualifications and/or experience in ESC on construction sites.						
12. The approved ESCP shall be available on-site for inspection by Council officers while work activities are occurring.						
13. The approved ESCP shall be up to date and show a timeline of installation, maintenance and removal of ESC measures.						
14. All ESC measures shall be appropriate for the Sediment Type(s) of the soils onsite, in accordance with the Blue Book, IECA White Books or other current recognised industry standard for ESC for Australian conditions.						
15. Adequate site data, including soil data from a NATA approved Laboratory, shall be obtained to allow the preparation of an appropriate ESCP, and allow the selection, design and specification of required ESC measures.						
16. All works shall be carried out in accordance with the approved ESCP (as amended from time to time) unless circumstances arise where:						
a) compliance with the ESCP would increase the potential for environmental harm; or						
b) circumstances change during construction and those circumstances could not have been foreseen; or						
c) Council determines that unacceptable off-site sedimentation is occurring as a result of a land-disturbing activity. In either case, the person(s) responsible may be required to take additional, or alternative protective action, and/or undertake reasonable restoration works within the timeframe specified by the Council.						
17. Additional ESC measures shall be implemented, and a revised ESCP submitted for approval to the certifier (within five business days of any such amendments) in the event that:						
a) there is a high probability that serious or material environmental harm may occur as a result of sediment leaving the site, or						
b) the implemented works fail to achieve Council's water quality objectives specified in these conditions, or						
c) site conditions significantly change; or						
d) site inspections indicate that the implemented works are failing to achieve the "objective" of the ESCP.						
18. A copy of any amended ESCP shall be forwarded to an appropriate Council Officer, within five business days of any such amendments.						
Site establishment including clearing and mulching						
19. No land clearing shall be undertaken unless preceded by the installation of adequate drainage and sediment control measures, unless such clearing is required for the purpose of installing such measures, in which case, only the minimum clearing required to install such measures shall occur.						
20. Bulk tree clearing and grubbing of the site shall be immediately followed by specified temporary erosion control measures (e.g. temporary grassing or mulching) prior to commencement of each stage of construction works.						
21. Trees and vegetation cleared from the site shall be mulched onsite within 7 days of clearing.						
22. Appropriate measures shall be undertaken to control any dust originating due to the mulching of vegetation onsite.						
23. All office facilities and operational activities shall be located such that any effluent, including wash-down water, can be totally contained and treated within the site.						
24. All reasonable and practicable measures shall be taken to ensure stormwater runoff from access roads and stabilised entry/exit systems, drains to an appropriate sediment control device.						
25. Site exit points shall be appropriately managed to minimise the risk of sediment being tracked onto sealed, public roadways.						
26. Stormwater runoff from access roads and stabilised entry/exit points shall drain to an appropriate sediment control device.						
27. The Applicant shall ensure an adequate supply of ESC, and appropriate pollution clean-up materials are available on-site at all times.						
28. All temporary earth banks, flow diversion systems, and sediment basin embankments shall be machine-compacted, seeded and mulched within ten (10) days of formation for the purpose of establishing a vegetative cover, or lined appropriately.						
29. Sediment deposited off site as a result of on-site activities shall be collected and the area cleaned/rehabilitated as soon as reasonable and practicable.						
30. Concrete waste and chemical products, including petroleum and oil-based products, shall be prevented from entering any internal or external water body, or any external drainage system, excluding those on-site water bodies specifically designed to contain and/or treat such material. Appropriate measures shall be installed to trap these materials onsite.						
31. Brick, tile or masonry cutting shall be carried out on a pervious surface (e.g. grass or open soil) and in such a manner that any resulting sediment-laden runoff is prevented from discharging into a gutter, drain or water. Appropriate measures shall be installed to trap these materials onsite.						
32. Newly sealed hard-stand areas (e.g. roads, driveways and car parks) shall be swept thoroughly as soon as practicable after sealing/surfacing to minimise the risk of components of the surfacing compound entering stormwater drains.						
33. Stockpiles of erodible material shall be provided with an appropriate protective cover (synthetic or organic) if the materials are likely to be stockpiled for more than 10 days.						
34. Stockpiles, temporary or permanent, shall not be located in areas identified as no-go zones (including, but not limited to, restricted access areas, buffer zones, or areas of non-disturbance) on the ESCP.						
35. No more than 150m of a stormwater, sewer line or other service trench shall to be open at any one time.						
36. Site spoil shall be lawfully disposed of in a manner that does not result in ongoing soil erosion or environmental harm.						
37. Wherever reasonable and practicable, stormwater runoff entering the site from external areas, and non-sediment laden (clean) stormwater runoff entering a work area or area of soil disturbance, shall be diverted around or through that area in a manner that minimises soil erosion and the contamination of that water for all discharges up to the specified design storm discharge.						

EROSION AND SEDIMENT CONTROL NOTES (cont)						
Site Management including Dust						
38. Priority shall be given to the prevention, or at least the minimisation, of soil erosion, rather than the trapping of displaced sediment. Such a clause shall not reduce the responsibility to apply and maintain, at all times, all necessary ESC measures.						
39. Measures used to control wind erosion shall be appropriate for the location and prevent soil erosion at all times, including working hours, out of hours, weekends, public holidays, and during any other shutdown periods.						
40. The application of liquid or chemical-based dust suppression measures shall ensure that sediment-laden runoff resulting from such measures does not create a traffic or environmental hazard.						
41. All cut and fill earth batters less than 3m in elevation shall be topsoiled, and grass seeded/hydr mulched within 10 days of completion of grading in consultation with Council.						
42. Once cut/fill operations have been finalised in a section, all disturbed areas that are not being worked on shall be stabilised in accordance with time lines in the Blue Book.						
43. All reasonable and practicable measures shall be taken to prevent, or at least minimise, the release of sediment from the site.						
44. Suitable all-weather maintenance access shall be provided to all sediment control devices.						
45. Sediment control devices, other than sediment basins, shall be de-silted and made fully operational as soon as reasonable and practicable after a sediment-producing event, whether natural or artificial, if the device's sediment retention capacity falls below 75% of its design retention capacity.						
46. All erosion and sediment control measures, including drainage control measures, shall be maintained in proper working order at all times during their operational lives.						
47. Washing/flushing of sealed roadways shall only occur where sweeping has failed to remove sufficient sediment and there is a compelling need to remove the remaining sediment (e.g. for safety reasons). In such circumstances, all reasonable and practicable sediment control measures shall be used to prevent, or at least minimise, the release of sediment into receiving waters. Only those measures that will not cause safety and property flooding issues shall be employed. Sediment removed from roadways shall be disposed of in a lawful manner that does not cause ongoing soil erosion or environmental harm.						
48. Sediment removed from sediment traps and places of sediment deposition shall be disposed of in a lawful manner that does not cause ongoing soil erosion or environmental harm.						
Sediment Basins – installation, maintenance and removal including sediment traps						
49. As-Constructed plans shall be prepared for all constructed Sediment Basins and associated emergency spillways. Such plans shall verify the basin's dimensions, levels and volumes comply with the approved design drawings. These plans may be requested by the Certifier or Council.						
50. Sediment basins shall be constructed and fully operational prior to any other soil disturbance in their catchment.						
51. Install an internal gated valve, or similar, in any outlet pipe once pipes installed, or install a sacrificial pipe from basin through wall to external outlet point. The valve shall be connected to a riser made from siltproof pipe in the basin. The valve may be opened once captured water meets water quality requirements. The final set up for temporary internal outlet structures to be confirmed prior to construction with Council. This set up will enable discharge of treated water from site without need for pumping.						
52. A sediment storage level marker post shall be with a cross member set just below the top of the sediment storage zone (as specified on the approved ESCP). At least a 75mm wide post shall be firmly set into the basin floor.						
53. The Site Manager shall obtain the relevant approvals from the relevant organisations to discharge treated water from any existing basins. Organisations may include, but not be limited to, Hunter Water, and Council.						
54. Where more than one stage is to be developed at one time, or before the preceding stage is complete, the sediment basin(s) for these stages shall have sufficient capacity to cater for all area directed to the basin(s).						
55. Prior to any forecast weather event likely to result in runoff, any basins/traps shall be dewatered to provide sufficient capacity to capture sediment laden water from the site.						
56. Sufficient quantities of chemicals/agents to treat captured water shall be placed such that water entering the basin mixes with the chemical/agents and is carried into the basin to speed up clarification.						
57. Any basin shall be dewatered within the X-day rainfall depth used to calculate the capacity of the basin, after a rainfall event.						
58. Sufficient quantities of chemicals/agents to treat turbid water shall be securely stored on-site to provide for at least three complete treatments of all basins requiring chemical treatment onsite.						
59. Prior to the controlled discharge (e.g. de-watering activities) from site including excavations and/or sediment basins, the following water quality objectives shall be achieved:						
a) Total Suspended Solids (TSS) to a maximum 50 milligrams/L;						
b) water pH between 6.5 and 8.5, unless otherwise required by the Council;						
c) Turbidity (measured in NTUs) to a maximum of 60 NTU; and						
d) EC levels no greater than background levels.						
60. The Development Approval may require testing of additional water quality elements prior to discharge. E.g. metals, organic substances, chemicals or bacteriological indicators.						
61. A sample of the released treated water shall be kept onsite in a clear container with the sample date recorded on it.						
62. Water quality samples shall be taken at a depth no less than 200mm below the water surface of the basin.						
63. No Aluminium based products may be used treat captured water onsite without the prior written permission from an appropriate Council Officer. The applicant shall have a demonstrated ability to use such products correctly and without environmental harm prior to any approval.						
64. The chemical/agent used in Type D and Type F basins to treat captured water captured in the basin shall be applied in concentrations sufficient to achieve Council's water quality objectives within the X-day rainfall depth used to calculate the capacity of the basin, after a rainfall event.						
65. All Manufacturers' instructions shall be followed for any chemicals/agents used onsite, except where approved by the Responsible Person or an appropriate Council Officer.						
66. The Applicant shall ensure that on each occasion a Type F or Type D basin was not de-watered prior to being surcharged by a following rainfall event, a report is presented to an appropriate Council officer within 5 days identifying the circumstances and proposed amendments, if any, to the basin's operating procedures.						
67. Settled sediment shall be removed as soon as reasonable and practicable from any sediment basin if:						
a) it is anticipated that the next storm event is likely to cause sediment to settle above the basin's sediment storage zone; or						
b) the elevation of settled sediment is above the top of the basin's sediment storage zone; or						
c) the elevation of settled sediment is above the basins sediment marker line.						
68. Scour protection measures placed on sediment basin emergency spillways shall appropriately protect the spillway chute and its side batters from scour, and shall extend a minimum of 3m beyond the downstream toe of the basin's embankment.						
69. Suitable all-weather maintenance access shall be provided to all sediment control devices.						
70. Materials, whether liquid or solid, removed from any ESC measure or excavation during maintenance or decommissioning, shall be disposed of in a manner that does not cause ongoing soil erosion, water pollution or environmental harm.						
71. All sediment basins shall remain fully operational at all times until the basin's design catchment achieves 70% ground cover or surface stabilisation acceptable to Council.						
72. The ESC measures installed during the decommissioning and rehabilitation of a sediment basin shall comply with same standards specified for the normal construction works.						
73. A sediment basin shall not be decommissioned until all up-slope site stabilisation measures have been implemented and are appropriately working to control soil erosion and sediment runoff.						
74. Immediately prior to the construction of the permanent stormwater treatment device, appropriate flow bypass conditions shall be established to prevent sediment-laden water entering the device.						

EROSION AND SEDIMENT CONTROL NOTES (cont)						
Revegetation/Stabilisation						
75. Temporary Stabilisation may be attained using vegetation, non rewettable soil polymers, or pneumatically applied erosion controls.						
76. All cut and fill earth batters less than 3m in elevation shall be topsoiled, and grass seeded/hydr mulched within 10 days of completion of grading in consultation with Council.						
77. Once cut/fill operations have been finalised in a section, all disturbed areas that are not being worked on shall be stabilised in accordance with time lines in the Blue Book.						
78. The LMC Seed mix shall be used unless stated on the ESCP/SWMP.						
79. The pH level of topsoil shall be appropriate to enable establishment and growth of specified vegetation prior to initiating the establishment of vegetation.						
80. Non rewettable binder shall be used in all hydr mulch/hydroseed/polymer mixes on slopes or works adjacent to a water course.						
81. Soil ameliorants shall be added to the soil in accordance with an approved Landscape Plan, Vegetation Management Plan, and/or soil analysis.						
82. Surface soil density, compaction and surface roughness shall be adjusted prior to seeding/planting in accordance with an approved Landscape Plan, Vegetation Management Plan, and/or soil analysis.						
83. Procedures for initiating a site shutdown, whether programmed or un-programmed, shall incorporate revegetation of all soil disturbances unless otherwise approved by Council. The stabilisation works shall not rely upon the longevity of non-vegetated erosion control blankets, or temporary soil binders.						
Site Monitoring and Maintenance						
84. The Applicant shall ensure that appropriate procedures and suitably qualified personnel are engaged to plan and conduct site inspections and water quality monitoring throughout the construction and maintenance phase.						
85. All ESC measures shall be inspected and any maintenance undertaken immediately:						
a) at least daily (when work is occurring on-site), and						
b) at least weekly (when work is not occurring on-site), and						
c) within 24hrs of expected rainfall; and						
d) within 18hrs of a rainfall event that causes runoff on the site.						
86. Written records shall be kept onsite of ESC monitoring and maintenance activities conducted during the construction and maintenance periods, and be available to Council officers on request.						
87. All environmentally relevant incidents shall be recorded in a field log that shall remain accessible to all relevant regulatory authorities.						
88. All water quality data, including dates of rainfall, dates of testing, testing results and dates of water release, shall be kept in an on-site register. The register is to be maintained up to date for the duration of the approved works and be available on-site for inspection by (insert name of regulatory authority) on request.						
89. At nominated instream water monitoring sites, a minimum of 3 water samples shall be taken and analysed, and the average result used to determine quality.						
Instream Works						
90. All instream works (including in or adjacent to watercourses natural or manmade, flowing or not) shall be carried out in accordance with the IECA White Books.						

SOIL AND WATER MANAGEMENT NOTES:	
1.	ALL WORK IS TO BE CARRIED OUT IN ACCORDANCE WITH RELEVANT ORDINANCES AND REGULATIONS, NOTE IN PARTICULAR THE REQUIREMENTS OF LANDCOMS MANAGING URBAN STORMWATER, SOILS AND CONSTRUCTION (THE 'BLUE BOOK').
2.	THE CONTRACTOR MUST NOTIFY COUNCIL WITHIN 5 WORKING DAYS OF THE INITIAL EROSION CONTROL MEASURES BEING INSTALLED.
3.	INSTALL SEDIMENT PROTECTION FILTERS ON ALL NEW AND EXISTING STORMWATER INLET PITS IN ACCORDANCE WITH EITHER THE MESH AND GRAVEL INLET FILTER DETAIL S06-11 OR THE GEOTEXTILE INLET FILTER DETAIL S06-12 OF THE 'BLUE BOOK'.
4.	ESTABLISH ALL REQUIRED SEDIMENT FENCES IN ACCORDANCE WITH DETAIL S06-8 OF THE 'BLUE BOOK'.
5.	INSTALL SEDIMENT FENCING AROUND INDIVIDUAL BUILDING ZONES/AREAS AS REQUIRED AND AS DIRECTED BY THE SUPERINTENDENT.
6.	ALL TRENCHES AND SWALE EXCAVATION SHALL BE SIDE-CAST TO THE HIGH SIDE AND CLOSED AT THE END OF EACH DAY'S WORK.
7.	THE CONTRACTOR SHALL ENSURE THAT ALL VEGETATION (TREE, SHRUB AND GROUND COVER) WHICH IS TO BE RETAINED SHALL BE PROTECTED THROUGHOUT THE DURATION OF CONSTRUCTION. REFER ARCHITECTS PLANS FOR TREES TO BE KEPT.
8.	ALL VEGETATION TO BE REMOVED SHALL BE MULCHED ONSITE AND SPREAD/STOCKPILED AS DIRECTED BY THE SUPERINTENDENT.
9.	STRIP TOPSOIL IN AREAS DESIGNATED FOR STRIPPING AND STOCKPILE FOR RE-USE AS REQUIRED. ANY SURPLUS MATERIAL SHALL BE REMOVED FROM SITE AND DISPOSED OF IN ACCORDANCE WITH EPA GUIDELINES.
10.	CONSTRUCT AND MAINTAIN ALL MATERIAL STOCKPILES IN ACCORDANCE WITH DETAIL S04-1 OF THE 'BLUE BOOK' (INCLUDING CUT-OFF SWALES TO THE HIGH SIDE AND SEDIMENT FENCES TO THE LOW SIDE). NOTABLY, ENSURE STOCKPILES DO NOT EXCEED 2.0m HIGH. IF MATERIALS ARE LIKELY TO BE STOCKPILED FOR MORE THAN 10 DAYS, THE CONTRACTOR SHALL PROVIDE AN APPROPRIATE PROTECTIVE COVER (SYNTHETIC OR ORGANIC).
11.	PROVIDE WATER TRUCKS OR SPRINKLER DEVICES DURING CONSTRUCTION AS REQUIRED TO SUPPRESS DUST. WHERE COUNCIL CONSIDERS THAT THE DUST IS NOT ADEQUATELY CONTROLLED, THE CONTRACTOR MUST INVESTIGATE OTHER DUST MITIGATION MEASURES SUCH AS DUST SUPPRESSANTS. THE CONTRACTOR MUST ENSURE THE CHEMICAL BASED DUST SUPPRESSANT DOES NOT CREATE A TRAFFIC OR ENVIRONMENTAL HAZARD.
12.	SHOULD ANY SEDIMENT LADEN WATER LEAVE THE SITE, THE INCIDENT MUST BE REPORTED TO COUNCIL WITHIN 2 HOURS OF THE SITE MANAGER BECOMING AWARE OF THE INCIDENT.
13.	THE CONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING A DETAILED WRITTEN RECORD OF ALL EROSION AND SEDIMENT CONTROLS ON-SITE DURING THE CONSTRUCTION PERIOD. THIS RECORD SHALL BE UPDATED ON A WEEKLY BASIS AND SHALL CONTAIN DETAILS ON THE CONDITION OF CONTROLS AND ANY/ALL MAINTENANCE, CLEANING AND BRANCHES. THIS RECORD SHALL BE KEPT ON-SITE AT ALL TIMES AND SHALL BE MADE AVAILABLE FOR INSPECTION BY THE PRINCIPAL CERTIFYING AUTHORITY AND THE SUPERINTENDENT DURING NORMAL WORKING HOURS.
14.	MEASURES USED TO CONTROL WIND EROSION MUST BE APPROPRIATE FOR THE LOCATION AND PREVENT SOIL EROSION AT ALL TIMES, INCLUDING WORK HOURS, WEEKENDS, PUBLIC HOLIDAYS AND DURING ANY OTHER SHUTDOWN PERIODS.
15.	ONCE CUT/FILL OPERATIONS HAVE BEEN FINALISED ALL DISTURBED AREAS THAT ARE NOT BEING WORKED ON SHALL BE RE-VEGETATED AS SOON AS IS PRACTICAL.
16.	PRIORITY MUST BE GIVEN TO THE PREVENTION, OR AT LEAST MINIMISATION, OF SOIL EROSION, RATHER THAN THE TRAPPING OF EXPOSED SEDIMENT. SUCH CLAUSE SHALL NOT REDUCE THE RESPONSIBILITY OF A CONTRACTOR TO APPLY AND MAINTAIN, AT ALL TIMES, ALL NECESSARY SEDIMENT CONTROL MEASURES.

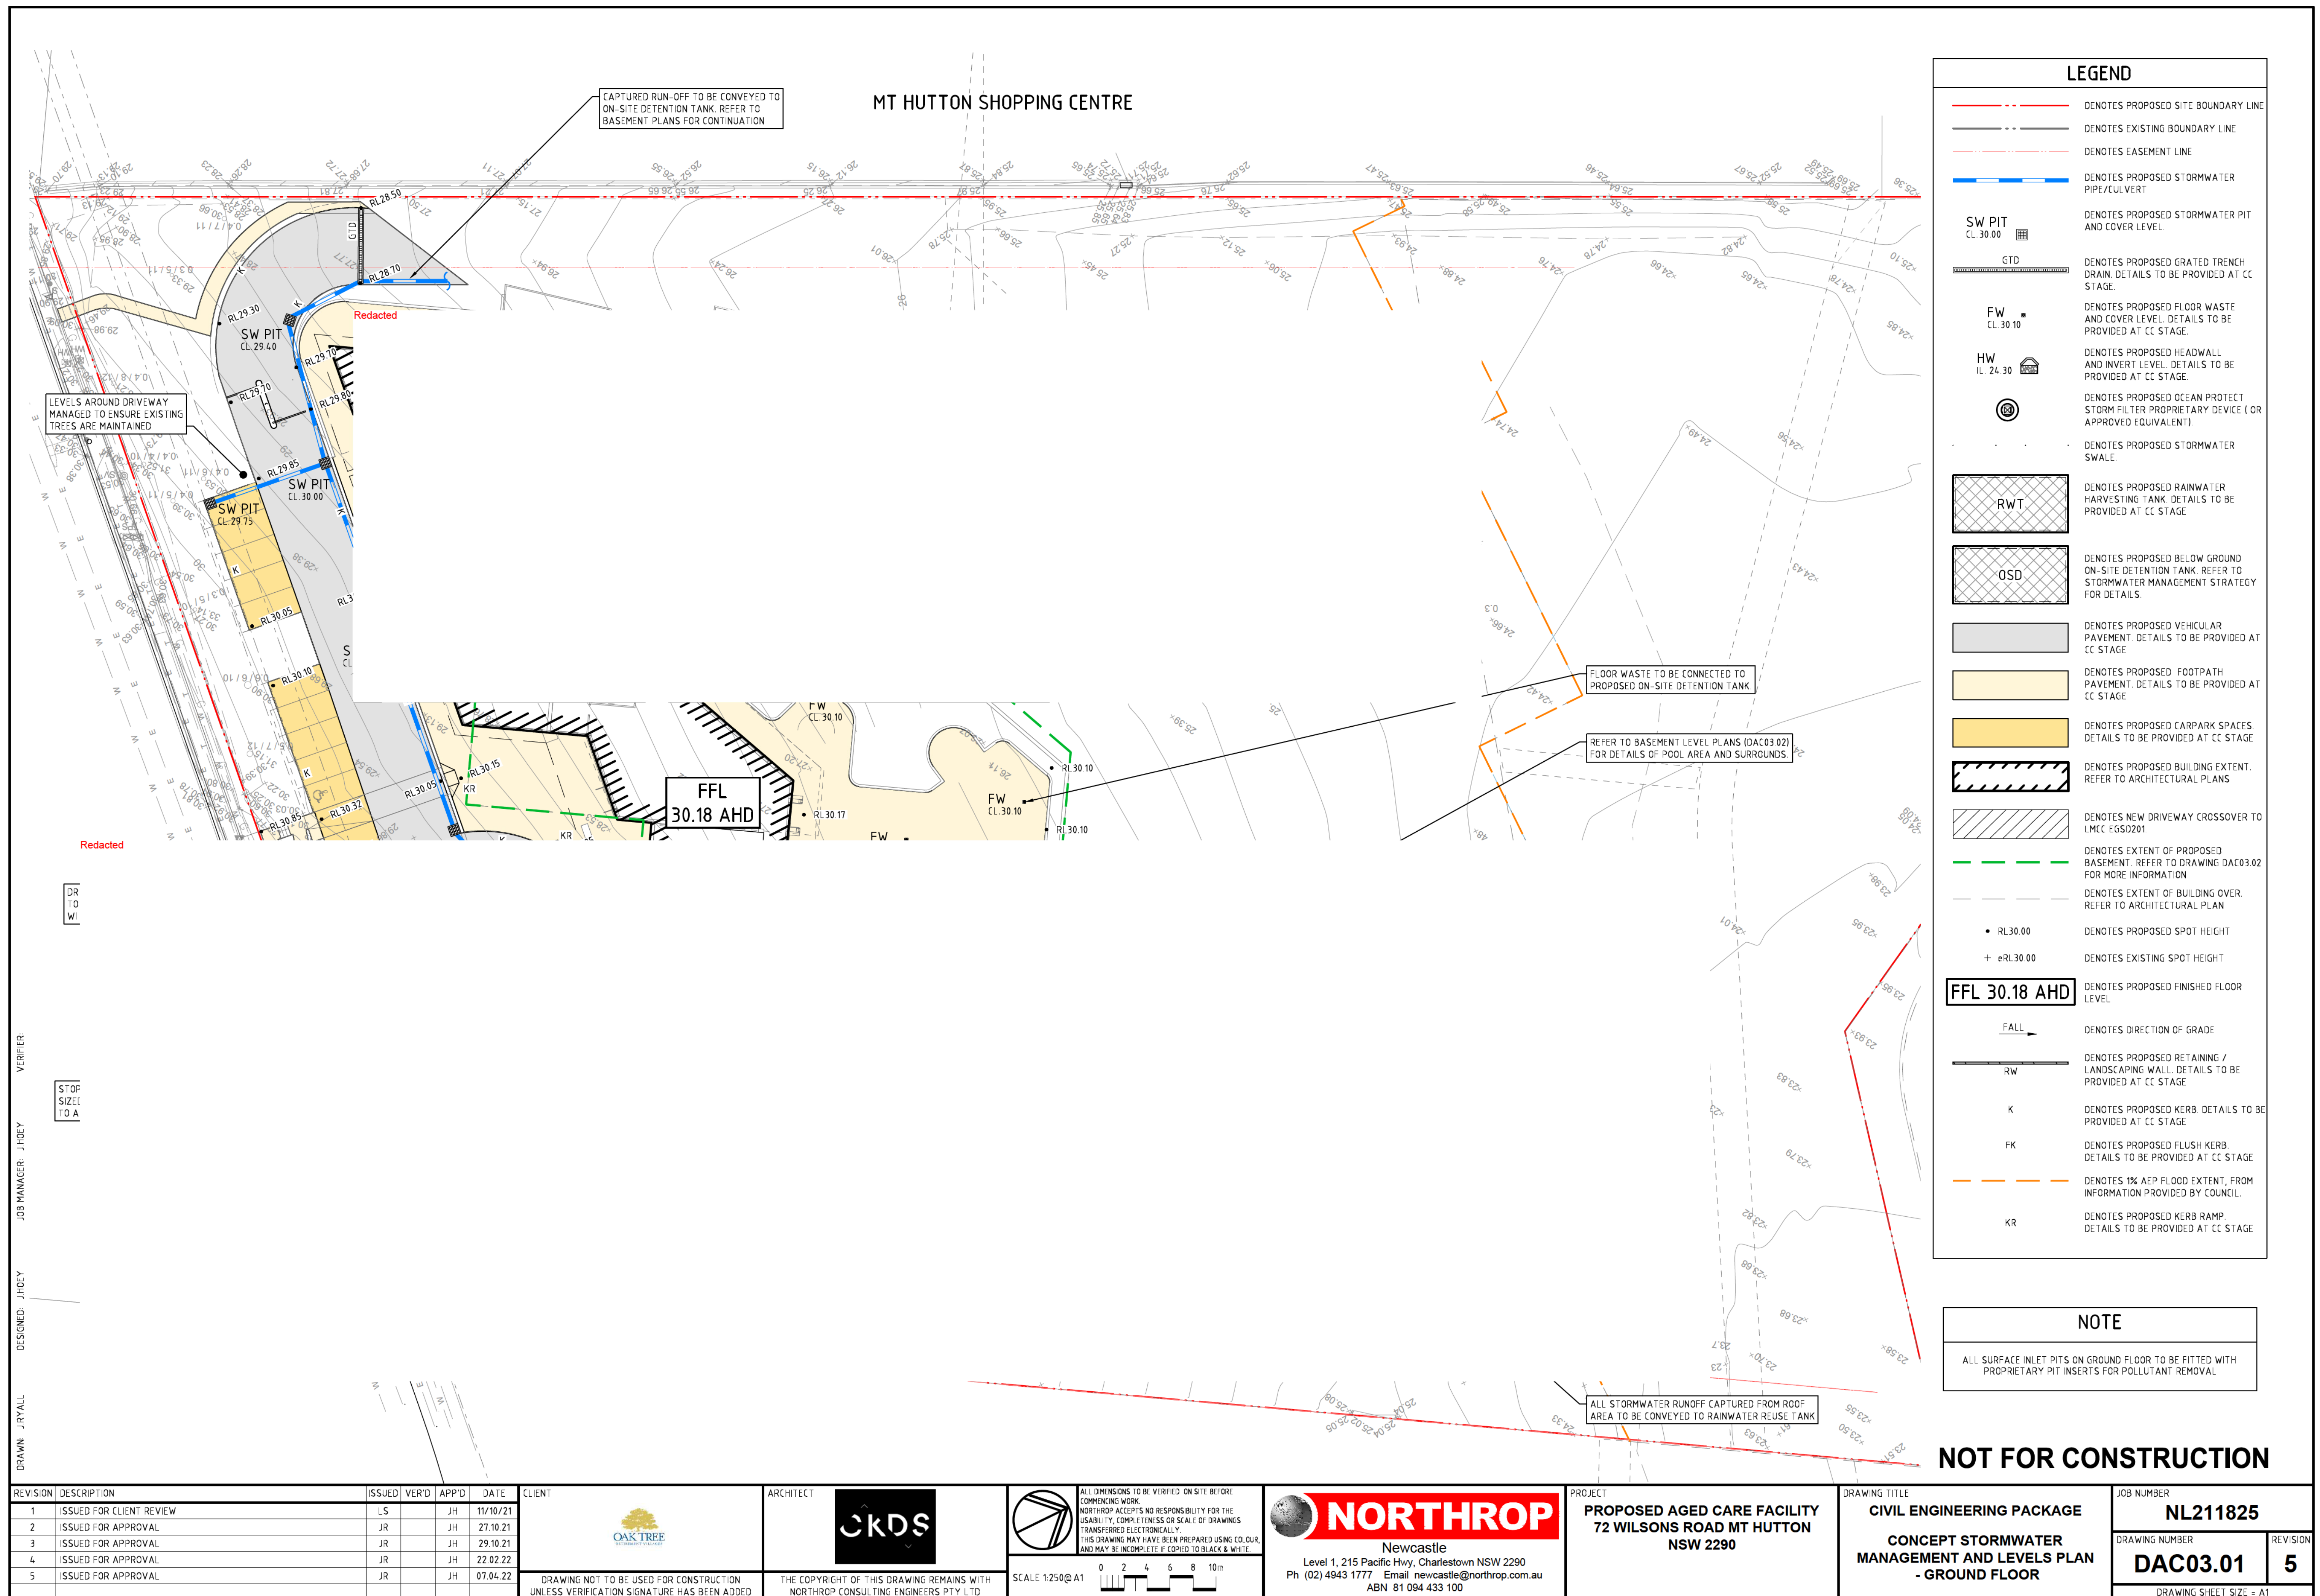

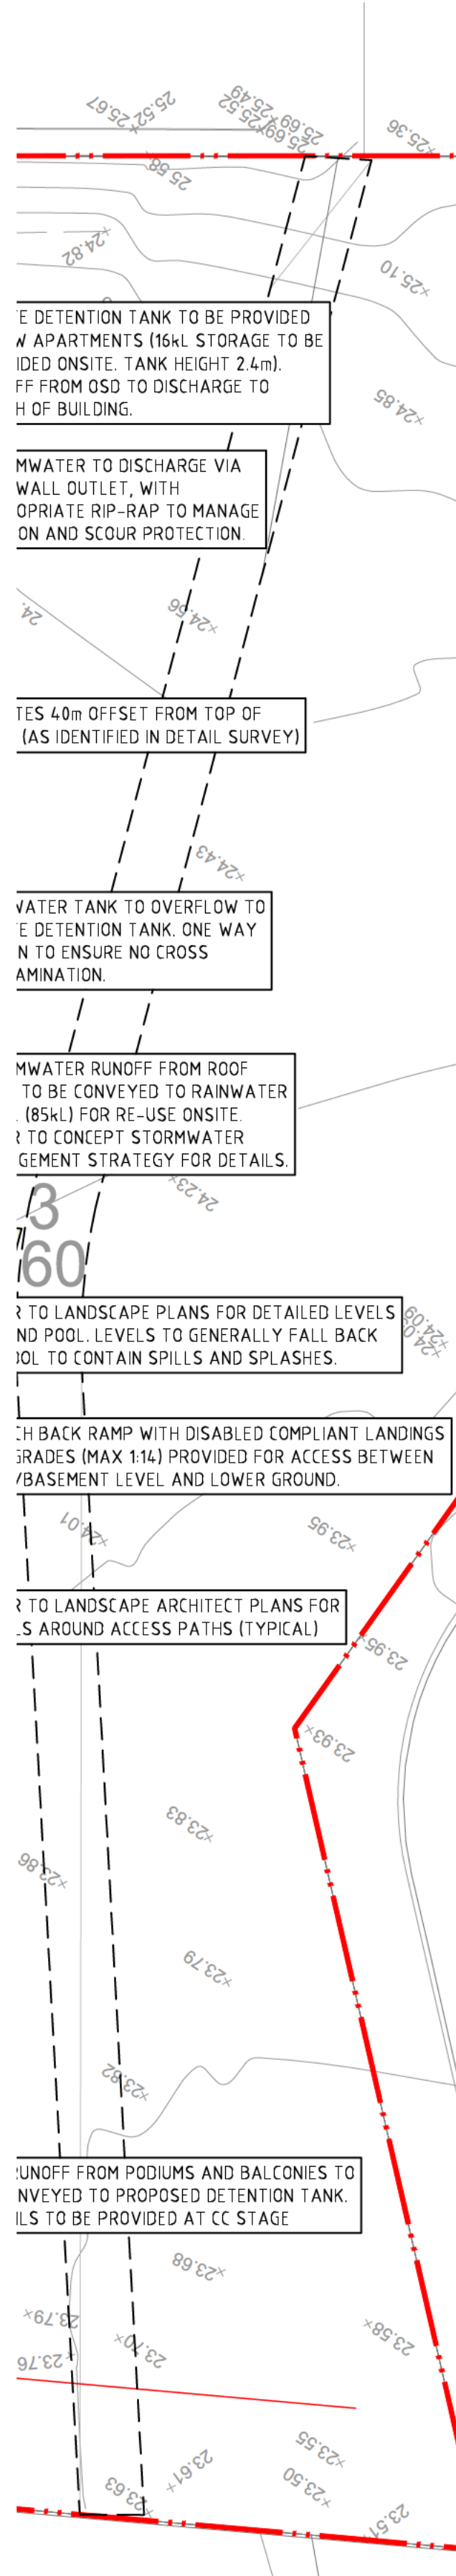

LEGEND	
	DENOTES PROPOSED SITE BOUNDARY LINE
	DENOTES EXISTING BOUNDARY LINE
	DENOTES EASEMENT LINE
	DENOTES SECTION MARKER. REFER TO DRAWING DAC03.00 FOR DETAIL
	DENOTES PROPOSED STORMWATER PIPE/CULVERT
	DENOTES PROPOSED STORMWATER PIT AND COVER LEVEL.
	DENOTES PROPOSED GRATED TRENCH DRAIN. DETAILS TO BE PROVIDED AT CC STAGE.
	DENOTES PROPOSED FLOOR WASTE AND COVER LEVEL. DETAILS TO BE PROVIDED AT CC STAGE.
	DENOTES PROPOSED HEADWALL AND INVERT LEVEL. DETAILS TO BE PROVIDED AT CC STAGE.
	DENOTES PROPOSED STORMWATER SWALE.
	DENOTES PROPOSED OCEAN PROTECT STORM FILTER PROPRIETARY DEVICE (OR APPROVED EQUIVALENT).
	DENOTES PROPOSED RAINWATER HARVESTING TANK. REFER TO STORMWATER MANAGEMENT STRATEGY FOR DETAILS
	DENOTES PROPOSED BELOW GROUND ON-SITE DETENTION TANK. REFER TO STORMWATER MANAGEMENT STRATEGY FOR DETAILS.
	DENOTES PROPOSED VEHICULAR PAVEMENT. DETAILS TO BE PROVIDED AT CC STAGE
	DENOTES PROPOSED FOOTPATH PAVEMENT. DETAILS TO BE PROVIDED AT CC STAGE
	DENOTES PROPOSED CARPARK SPACES. DETAILS TO BE PROVIDED AT CC STAGE
	DENOTES PROPOSED BUILDING EXTENT. REFER TO ARCHITECTURAL PLANS
	DENOTES NEW DRIVEWAY CROSSOVER TO LMCC EGS0201
	DENOTES EXTENT OF PROPOSED BASEMENT. REFER TO DRAWING DAC03.02 FOR MORE INFORMATION
	DENOTES EXTENT OF BUILDING OVER. REFER TO ARCHITECTURAL PLAN
	DENOTES PROPOSED SPOT HEIGHT
	DENOTES EXISTING SPOT HEIGHT
	DENOTES PROPOSED FINISHED FLOOR LEVEL
	DENOTES DIRECTION OF GRADE
	DENOTES PROPOSED RETAINING / LANDSCAPING WALL. DETAILS TO BE PROVIDED AT CC STAGE
	DENOTES PROPOSED KERB ONLY. DETAILS TO BE PROVIDED AT CC STAGE
	DENOTES PROPOSED FLUSH KERB. DETAILS TO BE PROVIDED AT CC STAGE
	DENOTES 1% AEP FLOOD EXTENT, FROM INFORMATION PROVIDED BY COUNCIL.
	DENOTES PROPOSED EXTERNAL FOOTPATH. DETAILS TO BE PROVIDED AT CC STAGE
	DENOTES 40M OFFSET FROM TOP OF BANK (AS IDENTIFIED FROM DETAIL SURVEY BY POSITIVE SURVEY SOLUTIONS DATED 23.7.21)

NOT FOR CONSTRUCTION

REVISION	DESCRIPTION	ISSUED	VER'D	APP'D	DATE	CLIENT	ARCHITECT	SCALE 1:250@A1	PROJECT	DRAWING TITLE	DRAWING NUMBER	REVISION
1	ISSUED FOR CLIENT REVIEW	LS		JH	11/10/21				PROPOSED AGED CARE FACILITY	CIVIL ENGINEERING PACKAGE	NL211825	
2	ISSUED FOR APPROVAL	JR		JH	27.10.21				72 WILSONS ROAD MT HUTTON	CONCEPT STORMWATER	DAC03.02	6
3	ISSUED FOR APPROVAL	JR		JH	29.10.21				NSW 2290	MANAGEMENT AND LEVELS PLAN		
4	ISSUED FOR APPROVAL	JS		JH	22.11.21					- BASEMENT LEVEL		
5	ISSUED FOR APPROVAL	JR		JH	22.02.22							
6	ISSUED FOR APPROVAL	JR		JH	07.04.22							

DRAWING NOT TO BE USED FOR CONSTRUCTION UNLESS VERIFICATION SIGNATURE HAS BEEN ADDED

THE COPYRIGHT OF THIS DRAWING REMAINS WITH NORTHROP CONSULTING ENGINEERS PTY LTD

ALL DIMENSIONS TO BE VERIFIED ON SITE BEFORE COMMENCING WORK. NORTHROP ACCEPTS NO RESPONSIBILITY FOR THE USABILITY, COMPLETENESS OR SCALE OF DRAWINGS TRANSFERRED ELECTRONICALLY. THIS DRAWING MAY HAVE BEEN PREPARED USING COLOUR, AND MAY BE INCOMPLETE IF COPIED TO BLACK & WHITE.

SCALE 1:250@A1

0 2 4 6 8 10m

NORTHROP

Newcastle

Level 1, 215 Pacific Hwy, Charlestown NSW 2290

Ph (02) 4943 1777 Email newcastle@northrop.com.au

ABN 81 094 433 100

PROJECT

PROPOSED AGED CARE FACILITY

72 WILSONS ROAD MT HUTTON

NSW 2290

DRAWING TITLE

CIVIL ENGINEERING PACKAGE

CONCEPT STORMWATER

MANAGEMENT AND LEVELS PLAN


- BASEMENT LEVEL

JOB NUMBER

NL211825

DRAWING SHEET SIZE ± A1

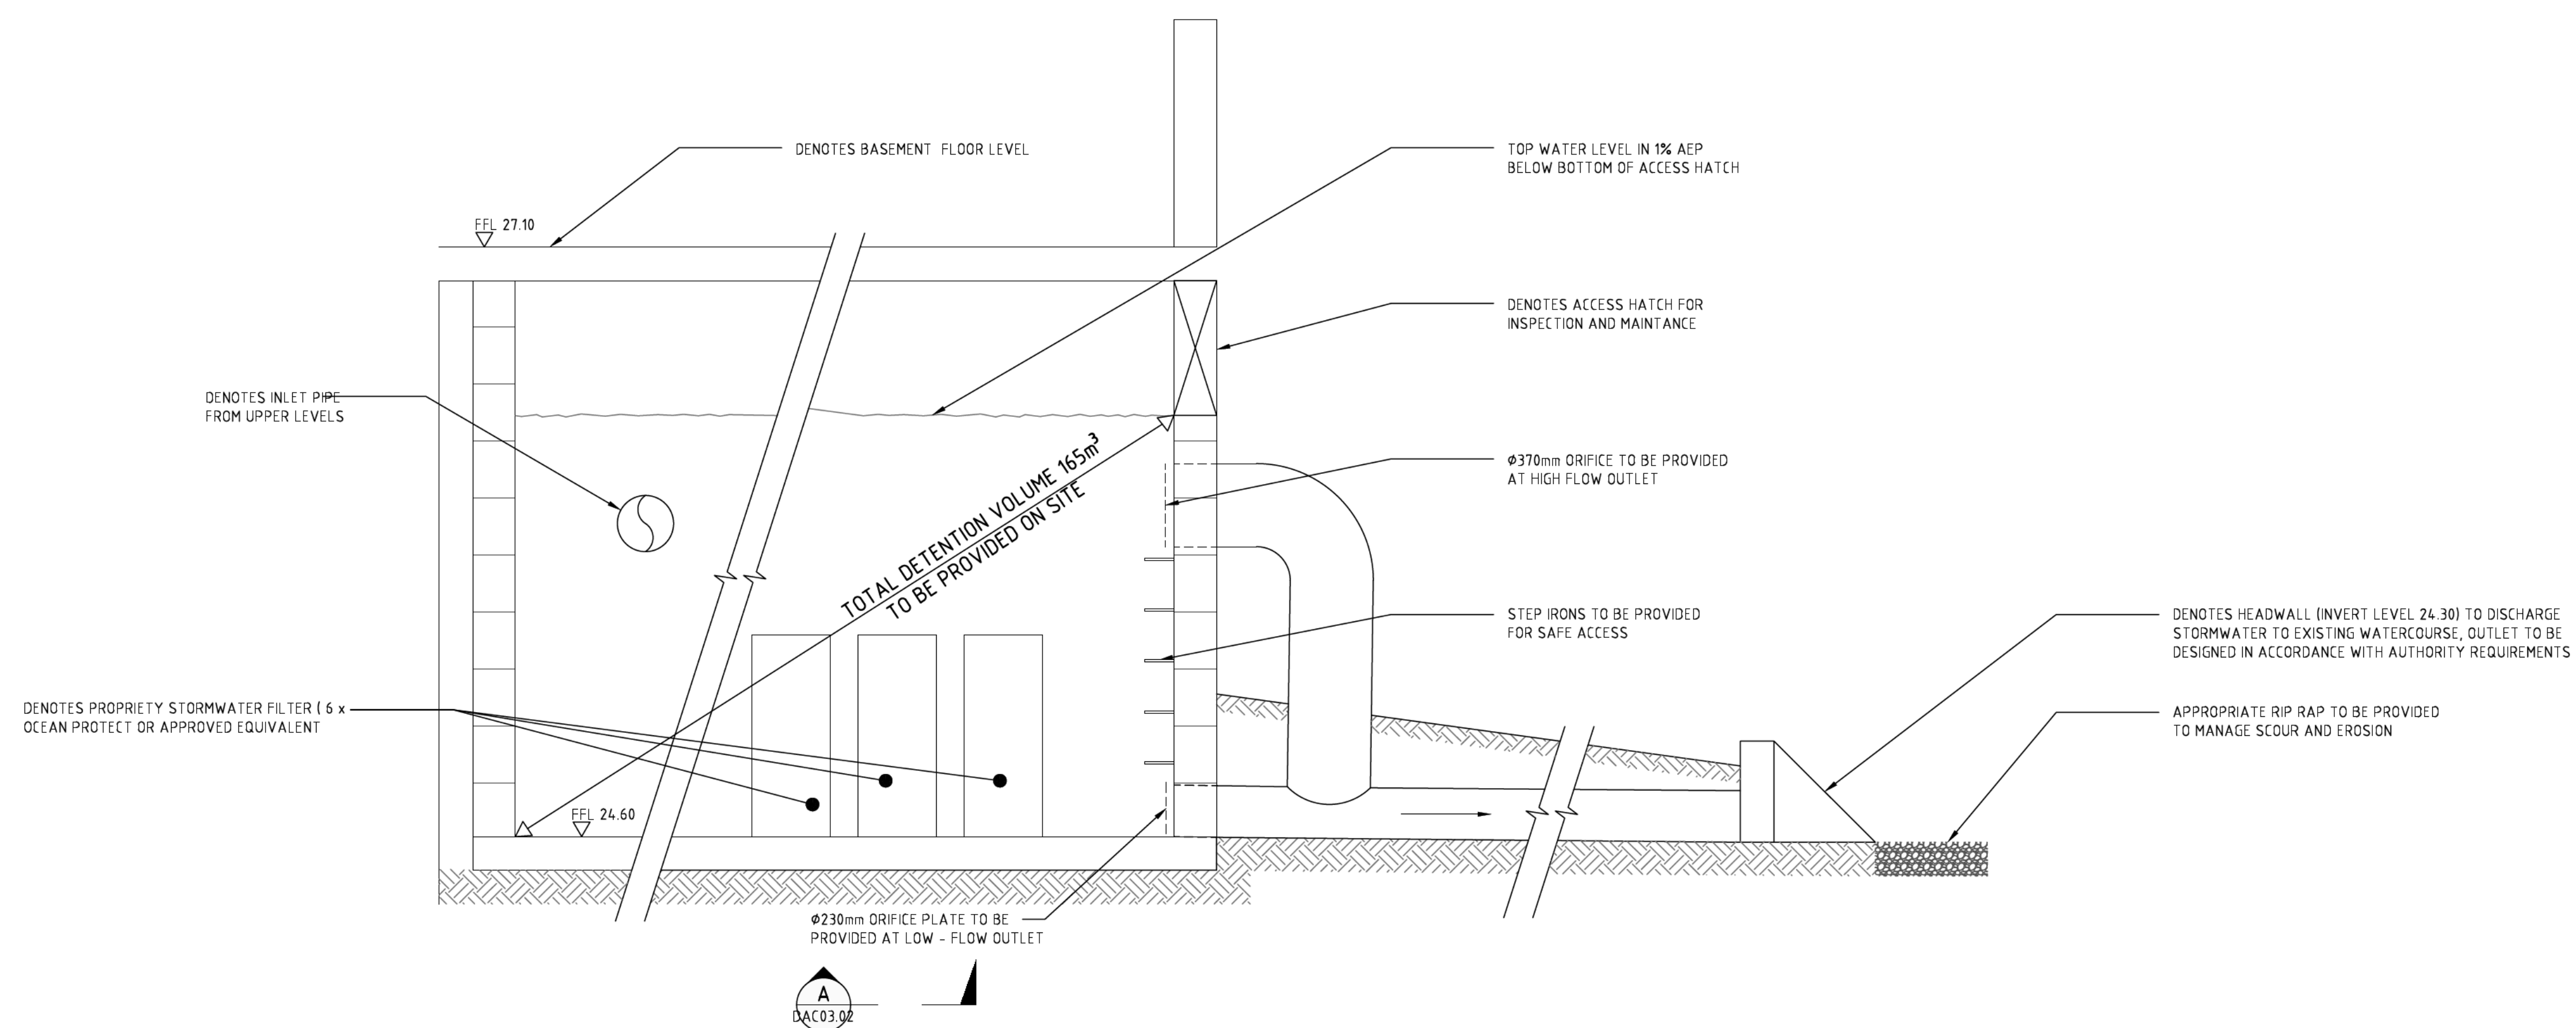


DRAWN: J RYALL DESIGNED: J HOEY JOB MANAGER: J HOEY VERIFIER:



NOTE:
STORMWATER DETENTION SHOWN INDICATIVELY TO INFORM DESIGN INTENT. DETAIL OF TANK CONFIGURATION, PROPRIETARY,
STORMWATER DEVICE, OUTLET PIPES SIZE + HEIGHT AND DISCHARGE OUTLET WORKS TO BE CONFIRMED AT DETAILED DESIGN STAGE

NOT TO SCALE

NOT FOR CONSTRUCTION

REVISION	DESCRIPTION	ISSUED	VER'D	APP'D	DATE	CLIENT	ARCHITECT		ALL DIMENSIONS TO BE VERIFIED ON SITE BEFORE COMMENCING WORK. NORTHROP ACCEPTS NO RESPONSIBILITY FOR THE USABILITY, COMPLETENESS OR SCALE OF DRAWINGS TRANSFERRED ELECTRONICALLY. THIS DRAWING MAY HAVE BEEN PREPARED USING COLOUR, AND MAY BE INCOMPLETE IF COPIED TO BLACK & WHITE.	PROJECT	DRAWING TITLE	JOB NUMBER		
1	ISSUED FOR APPROVAL	JR		JH	27.10.21					 Newcastle Level 1, 215 Pacific Hwy, Charlestown NSW 2290 Ph (02) 4943 1777 Email newcastle@northrop.com.au ABN 81 094 433 100	PROPOSED AGED CARE FACILITY 72 WILSONS ROAD MT HUTTON NSW 2290	CIVIL ENGINEERING PACKAGE	NL211825	
2	ISSUED FOR APPROVAL	JR		JH	22.02.22									
						DRAWING NOT TO BE USED FOR CONSTRUCTION UNLESS VERIFICATION SIGNATURE HAS BEEN ADDED	THE COPYRIGHT OF THIS DRAWING REMAINS WITH NORTHROP CONSULTING ENGINEERS PTY LTD		NOT TO SCALE				DRAWING NUMBER DAC05.01	REVISION 2
												CIVIL DETAILS	DRAWING SHEET SIZE = A1	