

# Nationwide House Energy Rating Scheme

## NatHERS Certificate No. 0007116874

Generated on 10 Mar 2022 using BERS Pro v4.4.1.5 (3.21)

### Property

**Address** 35 Burbank Avenue, EAST HILLS, NSW, 2213  
**Lot/DP** 82/709289  
**NCC Class\*** 1A  
**Type** New Dwelling

### Plans

**Main Plan** 04522  
**Prepared by** ES Design

### Construction and environment

Assessed floor area (m <sup>2</sup> *)	Exposure Type
Conditioned* 827.0	Suburban
Unconditioned* 176.0	<b>NatHERS climate zone</b>
Total 1004.0	56
Garage 154.0	




### Accredited assessor

**Name** Noura Al Hazzouri  
**Business name** none  
**Email** noura.h@optusnet.com.au  
**Phone** 0405600 600  
**Accreditation No.** DMN/18/1891

### Assessor Accrediting Organisation

Design Matters National

**Declaration of interest** Declaration completed: no conflicts

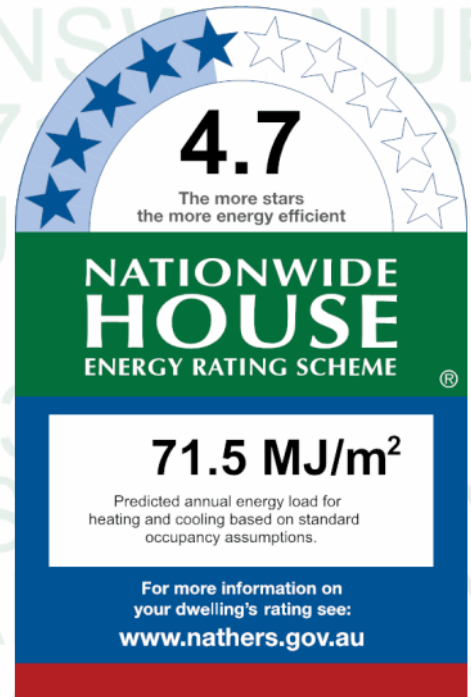

### Thermal performance

Heating	Cooling
<b>45.7</b> MJ/m <sup>2</sup>	<b>25.9</b> MJ/m <sup>2</sup>

### About the rating

NatHERS software models the expected thermal energy loads using information about the design and construction, climate and common patterns of household use. The software does not take into account appliances, apart from the airflow impacts from ceiling fans.

### Verification

To verify this certificate, scan the QR code or visit [hstar.com.au/QR/Generate?p=fjdSaSsNQ](http://hstar.com.au/QR/Generate?p=fjdSaSsNQ). When using either link, ensure you are visiting [hstar.com.au](http://hstar.com.au)



### National Construction Code (NCC) requirements

The NCC's requirements for NatHERS-rated houses are detailed in 3.12.0(a)(i) and 3.12.5 of the NCC Volume Two. For apartments the requirements are detailed in J0.2 and J5 to J8 of the NCC Volume One.

In NCC 2019, these requirements include minimum star ratings and separate heating and cooling load limits that need to be met by buildings and apartments through the NatHERS assessment. Requirements additional to the NatHERS assessment that must also be satisfied include, but are not limited to: insulation installation methods, thermal breaks, building sealing, water heating and pumping, and artificial lighting requirements. The NCC and NatHERS Heating and Cooling Load Limits (Australian Building Codes Board Standard) are available at [www.abcb.gov.au](http://www.abcb.gov.au).

State and territory variations and additions to the NCC may also apply.

## Certificate check

Ensure the dwelling is designed and then built as per the NatHERS Certificate. While you need to check the accuracy of the whole Certificate, the following spot check covers some important items impacting the dwelling's rating.

### Genuine certificate

Does this Certificate match the one available at the web address or QR code in the verification box on the front page? Does the set of NatHERS-stamped plans for the dwelling have a Certificate number on the stamp that matches this Certificate?

### Ceiling penetrations\*

Does the 'number' and 'type' of ceiling penetrations (e.g. downlights, exhaust fans, etc) shown on the stamped plans or installed, match what is shown in this Certificate?

### Windows

Does the installed window meet the substitution tolerances (SHGC and U-value) and window type, of the window shown on this Certificate? Substituted values must be based on the Australian Fenestration Rating Council (AFRC) protocol.

### Apartment entrance doors

Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.

### Exposure\*

Has the appropriate exposure level (terrain) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".

### Provisional\* values

Have provisional values been used in the assessment and, if so, noted in "additional notes" below?

## Additional notes

I have modeled the shading in accordance with NatHERS principles

## Window and glazed door *type and performance*

### Default\* windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-002-03 A	ALM-002-03 A Aluminium B SG High Solar Gain Low-E	5.4	0.58	0.55	0.61
ALM-001-03 A	ALM-001-03 A Aluminium A SG High Solar Gain Low-E	5.4	0.49	0.47	0.51

### Custom\* windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

## Window and glazed door *schedule*

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-002-03 A	n/a	2700	6280	n/a	45	SW	No

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-002-03 A	n/a	2700	3780	n/a	45	SW	No
Kitchen/Living	ALM-002-03 A	n/a	600	4100	n/a	45	SE	No
pantry	ALM-002-03 A	n/a	600	1600	n/a	45	SE	No
ldry	ALM-002-03 A	n/a	1200	1090	n/a	45	NW	No
ens5	ALM-002-03 A	n/a	1200	1450	n/a	45	NW	No
Bedroom 5	ALM-002-03 A	n/a	1200	2650	n/a	45	NW	No
Bedroom 6	ALM-002-03 A	n/a	1200	2650	n/a	45	NW	No
ens6	ALM-002-03 A	n/a	1200	1450	n/a	45	NW	No
ens7	ALM-002-03 A	n/a	1200	1450	n/a	45	NW	No
Bedroom 7	ALM-002-03 A	n/a	2700	3780	n/a	45	SW	No
family retreat	ALM-002-03 A	n/a	2700	6280	n/a	45	SW	No
Bedroom 3	ALM-002-03 A	n/a	1200	2650	n/a	45	SE	No
ens 3	ALM-002-03 A	n/a	1200	1450	n/a	45	SE	No
ens 4	ALM-002-03 A	n/a	1200	1450	n/a	45	SE	No
Bedroom 4	ALM-002-03 A	n/a	1200	2650	n/a	45	SE	No
Bedroom 2	ALM-002-03 A	n/a	3000	4000	n/a	45	NE	No
Bedroom 2	ALM-001-03 A	n/a	3000	850	n/a	45	SE	No
wir2	ALM-001-03 A	n/a	3000	850	n/a	45	SE	No
ens2	ALM-001-03 A	n/a	3000	850	n/a	45	SE	No
formal lounge	ALM-001-03 A	n/a	3000	2300	n/a	90	SW	No
formal lounge	ALM-001-03 A	n/a	3000	4800	n/a	45	SE	No
formal lounge	ALM-001-03 A	n/a	3000	3970	n/a	90	NW	No
formal lounge	ALM-002-03 A	n/a	3000	460	n/a	00	NW	No
formal lounge	ALM-002-03 A	n/a	3000	460	n/a	00	W	No
formal lounge	ALM-002-03 A	n/a	3000	460	n/a	00	W	No
formal lounge	ALM-002-03 A	n/a	3000	2940	n/a	45	SW	No
formal lounge	ALM-002-03 A	n/a	4800	850	n/a	00	NW	No
formal lounge	ALM-002-03 A	n/a	4800	850	n/a	00	NW	No
formal lounge	ALM-002-03 A	n/a	2000	2400	n/a	00	NE	No
formal lounge	ALM-001-03 A	n/a	3000	2000	n/a	00	NE	No
bath	ALM-001-03 A	n/a	3000	850	n/a	45	NW	No
butlers pantry	ALM-001-03 A	n/a	1200	3250	n/a	45	NW	No
Kitchen/Living	ALM-001-03 A	n/a	3000	2300	n/a	90	NE	No
Kitchen/Living	ALM-002-03 A	n/a	3000	6210	n/a	45	SW	No
Kitchen/Living	ALM-002-03 A	n/a	3000	3610	n/a	45	SW	No
Parents retreat	ALM-001-03 A	n/a	2700	3510	n/a	90	NE	No
Parents retreat	ALM-002-03 A	n/a	2700	2300	n/a	45	SW	No
Parents retreat	ALM-002-03 A	n/a	2700	4800	n/a	00	SE	No
Parents retreat	ALM-001-03 A	n/a	2700	1400	n/a	45	NW	No

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orientation	Window shading device*
Parents retreat	ALM-002-03 A	n/a	2700	6660	n/a	45	NW	No
Parents retreat	ALM-002-03 A	n/a	2700	460	n/a	00	NW	No
Parents retreat	ALM-002-03 A	n/a	2700	460	n/a	00	W	No
Parents retreat	ALM-002-03 A	n/a	2700	460	n/a	00	W	No
Parents retreat	ALM-002-03 A	n/a	2700	2000	n/a	00	NE	No
wir	ALM-001-03 A	n/a	2700	850	n/a	45	NE	No
wir	ALM-001-03 A	n/a	2700	850	n/a	45	NE	No
Master Bedroom	ALM-002-03 A	n/a	2700	4600	n/a	45	SW	No
master ens	ALM-001-03 A	n/a	2700	970	n/a	45	SW	No
master ens	ALM-001-03 A	n/a	2700	970	n/a	45	NE	No

## Roof window type and performance

### Default\* roof windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

### Custom\* roof windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

## Roof window schedule

Location	Window ID	Window no.	Opening %	Height (mm)	Width (mm)	Orientation	Outdoor shade	Indoor shade
No Data Available								

## Skylight type and performance

Skylight ID	Skylight description
GEN-04-006a	Single-glazed clear, Timber and Aluminium Frame

## Skylight schedule

Location	Skylight ID	Skylight No.	Skylight shaft length (mm)	Area (m <sup>2</sup> )	Orientation	Outdoor shade	Diffuser	Skylight shaft reflectance
Parents retreat	GEN-04-006a	n/a	50	1.10	SW	None	No	0.50
Parents retreat	GEN-04-006a	n/a	50	1.10	SW	None	No	0.50
Parents retreat	GEN-04-006a	n/a	50	2.20	SW	None	No	0.50

## External door *schedule*

Location	Height (mm)	Width (mm)	Opening %	Orientation
Garage	2400	4800	90	NE
formal lounge	3000	1100	90	NE

## External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade (colour)	Bulk insulation (R-value)	Reflective wall wrap*
EW-1	Cavity Brick	0.50	Medium	No insulation	No
EW-2	Cavity Brick	0.50	Medium	Foil Sided Bubble Wrap, Anti-glare one side	No
EW-3	Cavity Brick	0.50	Medium	Foil Sided Bubble Wrap, Anti-glare one side	No

## External wall *schedule*

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
Kitchen/Living	EW-1	2700	11250	SW	3750	NO
Kitchen/Living	EW-1	1500	6295	NW	0	NO
Kitchen/Living	EW-1	1200	6295	NW	0	NO
Kitchen/Living	EW-1	2700	6295	SE	0	NO
pantry	EW-1	800	2240	SE	0	NO
pantry	EW-1	1900	2240	SE	0	NO
storage1	EW-1	2700	4890	NW	0	NO
storage 2	EW-1	2700	2840	NW	0	NO
long-term stora	EW-1	2700	10295	NW	0	NO
long-term stora	EW-1	2700	4345	NE	0	NO
storage 3	EW-1	2700	6745	SE	0	NO
storage 3	EW-1	2700	3145	NE	0	NO
long-term stora	EW-1	2700	9040	SE	0	NO
ff hallway	EW-1	2700	3540	NE	0	NO
Garage	EW-1	2700	7550	SE	0	NO
Garage	EW-1	2700	600	SW	0	YES
Garage	EW-1	2700	12635	SE	0	YES
Garage	EW-1	2700	4485	NW	0	YES
Garage	EW-1	2700	728	NW	0	YES
Garage	EW-1	2700	860	W	6819	YES
Garage	EW-1	2700	776	SW	6107	YES
Garage	EW-1	2700	3650	SW	6000	YES
Garage	EW-1	2700	7450	NW	0	NO
Garage	EW-1	2700	7050	NE	0	NO

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
Garage	EW-1	2700	5450	NE	0	NO
ldry	EW-1	1000	4045	NW	0	NO
ldry	EW-1	1700	4045	NW	0	NO
ldry	EW-1	2700	4345	NE	6000	NO
ens5	EW-1	1000	2590	NW	0	NO
ens5	EW-1	1700	2590	NW	0	NO
Bedroom 5	EW-1	1000	3440	NW	0	NO
Bedroom 5	EW-1	1700	3440	NW	0	NO
Bedroom 6	EW-1	1000	3440	NW	0	NO
Bedroom 6	EW-1	1700	3440	NW	0	NO
ens6	EW-2	2700	1790	NW	0	NO
ens7	EW-1	2700	1790	NW	0	NO
Bedroom 7	EW-1	2700	4395	SW	1950	NO
Bedroom 7	EW-1	1000	3395	NW	0	NO
Bedroom 7	EW-1	1700	3395	NW	0	NO
family retreat	EW-1	2700	245	NE	5125	YES
family retreat	EW-1	2700	3395	SE	0	NO
family retreat	EW-1	2700	6795	SW	1950	NO
Bedroom 3	EW-1	1000	3280	SE	0	NO
Bedroom 3	EW-1	1700	3280	SE	0	NO
ens 3	EW-1	1000	1890	SE	0	NO
ens 3	EW-1	1700	1890	SE	0	NO
ens 4	EW-1	2700	1740	SE	0	NO
Bedroom 4	EW-1	2700	3440	SE	0	NO
Bedroom 2	EW-2	3000	5250	NE	0	NO
Bedroom 2	EW-2	3000	3645	SE	0	NO
Bedroom 2	EW-2	3000	1750	NW	7550	YES
wir2	EW-2	3000	2290	SE	0	NO
ens2	EW-2	3000	1645	SE	0	NO
ens2	EW-2	3000	750	SW	0	YES
formal lounge	EW-2	3000	5345	SE	0	YES
formal lounge	EW-2	3000	3350	SW	7300	YES
formal lounge	EW-2	3000	7245	SE	0	YES
formal lounge	EW-2	3000	4450	NW	0	YES
formal lounge	EW-2	3000	461	NW	0	YES
formal lounge	EW-2	3000	602	W	0	YES
formal lounge	EW-2	3000	808	W	5924	YES
formal lounge	EW-2	4800	3950	SW	5650	YES
formal lounge	EW-2	4800	4200	NW	0	NO



Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
formal lounge	EW-2	4800	3200	NE	3600	YES
formal lounge	EW-2	3000	934	N	3451	YES
formal lounge	EW-2	3000	1061	N	3288	NO
formal lounge	EW-2	3000	1031	NE	1895	NO
formal lounge	EW-2	3000	2295	NE	1725	YES
bath	EW-2	3000	1345	NW	0	NO
bath	EW-2	3000	4545	NE	5650	YES
butlers pantry	EW-2	3000	5440	NW	0	NO
Kitchen/Living	EW-2	3000	3450	NE	7300	YES
Kitchen/Living	EW-2	3000	8500	SE	0	NO
Kitchen/Living	EW-2	3000	11550	SW	3200	NO
Kitchen/Living	EW-2	3000	8495	NW	0	NO
Parents retreat	EW-3	2700	5200	SE	0	YES
Parents retreat	EW-3	2700	474	SE	5032	YES
Parents retreat	EW-3	2700	602	E	4852	YES
Parents retreat	EW-3	2700	696	E	3830	YES
Parents retreat	EW-3	2700	3650	NE	3700	YES
Parents retreat	EW-3	2700	5100	SE	0	NO
Parents retreat	EW-3	2700	3350	SW	7300	YES
Parents retreat	EW-3	2700	7245	SE	0	YES
Parents retreat	EW-3	2700	2045	NW	0	YES
Parents retreat	EW-3	2700	1800	SW	2100	YES
Parents retreat	EW-3	2700	2400	NW	0	NO
Parents retreat	EW-3	2700	1800	NE	8000	YES
Parents retreat	EW-3	2700	6800	NW	0	YES
Parents retreat	EW-3	2700	608	NW	0	YES
Parents retreat	EW-3	2700	532	W	0	YES
Parents retreat	EW-3	2700	873	W	0	YES
Parents retreat	EW-3	2700	750	SW	8150	YES
Parents retreat	EW-3	2700	4200	NW	0	NO
Parents retreat	EW-3	2700	934	N	0	NO
Parents retreat	EW-3	2700	1061	N	0	NO
Parents retreat	EW-3	2700	1031	NE	0	NO
Parents retreat	EW-3	2700	2000	NE	0	NO
wir	EW-3	2700	6000	SE	0	NO
wir	EW-3	2700	3845	SW	1500	NO
wir	EW-3	2700	3450	NE	7300	YES
Master Bedroom	EW-3	2700	4490	SW	1500	NO
Master Bedroom	EW-3	2700	1495	NE	2100	YES

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
master ens	EW-3	2700	2995	SW	1500	NO
master ens	EW-3	2700	6000	NW	0	NO
master ens	EW-3	2700	2995	NE	0	NO

## Internal wall type

Wall ID	Wall type	Area (m <sup>2</sup> )	Bulk insulation
IW-1 - Single Skin Brick		675.00	No insulation

## Floor type

Location	Construction	Area (m <sup>2</sup> )	Sub-floor ventilation	Added insulation (R-value)	Covering
Kitchen/Living	Waffle pod slab 300 mm 100mm	70.80	None	Waffle Pod 300mm	80/20 Carpet 10mm/Ceramic
pantry	Waffle pod slab 300 mm 100mm	10.40	None	Waffle Pod 300mm	Carpet 10mm
storage1	Waffle pod slab 300 mm 100mm	21.30	None	Waffle Pod 300mm	Carpet 10mm
storage 2	Waffle pod slab 300 mm 100mm	12.30	None	Waffle Pod 300mm	Carpet 10mm
long-term stora	Waffle pod slab 300 mm 100mm	40.50	None	Waffle Pod 300mm	Carpet 10mm
storage 3	Waffle pod slab 300 mm 100mm	21.20	None	Waffle Pod 300mm	Carpet 10mm
long-term stora	Waffle pod slab 300 mm 100mm	42.00	None	Waffle Pod 300mm	Carpet 10mm
ff hallway	Concrete Slab on Ground 100mm	51.10	None	No Insulation	Carpet 10mm
Garage /storage 3	Concrete Above Plasterboard 100mm	20.50		No Insulation	Bare
Garage /long-term stora	Concrete Above Plasterboard 100mm	0.80		No Insulation	Bare
Garage /ff hallway	Concrete Above Plasterboard 100mm	1.70		No Insulation	Bare
Garage	Waffle pod slab 300 mm 100mm	130.70	None	Waffle Pod 300mm	Bare
ldry/long-term stora	Concrete Above Plasterboard 100mm	13.20		No Insulation	Ceramic Tiles 8mm
ldry/ff hallway	Concrete Above Plasterboard 100mm	0.70		No Insulation	Ceramic Tiles 8mm
ldry	Waffle pod slab 300 mm 100mm	0.80	None	Waffle Pod 300mm	Ceramic Tiles 8mm
ens5/long-term stora	Concrete Above Plasterboard 100mm	4.70		No Insulation	Ceramic Tiles 8mm
ens5	Waffle pod slab 300 mm 100mm	0.50	None	Waffle Pod 300mm	Ceramic Tiles 8mm
wir5/long-term stora	Concrete Above Plasterboard 100mm	5.90		No Insulation	Carpet 10mm
Bedroom 5/storage 2	Concrete Above Plasterboard 100mm	0.80		No Insulation	Carpet 10mm
Bedroom 5/long-term stora	Concrete Above Plasterboard 100mm	13.60		No Insulation	Carpet 10mm
Bedroom 5	Waffle pod slab 300 mm 100mm	0.70	None	Waffle Pod 300mm	Carpet 10mm



Location	Construction	Area (m <sup>2</sup> )	Sub-floor ventilation	Added insulation (R-value)	Covering
Bedroom 6/storage1	Concrete Above Plasterboard 100mm	3.30		No Insulation	Carpet 10mm
Bedroom 6/storage 2	Concrete Above Plasterboard 100mm	11.20		No Insulation	Carpet 10mm
Bedroom 6	Waffle pod slab 300 mm 100mm	0.70	None	Waffle Pod 300mm	Carpet 10mm
ens6/storage1	Concrete Above Plasterboard 100mm	3.30		No Insulation	Ceramic Tiles 8mm
wir4/storage1	Concrete Above Plasterboard 100mm	4.00		No Insulation	Carpet 10mm
ens7/storage1	Concrete Above Plasterboard 100mm	3.30		No Insulation	Ceramic Tiles 8mm
wir7/storage1	Concrete Above Plasterboard 100mm	4.00		No Insulation	Carpet 10mm
Bedroom 7/Kitchen/Living	Concrete Above Plasterboard 100mm	12.60		No Insulation	Carpet 10mm
Bedroom 7/storage1	Concrete Above Plasterboard 100mm	1.70		No Insulation	Carpet 10mm
Bedroom 7	Concrete Slab on Ground 100mm	0.70	None	No Insulation	Carpet 10mm
family retreat/Kitchen/Living	Concrete Above Plasterboard 100mm	19.90		No Insulation	Carpet 10mm
family retreat/pantry	Concrete Above Plasterboard 100mm	1.70		No Insulation	Carpet 10mm
family retreat/storage1	Concrete Above Plasterboard 100mm	0.70		No Insulation	Carpet 10mm
family retreat/long-term stora	Concrete Above Plasterboard 100mm	1.20		No Insulation	Carpet 10mm
family retreat/ff hallway	Concrete Above Plasterboard 100mm	47.20		No Insulation	Carpet 10mm
Bedroom 3/long-term stora	Concrete Above Plasterboard 100mm	14.80		No Insulation	Carpet 10mm
Bedroom 3/ff hallway	Concrete Above Plasterboard 100mm	0.50		No Insulation	Carpet 10mm
wir3/long-term stora	Concrete Above Plasterboard 100mm	4.50		No Insulation	Carpet 10mm
ens 3/long-term stora	Concrete Above Plasterboard 100mm	3.80		No Insulation	Ceramic Tiles 8mm
ens 4/long-term stora	Concrete Above Plasterboard 100mm	3.50		No Insulation	Ceramic Tiles 8mm
wir4/long-term stora	Concrete Above Plasterboard 100mm	4.20		No Insulation	Carpet 10mm
Bedroom 4/pantry	Concrete Above Plasterboard 100mm	8.50		No Insulation	Carpet 10mm
Bedroom 4/long-term stora	Concrete Above Plasterboard 100mm	7.00		No Insulation	Carpet 10mm
Bedroom 4/ff hallway	Concrete Above Plasterboard 100mm	0.50		No Insulation	Carpet 10mm
Bedroom 2/Garage	Concrete Above Plasterboard 150mm	22.20		No Insulation	Carpet 10mm
Bedroom 2	Suspended Concrete Slab 150mm	1.30	Open	No Insulation	Carpet 10mm
wir2/Garage	Concrete Above Plasterboard 150mm	8.80		No Insulation	Carpet 10mm
ens2/Garage	Concrete Above Plasterboard 150mm	6.10		No Insulation	Ceramic Tiles 8mm
formal lounge/Garage	Concrete Above Plasterboard 150mm	73.60		No Insulation	Ceramic Tiles 8mm
formal lounge/ldry	Concrete Above Plasterboard 150mm	0.60		No Insulation	Ceramic Tiles 8mm
formal lounge/family retreat	Concrete Above Plasterboard 150mm	26.70		No Insulation	Ceramic Tiles 8mm

Location	Construction	Area (m <sup>2</sup> )	Sub-floor ventilation	Added insulation (R-value)	Covering
formal lounge	Suspended Concrete Slab 150mm	3.10	Open	No Insulation	Ceramic Tiles 8mm
bath/ldry	Concrete Above Plasterboard 150mm	7.30		No Insulation	Ceramic Tiles 8mm
bath	Suspended Concrete Slab 150mm	0.60	Open	No Insulation	Ceramic Tiles 8mm
butlers pantry/ldry	Concrete Above Plasterboard 150mm	6.60		No Insulation	Carpet 10mm
butlers pantry/ens5	Concrete Above Plasterboard 150mm	5.30		No Insulation	Carpet 10mm
butlers pantry/wir5	Concrete Above Plasterboard 150mm	1.00		No Insulation	Carpet 10mm
butlers pantry	Suspended Concrete Slab 150mm	0.80	Open	No Insulation	Carpet 10mm
store/wir5	Concrete Above Plasterboard 150mm	3.30		No Insulation	Carpet 10mm
Kitchen/Living /wir5	Concrete Above Plasterboard 150mm	1.50		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /Bedroom 5	Concrete Above Plasterboard 150mm	15.60		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /Bedroom 6	Concrete Above Plasterboard 150mm	15.70		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /ens6	Concrete Above Plasterboard 150mm	3.10		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /wir4	Concrete Above Plasterboard 150mm	3.50		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /family retreat	Concrete Above Plasterboard 150mm	18.20		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /Bedroom 3	Concrete Above Plasterboard 150mm	15.90		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /wir3	Concrete Above Plasterboard 150mm	5.30		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /ens 3	Concrete Above Plasterboard 150mm	4.10		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /ens 4	Concrete Above Plasterboard 150mm	3.80		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /wir4	Concrete Above Plasterboard 150mm	4.90		No Insulation	Ceramic Tiles 8mm
Kitchen/Living /Bedroom 4	Concrete Above Plasterboard 150mm	5.80		No Insulation	Ceramic Tiles 8mm
Kitchen/Living	Suspended Concrete Slab 150mm	2.10	Open	No Insulation	Ceramic Tiles 8mm
Parents retreat/formal lounge	Concrete Above Plasterboard 150mm	88.40		No Insulation	Ceramic Tiles 8mm
Parents retreat/store	Concrete Above Plasterboard 150mm	1.10		No Insulation	Ceramic Tiles 8mm
wir/Kitchen/Living	Concrete Above Plasterboard 150mm	23.10		No Insulation	Carpet 10mm
Master Bedroom /Kitchen/Living	Concrete Above Plasterboard 150mm	28.10		No Insulation	Carpet 10mm
master ens/Kitchen/Living	Concrete Above Plasterboard 150mm	15.90		No Insulation	Ceramic Tiles 8mm

## Ceiling type

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
Kitchen/Living	Plasterboard	Bulk Insulation R1	No
Kitchen/Living	Concrete Above Plasterboard	No Insulation	No
pantry	Concrete Above Plasterboard	No Insulation	No

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
storage1	Concrete Above Plasterboard	No Insulation	No
storage 2	Concrete Above Plasterboard	No Insulation	No
long-term stora	Plasterboard	Bulk Insulation R1	No
long-term stora	Concrete Above Plasterboard	No Insulation	No
storage 3	Plasterboard	Bulk Insulation R1	No
storage 3	Concrete Above Plasterboard	No Insulation	No
long-term stora	Plasterboard	Bulk Insulation R1	No
long-term stora	Concrete Above Plasterboard	No Insulation	No
ff hallway	Concrete Above Plasterboard	No Insulation	No
Garage	Plasterboard	Bulk Insulation R1	No
Garage	Concrete Above Plasterboard	No Insulation	No
ldry	Concrete Above Plasterboard	No Insulation	No
ens5	Concrete Above Plasterboard	No Insulation	No
wir5	Concrete Above Plasterboard	No Insulation	No
Bedroom 5	Concrete Above Plasterboard	No Insulation	No
Bedroom 6	Concrete Above Plasterboard	No Insulation	No
ens6	Plasterboard	Bulk Insulation R1	No
ens6	Concrete Above Plasterboard	No Insulation	No
wir4	Plasterboard	Bulk Insulation R1	No
wir4	Concrete Above Plasterboard	No Insulation	No
ens7	Plasterboard	Bulk Insulation R1	No
wir7	Plasterboard	Bulk Insulation R1	No
Bedroom 7	Plasterboard	Bulk Insulation R1	No
family retreat	Plasterboard	Bulk Insulation R1	No
family retreat	Concrete Above Plasterboard	No Insulation	No
Bedroom 3	Concrete Above Plasterboard	No Insulation	No
wir3	Concrete Above Plasterboard	No Insulation	No
ens 3	Concrete Above Plasterboard	No Insulation	No
ens 4	Concrete Above Plasterboard	No Insulation	No
wir4	Concrete Above Plasterboard	No Insulation	No
Bedroom 4	Plasterboard	Bulk Insulation R1	No
Bedroom 4	Concrete Above Plasterboard	No Insulation	No
Bedroom 2	Plasterboard	Bulk Insulation R1	No
wir2	Plasterboard	Bulk Insulation R1	No
ens2	Plasterboard	Bulk Insulation R1	No
formal lounge	Plasterboard	Bulk Insulation R1	No
formal lounge	Concrete Above Plasterboard	No Insulation	No
bath	Plasterboard	Bulk Insulation R1	No
butlers pantry	Plasterboard	Bulk Insulation R1	No

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
store	Plasterboard	Bulk Insulation R1	No
store	Concrete Above Plasterboard	No Insulation	No
Kitchen/Living	Plasterboard	Bulk Insulation R1	No
Kitchen/Living	Concrete Above Plasterboard	No Insulation	No
Parents retreat	Plasterboard	Bulk Insulation R3.5	No
wir	Plasterboard	Bulk Insulation R3.5	No
Master Bedroom	Plasterboard	Bulk Insulation R3.5	No
master ens	Plasterboard	Bulk Insulation R3.5	No

## Ceiling penetrations\*

Location	Quantity	Type	Diameter (mm <sup>2</sup> )	Sealed/unsealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
formal lounge	4	Downlights - LED	150	Sealed
butlers pantry	1	Exhaust Fans	300	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Parents retreat	8	Downlights - LED	150	Sealed
wir	4	Downlights - LED	150	Sealed
Master Bedroom	6	Downlights - LED	150	Sealed

## Ceiling fans

Location	Quantity	Diameter (mm)
No Data Available		

## Roof type

Construction	Added insulation (R-value)	Solar absorptance	Roof shade
Concrete	No Insulation, Only an Air Gap	0.50	Medium
Concrete	No Insulation, Only an Air Gap	0.30	Light
Corrugated Iron	Bulk, Reflective Side Down, No Air Gap Above R1.3	0.30	Light

## Explanatory notes

### About this report

A NatHERS rating is a comprehensive, dynamic computer modelling evaluation of a home, using the floorplans, elevations and specifications to estimate an energy load. It addresses the building layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings), but does not cover the water or energy use of appliances or energy production of solar panels.

Ratings are based on a unique climate zone where the home is located and are generated using standard assumptions, including occupancy patterns and thermostat settings. The actual energy consumption of a home may vary significantly from the predicted energy load, as the assumptions used in the rating will not match actual usage patterns. For example, the number of occupants and personal heating or cooling preferences will vary.

While the figures are an indicative guide to energy use, they can be used as a reliable guide for comparing different dwelling designs and to demonstrate that the design meets the energy efficiency requirements in the National Construction Code. Homes that are energy efficient use less energy, are warmer on cool days, cooler on hot days and cost less to run. The higher the star rating the more thermally efficient the dwelling is.

### Accredited assessors

To ensure the NatHERS Certificate is of a high quality, always use an accredited or licenced assessor. NatHERS accredited assessors are members of a professional body called an Assessor Accrediting Organisation (AAO).

Australian Capital Territory (ACT) licensed assessors may only produce assessments for regulatory purposes using software for which they have a licence endorsement. Licence endorsements can be confirmed on the ACT licensing register

AAOs have specific quality assurance processes in place, and continuing professional development requirements, to maintain a high and consistent standard of assessments across the country. Non-accredited assessors do not have this level of quality assurance or any ongoing training requirements.

Any questions or concerns about this report should be directed to the assessor in the first instance. If the assessor is unable to address these questions or concerns, the AAO specified on the front of this certificate should be contacted.

### Disclaimer

The format of the NatHERS Certificate was developed by the NatHERS Administrator. However the content of each individual certificate is entered and created by the assessor to create a NatHERS Certificate. It is the responsibility of the assessor who prepared this certificate to use NatHERS accredited software correctly and follow the NatHERS Technical Notes to produce a NatHERS Certificate.

The predicted annual energy load in this NatHERS Certificate is an estimate based on an assessment of the building by the assessor. It is not a prediction of actual energy use, but may be used to compare how other buildings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, indoor air temperature and local climate.

Not all assumptions that may have been made by the assessor while using the NatHERS accredited software tool are presented in this report and further details or data files may be available from the assessor.

## Glossary

<b>Annual energy load</b>	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
<b>Assessed floor area</b>	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
<b>Ceiling penetrations</b>	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, rangehoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
<b>Conditioned</b>	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
<b>Custom windows</b>	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
<b>Default windows</b>	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
<b>Entrance door</b>	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
<b>Exposure category – exposed</b>	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
<b>Exposure category – open</b>	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
<b>Exposure category – suburban</b>	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
<b>Exposure category – protected</b>	terrain with numerous, closely spaced obstructions over 10m e.g. city and industrial areas.
<b>Horizontal shading feature</b>	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
<b>National Construction Code (NCC) Class</b>	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at <a href="http://www.abcb.gov.au">www.abcb.gov.au</a> .
<b>Opening percentage</b>	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
<b>Provisional value</b>	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at <a href="http://www.nathers.gov.au">www.nathers.gov.au</a>
<b>Reflective wrap</b> (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
<b>Roof window</b>	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
<b>Shading device</b>	a device fixed to windows that provides shading e.g. window awnings or screens but excludes eaves.
<b>Shading features</b>	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
<b>Solar heat gain coefficient (SHGC)</b>	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
<b>Skylight</b> (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
<b>U-value</b>	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
<b>Unconditioned</b>	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
<b>Vertical shading features</b>	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).