

GM POLES MANUFACTURED UPPER AND MIDDLE CURVED CROSSARM TO SUIT 8x VAILO ZENITH GEN V 1500w LIGHT FITTINGS MOUNTED UNDERSLUNG AT UP TO 40° LENS TILT TO HORIZONTAL. NO ALLOWANCE FOR EXTERNAL GLARE CONTROL DEVICES. REFER DETAIL "B".

GM POLES MANUFACTURED LOWER CURVED CROSSARMS, EACH TO SUIT 6x VAILO ZENITH GEN V 1500w LIGHT FITTINGS MOUNTED UNDERSLUNG AT UP TO 40° LENS TILT TO HORIZONTAL. NO ALLOWANCE FOR EXTERNAL GLARE CONTROL DEVICES.




GMP ID: TP-Z35M-367-3D
QTY: 4
 GM POLES MANUFACTURED TAPERED POLYGONAL POLE. POLE AND ACCESSORIES TO BE HOT DIP GALVANISED AFTER FABRICATION.

DESIGNED TO THE FOLLOWING:
 -IMPORTANCE LEVEL 3
 -TERRAIN CATEGORY 2.3
 -WIND REGION A2

ULS BASE REACTIONS FOR FOOTING DESIGN BY OTHERS:
 M* = 1070 kNm
 V* = 49.5 kN
 N* = 68 kN

600x190 CLEAR FLUSH FITTING ACCESS DOORS (QTY x 3), DOOR C/W INTERNAL GEAR TRAY. DRIVER ARRANGEMENT TO BE DETERMINED BY OTHERS.


BASEPLATE TO SUIT GM POLES HIGH STRENGTH 20x M30 FOUNDATION BOLTS ON A 1050mm P.C.D. REFER TO BASEPLATE DETAIL "C".

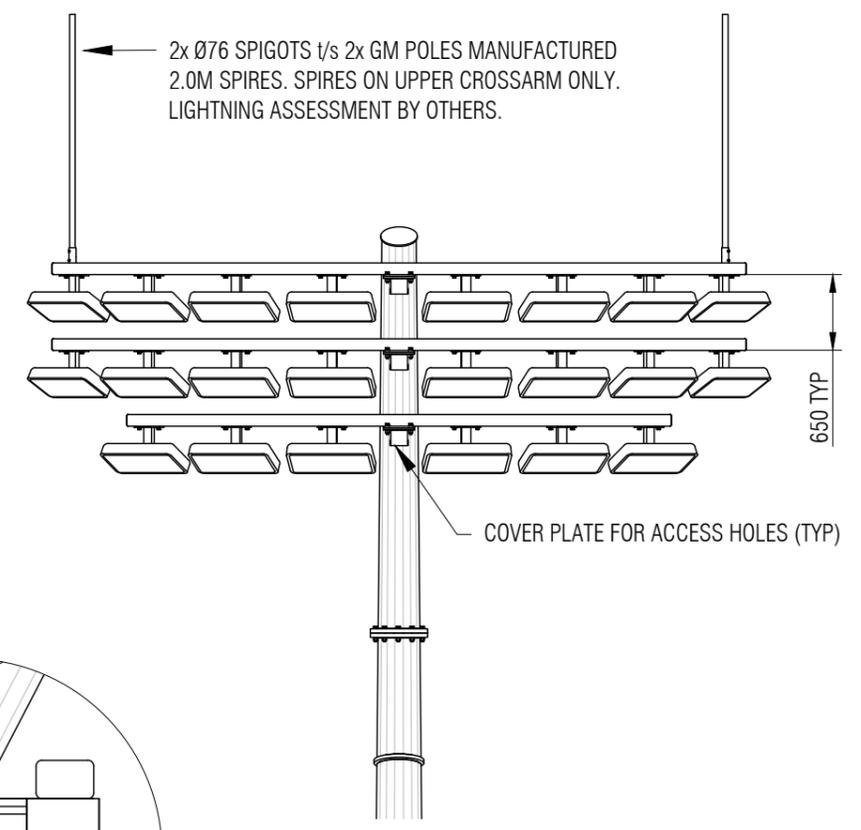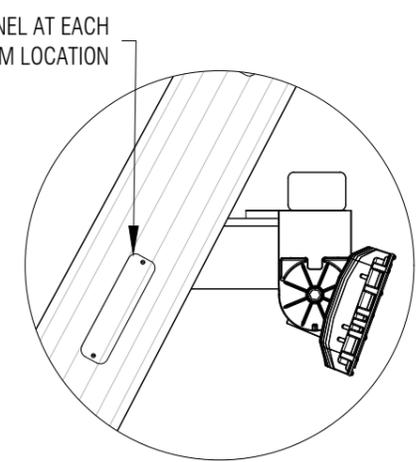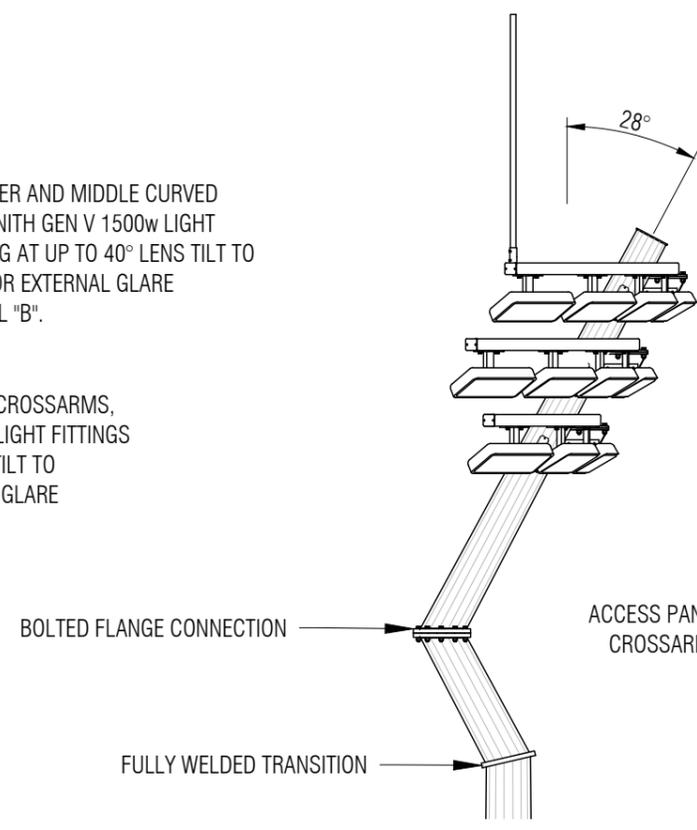


DETAIL "A" ELEVATION VIEW

Please sign & date as approved or mark any amendments & return email to sales@gmpoles.com.au

Signed	Date
<input type="checkbox"/> Approved	<input type="checkbox"/> Please Amend

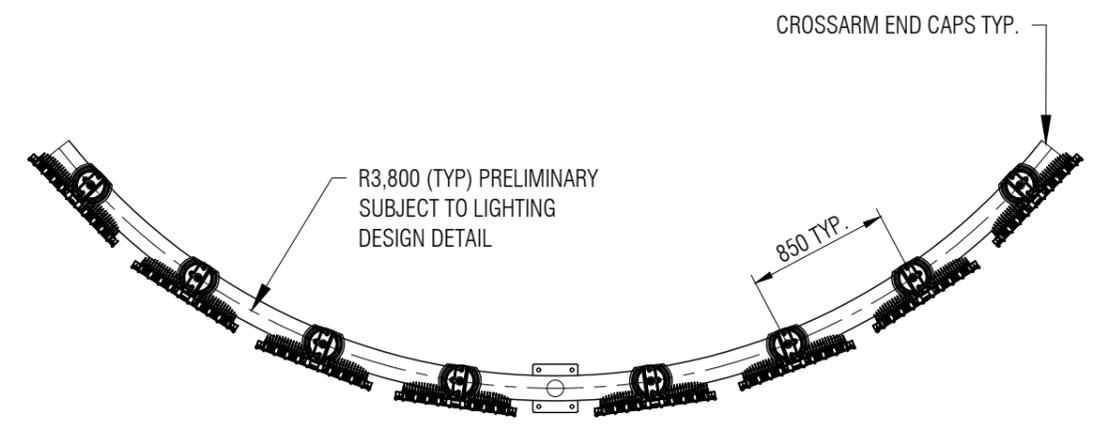

DETAIL "B" PLAN VIEW

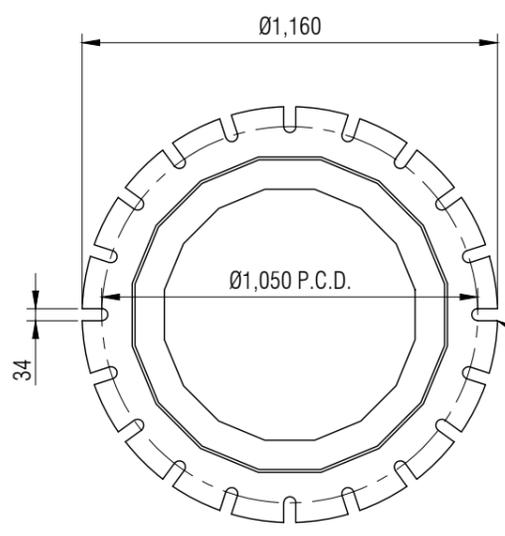

BASEPLATE DETAIL "C"

												490 Freeman Rd. RICHLANDS, QLD 4077 Ph: (07) 3718 4900	
										TOM WILLIS OVAL GENERAL ARRANGEMENT			
Rev	Date	Drn	Chk	Description	Chk	Drn	Date	Scale	Drawing No			Page	
0	15/08/2024	B.D.	D.L.	INITIAL ISSUE	B. Donaldson	B. Donaldson	15/08/2024	N.T.S.	CD0009376B			1	of 1