Planting Schedule

Botanical Name	Common Name	Pot Size	Height (m)	Quantity
TREES				
Acer palmatum	Japanese Maple	400L	7	1
**Angophora costata*	Sydney Red Gum	75L	16	7
**Ceratopetalum gummiferum*	NSW Christmas Bush	25L	6	21
**Eucalyptus capitellata*	Brown Stringybark	25L	12	8
Syzygium australe 'Pinnacle'	Pinnacle Scrub Cherry	100L	6	14
Tristaniopsis laurina	Water Gum	100L	6	5
SHRUBS/ACCENT				
**Banksia ericifolia*	Heath Banksia	200mm	3	41
**Dodonaea triquetra*	Hop Bush	200mm	3	24
Doryanthes excelsa	Gymea Lily	200mm	1.5	59
**Grevillea buxifolia*	Grey Spider Flower	200mm	1.5	80
**Persoonia linearis*	Geebung	200mm	3	20
Syzygium cascade	Cascade Lily Pilly	200mm	1.5m Hedge	13
Westringia fruticosa	Coastal Rosemary	200mm	1.4	13
GROUNDCOVERS/ACCENTS				
Ajuga reptans	Carpet Bugle	150mm	0.5	30
Convolvulus cneorum	SIlverbush	150mm	0.4	88
**Dianella caerula s. lat.*	Blue Flax Lily	150mm	0.4	1450
Dianella Silver Border	Silver Border	150mm	0.4	26
Grevillea 'Bronze Rambler'	Grevillea	150mm	0.3	295
Hemerocallis cv.	Yellow Day Lily	150mm	0.6	72
Lomandra tanika	Dwarf Matt Rush	150mm	0.4	80
**Lomandra longifolia*	Matt Rush	150mm	0.4	550
Myoporum parvifolium	Creeping Boobialla	200mm	0.3	20
Philodendron xanadu	Xanadu	200mm	0.4	44
**Viola hederacea*	Native Violet	150mm	0.1	200

** DENOTES PLANT SELECTED FROM THE DUFFYS FOREST ECOLOGICAL COMMUNITY PLANT LIST*

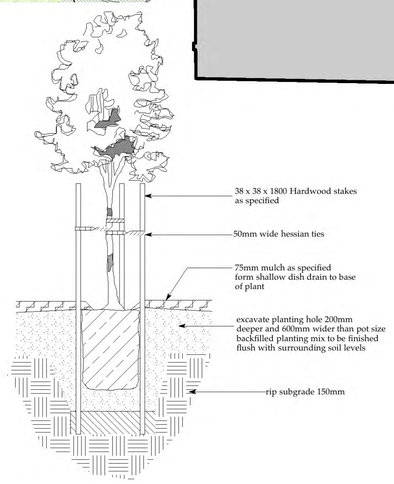

1 / CD01 TREE PLANTING
Scale: 1:20

Syzygium australe 'Pinnacle'
(Pinnacle Scrub Cherry)

Grevillea buxifolia
(Grey Spider Flower)

sitedesign
LANDSCAPE ARCHITECTS
www.sitedesign.net.au
PO BOX 265 SEAFORTH NSW 2092
M: 0417 685 846
E: julian@sitedesign.net.au

ALL EXISTING & OVERALL DIMENSIONS ARE NOMINAL & SUBJECT TO VERIFICATION ON SITE. WHERE ANY DISCREPANCY OCCURS BETWEEN NEW WORK & EXISTING DIMENSIONS - EXISTING DIMENSIONS/WORK SHOULD TAKE PREFERENCE WHERE NECESSARY - OTHERWISE NOTIFY SITEDESIGN LANDSCAPE ARCHITECTS

LEGEND

EXISTING TREES TO BE RETAINED REFER TO TREE PLAN & ARBORIST REPORT

EXISTING TREES TO BE REMOVED

RETAIN EXISTING PLANTING

EXISTING CONTOURS & SPOT LEVELS

PROPOSED SPOT LEVELS

EXTENT OF WORKS

BOUNDARY LINE

T1, T2 etc — Trees identified as a Priority for retention

T1, T2 etc — Trees identified for consideration for retention

T1, T2 etc — Trees identified as recommended for removal, regardless of future development proposals

T1, T2 etc — Trees identified as not worthy of specific consideration in site planning

CRUSHED ROCK (POROUS)

AS SELECTED TILE

AS SELECTED POROUS PAVING

BITUMEN DRIVEWAY

HARDWOOD TIMBER DECKING

AS SELECTED TILE

TURF (SHADE MASTER BUFFALO)

PROJECT:
Performin Arts & Science Building (STAGES 1 & 2)

CLIENT:
Brigidine College ST IVES NSW

DRAWING:
Landscape Plan

DATE: 1.11.10

PROJECT NO: 10-0231

ISSUE: A

DRAWN: JB

SCALE: 1:200 @ A1

DRAWING #: LP01

AMENDMENTS

ISSUE	AMENDMENT	DATE
A	Issue for Council Approval	1.11.10

0 2 4 6 8 10 20m

BRIGIDINE ST IVES
FORTITER ET SUAVITER